


Ans 1)

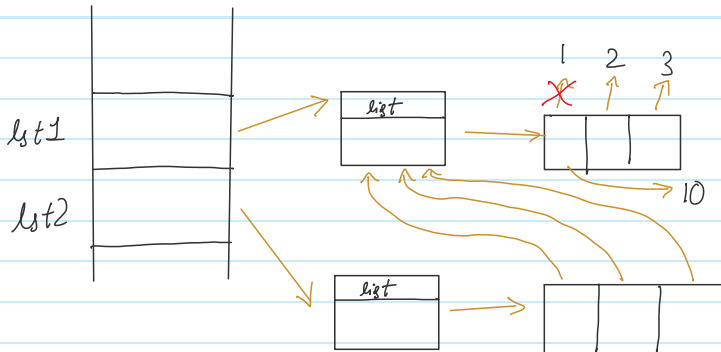

`lst1` is mutable & all 3 spots, referenced by the `list` object, which further references `lst2`, also reference to the `list` object that is referenced by `lst1`. Therefore, when `lst2[0][0] = 10`, all 0 indices of each element in `lst2` change to 10, since each element refers to the same `list` object.

Answer: `lst2` would be `[[10, 2, 3], [10, 2, 3], [10, 2, 3]]`.