

Roundcube Webmail :: Inbox

Meet - xgc-momq-mxj

Instances | EC2 | us-east-2

Manage Jenkins [Jenkins]

3.14.197.35:8080/manage/

Jenkins

Search (CTRL+K)

admin

log out

Dashboard > Manage Jenkins

New Item

People

Build History

Project Relationship

Check File Fingerprint

Manage Jenkins

Maven Repository

My Views

Docker Swarm Dashboard

Build Queue

Manage Jenkins

The following installed plugins are deprecated:
Maven Repository Scheduled Cleanup Plugin

In general, this means that these plugins are either obsolete, no longer being developed, or may no longer work. See the linked web pages for further information about the cause for the deprecation, and suggestions on how to proceed.

New version of Jenkins (2.440.2) is available for download (changelog).

Building on the built-in node can be a security issue. You should set up distributed builds. See the documentation.

Warnings have been published for the following currently installed components:

Set up agent

Set up cloud

Dismiss

Go to plugin manager

Configure which of these warnings are shown

Roundcube Webmail :: Inbox

Meet - xgc-momq-mxj

Instances | EC2 | us-east-2

Nodes [Jenkins]

3.14.197.35:8080/manage/computer/

Jenkins

Search (CTRL+K)

admin

log out

Dashboard > Manage Jenkins > Nodes

Nodes

Clouds

Build Queue

Build Queue

No builds in the queue.

Build Executor Status

1 Idle

2 Idle

Nodes

+ New Node

Configure Monitors

S	Name	Architecture	Clock Difference	Free Disk Space	Free Swap Space	Free Temp Space	Response Time
	Built-in Node	Linux (amd64)	In sync	3.58 GiB	0 B	3.58 GiB	0ms
Data obtained		21 min	21 min	21 min	21 min	21 min	21 min

Icon: S M L

REST API Jenkins 2.440.1

Roundcube Webmail :: Inbox x Meet - xgc-momq-mxj PLAYING x Instances | EC2 | us-east-2 x New node [Jenkins] x

3.14.197.35:8080/manage/computer/new

Jenkins

Search (CTRL+K) admin log out

Dashboard > Manage Jenkins > Nodes > New node

New node

Node name

Jenkins-Slave-Node

Type

☒ Permanent Agent

Adds a plain, permanent agent to Jenkins. This is called "permanent" because Jenkins doesn't provide higher level of integration with these agents, such as dynamic provisioning. Select this type if no other agent types apply — for example such as when you are adding a physical computer, virtual machines managed outside Jenkins, etc.

Create

Roundcube Webmail :: Inbox x Meet - xgc-momq-mxj PLAYING x Instances | EC2 | us-east-2 x Jenkins x

3.14.197.35:8080/manage/computer/createItem

Jenkins

You are sharing your entire screen. Stop Sharing admin log out

Dashboard > Manage Jenkins > Nodes >

Name ?

Jenkins-Slave-Node

Description ?

Demo on Jenkins Master & Slave

Plain text Preview

Number of executors ?

1

Save

Roundcube Webmail :: Inbox x Meet - xgc-momq-mxj PLAYING x Instances | EC2 | us-east-2 x Jenkins x

3.14.197.35:8080/manage/computer/createItem

Dashboard > Manage Jenkins > Nodes >

You are sharing your entire screen. Stop Sharing

Number of executors ?
1

Remote root directory ?
/home/ec2-user/

Labels ?
Jenkins-Slave-Node

Usage ?
Use this node as much as possible

Launch method ?
Launch agents via SSH

Roundcube Webmail :: Inbox x Meet - xgc-momq-mxj PLAYING x Instances | EC2 | us-east-2 x Jenkins-Slave-Node Configuration: x

3.14.197.35:8080/computer/Jenkins-Slave-Node/configure

Dashboard > Nodes > Jenkins-Slave-Node > Configure

You are sharing your entire screen. Stop Sharing

Launch agents via SSH

Host ?
172.31.7.35 Jenkins Slave Server Private IP

The Host must be specified



Credentials ?
ec2-user (jenkins-slave-userid-password)

+ Add

Host Key Verification Strategy ?
Non verifying Verification Strategy

SELECT NON VERIFYING VERIFICATION STRATEGY

Advanced Edited

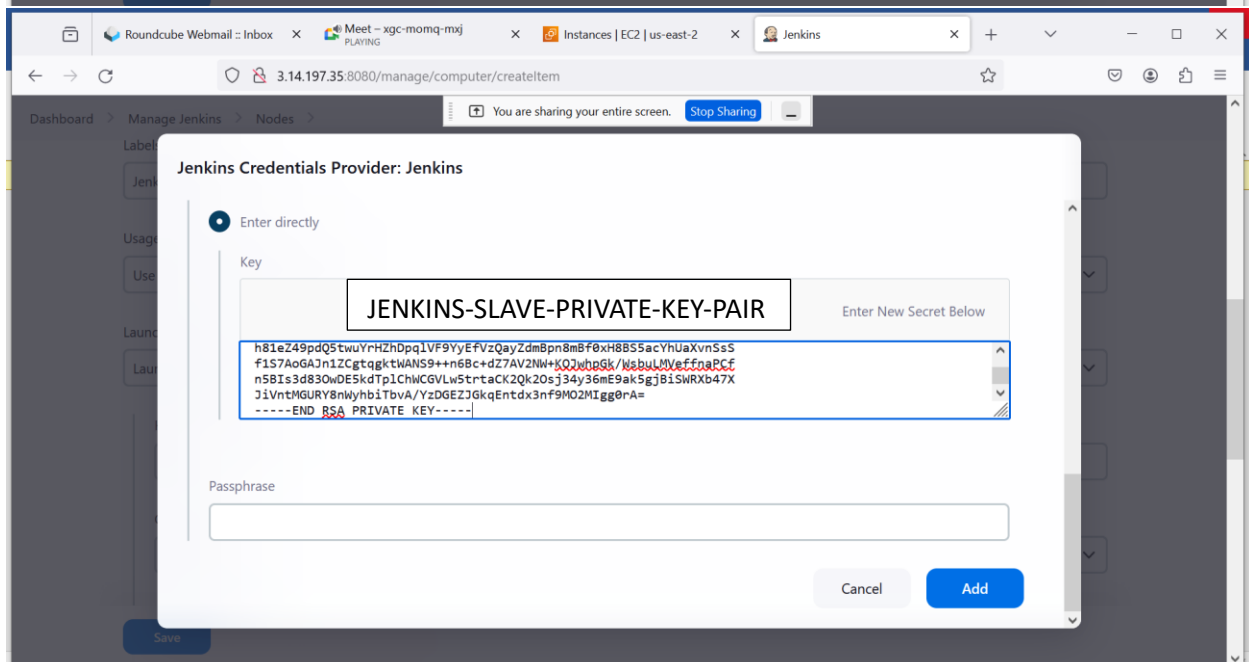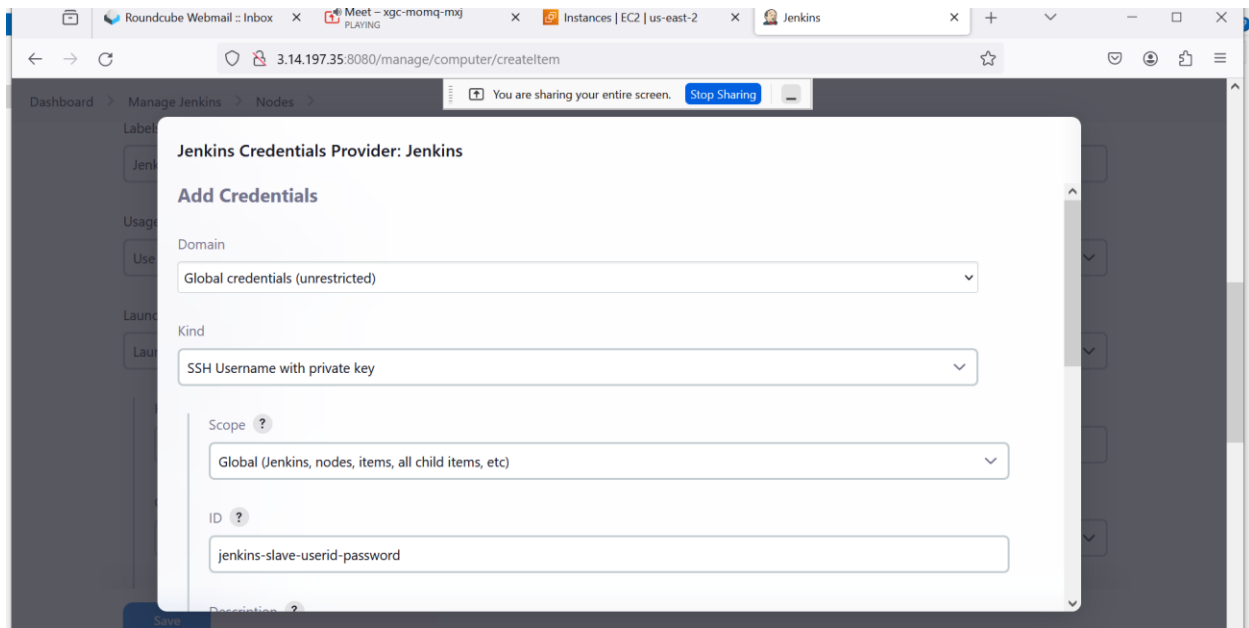

Roundcube Webmail :: Inbox x Meet - xgc-momq-mxj PLAYING x Instances | EC2 | us-east-2 x Nodes [Jenkins]

https://us-east-2.console.aws.amazon.com/ec2/home?region=us-east-2#Instances:v=3,\$case=tags:true\client:false,\$

aws Services Search You are sharing your entire screen. Stop Sharing

EC2 Dashboard x

EC2 Global View

Events

▼ Instances

Instances

Instance Types

Launch Templates

Spot Requests

Savings Plans

Reserved Instances

Dedicated Hosts

Capacity Reservations

New

▼ Images

AMIs

AMI Catalog

Instances (1/5) Info

Find Instance by attribute or tag (case-sensitive)

All states

1

	Name	Instance ID	Instance state	Instance type	Status check
<input type="checkbox"/>	jenkins without docker	i-0d2405b6a3dc56798	Stopped	t2.micro	-
<input type="checkbox"/>	Prometheus Server	i-0cb33229b76c6b308	Running	t2.large	2/2 checks passed
<input checked="" type="checkbox"/>	Jenkins -Slave	i-0604f6d240a198b25	Running	t2.micro	2/2 checks passed
<input type="checkbox"/>	Jenkins server	i-0bd517d52714c13b9	Running	t3.large	2/2 checks passed
<input type="checkbox"/>	Madhu Server	i-02628a0304aa58b4d	Stopped	t3.large	-

Instance: i-0604f6d240a198b25 (Jenkins -Slave)

Details Status and alarms New Monitoring Security Networking Storage Tags

▼ Instance summary Info

Instance ID

i-0604f6d240a198b25 (Jenkins -Slave)

Public IPv4 address

18.224.38.185 open address

Private IPv4 address copied

172.31.7.35

IPv6 address

Instance state

Public IPv4 DNS

CloudShell Feedback © 2024, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Roundcube Webmail :: Inbox x Meet - xgc-momq-mxj PLAYING x Instances | EC2 | us-east-2 x Jenkins-Slave-Node Configurati x

3.14.197.35:8080/computer/Jenkins-Slave-Node/configure

Dashboard > Nodes > Jenkins-Slave-Node > Configure

You are sharing your entire screen. Stop Sharing

Advanced Edited

Availability ?

Keep this agent online as much as possible

Node Properties

☐ Disable deferred wipeout on this node ?

☐ Disk Space Monitoring Thresholds

☐ Environment variables

☐ Tool Locations

Roundcube Webmail :: Inbox

Meet - xgc-momq-mxj

Instances | EC2 | us-east-2

Nodes [Jenkins]

3.14.197.35:8080/computer/

Jenkins

You are sharing your entire screen. Stop Sharing

admin

log out

Dashboard > Nodes >

Nodes

Clouds

Build Queue

No builds in the queue.

Build Executor Status

Built-In Node

1 Idle

2 Idle

Jenkins-Slave-Node

1 Idle

Nodes

New Node

Configure Monitors

S	Name 1	Architecture	Clock Difference	Free Disk Space	Free Swap Space	Free Temp Space	Response Time
	Built-In Node	Linux (amd64)	In sync	3.56 GiB	0 B	3.56 GiB	0ms
	Jenkins-Slave-Node	Linux (amd64)	In sync	3.56 GiB	0 B	3.56 GiB	195ms
Data obtained		3 min 4 sec	3 min 4 sec	3 min 4 sec	3 min 4 sec	3 min 4 sec	3 min 4 sec

Icon: S M L