



विशाल जाधव सरांचे

VJTech Academy

Inspiring Your Success...


“Applet and Graphics Programming”

VJTech Academy
Inspiring Your Success...

Live Class Lectures

//Write applet program to display message: drawString("Output Message", int x, int y);

```
import java.applet.*;
import java.awt.*;
public class AppletDemo extends Applet
{
    public void paint(Graphics g)
    {
        g.drawString("Welcome to world of Applet",150,150);
    }
}
/*
<applet code="AppletDemo.class" width="500" height="500">
</applet>
*/
```

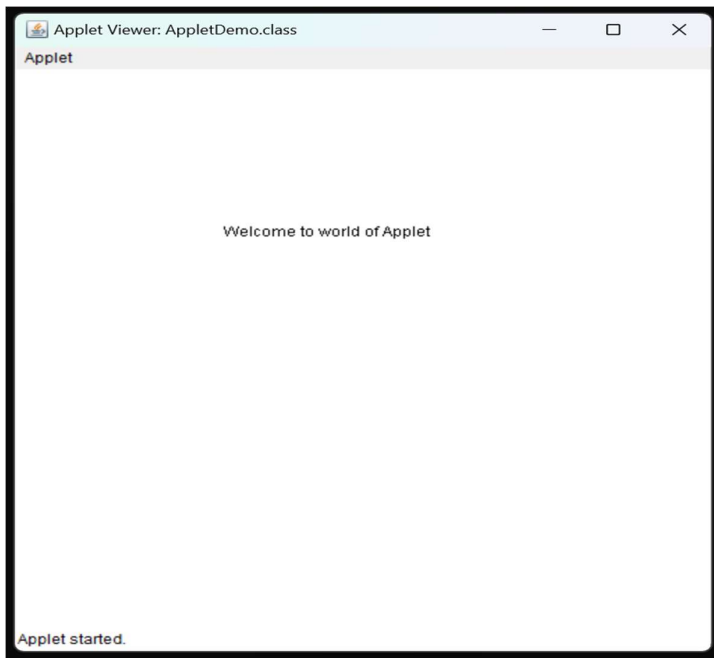

How to run applet code on browser:

1) Create Applet Code and compile it


```
import java.applet.*;
import java.awt.*;
public class AppletDemo1 extends Applet
{
    public void paint(Graphics g)
    {
        g.drawString("Welcome to world of Applet",150,150);
    }
}
```

2) Create HTML file and run it

```
<html>
<body>
    <applet code="AppletDemo1.class" width="500" height="500">
    </applet>
</body>
</html>
```


Write Applet code which will draw Line

```
import java.applet.*;
import java.awt.*;
public class DrawLineDemo extends Applet
{
    public void paint(Graphics g)
    {
        g.drawLine(100,150,350,400);
    }
}
/*
<applet code="DrawLineDemo.class" width="500" height="500">
</applet>
*/
```

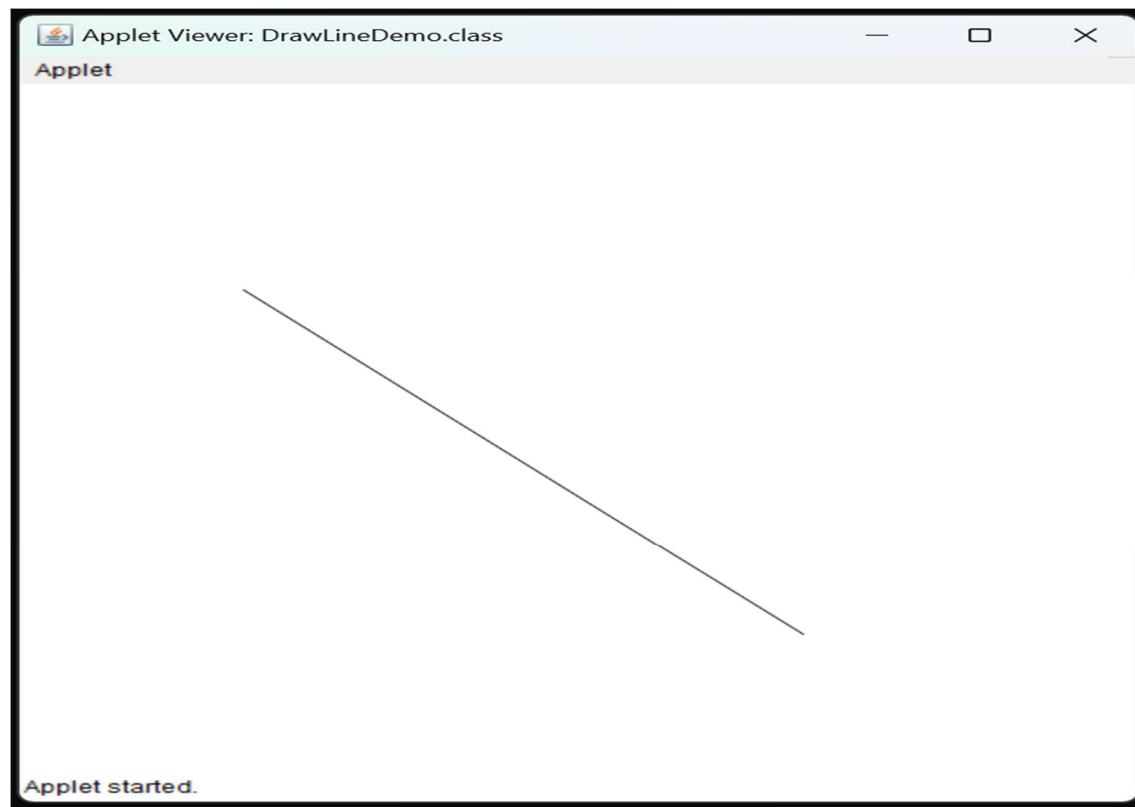


Write Applet code which will draw Oval and circle

```
import java.applet.*;
import java.awt.*;
public class DrawOvalDemo extends Applet
{
    public void paint(Graphics g)
    {
        g.drawOval(100,150,160,160);    //circle
        g.drawOval(300,150,200,100);    //ellipse
    }
}
/*
<applet code="DrawOvalDemo.class" width="500" height="500">
</applet>
*/
```

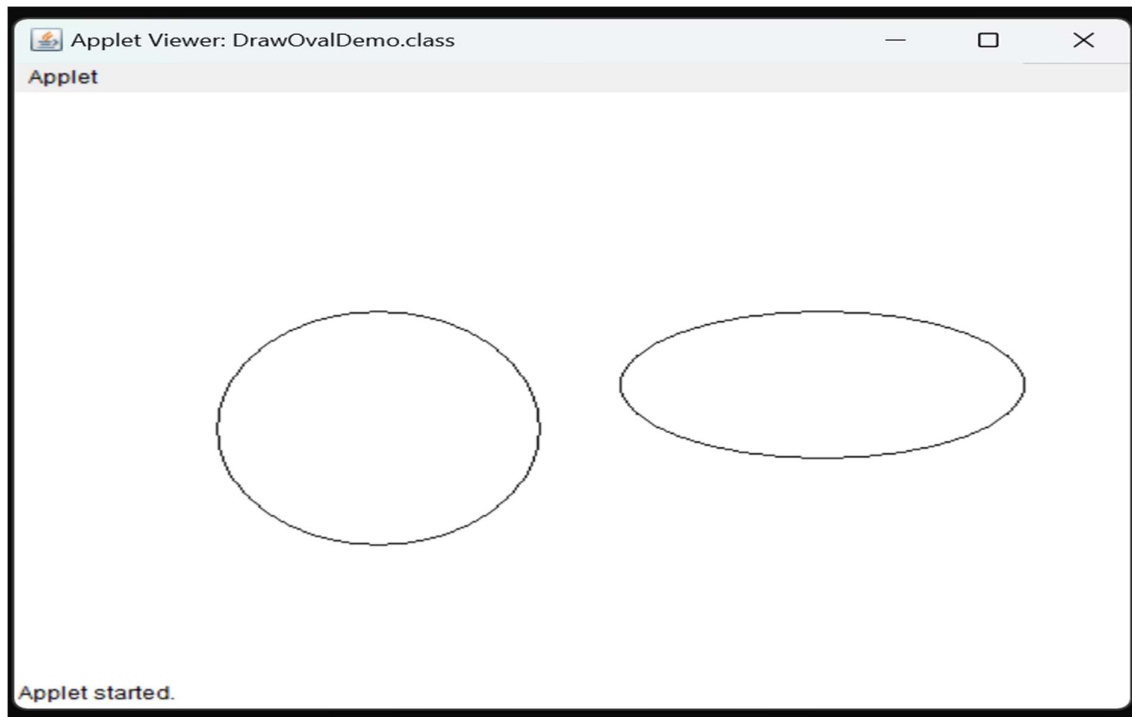

Write Applet code which will draw rectangle


```
import java.applet.*;
import java.awt.*;
public class DrawRectDemo extends Applet
{
    public void paint(Graphics g)
    {
        g.drawRect(100,150,160,160);
        g.fillRect(300,150,200,100);
    }
}
/*
<applet code="DrawRectDemo.class" width="500" height="500">
</applet>
*/
```

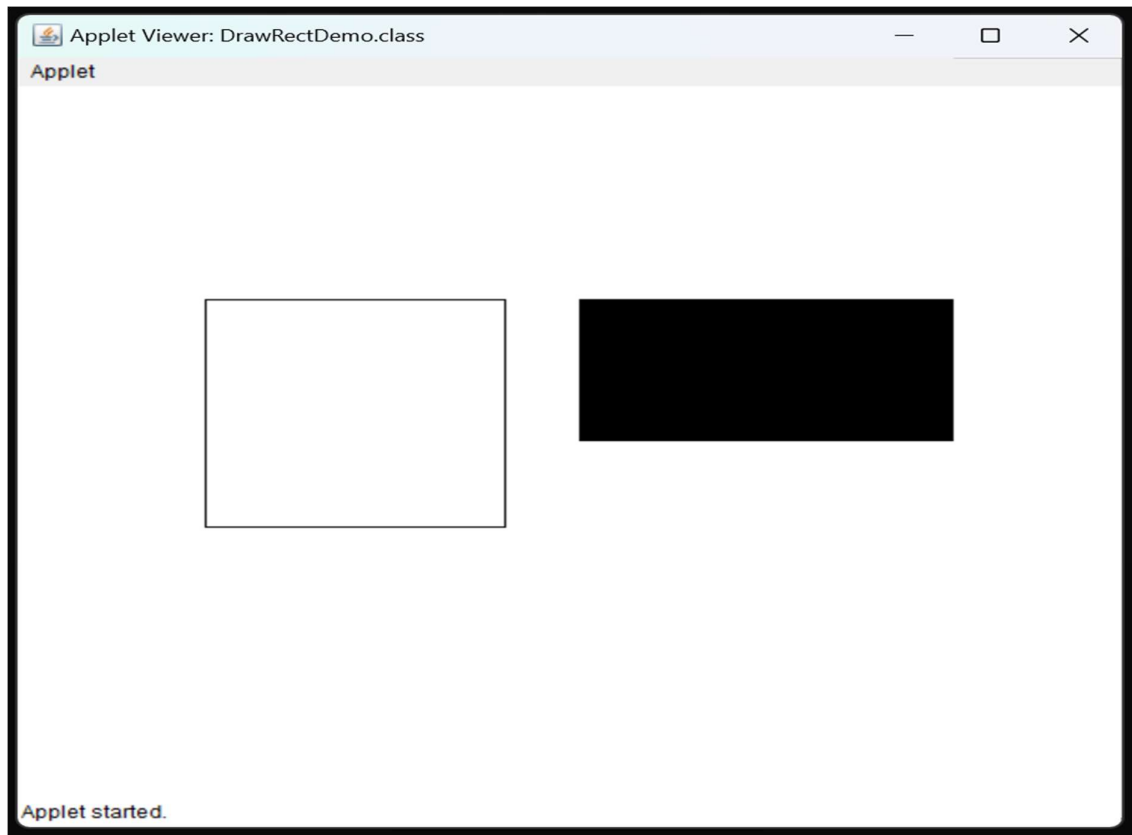

Write Applet code that will draw polygon

- drawPolygon() method in applet
- Syntax: drawPolygon(xarray,yarray,npoints);


```
import java.applet.*;
import java.awt.*;
public class drawPolygonDemo extends Applet
{
    public void paint(Graphics g)
    {
        int Xarray[]={50,250,70,50};
        int Yarray[]={60,300,350,60};
        int npoints=3;
        g.drawPolygon(Xarray,Yarray,npoints);
    }
}
/*
<applet code="drawPolygonDemo.class" width="500" height="500">
</applet>
*/
```

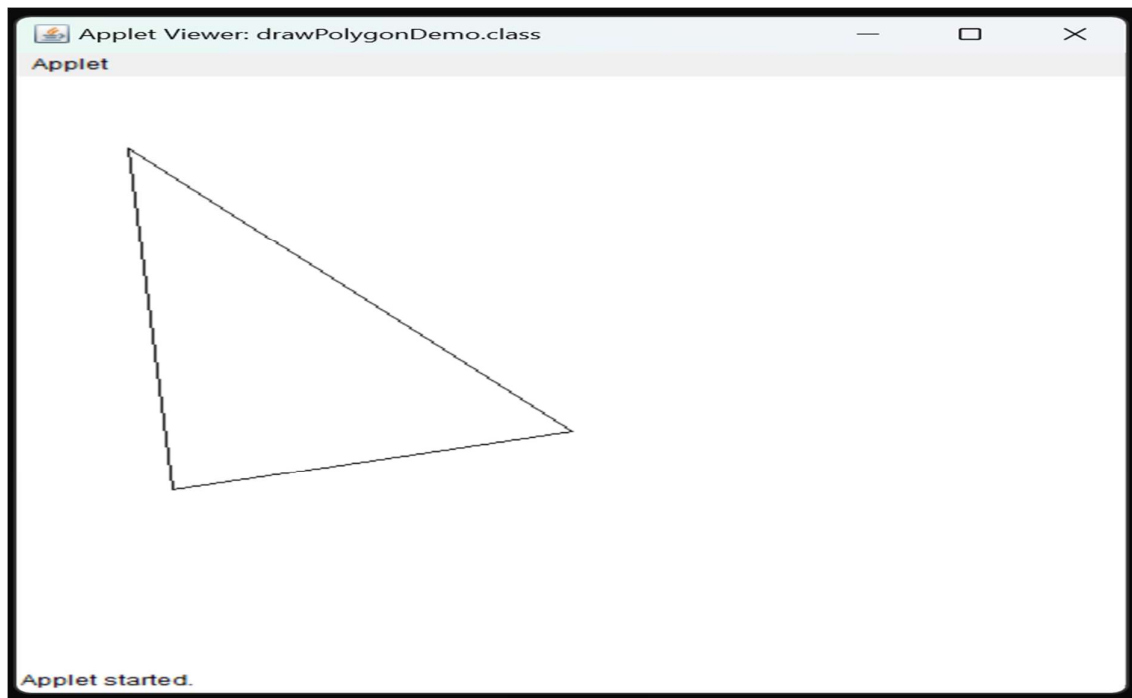

Write Applet code which will draw arc

- drawArc() method in Applet
- Syntax: drawArc(int x,int y,int width,int height,int startAngle,int SweepAngle)


```
import java.awt.*;
import java.applet.*;
public class drawArcDemo extends Applet
{
    public void paint(Graphics g)
    {
        g.fillArc(100,120,200,150,45,-180);
    }
}
/*
<applet code="drawArcDemo.class" width="500" height="500">
</applet>
*/
```

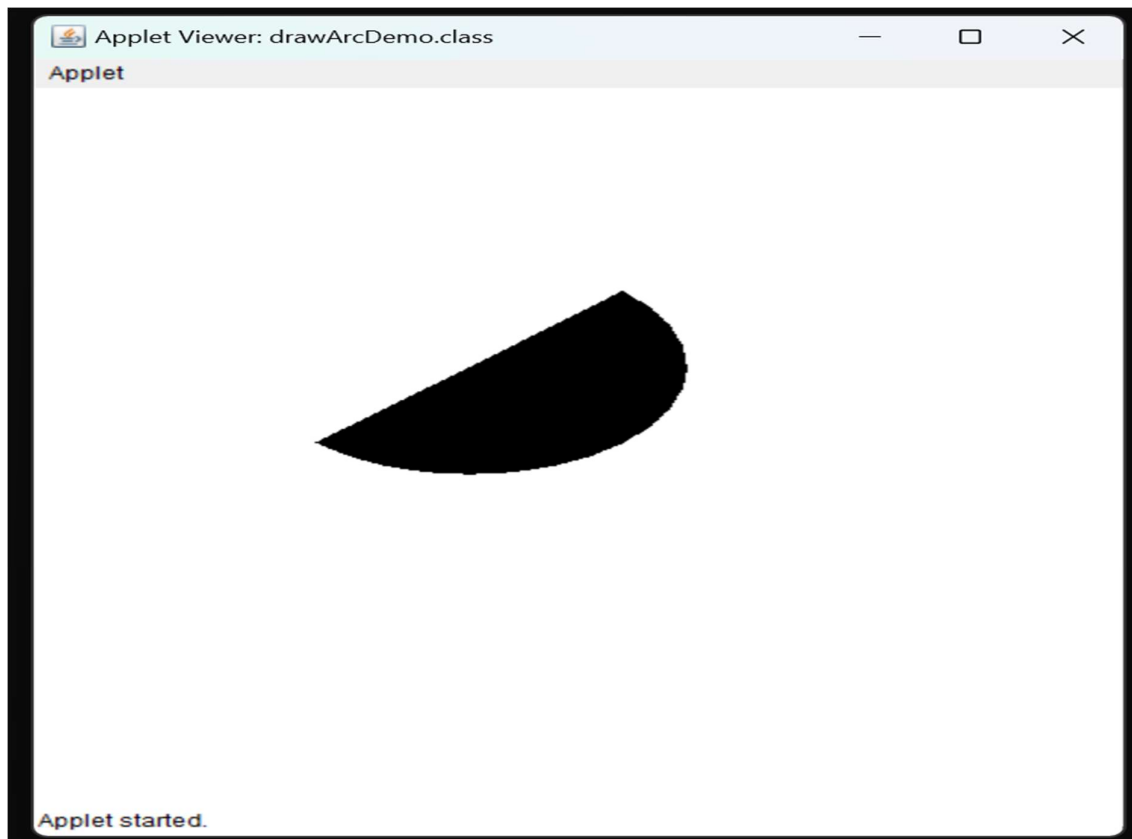

Write Applet code which will draw round rectangle


- drawRoundRect() method

```
import java.applet.*;
import java.awt.*;
public class drawRoundRectDemo extends Applet
{
    public void paint(Graphics g)
    {
        g.drawRoundRect(100,120,200,140,60,75);
        g.fillRoundRect(350,120,200,140,60,75);
    }
}
/*
<applet code="drawRoundRectDemo.class" width="500" height="500">
</applet>
*/
```

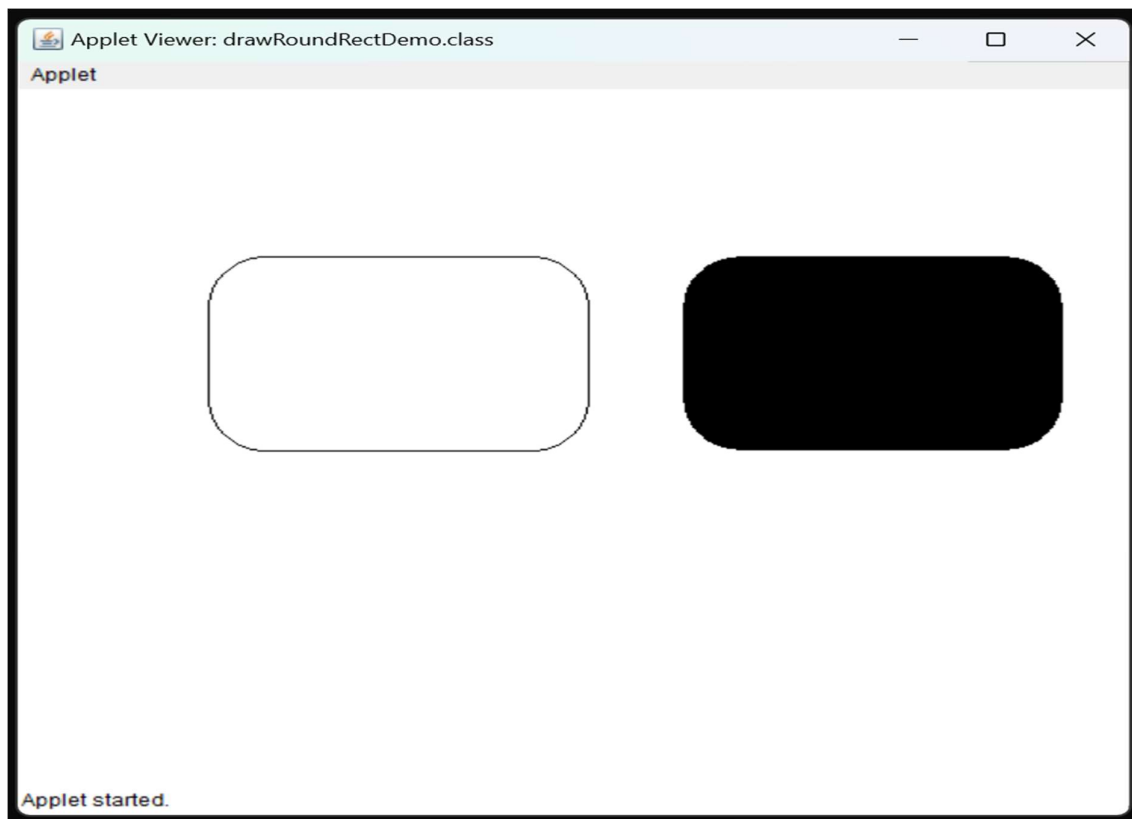

Write Applet code to accept input to program using param tag

```
import java.applet.*;
import java.awt.*;
public class paramDemo extends Applet
{
    String msg;
    public void init()
    {
        msg=getParameter("coaching");
    }
    public void paint(Graphics g)
    {
        g.drawString("You have entered: "+msg,150,150);
    }
}
/*
<applet code="paramDemo.class" width="500" height="500">
<param name="coaching" value="VJTech Academy">
</applet>
*/
```

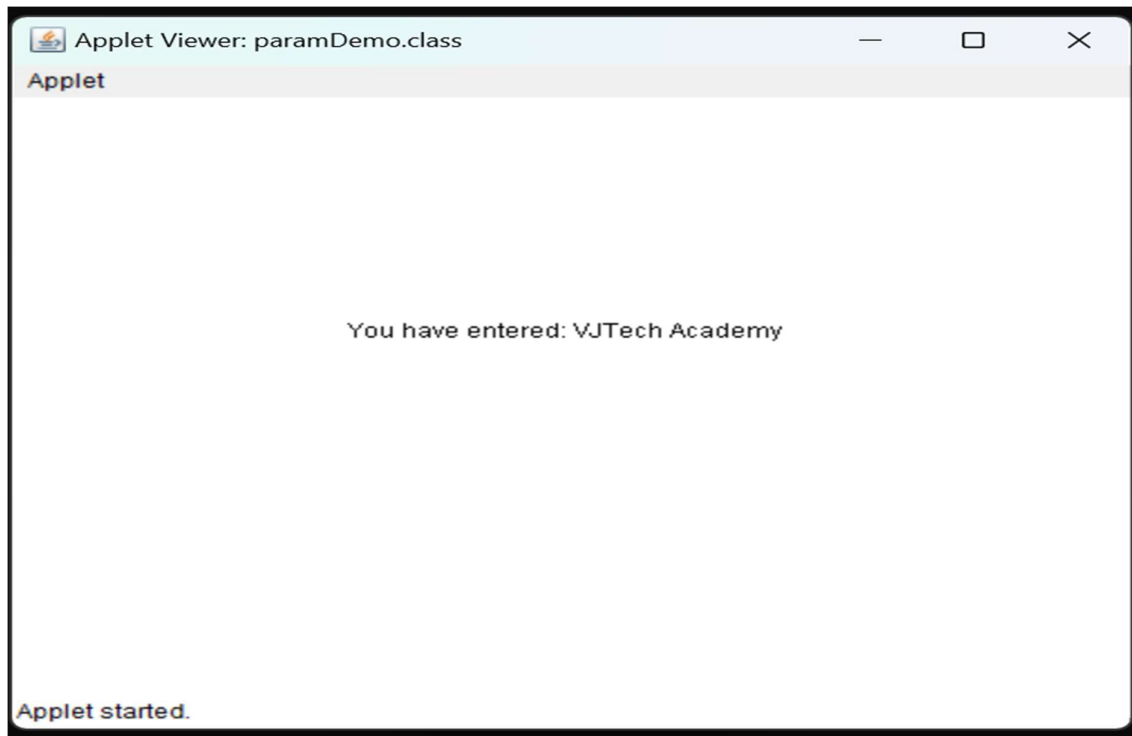


Write applet program to accept name and display Welcome <name> message

```
import java.applet.*;
import java.awt.*;
public class paramDemo1 extends Applet
{
    String name;
    public void init()
    {
        name=getParameter("n1");
    }
    public void paint(Graphics g)
    {
        g.drawString("Welcome "+name,150,150);
    }
}
/*
<applet code="paramDemo1.class" width="500" height="500">
<param name="n1" value="James Gosling">
</applet>
*/
```




Design an applet which display equals size three rectangle one below the other and fill them with orange, white and green color respectively.

```
import java.applet.*;
import java.awt.*;
public class ThreeRectWithColors extends Applet
{
    public void paint(Graphics g)
    {
        g.setColor(Color.orange);
        g.fillRect(100,120,200,140);
        g.setColor(Color.white);
        g.fillRect(100,300,200,140);
        g.setColor(Color.green);
        g.fillRect(100,480,200,140);
    }
}
/*
<applet code="ThreeRectWithColors.class" width="400" height="700">
</applet>
*/
```

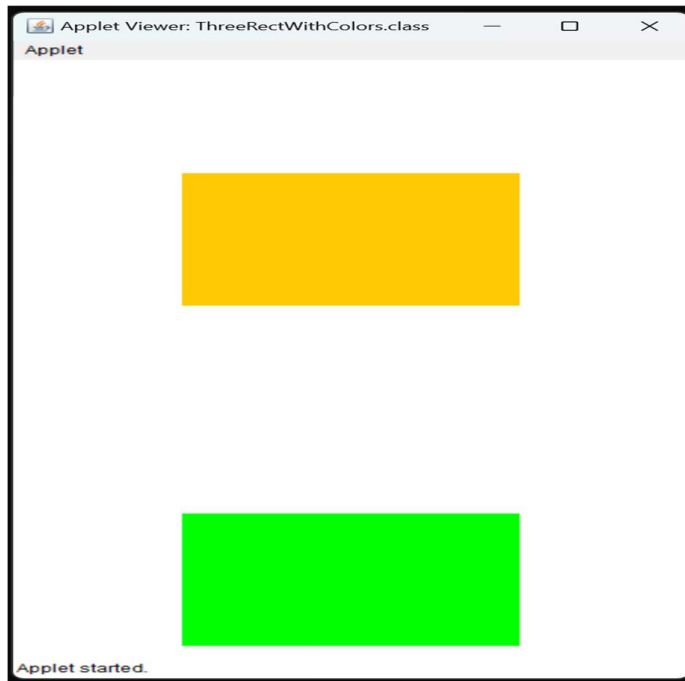

Write an applet to accept Account No and balance in form of parameter and print message "low balance" if the balance is less than 500.

```
import java.applet.*;
import java.awt.*;
public class BankDemo extends Applet
{
    int acc_no,balance;
    public void init()
    {
        acc_no=Integer.parseInt(getParameter("a1"));
        balance=Integer.parseInt(getParameter("b1"));
    }
    public void paint(Graphics g)
    {
        if(balance<500)
        {
            g.drawString("Low Balance",150,150);
        }
        else
        {
            g.drawString("Sufficient Balance",150,150);
        }
    }
}
/*
<applet code="BankDemo.class" width="500" height="500">
<param name="a1" value="101010">
<param name="b1" value="350">
</applet>
*/
```

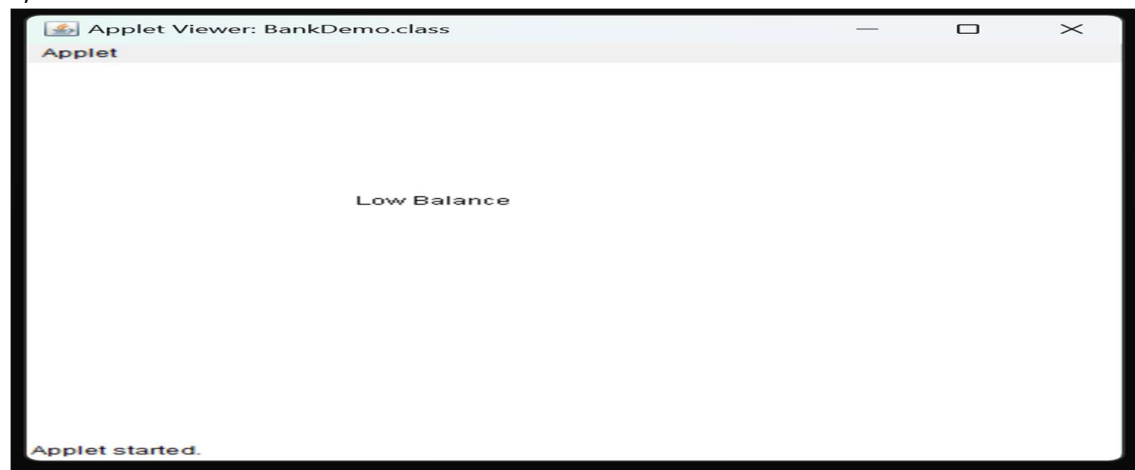

Font class

```
import java.applet.*;
import java.awt.*;
public class FontDemo extends Applet
{
    public void init()
    {
        Font f1=new Font("Arial Black",Font.BOLD|Font.ITALIC,25);
        setFont(f1);
    }
    public void paint(Graphics g)
    {
        g.drawString("Welcome to VJTech Academy",100,150);
    }
}
/*
<applet code="FontDemo.class" width="500" height="500">
</applet>
*/
```



getAllFonts() method

```
import java.applet.*;
import java.awt.*;
public class getAllFontsDemo extends Applet
{
    public void paint(Graphics g)
    {
        Font x[] = GraphicsEnvironment.getLocalGraphicsEnvironment().getAllFonts();
        for (int i=0;i<x.length;i++)
        {
            System.out.println(x[i]);
        }
    }
}
/*
<applet code="getAllFontsDemo.class" width="500" height="500">
</applet>
*/
```

getFamily(),getFontName(),getStyle(),getSize() method

```
import java.applet.*;
import java.awt.*;
public class getFamilyDemo extends Applet
{
    Font f1;
    public void init()
    {
        f1=new Font("Arial Black",Font.ITALIC,25);
        setFont(f1);
    }
    public void paint(Graphics g)
    {
        System.out.println(f1.getFamily());
        System.out.println(f1.getFontName());
        System.out.println(f1.getStyle());
        System.out.println(f1.getSize());
        System.out.println(g.getFont());
    }
}
/*
<applet code="getFamilyDemo.class" width="500" height="500">
</applet>
*/
```

```
F:\JavaBatch2024\Applet>appletviewer getFamilyDemo.java
Arial Black
Arial Black
2
25
java.awt.Font[family=Arial Black,name=Arial Black,style=italic,size=25]
```