CSS(JavaScript) Practical Programs by VJTech Academy

Practical No 1: Write simple JavaScript with HTML for arithmetic expression evaluation and message printing.

```
<html>
<body>
        <script language="javascript" type="text/javascript">
                var a,b,c;
                a=parseInt(prompt("Enter first no:"));
                b=parseInt(prompt("Enter second no:"));
                c=a+b;
                document.write("<br>Addition="+c);
                c=a-b;
                document.write("<br>Subtraction="+c);
                c=a*b;
                document.write("<br>Multiplication="+c);
                c=a/b;
                document.write("<br>Division="+c);
                c=a%b;
                document.write("<br>Reminder="+c);
                a++;
                document.write("<br>Value of a after increment="+a);
                b--;
                document.write("<br>Value of b after decrement="+b);
        </script>
</body>
</html>
```

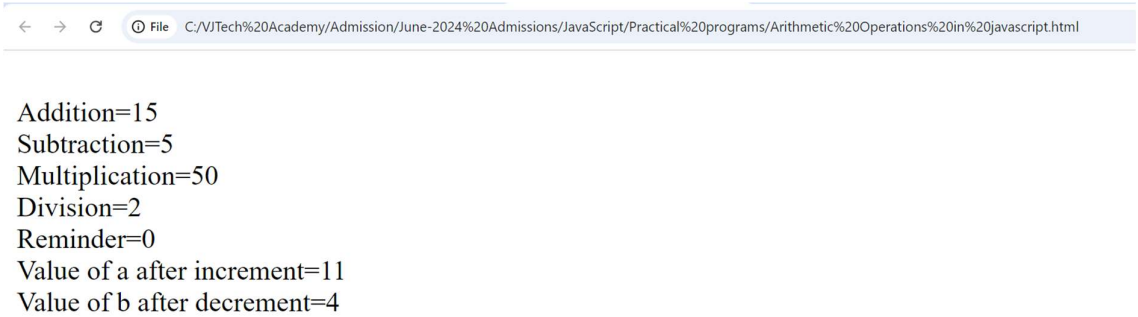

CSS(JavaScript) Practical Programs by VJTech Academy

Practical No2:-Develop JavaScript to use decision making and looping statements

I) If statement:

```
<html>
<body>
	<script language="javascript" type="text/javascript">
		var a,b;
		a=parseInt(prompt("Enter first no:"));
		b=parseInt(prompt("Enter second no:"));
		if(a==b)
		{
			document.write("<br>Both numbers are equal");
		}
		document.write("<br>End of Program");
	</script>
</body>
</html>
```

2) If-Else statement:

```
<html>
<body>
	<script language="javascript" type="text/javascript">
		var a,b;
		a=parseInt(prompt("Enter first no:"));
		b=parseInt(prompt("Enter second no:"));
		if(a==b)
		{
			document.write("<br>Both numbers are equal");
		}
		else
		{
			document.write("<br>Both numbers are not equal");
		}
		document.write("<br>End of Program");
	</script>
</body>
</html>
```

3) Else-If Ladder:

```
<html>
<body>
		<script language="javascript" type="text/javascript">
			var marks;
			marks=parseInt(prompt("Enter your marks:"));
			if(marks>=75)
			{
				document.write("<br>You got distinction");
			}
			else if(marks>=60)
			{
				document.write("<br>You got first class");
			}
			else if(marks>=40)
			{
				document.write("<br>You are pass only");
			}
			else
			{
				document.write("<br>You are fail");
			}
		</script>
</body>
</html>
```

4) switch case statement:

```
<html>
<body>
	<script language="javascript" type="text/javascript">
		var ch;
		ch=parseInt(prompt("Enter number between 1 to 3:"));
		switch(ch)
		{
			case 1: document.write("You have entered ONE");
				break;
			case 2: document.write("You have entered TWO");
				break;
			case 3: document.write("You have entered THREE");
				break;
			default: document.write("Invalid Input");
				break;
		}
	</script>
</body>
</html>
```

CSS(JavaScript) Practical Programs by VJTech Academy

5) For loop statement

```
<html>
<body>
        <script language="javascript" type="text/javascript">
            for(i=1;i<=5;i++)
            {
                document.write("<br>VJTech Academy");
            }
        </script>
</body>
</html>
```

OUTPUT

VJTech Academy
VJTech Academy
VJTech Academy
VJTech Academy
VJTech Academy

6) While loop

```
<html>
<body>
    <script language="javascript" type="text/javascript">
        var i=1;
        while(i<=5)
        {
            document.write("<br>VJTech Academy");
            i++;
        }
    </script>
</body>
</html>
```

OUTPUT

VJTech Academy
VJTech Academy
VJTech Academy
VJTech Academy
VJTech Academy

7) Do While loop:

```
<html>
<body>
        <script language="javascript" type="text/javascript">
            var i=1;
            do
            {
                document.write("<br>VJTech Academy");
                i++;
            }while(i<=5);
        </script>
</body>
</html>
```

OUTPUT

```
VJTech Academy
VJTech Academy
VJTech Academy
VJTech Academy
VJTech Academy
```

8) for in loop

```
<html>
<body>
        <script language="javascript" type="text/javascript">
            var num_arr=new Array(10,20,30,40,50);
            document.write("Array Elements:");
            for(x in num_arr)
            {
                document.write(" "+num_arr[x]);
            }
        </script>
</body>
</html>
```

OUTPUT:

```
Array Elements: 10 20 30 40 50
```

Practical No-3. Develop JavaScript to implements Array functionalities

1) Array created using new keyword

```
<html>
<body>
        <script language="javascript" type="text/javascript">
          var a=new Array(10,20,30,40,50);
          document.write("Array Elements:");
          for(i=0;i<a.length;i++)
          {
                document.write(" "+a[i]);
          }
        </script>
</body>
</html>
```

2) Array created using literals

```
<html>
<body>
        <script language="javascript" type="text/javascript">
          var a=[10,20,30,40,50];
          document.write("Array Elements:");
          for(i=0;i<a.length;i++)
          {
                document.write(" "+a[i]);
          }
        </script>
</body>
</html>
```

Practical No-4. Develop javascript to implement functions

```
<html>
<body>
	Enter any number:<input type="text" id="tf1">
	<input type="button" name="b1" value="Check Even/Odd" onclick="Display()">
	<script language="javascript" type="text/javascript">
		function Display()
		{
			var no=document.getElementById("tf1").value;
			if(no%2==0)
			{
				alert("Number is Even");
			}
			else
			{
				alert("Number is Odd");
			}
		}
	</script>
</body>
</html>
```

Practical No-5. Develop JavaScript to implement Strings.

```
<html>
<body>
	<script language="javascript" type="text/javascript">
		var str=new String("VJTech");
		document.write("Original String:"+str);
		document.write("<br>Length of string:"+str.length);
		document.write("<br>Concate Method:"+str.concat("Academy"));
		document.write("<br>toLowerCase Method:"+str.toLowerCase());
		document.write("<br>toUpperCase Method:"+str.toUpperCase());
		document.write("<br>Character present at index 2 :"+str.charAt(2));
	</script>
</body>
</html>
```

OUTPUT

```
Original String:VJTech
Length of string:6
Concate Method:VJTechAcademy
toLowerCase Method:vjtech
toUpperCase Method:VJTECH
Character presen
```

Practical No-6. Create web page using Form Elements

```
<html>
<body>
	<form name="myform">
		Enter Full Name:<input type="text" name="tf1"><br><br>
		Enter Mobile No:<input type="number" name="tf2"><br><br>
		Select Gender:<input type="radio" name="r1" value="Male">Male
				<input type="radio" name="r1" value="Female">Female
				<input type="radio" name="r1" value="Other">Other <br><br>
		<input type="checkbox"  name="c1" value="bike">I like bike
		<input type="checkbox" name="c2" value="car">I like car <br><br>
		<input type="submit" name="b1" value="Submit">
		<input type="reset" name="b2" value="Reset">
	</form>
</body>
</html>
```

Practical No-7: Create web page to implement Form Events.

```
<html>
<body>
	<form name="myform">
		<input type="button" name="b1" value="Single Click" onclick="Display1()">
		<input type="button" name="b2" value="Double Click" ondblclick="Display2()">
		<input type="button" name="b3" value="On Mouse Over"
onmouseover="Display3()">
		<input type="button" name="b4" value="On Mouse Out"
onmouseout="Display4()">
	</form>
	<script language="javascript" type="text/javascript">
		function Display1()
		{
			alert("Single on click Event Occurred");
		}
		function Display2()
		{
			alert("Double on click Event Occurred");
		}
		function Display3()
		{
			alert("On Mouse over Event Occurred");
		}
		function Display4()
		{
			alert("On Mouse out Event Occurred");
		}
	</script>
</body>
</html>
```

Practical No-8: Create web page to implement Form Events. Part II

```
<html>
<body onload="alert('onload event occurred')" onunload="alert('onunload event occurred')">
	Enter Name:<input type="text" name="tf1" onkeypress="alert('OnKeyPress Event
Occurred')"><br><br>
	Enter Mobile No:<input type="number" name="tf2" onkeydown="alert('OnKeyDown event
Occurred')" ><br><br>
	Enter Email Id:<input type="text" name="tf3" onkeyup="alert('OnKeyUp event
occurred')"><br><br>
	Enter Feedback:<input type="text" name="tf4" onfocus="alert('onfocus event occurred')"
onblur="alert('onblur event occurred')">
</body>
</html>
```

Practical No:-9 Develop a webpage using intrinsic java functions, Disable/Enable Elements and Make Readonly element

```
<html>
<body>
	<form name="myform">
		Enter Name:<input type="text" id="tf1">
		<input type="button" name="b1" value="Enable" onclick="EnableFunction()">
		<input type="button" name="b2" value="Disable" onclick="DisableFunction()">
		<br><br>
		Country Name:<input type="text" id="tf2">
		<input type="button" name="b3" value="Read Only" onclick="ReadOnlyFunction()">
		<br><br>
		<img src="submit.png" width="50px" height="50px"
onclick="javascript:document.forms.myform.submit()">

	</form>
	<script language="javascript" type="text/javascript">
		function EnableFunction()
		{
			document.getElementById("tf1").disabled=false;
		}
		function DisableFunction()
		{
			document.getElementById("tf1").disabled=true;
		}
		function ReadOnlyFunction()
		{
			document.getElementById("tf2").readOnly=true;
		}
	</script>
</body>
</html>
```

CSS(JavaScript) Practical Programs by VJTech Academy

- **Practical No:-10.Develop a webpage for creating session and persistent cookies. Observe the effects with browser cookies settings.**

```
<html>
<body>
	Enter Cookie Name:<input type="text" id="tf1"><br><br>
	Enter Cookie Value:<input type="text" id="tf2"><br><br>
	<input type="button" name="b1" value="Create Cookie" onclick="CreateCookie()">
	<input type="button" name="b2" value="Read Cookie" onclick="ReadCookie()">
	<input type="button" name="b3" value="Update Cookie" onclick="UpdateCookie()">
	<input type="button" name="b4" value="Delete Cookie" onclick="DeleteCookie()">
	<script language="javascript" type="text/javascript">
		function CreateCookie()
		{
			var nm=document.getElementById("tf1").value;
			var val=document.getElementById("tf2").value;
			document.cookie=nm+"="+val+";expires=Wed, 01 Jan 2025 00:00:00 UTC";
			alert("Cookie created successfully");
		}
		function ReadCookie()
		{
			var x=document.cookie;
			alert("All Cookies:"+x);
		}
		function UpdateCookie()
		{
			var nm=document.getElementById("tf1").value;
			var val=document.getElementById("tf2").value;
			document.cookie=nm+"="+val;
			alert("Cookie updated successfully");
		}
		function DeleteCookie()
		{
			var nm=document.getElementById("tf1").value;
			document.cookie=nm+"="+";expires=Wed, 01 Jan 1970 00:00:00 UTC";
			alert("Cookie deleted successfully");
		}
	</script>
</body>
</html>
```