

Week 4

Spring Core – Load list of countries from Spring Configuration

XML file

```
<?xml version="1.0" encoding="UTF-8"?>

<beans xmlns="http://www.springframework.org/schema/beans"
       xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
       xsi:schemaLocation="
         http://www.springframework.org/schema/beans
         https://www.springframework.org/schema/beans/spring-beans.xsd">

    <!-- India -->
    <bean id="in" class="com.cognizant.spring_learn.Country">
        <property name="code" value="IN"/>
        <property name="name" value="India"/>
    </bean>

    <bean id="us" class="com.cognizant.spring_learn.Country">
        <property name="code" value="US"/>
        <property name="name" value="United States"/>
    </bean>


    <bean id="de" class="com.cognizant.spring_learn.Country">
        <property name="code" value="DE"/>
        <property name="name" value="Germany"/>
    </bean>

    <bean id="jp" class="com.cognizant.spring_learn.Country">
        <property name="code" value="JP"/>
        <property name="name" value="Japan"/>
    </bean>

    <!-- List of Countries -->
    <bean id="countryList" class="java.util.ArrayList">
        <constructor-arg>
            <list>
                <ref bean="in"/>
                <ref bean="us"/>
                <ref bean="de"/>
                <ref bean="jp"/>
            </list>
        </constructor-arg>
    </bean>

</beans>
```

Class File

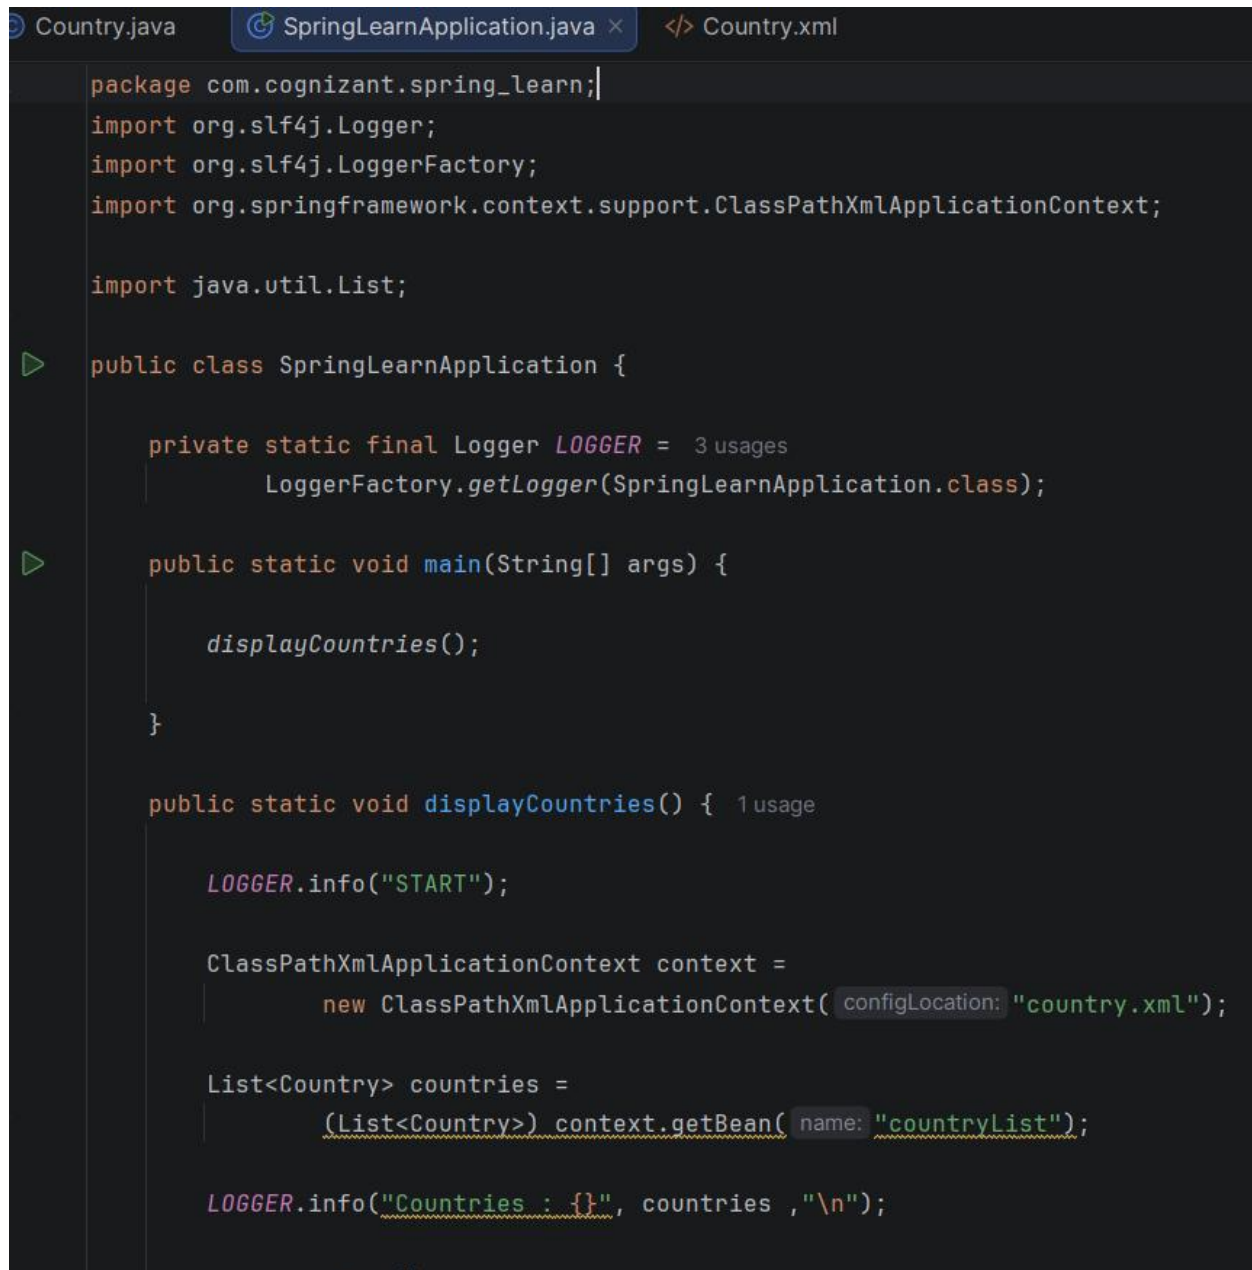

```
Country.java SpringLearnApplication.java x </> Country.xml

package com.cognizant.spring_learn;

import org.slf4j.Logger;
import org.slf4j.LoggerFactory;
import org.springframework.context.support.ClassPathXmlApplicationContext;

import java.util.List;

public class SpringLearnApplication {

    private static final Logger LOGGER = 3 usages
        LoggerFactory.getLogger(SpringLearnApplication.class);

    public static void main(String[] args) {

        displayCountries();

    }

    public static void displayCountries() { 1 usage


        LOGGER.info("START");

        ClassPathXmlApplicationContext context =
            new ClassPathXmlApplicationContext( configLocation: "country.xml");

        List<Country> countries =
            (List<Country>) context.getBean( name: "countryList");

        LOGGER.info("Countries : {}", countries ,"\n");
    }
}
```

Output

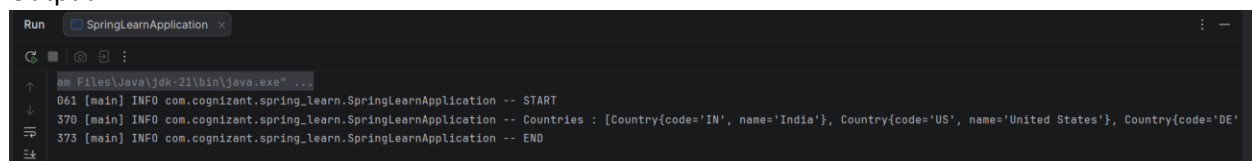

```
Run SpringLearnApplication x

061 [main] INFO com.cognizant.spring_learn.SpringLearnApplication -- START
370 [main] INFO com.cognizant.spring_learn.SpringLearnApplication -- Countries : [Country{code='IN', name='India'}, Country{code='US', name='United States'}, Country{code='DE'
373 [main] INFO com.cognizant.spring_learn.SpringLearnApplication -- END
```