
Mean-direction cosine (diagnostic) across all datasets (higher is better)

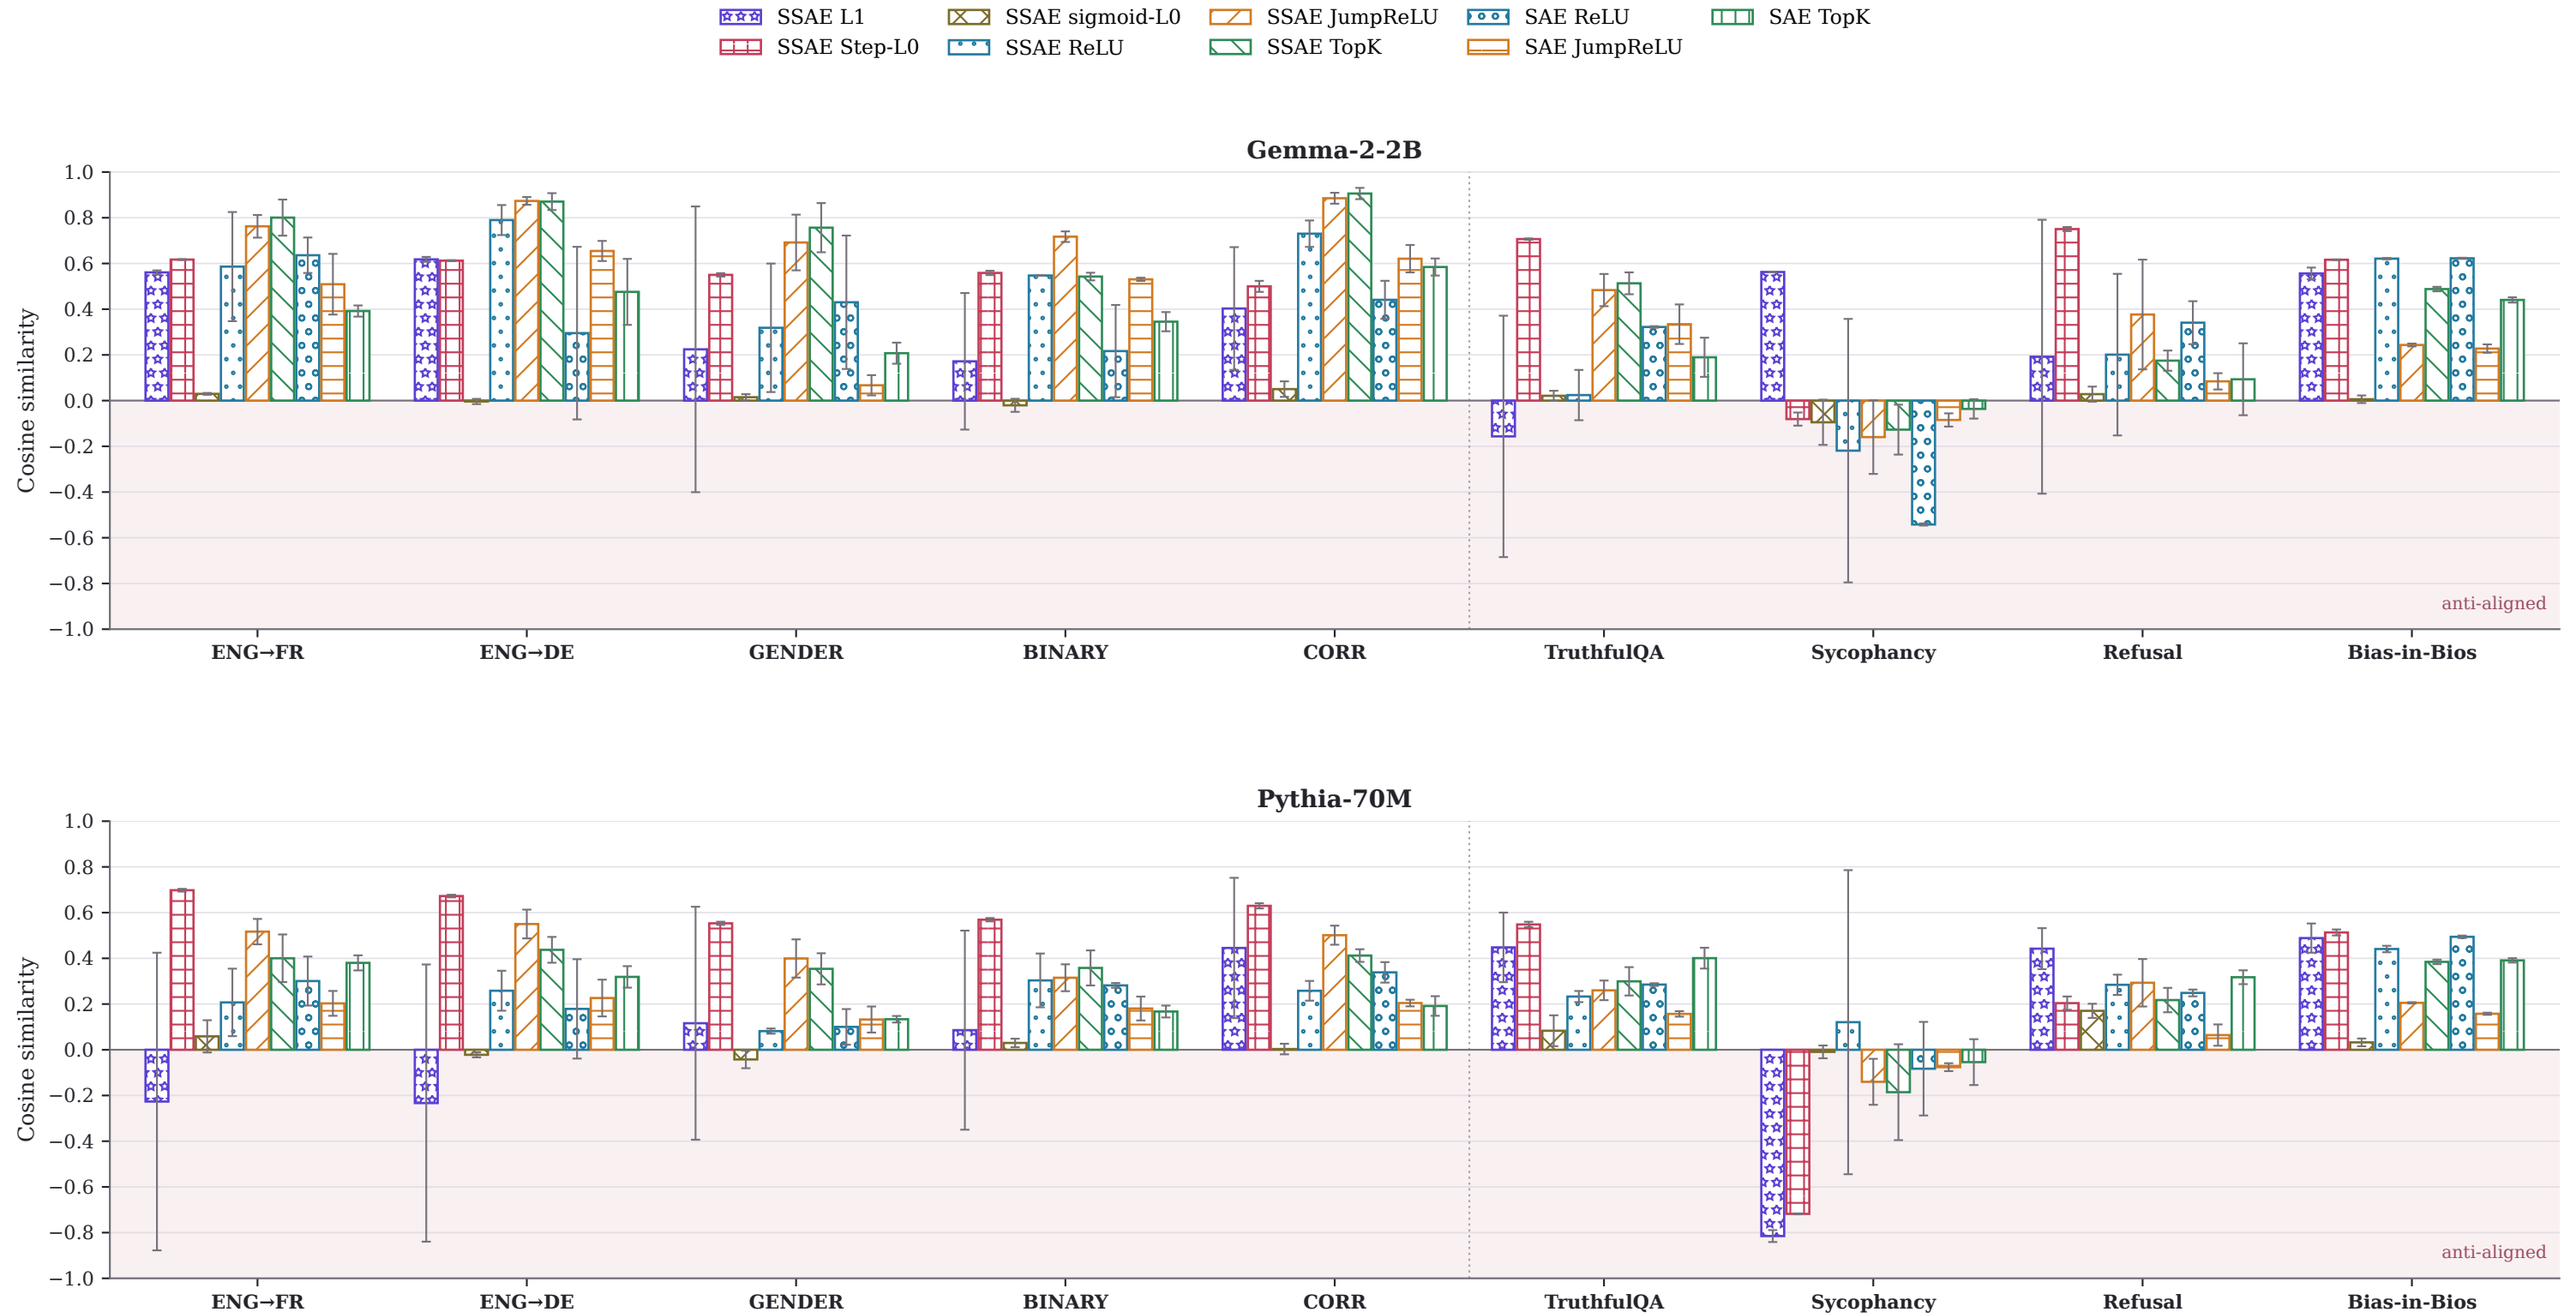

Train-only selection uses |corr(factor, latent response)|; the sign of that response correlation orients its decoder axis. Negative bars are retained and mean held-out anti-alignment—not missing data.