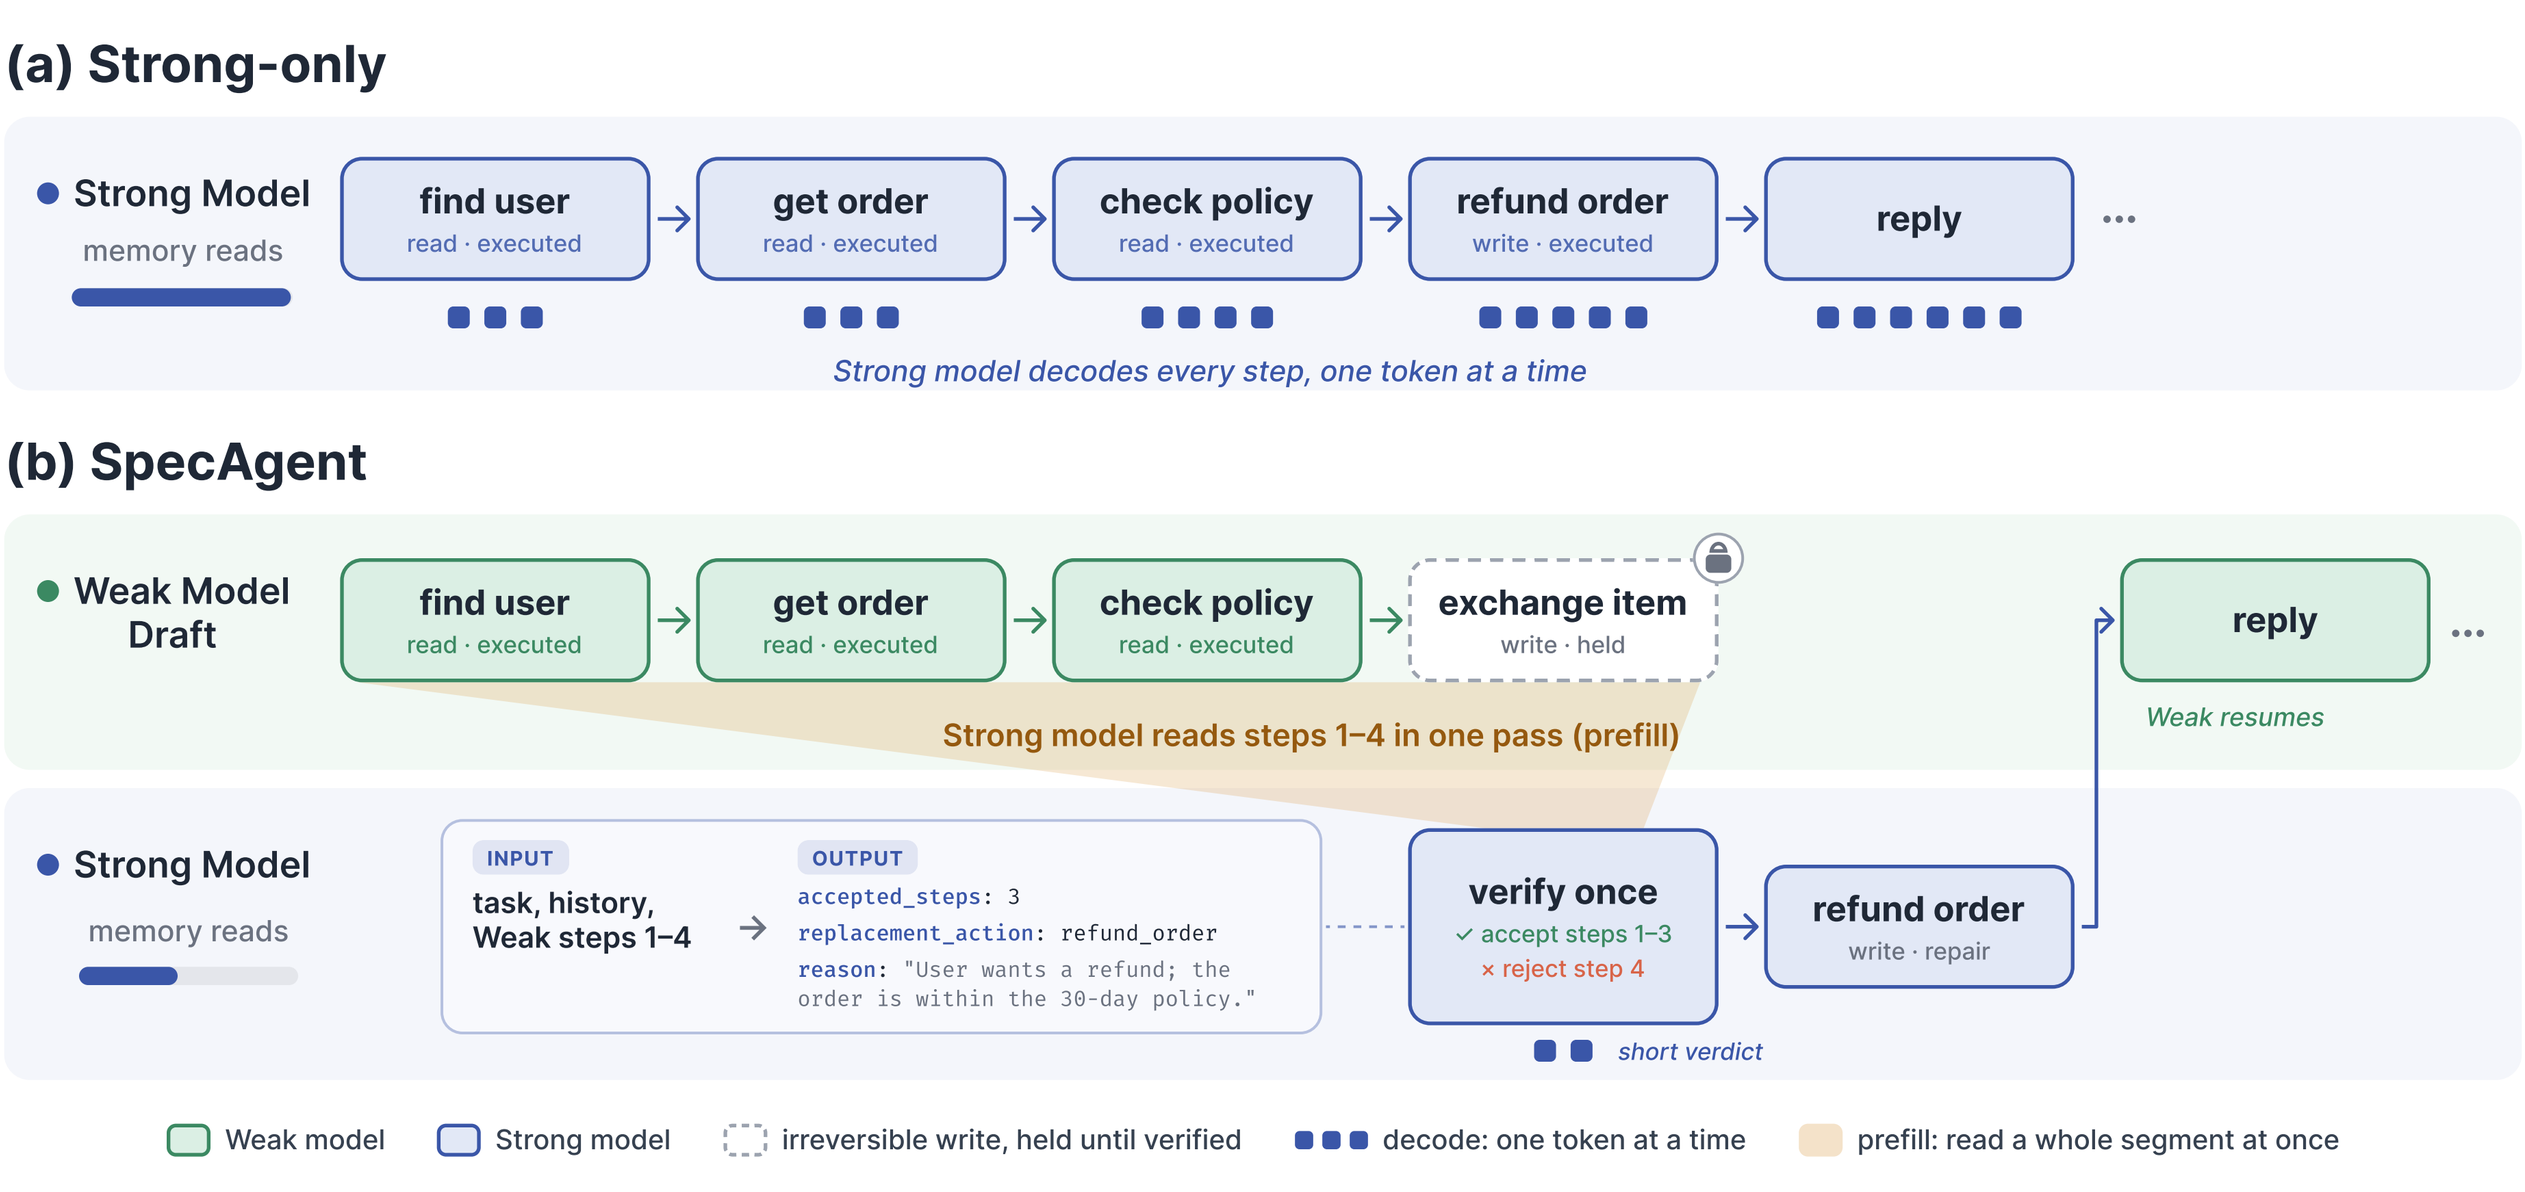

(a) Strong-only
Strong Model
memory reads
find user
read · executed
get order
read · executed
check policy
read · executed
refund order
write · executed
reply
...
Strong model decodes every step, one token at a time
(b) SpecAgent
Weak Model
Draft
find user
read · executed
get order
read · executed
check policy
read · executed
exchange item
write · held
reply
...
Weak resumes
Strong model reads steps 1–4 in one pass (prefill)
Strong Model
memory reads
INPUT
task, history,
Weak steps 1–4
OUTPUT
accepted_steps: 3
replacement_action: refund_order
reason: "User wants a refund; the order is within the 30-day policy."
verify once
✓ accept steps 1–3
× reject step 4
refund order
write · repair
short verdict
Weak model
Strong model
irreversible write, held until verified
decode: one token at a time
prefill: read a whole segment at once