

# C programing

shubh patel

September 2025

## 1 Example-6 MINUTES INTO HOURS

```
#include <stdio.h>
int main() {
    int minutes;
    float hours;
    printf("Enter minutes: ");
    scanf("%d", &minutes);
    hours = minutes / 60.0;
    printf("Hours = %.2f\n", hours);
    return 0;
}
```

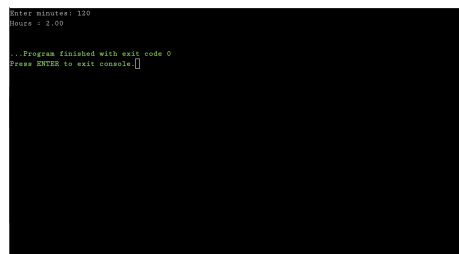


Figure 1: figure