

C programing

shubh patel

September 2025

1 Example-7 Dollars into Rupees

```
#include <stdio.h>
int main() {
    float dollars, rupees;
    printf("Enter dollars: ");
    scanf("%f", &dollars);
    rupees = dollars * 48;
    printf("Rupees = %.2f\n", rupees);
    return 0;
}
```

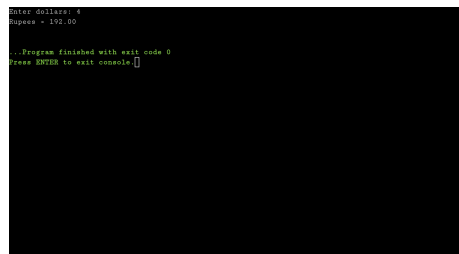


Figure 1: figure