Overview
API Functions
Level of Requirement for Parameters
Request Format
Response Format
Namespace
SOAPAction
Interface for Subscription Relationship Synchronization
Process
SyncOrderRelation
API Function
Request URI
Request
Response
Error Codes
API Error Responses
Service Error Response
Policy Error Response

Overview

[API Functions](#)

[Level of Requirement for Parameters](#)

[Request Format](#)

[Response Format](#)

[Namespace](#)

[SOAPAction](#)

Huawei Proprietary and Confidential
Copyright © Huawei Technologies Co., Ltd.

API Functions

The SDP provides data synchronization capability application programming interfaces (APIs) for third-party applications (App for short) to connect to it and use its data synchronization capability to synchronize subscription relationships. App is generally developed by various partners of the SDP.

NOTE:

Partners are the enterprises and individuals who sign a contract and cooperate with carriers in utilizing the SDP. Partners include SPs, CPs, Developers, and Enterprises. In this document, partners are mainly the SPs, Developers, and Enterprises who use APIs for secondary development.

Table 1 describes functions of DataSync capability APIs provided by the SDP.

Table 1 Functions of DataSync capability APIs

Function	Description	API
Subscription relationship synchronization	The SDP (functioning as the client) invokes an API to synchronize subscription relationships to the App (functioning as the server). Partners must code the App based on the API field requirements so that the App can correctly parse and respond to requests received from the SDP. The App must send a response to the SDP within 30 seconds.	SyncOrderRelation

Parent topic: Overview

Huawei Proprietary and Confidential
Copyright © Huawei Technologies Co., Ltd.

Level of Requirement for Parameters

The App must develop APIs based on the level of requirement for each parameter.

Table 1 Level of requirement for parameters

Type	Description
Mandatory	A parameter is always mandatory in a request. Parameters with the **Mandatory** requirement are used for access authentication or service processing. If a parameter with the **Mandatory** requirement is left empty in a request, access authentication or service processing fails and the request fails.
Conditional	A parameter is mandatory or optional in specified conditions. Parameters with the **Conditional** requirement are used for access authentication or service processing in specified conditions. If the specified conditions is met but a parameter with the **Conditional** requirement is left empty in a request, access authentication or service processing fails and the request fails.
Optional	A parameter is always optional. Parameters with the **Optional** requirement are not used for service processing.

Parent topic: Overview

Huawei Proprietary and Confidential
Copyright © Huawei Technologies Co., Ltd.

Request Format

The SDP provides the SOAP request in the following format:

```
<soapenv:Envelope>
   <soapenv:Header>
         <parameter>…</parameter>
…
   </soapenv:Header>
   <soapenv:Body>
         <parameter>…</parameter>
…
   </soapenv:Body>
</soapenv:Envelope>
```

Table 1 Request format

Element	Description
<soapenv:Envelope>	Root element in a request, which specifies the namespace.
<soapenv:Header>	Request header. Parameters in this element are defined by the SDP and are mainly information to be processed by the SDP services, including access authentication parameters.
<soapenv:Body>	Request body. Parameters in this element comply with the SOAP protocol.

Parent topic: Overview

Huawei Proprietary and Confidential
Copyright © Huawei Technologies Co., Ltd.

Response Format

Success Response Format

The SDP provides the SOAP API success responses in the following format:

```
<soapenv:Envelope>
   <soapenv:Body>
         <parameter>…</parameter>
…
   </soapenv:Body>
</soapenv:Envelope>
```

Table 1 Success response format

Element	Description
<soapenv:Envelope>	Root element in a success response, which specifies the namespace.
<soapenv:Body>	Success response body. Parameters in this element comply with the SOAP protocol.

Error Response Format

The SDP provides the SOAP API error responses in the following format:

```
<soapenv:Envelope>
  <soapenv:Body>
    <soapenv:Fault>
         <parameter>…</parameter>
…

      <detail>
         <parameter>…</parameter>
…
      </detail>
    </soapenv:Fault>
  </soapenv:Body>
</soapenv:Envelope>
```

Table 2 Error response format

Element	Description
<soapenv:Envelope>	Root element in an error response, which specifies the namespace.
<soapenv:Body>	Error response body, contains the <soapenv:Fault> and <detail> elements. This element specifies the error code and error details.
<soapenv:Fault>	Error code and description. For details about error responses, see API Error Responses.
	Error details, which are the same as the <soapenv:Fault> element

<detail>	information.

Parent topic: Overview

Huawei Proprietary and Confidential
Copyright © Huawei Technologies Co., Ltd.

Namespace

Partners must follow the specified namespaces of data types when developing DataSync capability APIs.

- Table 1 describes the namespaces of DataSync capability APIs.
- The namespace of data types used by the DataSync capability APIs is **http://www.csapi.org/schema/parlayx/data/v1_0**.

Table 1 Namespaces of DataSync capability APIs

Namespace	API
http://www.csapi.org/wsdl/parlayx/data/sync/v1_0	SyncOrderRelation

Parent topic: Overview

Huawei Proprietary and Confidential
Copyright © Huawei Technologies Co., Ltd.

SOAPAction

Leave the **SOAPAction** parameter empty.

The following is an example of the **SOAPAction** parameter setting in an HTTP header:

```
SOAPAction: ""
```

Parent topic: Overview

Huawei Proprietary and Confidential
Copyright © Huawei Technologies Co., Ltd.

Interface for Subscription Relationship Synchronization

Process

SyncOrderRelation

Huawei Proprietary and Confidential
Copyright © Huawei Technologies Co., Ltd.

Process


When a user subscription relationship is generated or modified on the SDP, the SDP uses the SyncOrderRelation interface to synchronize the subscription relationship to App.

The SDP uses the SyncOrderRelation interface to synchronize subscription relationships when:

- A user subscribes to a product on the portal or using an SMS message.
- The carrier subscribes to or unsubscribes from a product for a user.
- Automatic renewal of subscription to a product fails.
- A user unsubscribes from a product on the portal or using an SMS message.

Figure 1 shows the process of synchronizing a subscription relationship.

Figure 1 Process of synchronizing a subscription relationship to a third party

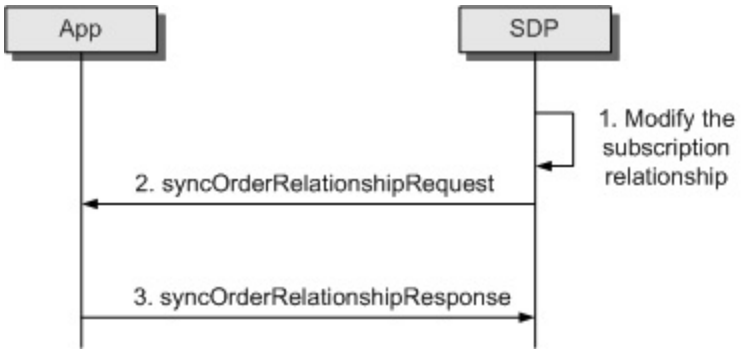

Parent topic: Interface for Subscription Relationship Synchronization

Huawei Proprietary and Confidential
Copyright © Huawei Technologies Co., Ltd.

SyncOrderRelation

API Function

Request URI

Request

Response

Error Codes

Parent topic: Interface for Subscription Relationship Synchronization

Huawei Proprietary and Confidential
Copyright © Huawei Technologies Co., Ltd.

API Function

The SDP (functioning as the client) invokes an API to synchronize subscription relationships to the App (functioning as the server).

Partners must code the App based on the API field requirements so that the App can correctly parse and respond to requests received from the SDP. The App must send a response to the SDP within 30 seconds.

Parent topic: SyncOrderRelation

Huawei Proprietary and Confidential
Copyright © Huawei Technologies Co., Ltd.

Request URI

The request URI is the destination URI of SyncOrderRelation messages sent by the SDP to the App. The URI is defined by the App.

Parent topic: SyncOrderRelation

Huawei Proprietary and Confidential
Copyright © Huawei Technologies Co., Ltd.

Request

The SDP functions as the client and sends a **SyncOrderRelationRequest** message to the App.

Example

- Subscription example:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelop
   <soapenv:Body>
      <ns1:syncOrderRelation xmlns:ns1="http://www.csapi.org/schema/par
         <ns1:userID>
            <ID>8619800000001</ID>
            <type>0</type>
         </ns1:userID>
         <ns1:spID>001100</ns1:spID>
         <ns1:productID>1000000423</ns1:productID>
         <ns1:serviceID>00110020000001100</ns1:serviceID>
         <ns1:serviceList>00110020000001100</ns1:serviceList>
         <ns1:updateType>1</ns1:updateType>
         <ns1:updateTime>20130723082551</ns1:updateTime>
         <ns1:updateDesc>Addition</ns1:updateDesc>
         <ns1:effectiveTime>20130723082551</ns1:effectiveTime>
         <ns1:expiryTime>20361231160000</ns1:expiryTime>
         <ns1:extensionInfo>
            <item>
               <key>accessCode</key>
               <value>20086</value>
            </item>
            <item>
               <key>chargeMode</key>
               <value>0</value>
            </item>
            <item>
               <key>MDSPSUBEXPMODE</key>
               <value>1</value>
            </item>
            <item>
               <key>objectType</key>
               <value>1</value>
            </item>
            <item>
               <key>isFreePeriod</key>
               <value>false</value>
            </item>
            <item>
               <key>payType</key>
               <value>0</value>
            </item>
            <item>
               <key>transactionID</key>
               <value>50401600000130723162430417 0004</value>
            </item>
            <item>
```

```
            <key>orderKey</key>
            <value>9990000000000194</value>
         </item>
         <item>
            <key>keyword</key>
            <value>sub</value>
         </item>
         <item>
            <key>cycleEndTime</key>
            <value>20130822160000</value>
         </item>
         <item>
            <key>durationOfGracePeriod</key>
            <value>-1</value>
         </item>
         <item>
            <key>serviceAvailability</key>
            <value>0</value>
         </item>
         <item>
            <key>channelID</key>
            <value>1</value>
         </item>
         <item>
            <key>TraceUniqueID</key>
            <value>50401600000130723162430417005</value>
         </item>
         <item>
            <key>operCode</key>
            <value>zh</value>
         </item>
         <item>
            <key>rentSuccess</key>
            <value>true</value>
         </item>
         <item>
            <key>try</key>
            <value>false</value>
         </item>
      </ns1:extensionInfo>
   </ns1:syncOrderRelation>
</soapenv:Body>
</soapenv:Envelope>
```

- Unsubscription example:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelop
   <soapenv:Body>
      <ns1:syncOrderRelation xmlns:ns1="http://www.csapi.org/schema/par
         <ns1:userID>
            <ID>8619800000001</ID>
            <type>0</type>
         </ns1:userID>
         <ns1:spID>001100</ns1:spID>
         <ns1:productID>1000000423</ns1:productID>
         <ns1:serviceID>0011002000001100</ns1:serviceID>
         <ns1:serviceList>0011002000001100</ns1:serviceList>
         <ns1:updateType>2</ns1:updateType>
```

```
        <ns1:updateTime>20130723094953</ns1:updateTime>
        <ns1:updateDesc>Deletion</ns1:updateDesc>
        <ns1:effectiveTime>20130723082551</ns1:effectiveTime>
        <ns1:expiryTime>20130723094952</ns1:expiryTime>
        <ns1:extensionInfo>
           <item>
              <key>updateReason</key>
              <value>1</value>
           </item>
           <item>
              <key>payType</key>
              <value>0</value>
           </item>
           <item>
              <key>transactionID</key>
              <value>50401600000130723174831516100 3</value>
           </item>
           <item>
              <key>orderKey</key>
              <value>9990000000000000194</value>
           </item>
           <item>
              <key>MDSPSUBEXPMODE</key>
              <value>1</value>
           </item>
           <item>
              <key>objectType</key>
              <value>1</value>
           </item>
           <item>
              <key>chargeMode</key>
              <value>0</value>
           </item>
           <item>
              <key>accessCode</key>
              <value>20086</value>
           </item>
           <item>
              <key>keyword</key>
              <value>unsub</value>
           </item>
           <item>
              <key>channelID</key>
              <value>1</value>
           </item>
           <item>
              <key>TraceUniqueID</key>
              <value>50401600000130723174831516100 6</value>
           </item>
           <item>
              <key>rentSuccess</key>
              <value>true</value>
           </item>
           <item>
              <key>try</key>
              <value>false</value>
           </item>
        </ns1:extensionInfo>
```

```
      </ns1:syncOrderRelation>
   </soapenv:Body>
</soapenv:Envelope>
```

Message Header Parameters

None.

Message Body Parameters

Table 1 describes parameters in a **syncOrderRelationRequest** message body.

Table 1 Parameters in a SyncOrderRelationRequest message body

Parameter	Type	Length	Level of Requirement	Description
userID	UserID	-	Mandatory	User ID and user type. For details, see UserID.
spID	String	21	Mandatory	ID of the partner to which the prod belongs. The ID is automatically allocated b SDP to the SP after successful registration. To obtain the ID, use the registere account to log in to the SDP management portal and query the account information, or obtain it frc notification email after successful registration. [Example] 000201
productID	String	21	Mandatory	Product ID. The ID is automatically allocated b SDP when a third party or the carr releases a subscribable product. [Example] 1000000201
				ID of the service to which the prod belongs. The ID is automatically allocated b SDP when a third party releases a service.

serviceID	String	21	Mandatory	**NOTE:** When the product is a bundle prod the value is the Bundle ID. [Example] 00030420000001075
serviceList	String	1024	Optional	List of subservice IDs. The value varies according to the product type. • If the product is a bundle product, the value is IDs subservices in the bundle Separate multiple subser IDs by vertical bars (|). • If the product is a non-bu product, the value is the s as the **serviceID** value. [Example] 00030420000001075|00030420000
updateType	int	2	Mandatory	Operation type. • 1: Add • 2: Delete • 3: Update [Example] 1
updateTime	String	14	Mandatory	Time when the subscription relatio is updated (UTC time). [Format] yyyyMMddHHmmss [Example] 20130227000000
				Description about the update of the subscription relationship. When the **extensionInfo** field cont the **UpdateReason** field, the **UpdateReason** field specifies the subscription relationship update re

updateDesc	String	255	Optional	• UpdateReason =2 ▪ 7698: The produ automatically unsubscribed fro the end of the gr period. ▪ 7699: The produ automatically unsubscribed fro the end of the suspension perio • UpdateReason =3 ▪ 7330: The user account balance insufficient. ▪ 7333: An interna charging error o on the SDP. ▪ 7271: The SDP not have sufficie charging informa to perform rating ▪ 7999: Other erro occur. [Example] Add a new subscription.
effectiveTime	String	14	Optional	Time when the subscription relation takes effect (UTC time). [Format] yyyyMMddHHmmss [Example] 20130227000000
expiryTime	String	14	Optional	Time when the subscription relation expires (UTC time). [Format] yyyyMMddHHmmss [Example] 20130327000000
				Extended information.

extensionInfo	NamedParameterList	-	Optional	For the **NamedParameterList** information, see Table 3. For the extended fields transmitted **NamedParameterList**, see Table

Table 2 UserID parameters

Parameter	Type	Length	Level of Requirement	Description
ID	String	30	Mandatory	User ID. If the user is a mobile phone user, this value is a mobile number containing the country code. [Example] 8613012312123
type	int	2	Mandatory	User type. • 0: mobile phone user. • 10: user fake ID • 11: email user • 18: Internet user (added user type in the Saudi Arabia Mobily office). [Example] 0

Table 3 NamedParameterList parameters

Parameter	Type	Length	Level of Requirement	Description
item	NamedParameter[0...unbounded]	-	Optional	Data type corresponding to the extended field, which consists of **key** and **value**. For the **NamedParameters** information, see Table 3.

Table 4 NamedParameter parameters

Parameter	Type	Length	Level of Requirement	Description
key	String	-	Mandatory	ID of the extended field. The value is specified by the SDP. [Example] try
value	String	-	Mandatory	Value of the key. [Example] true

Table 5 Extended parameters transmitted in extensionInfo

Key	Value		
Parameter	**Type**	**Length**	**Description**
accessCode	String	30	Product access code. The SDP obtains the value during subscription relationship synchronization. When a third party releases a subscribable product on the SDP management portal, the third party sets product access code if the product can be subscribed to by SMS message. [Example] 1
chargeMode	int	4	Charging period of the product. The value is set when a third party releases a subscribable product on the SDP management portal. • 0: month • 10: multiday • 13: multimonth • 18: day • 19: week • 20: multiweek [Example] 0
			Expiration mode of a subscription relationship

MDSPSUBEXPMODE	String	1	upon unsubscription. • 1: expires immediately • 2: expires next week [Example] 1
objectType	String	1	Type of the pricing object. • 1: Service • 2: Content • 3: Category • 4: Package [Example] 1
isFreePeriod	boolean	-	Indicates whether the subscription is repeated during the period free of charge. • true: yes • false: no
payType	int4	-	Payment type. • 0: postpaid user • 1: prepaid user [Example] 0
transactionID	String	-	Transaction ID. The ID is automatically generated by the SDP and is used only to trace messages during the SDP commissioning. The SP ignores this parameter. [Example] 10000120010111062302172100011
orderKey	String	20	Subscription relationship key that uniquely identifies a subscription record. For services that do not support automatic renewal, each subscription generates a subscription relationship record and generates a new key. [Example]

			99900000000000194
keyword	String	100	Subscription and unsubscription command words. When a third party releases a subscribable product on the SDP management portal, the third party sets the subscription and unsubscription command words if the product can be subscribed to by SMS message. If multiple command words are set, the SDP writes any of them to the request during subscription relationship synchronization. [Example] sub
cycleEndTime	String	14	End time of the bill cycle (UTC time). [Format] yyyyMMddHHmmss [Example] 20130227000000
durationOfGracePeriod	String	4	Grace period of the product. **NOTE:** • This parameter is displayed only when **updateType** is set to **1** and **updateType** is set to **3**. • If the grace period is not set, set this parameter to **-1**. [Unit] Day [Example] 5
			Update reason. When **updateType** is set to **2**, the possible reasons are as follows: • 1: A user unsubscribes from a product. • 2: Rental fails to be collected upon subscription renewal. • 3: Unsubscription is triggered when the charging fails upon the first

updateReason	int	4	subscription. • 4: Unsubscription is triggered when the service status is abnormal. • 5: Unsubscription is triggered when the user status is abnormal. [Example] 1
serviceAvailability	String	10	Indicates whether users can use the service in the grace period. • 0: yes • 1: no **NOTE:** • This parameter is displayed only when **updateType** is set to **1** and **updateType** is set to **3**. • If the grace period is not set, set this parameter to **-1**. [Example] 0
channelID	Int	4	Operation channel. • 1: web • 2: SMS • 3: USSD • 4: IVR • 5: CC (CRM) • 6: PDA • 7: XHTML (WAP 2) (This value is used in the SDP baseline version.) • 10: Promotion (This value is used for requests sent by the Promotion.) • 21: ODP • 99: Other • 100: SP website • 101: UE(User Equipment) • 102: MDSP CC Portal

			• 105: PCClient • 110: IVR Call Out • 111: SDP Web Tool (CS) • 112: SDP Web Tool (Admin) • 113: SDP Web Tool (CP) • 115: MMS • 120: channel of unsubscription caused by user deregistration • 124: channel of unsubscription caused by the blacklist • 125: SP website (added channel type in the MTN project, which is used for subscription on the SP website.) [Example] 1
TraceUniqueID	String	30	Transaction ID. The ID is automatically generated by the SDP and is used only to trace messages during the SDP commissioning. The SP ignores this parameter. [Example] 10000120010111062302172100011
operCode	String	40	Operation code. This parameter specifies the subscription language type. • zh • en The parameter is automatically set based on the language selected by the user during subscription on the portal. [Example] zh
rentSuccess	boolean	N/A	Indicates whether the monthly rental is successfully deducted. • true: yes • false: no This parameter is valid only when **updateType**

			is set to **3**. [Example] true
try	boolean	N/A	Indicates whether the product is in the trial user period. • true: yes • false: no A trial use period can be set when an SP releases a subscribable product supporting automatic subscription renewal. [Example] true

Parent topic: SyncOrderRelation

Huawei Proprietary and Confidential
Copyright © Huawei Technologies Co., Ltd.

Response

The App functions as the server, processes **SyncOrderRelation** messages received from the SDP, and sends **SyncOrderRelationResponse** messages to the SDP.

This topic provides a success response example and describes parameters in the response. If a request fails, the App sends an error response that contains an error code. For details about error responses, see API Error Responses.

Example

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlr
   <soapenv:Header/>
   <soapenv:Body>
      <loc:syncOrderRelationResponse>
         <loc:result>0</loc:result>
         <loc:resultDescription>OK</loc:resultDescription>
      </loc:syncOrderRelationResponse>
   </soapenv:Body>
</soapenv:Envelope>
```

Message Body Parameters

Table 1 describes parameters in a **SyncOrderRelationResponse** message body.

Table 1 Parameters in a SyncOrderRelationResponse message body

Parameter	Type	Level of Requirement	Description
result	String	Mandatory	• 0: The request succeeds. • Other values: The request is abnormal. For the error codes, see Error Codes.
resultDescription	String	Mandatory	Description of the subscription relationship synchronization result.
extensionInfo	NamedParameterList	Optional	Extended parameter. No extended information.

Parent topic: SyncOrderRelation

Copyright © Huawei Technologies Co., Ltd.

Error Codes

Table 1 describes **SyncOrderRelation** error codes that the App may return upon an exception.

Table 1 SyncOrderRelation error codes

Error Code	Description	Cause
1211	The field format is incorrect or the value is invalid.	The **Format** value is incorrect or in an incorrect format in the body of the subscription relationship synchronization request.
2030	The subscription relationship already exists.	The subscription relationship already exists in the SP system.
2031	The subscription relationship does not exist.	The subscription relationship does not exist in the SP system.
2032	The service does not exist.	The service to which the product belongs does not exist.
2033	The service is unavailable.	The service to which the product belongs is in an abnormal status.
2034	The service is unavailable.	The service to which the product belongs cannot be subscribed to.
2500	An internal system error occurred.	An internal error occurs in the SP system.

Parent topic: SyncOrderRelation

Huawei Proprietary and Confidential
Copyright © Huawei Technologies Co., Ltd.

API Error Responses

[Service Error Response]

[Policy Error Response]

Huawei Proprietary and Confidential
Copyright © Huawei Technologies Co., Ltd.

Service Error Response

A service error is caused by service operation exceptions irrelevant to policies. When a service error occurs, the server sends a service error response to the client. This topic provides a service error response example and describes parameters in the response.

Example

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlr
  <soapenv:Body>
    <soapenv:Fault>
      <faultcode>SVC0001</faultcode>
<faultstring>Waiting for response timed out, message type is OutwardGetLocReq</f
      <detail>
        <ns1:ServiceException xmlns:ns1="http://www.csapi.org/schema/parlayx/cor
          <messageId>SVC0001</messageId>
<text>Waiting for response timed out, message type is OutwardGetLocReq.</text>
<variables>OutwardGetLocReq</variables>
        </ns1:ServiceException>
      </detail>
    </soapenv:Fault>
  </soapenv:Body>
</soapenv:Envelope>
```

Parameter Description

Table 1 describes parameters in a service error response.

Table 1 Parameters in a service error response

Parameter	Type	Level of Requirement	Description
faultcode	xsd:string	Mandatory	Result code. [Format] SVC*ABCD* In the format, **SVC** identifies a service error response, and *ABCD* is a number ranging from 0001 to 9999. [Example] SVC0001
faultstring	xsd:string	Mandatory	Error description. The value can contain the variable *%#* in definition. When sending a response, the server replaces the variable *%#* with the value of **variables**. [Example]

			Waiting for response timed out, message type is OutwardGetLocReq.
messageId	xsd:string	Mandatory	The value is the same as that of **faultcode**.
text	xsd:string	Mandatory	The value is the same as that of **faultstring**.
variables	xsd:string [0..unbounded]	Optional	Value of the variable defined in the value of **faultstring**. [Example] OutwardGetLocReq

Parent topic: API Error Responses

Huawei Proprietary and Confidential
Copyright © Huawei Technologies Co., Ltd.

Policy Error Response

A policy error is caused by service level agreement (SLA) violation. When a policy error occurs, the server sends a policy error response to the client. This topic provides a policy error response example and describes parameters in the response.

Example

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlr
  <soapenv:Body>
    <soapenv:Fault>
      <faultcode>POL0006</faultcode>
<faultstring>GroupAddr is not supported</faultstring>
      <detail>
        <ns1:PolicyException xmlns:ns1="http://www.csapi.org/schema/parlayx/comm
          <messageId>POL0006</messageId>
<text>GroupAddr is not supported</text>
<variables>GroupAddr</variables>
        </ns1:PolicyException>
      </detail>
    </soapenv:Fault>
  </soapenv:Body>
</soapenv:Envelope>
```

Parameter Description

Table 1 describes parameters in a policy error response.

Table 1 Parameters in a policy error response

Parameter	Type	Level of Requirement	Description
faultcode	xsd:string	Mandatory	Result code. [Format] POL*ABCD* In the format, **POL** identifies a policy error response, and *ABCD* is a number ranging from 0001 to 9999. [Example] POL0006
faultstring	xsd:string	Mandatory	Error description. The value can contain the variable %# in definition. When sending a response, the server replaces the variable %# with the value of **variables**. [Example]

			GroupAddr is not supported
messageId	xsd:string	Mandatory	The value is the same as that of **faultcode**.
text	xsd:string	Mandatory	The value is the same as that of **faultstring**.
variables	xsd:string [0..unbounded]	Conditional	Value of the variable defined in the value of **faultstring**. [Example] GroupAddr

Parent topic: API Error Responses

Huawei Proprietary and Confidential
Copyright © Huawei Technologies Co., Ltd.

API Error Responses

Huawei Proprietary and Confidential
Copyright © Huawei Technologies Co., Ltd.