

PUNE INSTITUTE OF COMPUTER
TECHNOLOGY, DHANKAWADI PUNE-43.

A
Project Report
On

Generic Compression

SUBMITTED BY

NAME: Shubham Fargade(41327)

NAME: Hardik Chandak(41331)

NAME: Atul Kardak(41340)

NAME:Yash Kasat(41341)

CLASS: BE3

GUIDED BY

Prof. Mrs. H. P. Channe



COMPUTER ENGINEERING DEPARTMENT

Academic Year:2020-21

PUNE INSTITUTE OF COMPUTER TECHNOLOGY,
DHANKAWADI PUNE-43.



CERTIFICATE

This is to certify that **Mr. Hardik Chandak, Mr. Shubham Fargade, Mr. Atul Kardak, Mr. Yash Kasat**, students of B.E. (Computer Engineering Department)

Batch 2020-21, has satisfactorily completed a project report on “**Generic Compression**” under the guidance of **Prof. Mrs. H. P. Channe** towards the partial fulfillment of the fourth year Computer Engineering Semester I of Pune University.

Prof. Mrs. H.P.Channe
Project Guide

Prof. Mrs. M.S.Takalikar
Head of Department,

ABSTRACT

Data is being generated at very high velocity in today's world. So, data compression comes in handy a lot of times. We are implementing run length encoding in this project. Run-length encoding (RLE) is a very simple form of lossless data compression in which runs of data (that is, sequences in which the same data value occurs in many consecutive data elements) are stored as a single data value and count, rather than as the original run. This is most useful on data that contains many such runs. Consider, for example, simple graphic images such as icons, line drawings, and animations. It is not useful with files that don't have many runs as it could greatly increase the file size. Also, running compression parallelly will save great amount of time while dealing with large data files.

CONTENTS

1.PROBLEM STATEMENT

2.DOMAIN

3.METHODOLOGY

4.SERIAL ALGORITHM

5.PARALLEL ALGORITHM

6.CONCLUSION

1. PROBLEM STATEMENT


Write a parallel algorithm to run 'run length encoding' concurrently on many core GPU.

2. DOMAIN

High Performance Computing.

We will be writing an algorithm to run run length encoding concurrently on many core GPU.

3.METHODOLOGY

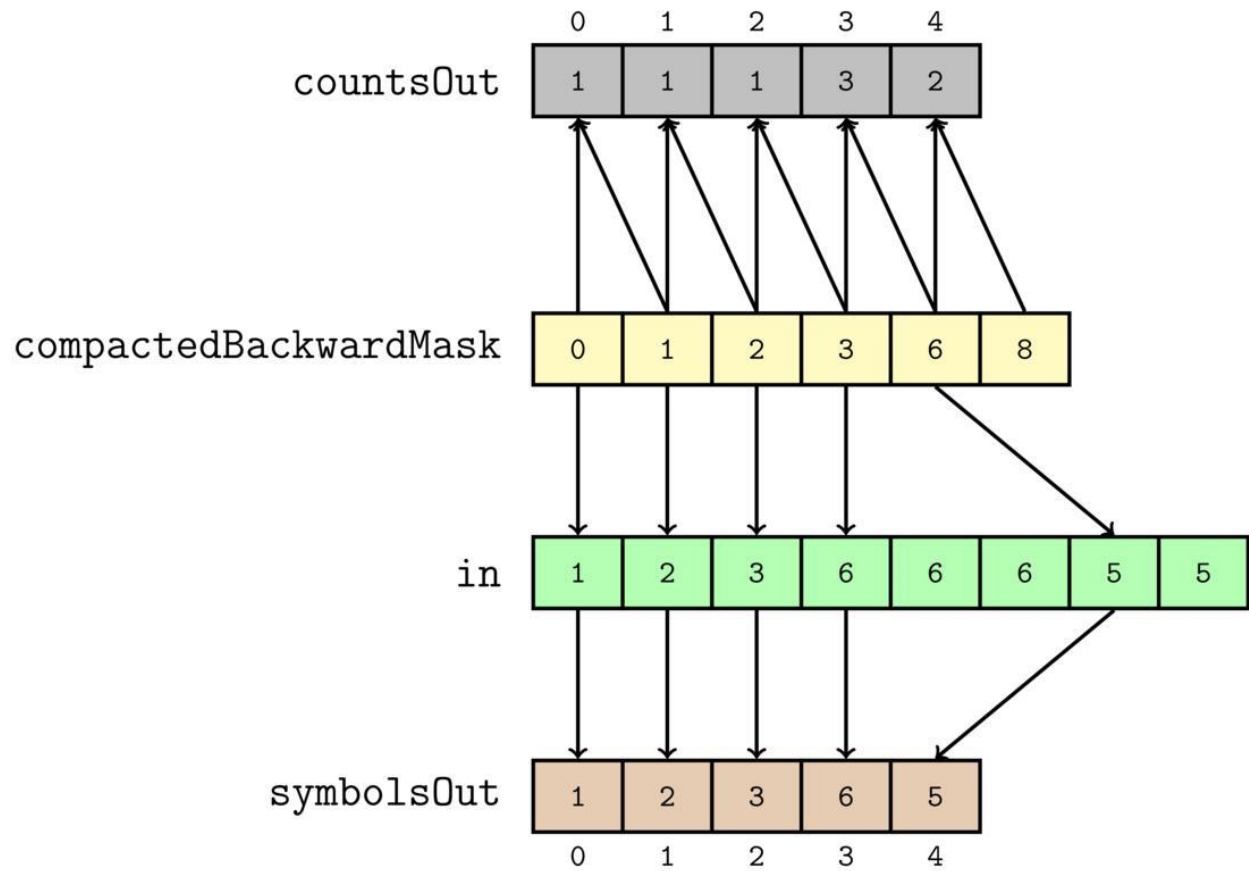

4.SERIAL ALGORITHM

```
class RunLengthEncoding
{
/   Perform Run Length Encoding (RLE) data compression algorithm
/   on String str
    public static String encode(String str)
    {
/       stores output String String encoding = ""; int count;

        for (int i = 0; i < str.length(); i++)
        {
/           count occurrences of character at index i count = 1;
            while (i + 1 < str.length() && str.charAt(i) == str.charAt(i+1))
                { count++;
                  i++;
                }

/           append current character and its count to the result
            encoding += String.valueOf(count) + str.charAt(i);
        }

        return encoding;
    }
}
```


5. PARALLEL ALGORITHM

//Program to calculate Backward Masks of all elements

```
__global__ void maskKernel(int* g_in, int* g_backwardMask, int n) { for
(int i: hemi::grid_stride_range(0, n)) {
    if(i == 0)
        g_backwardMask[i] = 1;
    else {
        g_backwardMask[i] = (g_in[i] != g_in[i - 1]);
    }
}
}

__global__ void compactKernel(int* g_scannedBackwardMask, int
                             *g_compactedBackwardMask, int*
                             g_totalRuns,
                             int n) {
    for(int i: hemi::grid_stride_range(0, n)) {
        if(i == (n - 1)) {
            g_compactedBackwardMask[g_scannedBackwardMask[i]] = i + 1;
            *g_totalRuns = g_scannedBackwardMask[i];
        }

        if(i == 0) {
            g_compactedBackwardMask[0] = 0;
        }
        elseif(g_scannedBackwardMask[i] != g_scannedBackwardMask[i - 1])
            { g_compactedBackwardMask[g_scannedBackwardMask[i] - 1] = i;
        }
    }
}
}
```

//Final Compression Algorithm

```
__global__ void scatterKernel(  
    int* g_compactedBackwardMask,  
    int* g_totalRuns,  
    int* g_in,  
    int* g_symbolsOut,  
    int* g_countsOut) {  
    int n = *g_totalRuns;  
    for(int i: hemi::grid_stride_range(0, n)) {  
        int a = g_compactedBackwardMask[i];  
        int b = g_compactedBackwardMask[i + 1];  
        g_symbolsOut[i] = g_in[a];  
        g_countsOut[i] = b - a;  
    }  
}
```

6.CONCLUSION

Thus ,we have successfully implemented run length encoding algorithm concurrently on many core GPU.

