
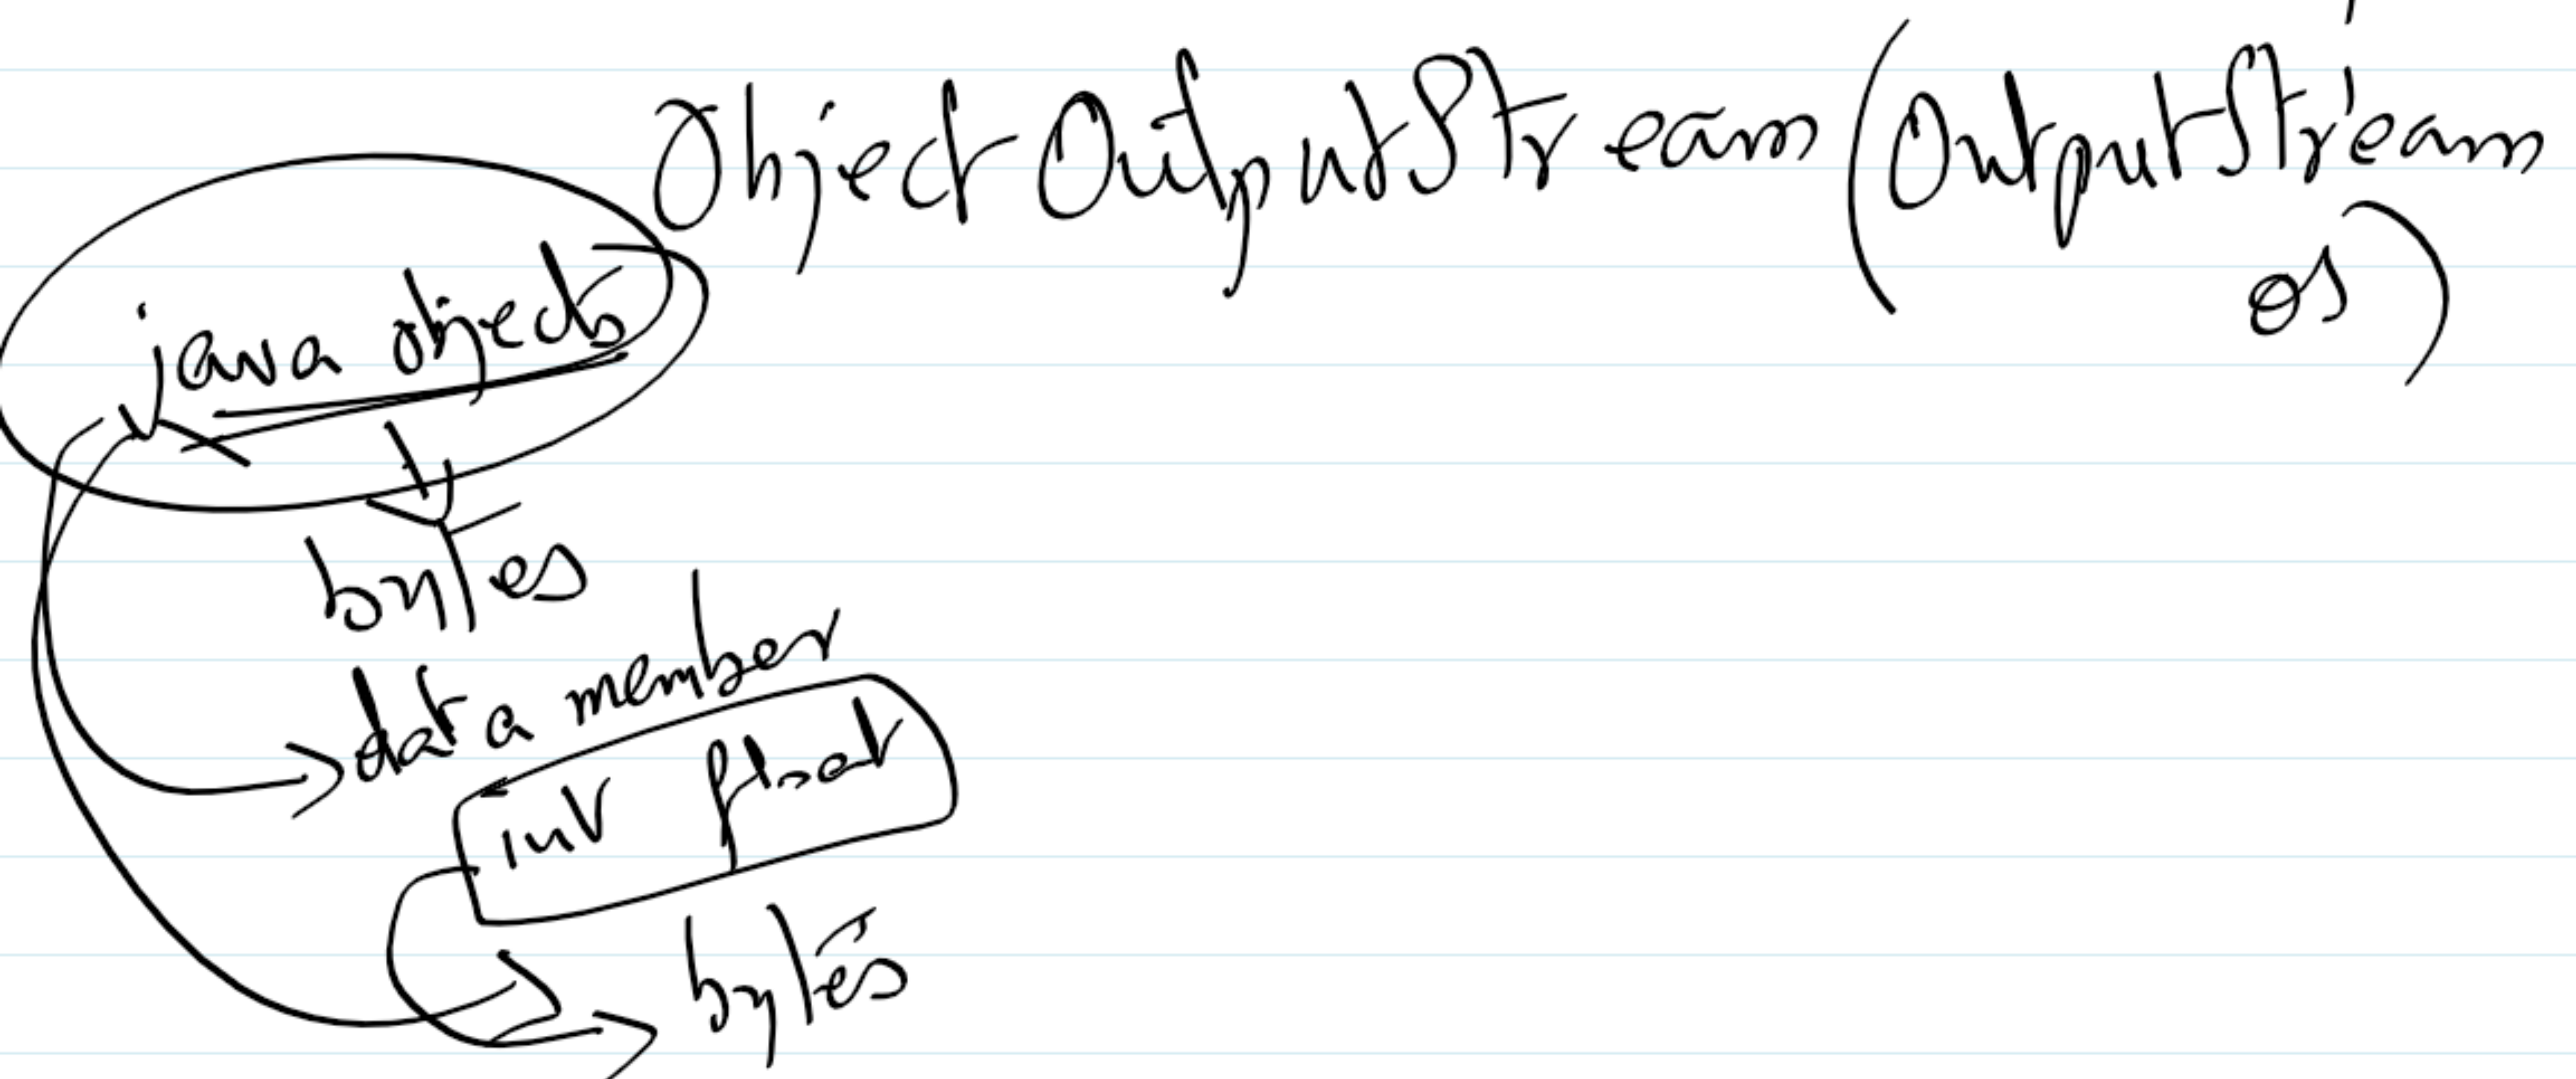
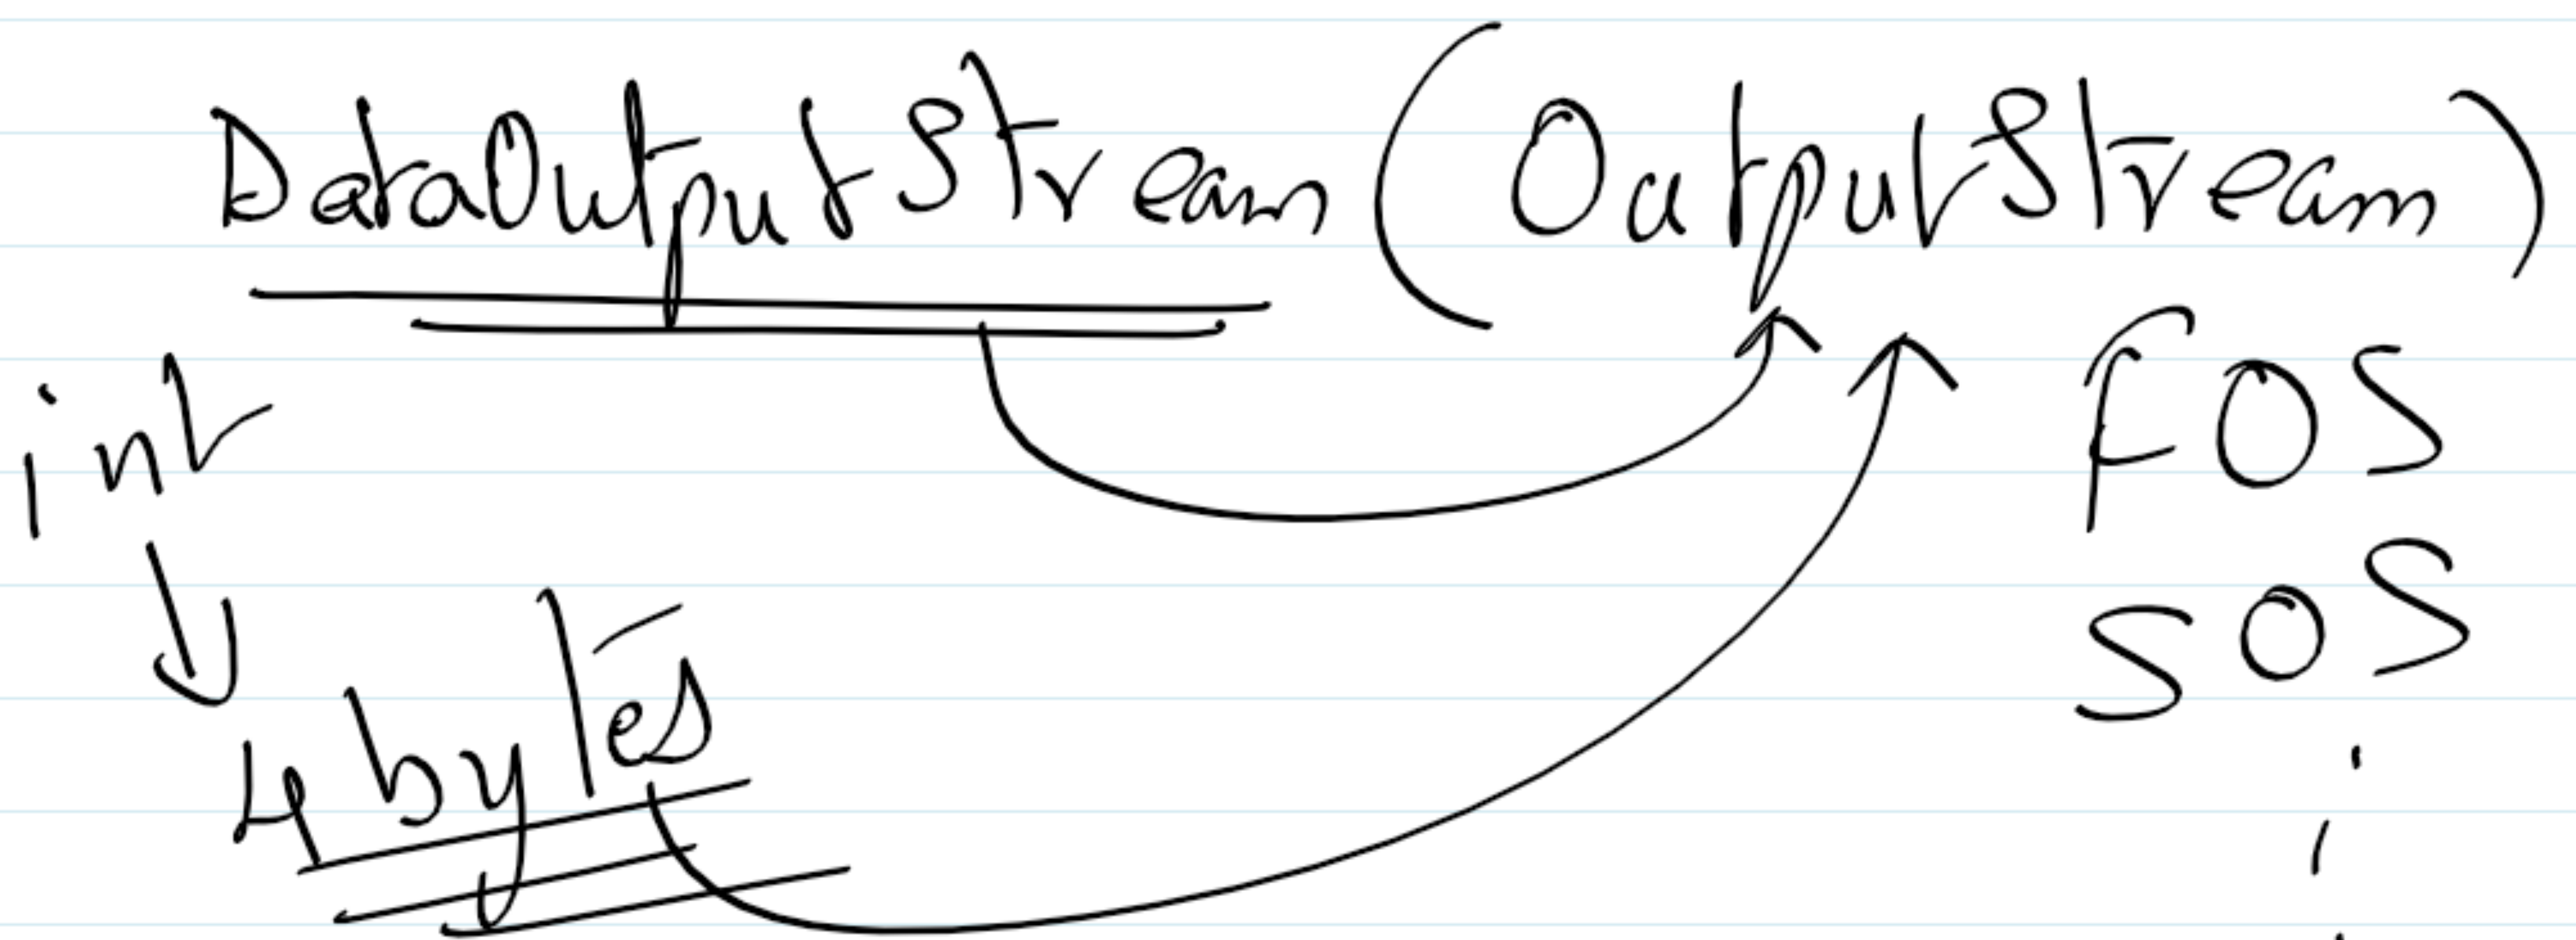
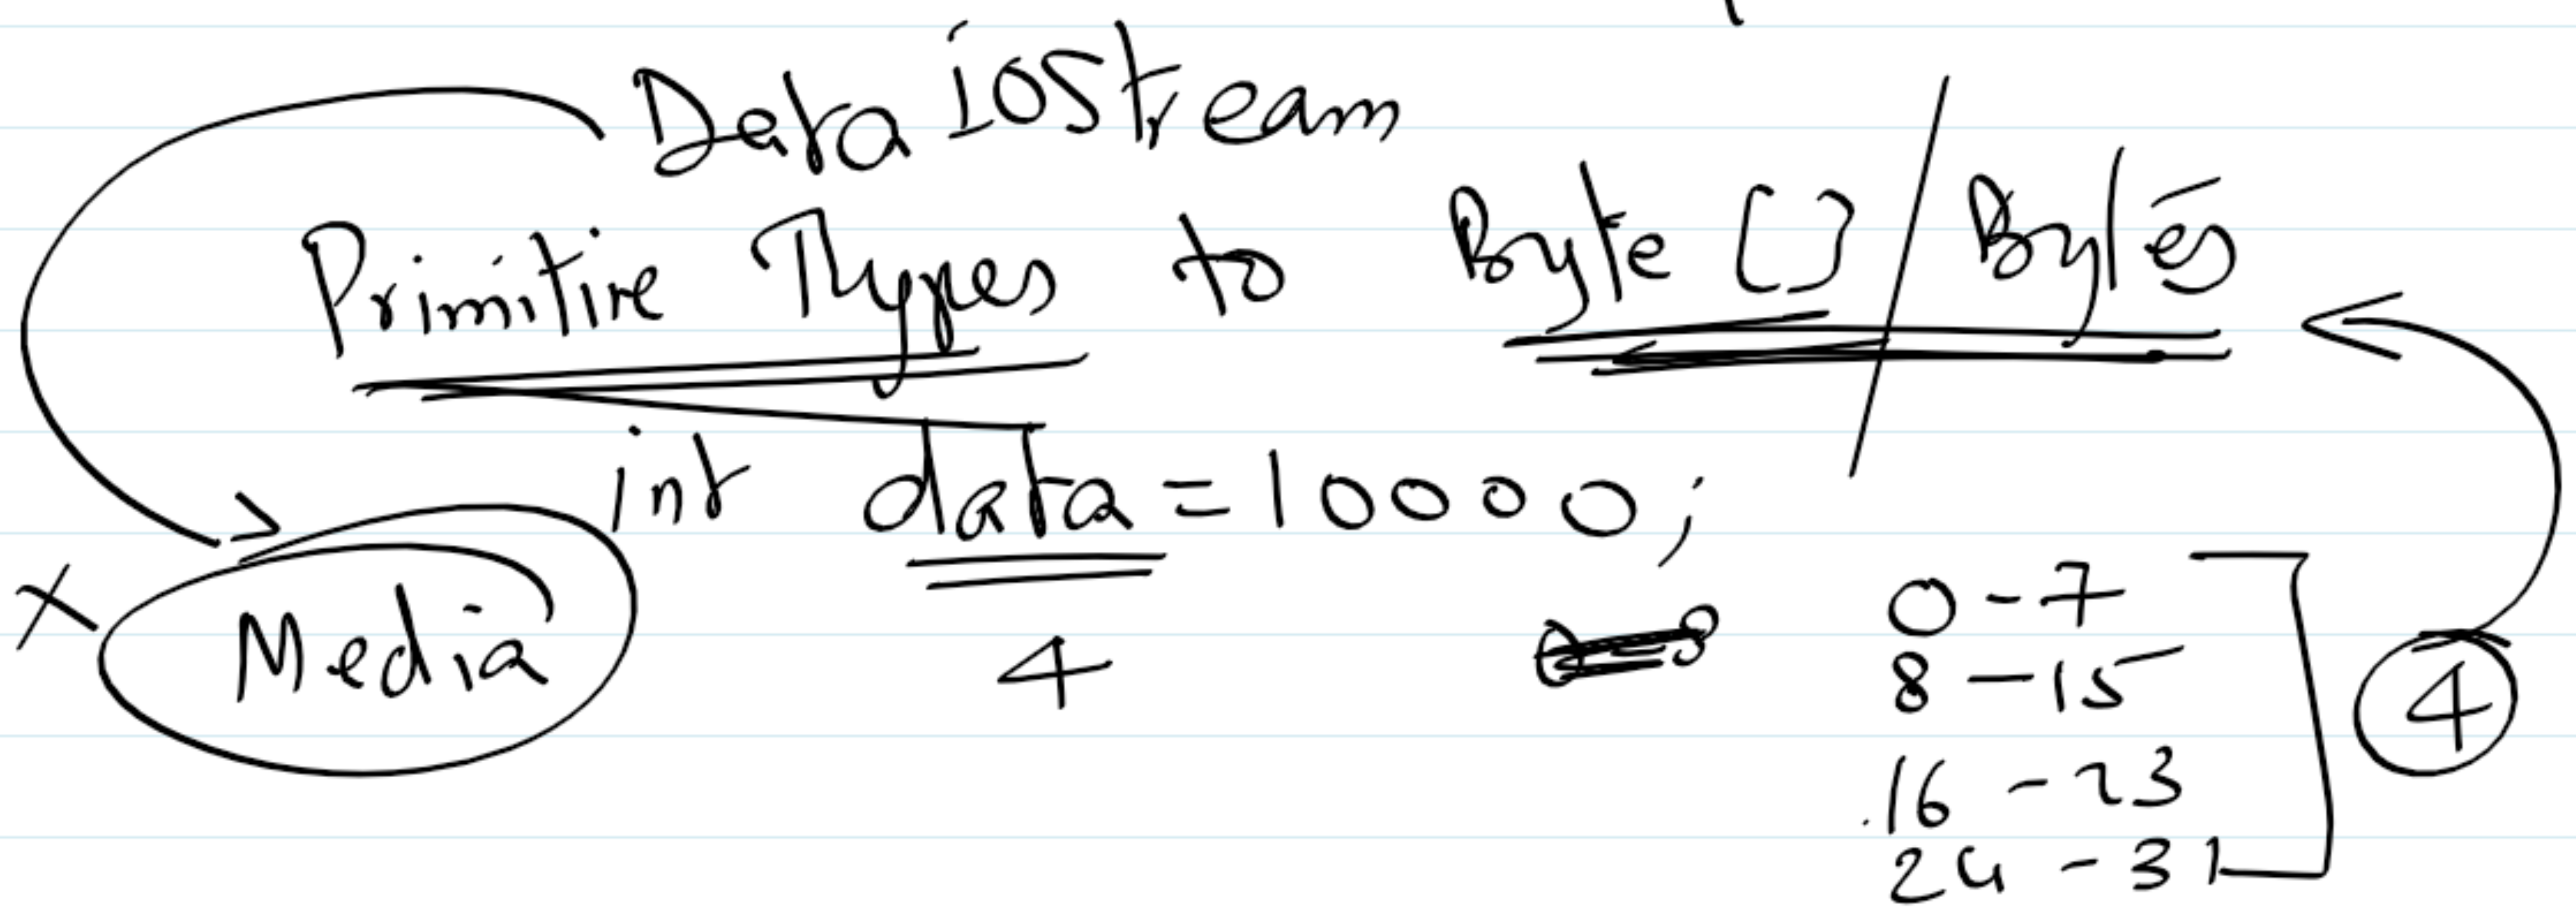
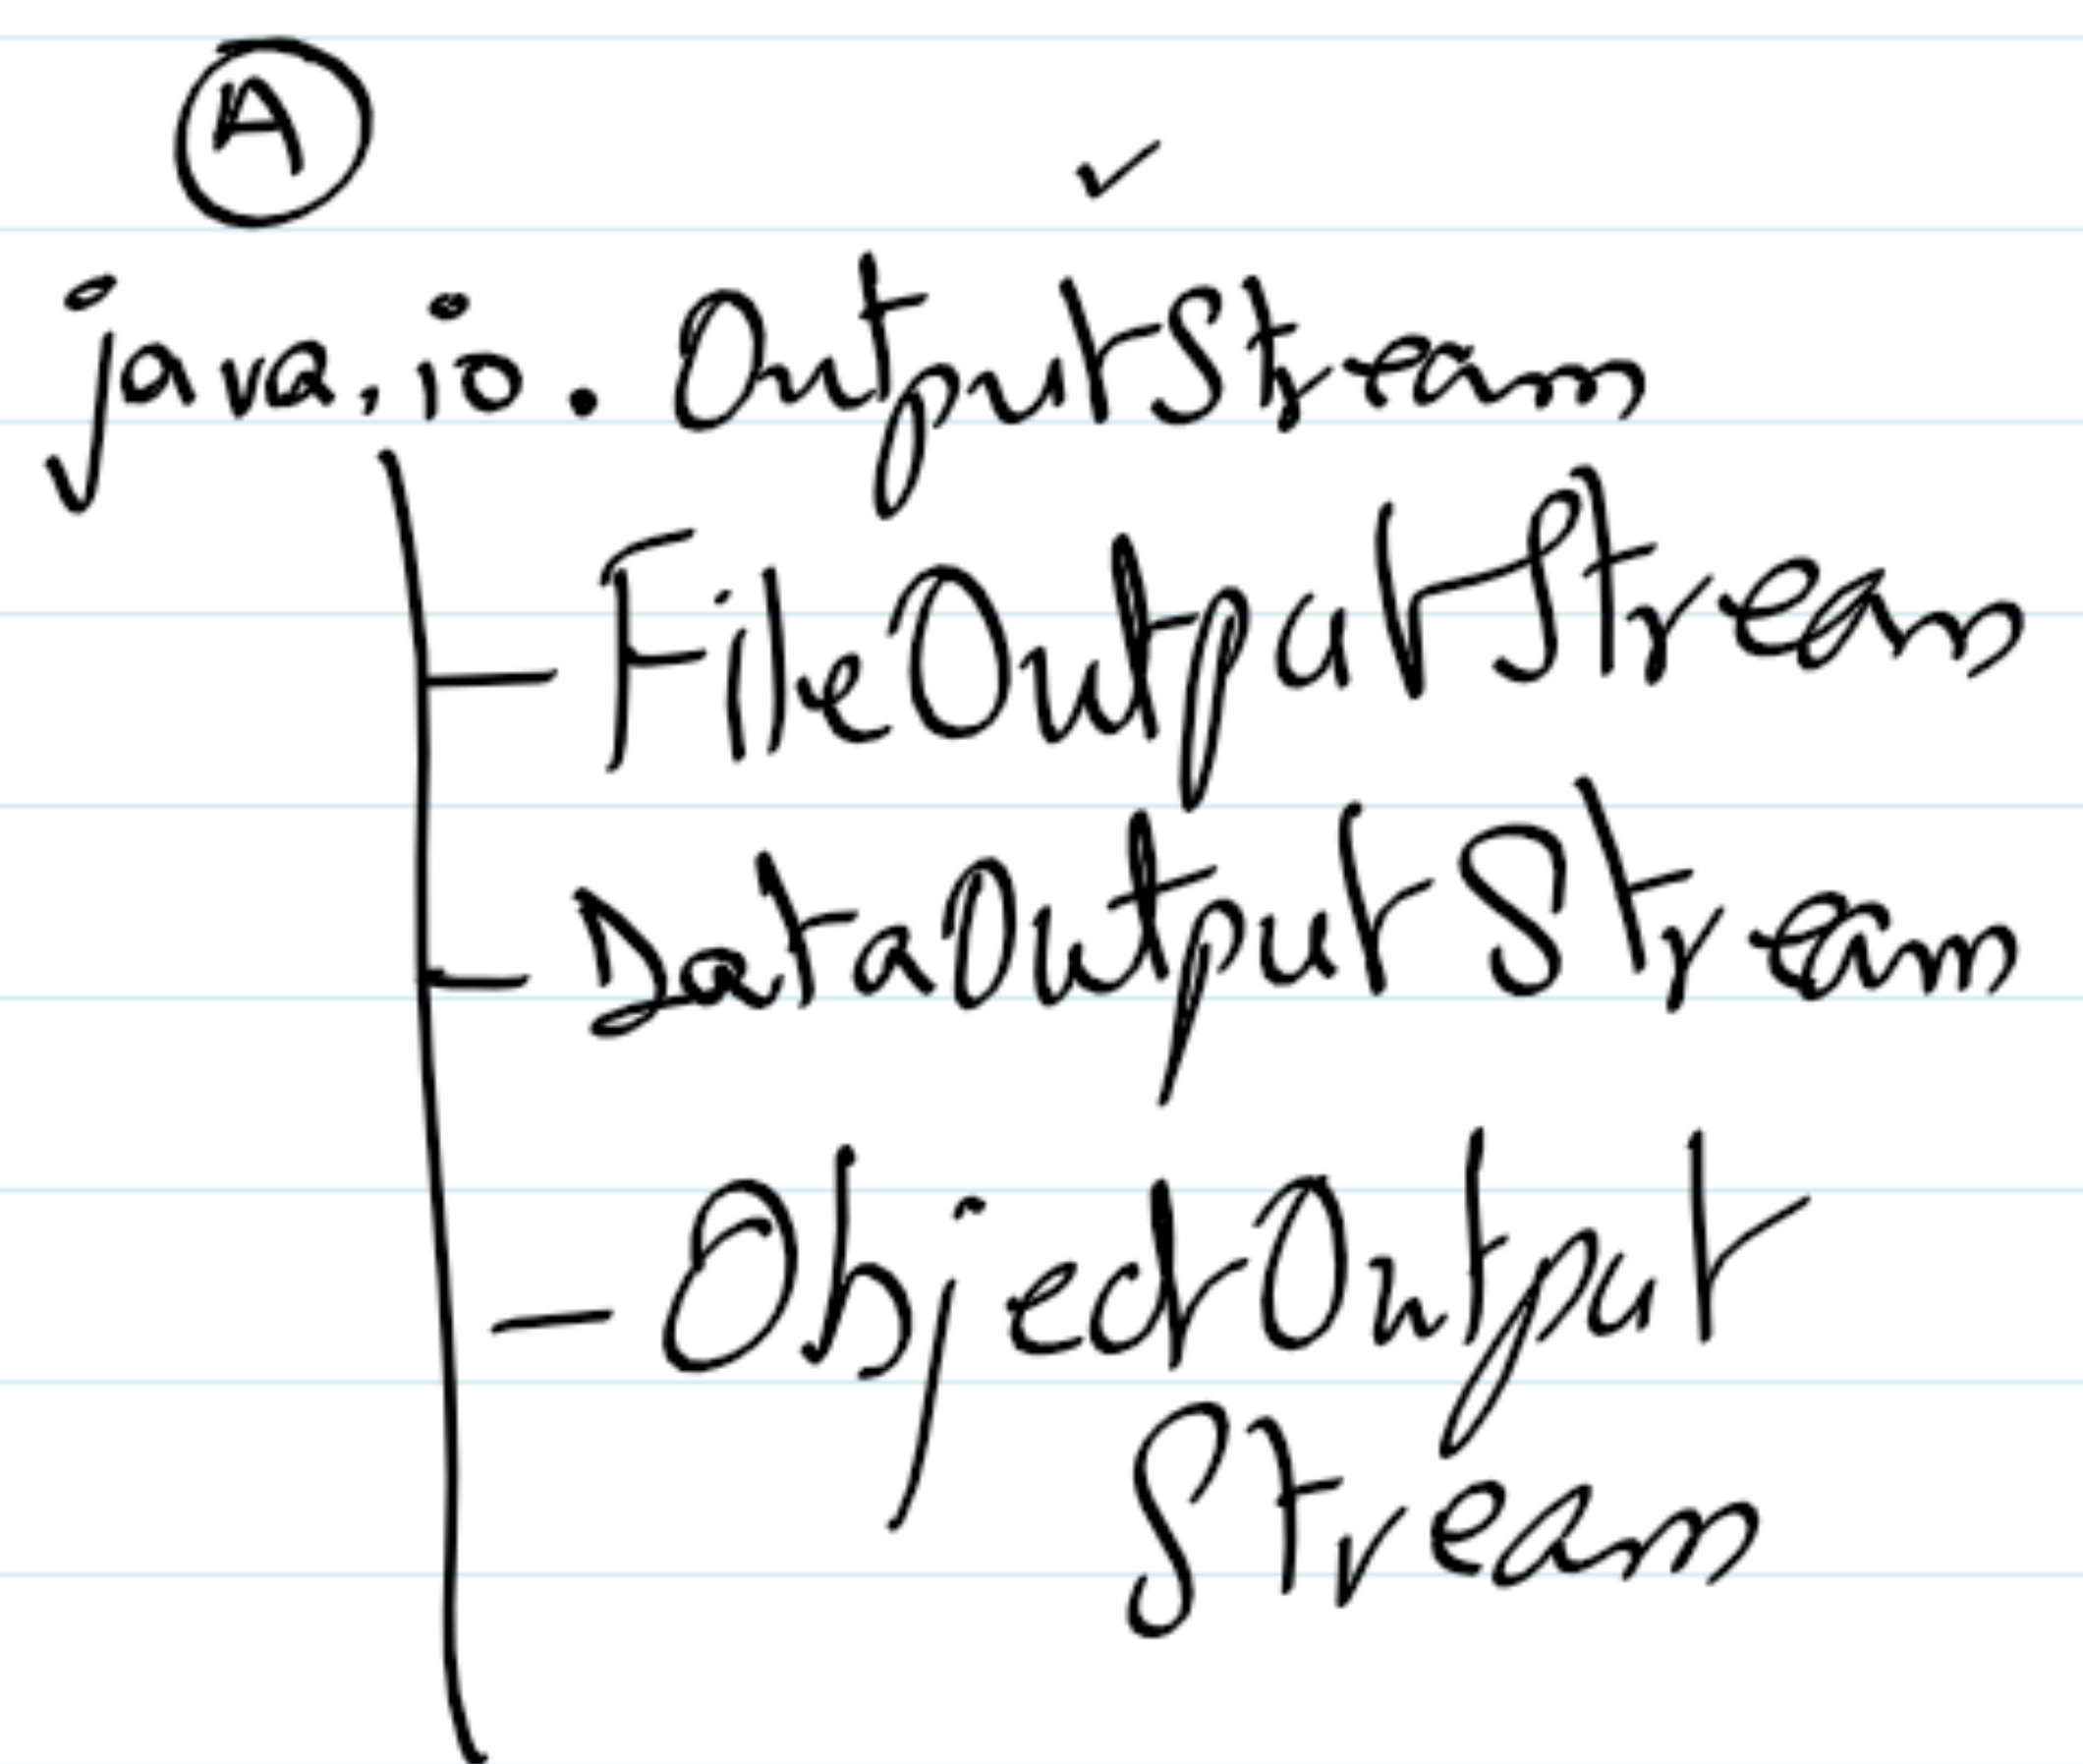


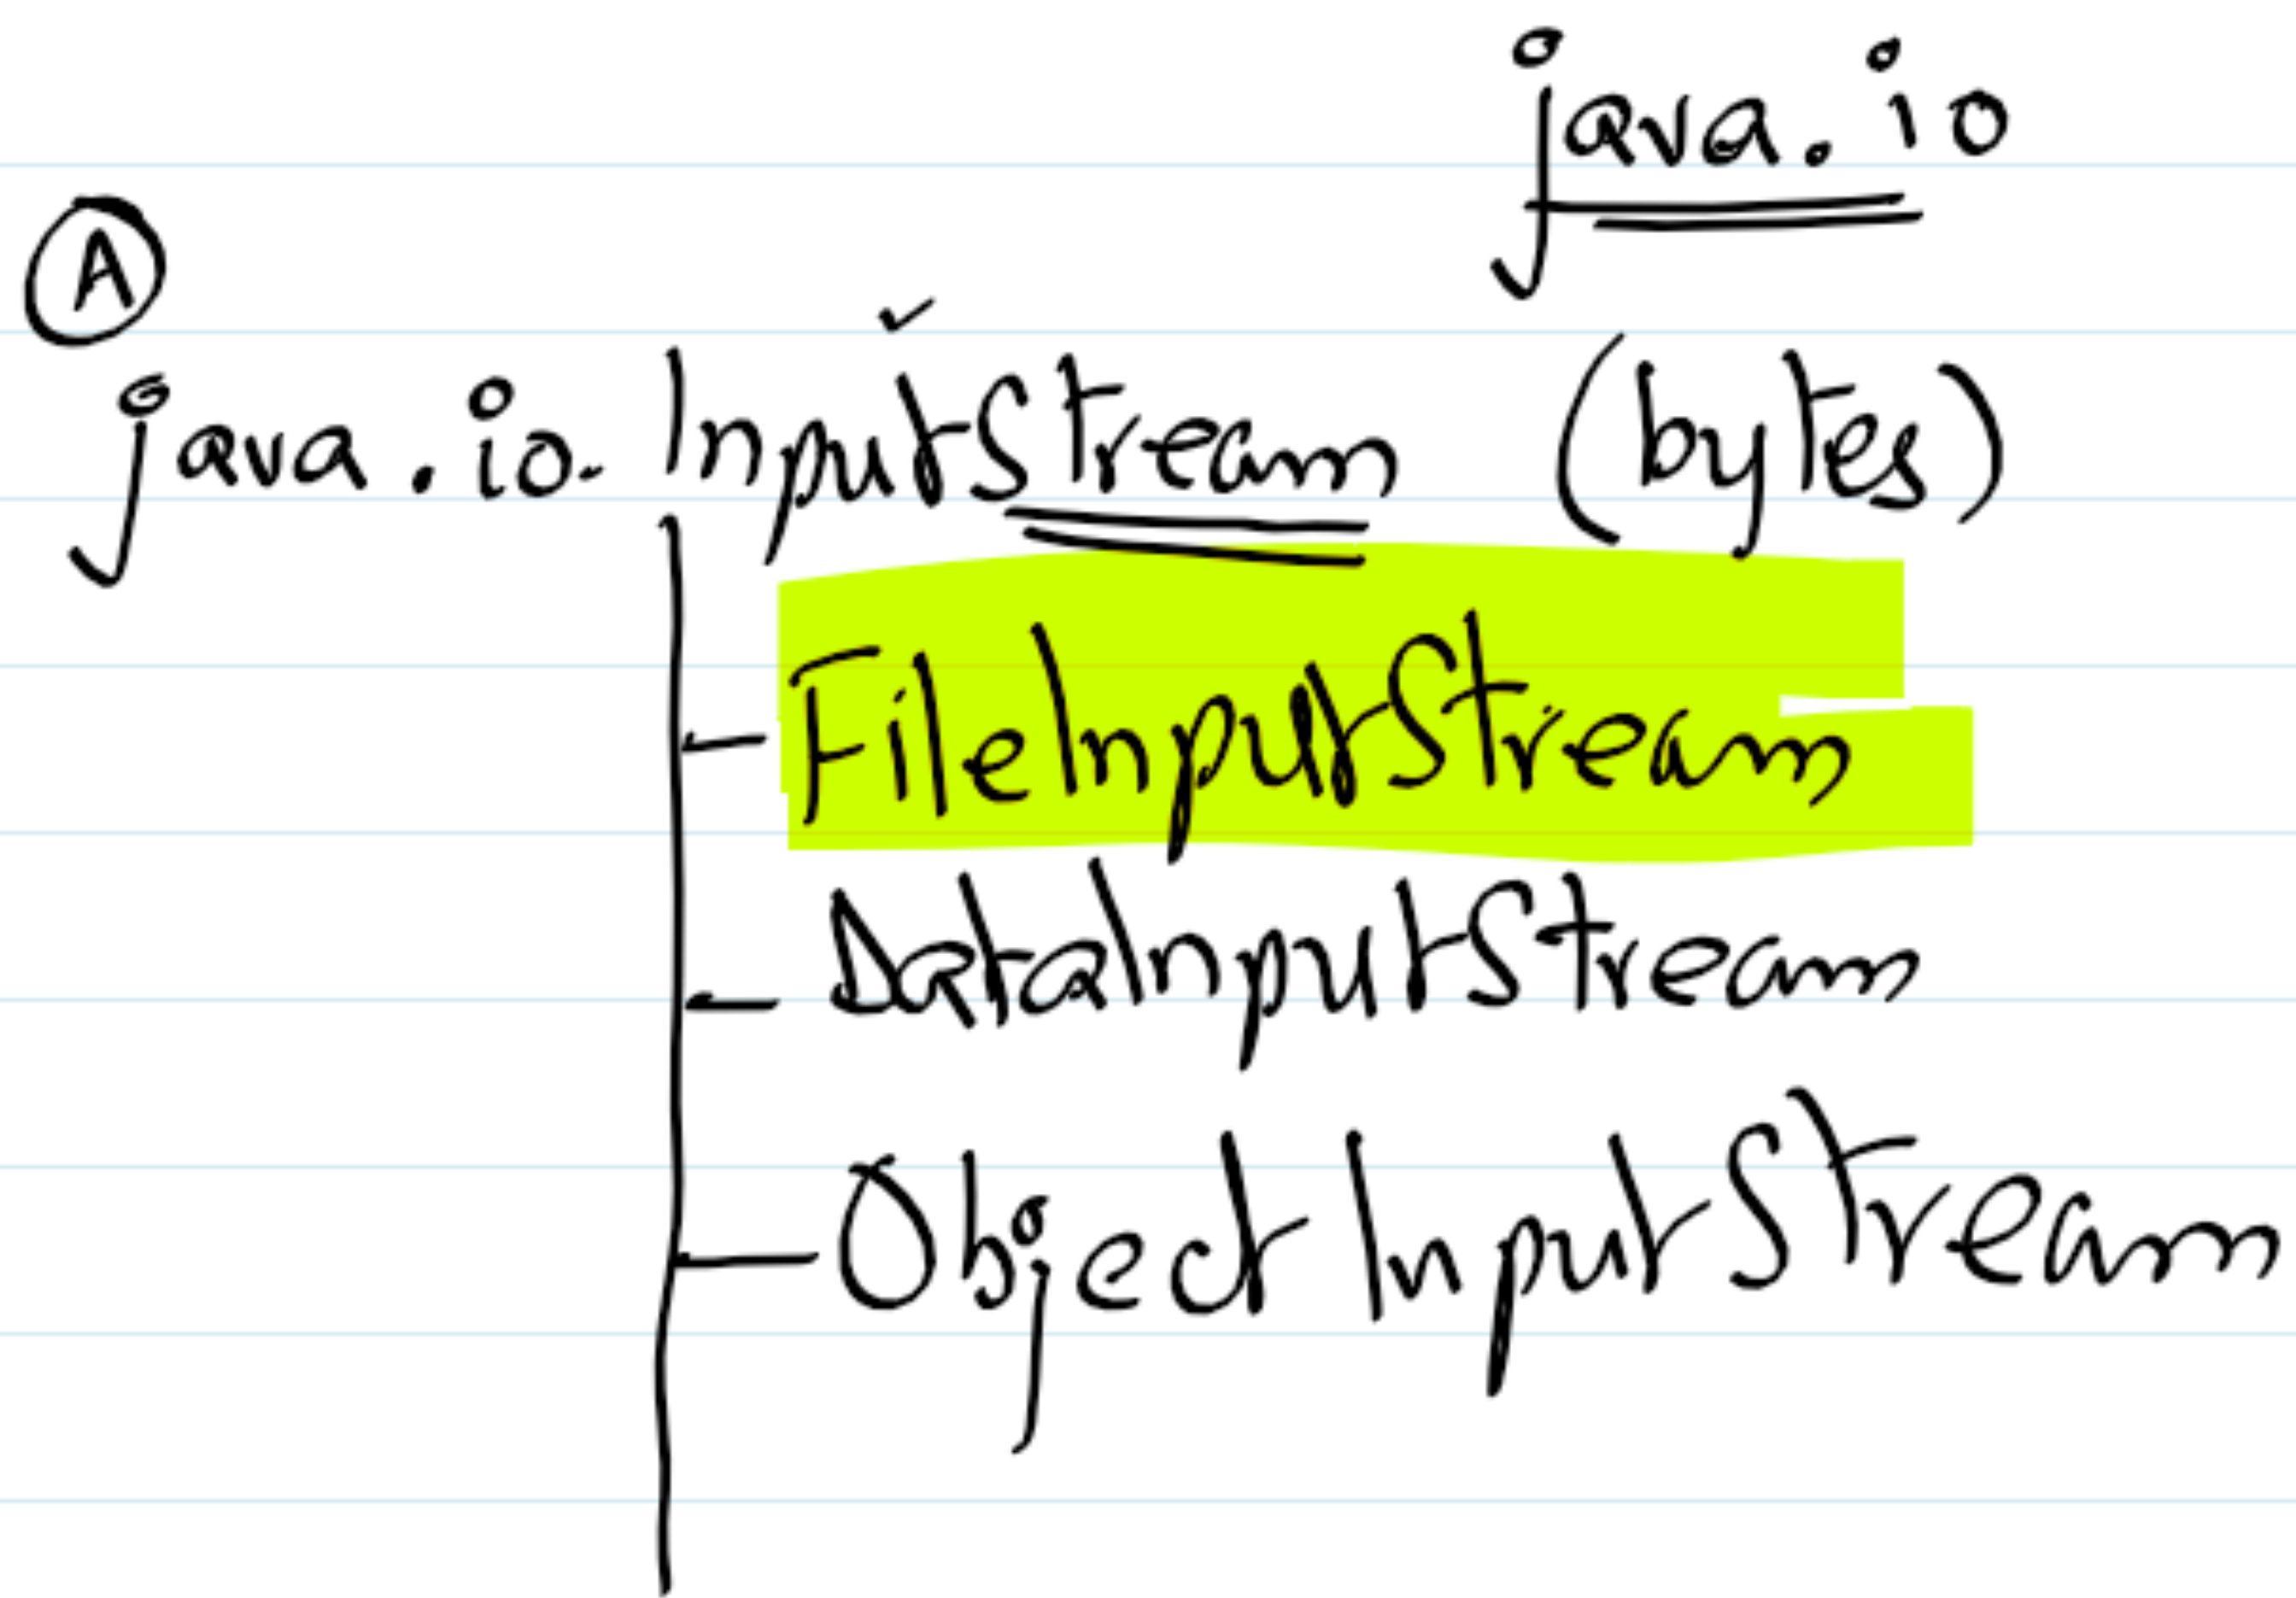

Text


Reader

└ BufferedReader

10 → reader.read(5); 3
500 200 100 5

Writer

└ BufferedWriter

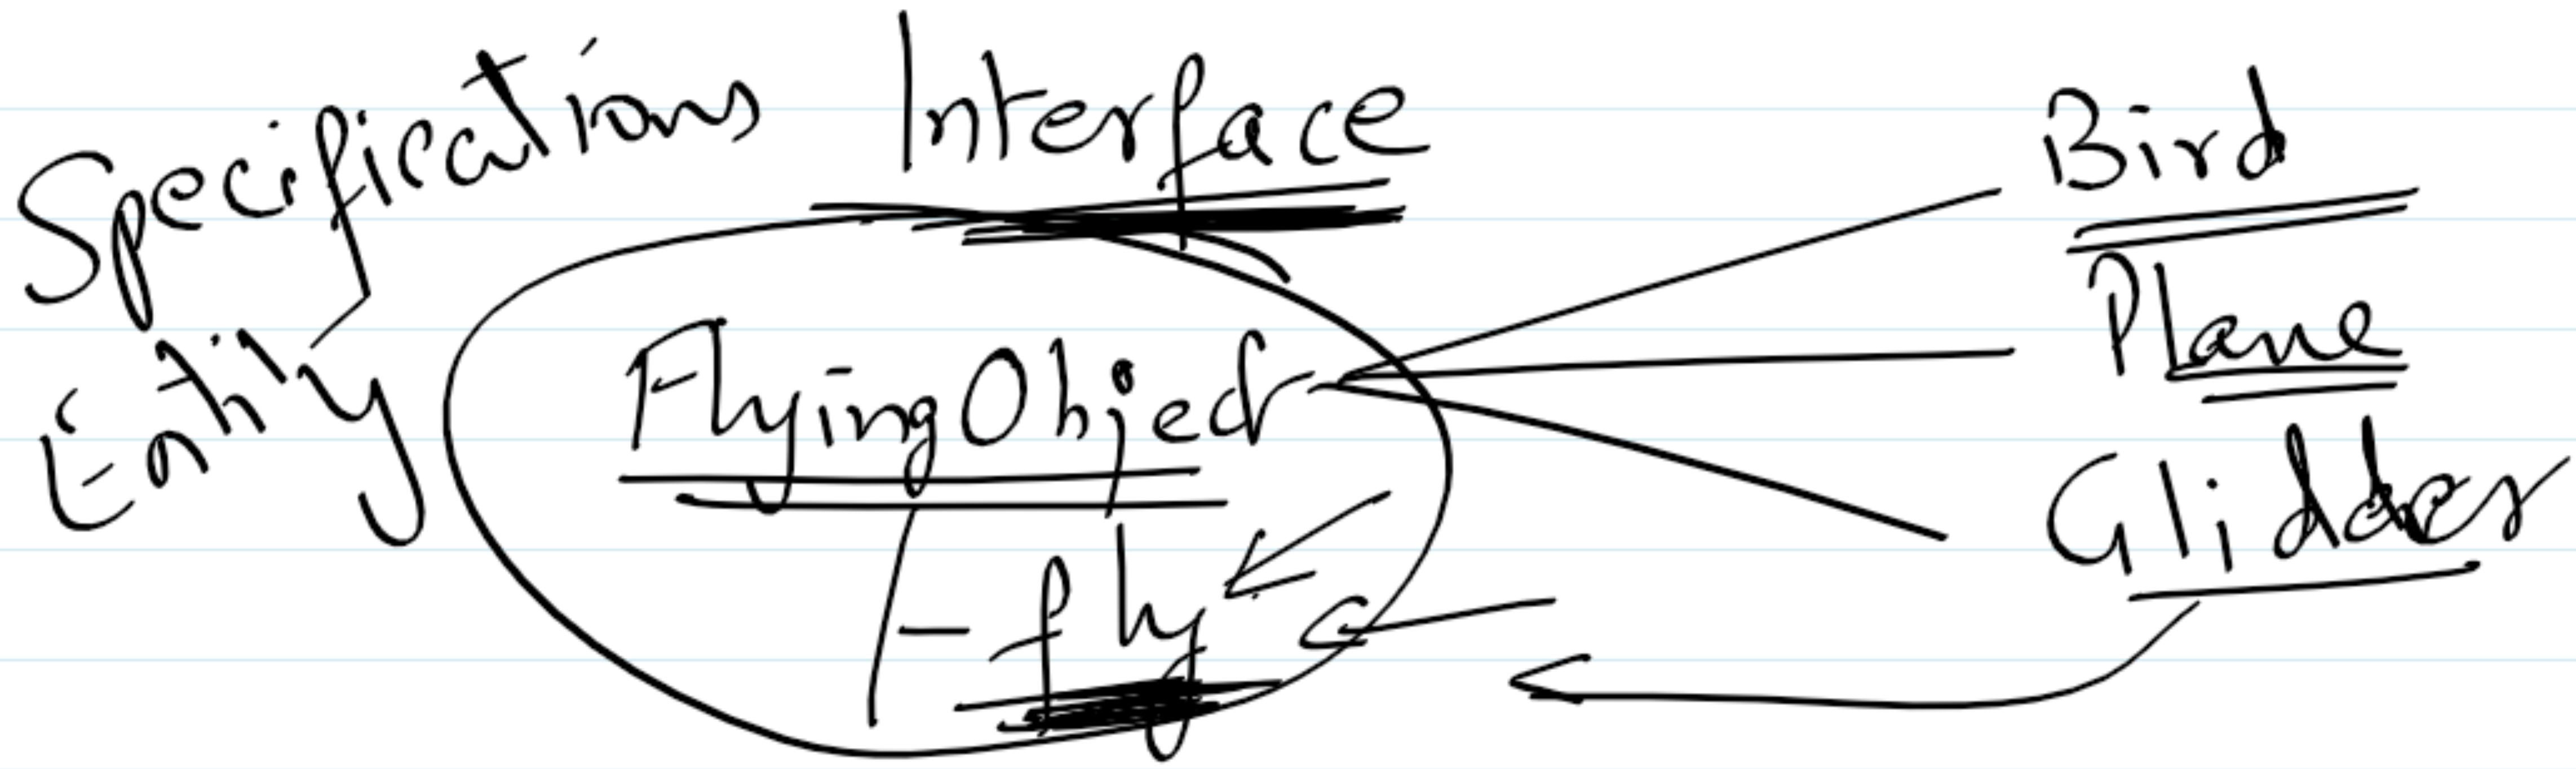

Bird → FlyingObject

{ fly () }

How

Plane → FO

{ fly () }

3

public interface FlyingObject

void fly();

default void show () (X)

{ }

→ implementation

final

Static

default

methods

Multiple Inheritance

interface Bird extend FO, MammalFunc, LivingFunc

public class Parrot implements (Bird, Flo, A, B, C)
 abstract
 x default

Bird bird = new Parrot();
bird.fly(); Upcast.

Parrot obj = (Parrot) bird;
 obj's

interface
~~class~~ One
 {
 void show();
 void display();
 }

VTable One
 One::show

3; interface
~~class~~ Two
 {
 void show();
 void display();
 }

VTable Two
 Two::show

3;

class Three implements
 {
 void show() ✓
 }
 3

Three obj;

obj.show();

Three::show
Three::show

VTable
Three

~~obj = One::display();~~
~~Two::~~

class Three public One

