

Cursor  $\rightarrow$  Iterator

ArrayList<String> list = - - - -

① for (String str : list)  
{

② ~~list~~ AL  $\rightarrow$  RandomAccess


for (int temp = 0; temp < list.size();  
temp++)  
{  
String str = list.get(temp);  
}

③ Cursor

Iterator<String> o1 = list.iterator();

while (o1.hasNext())

{  
o1.next();  
}

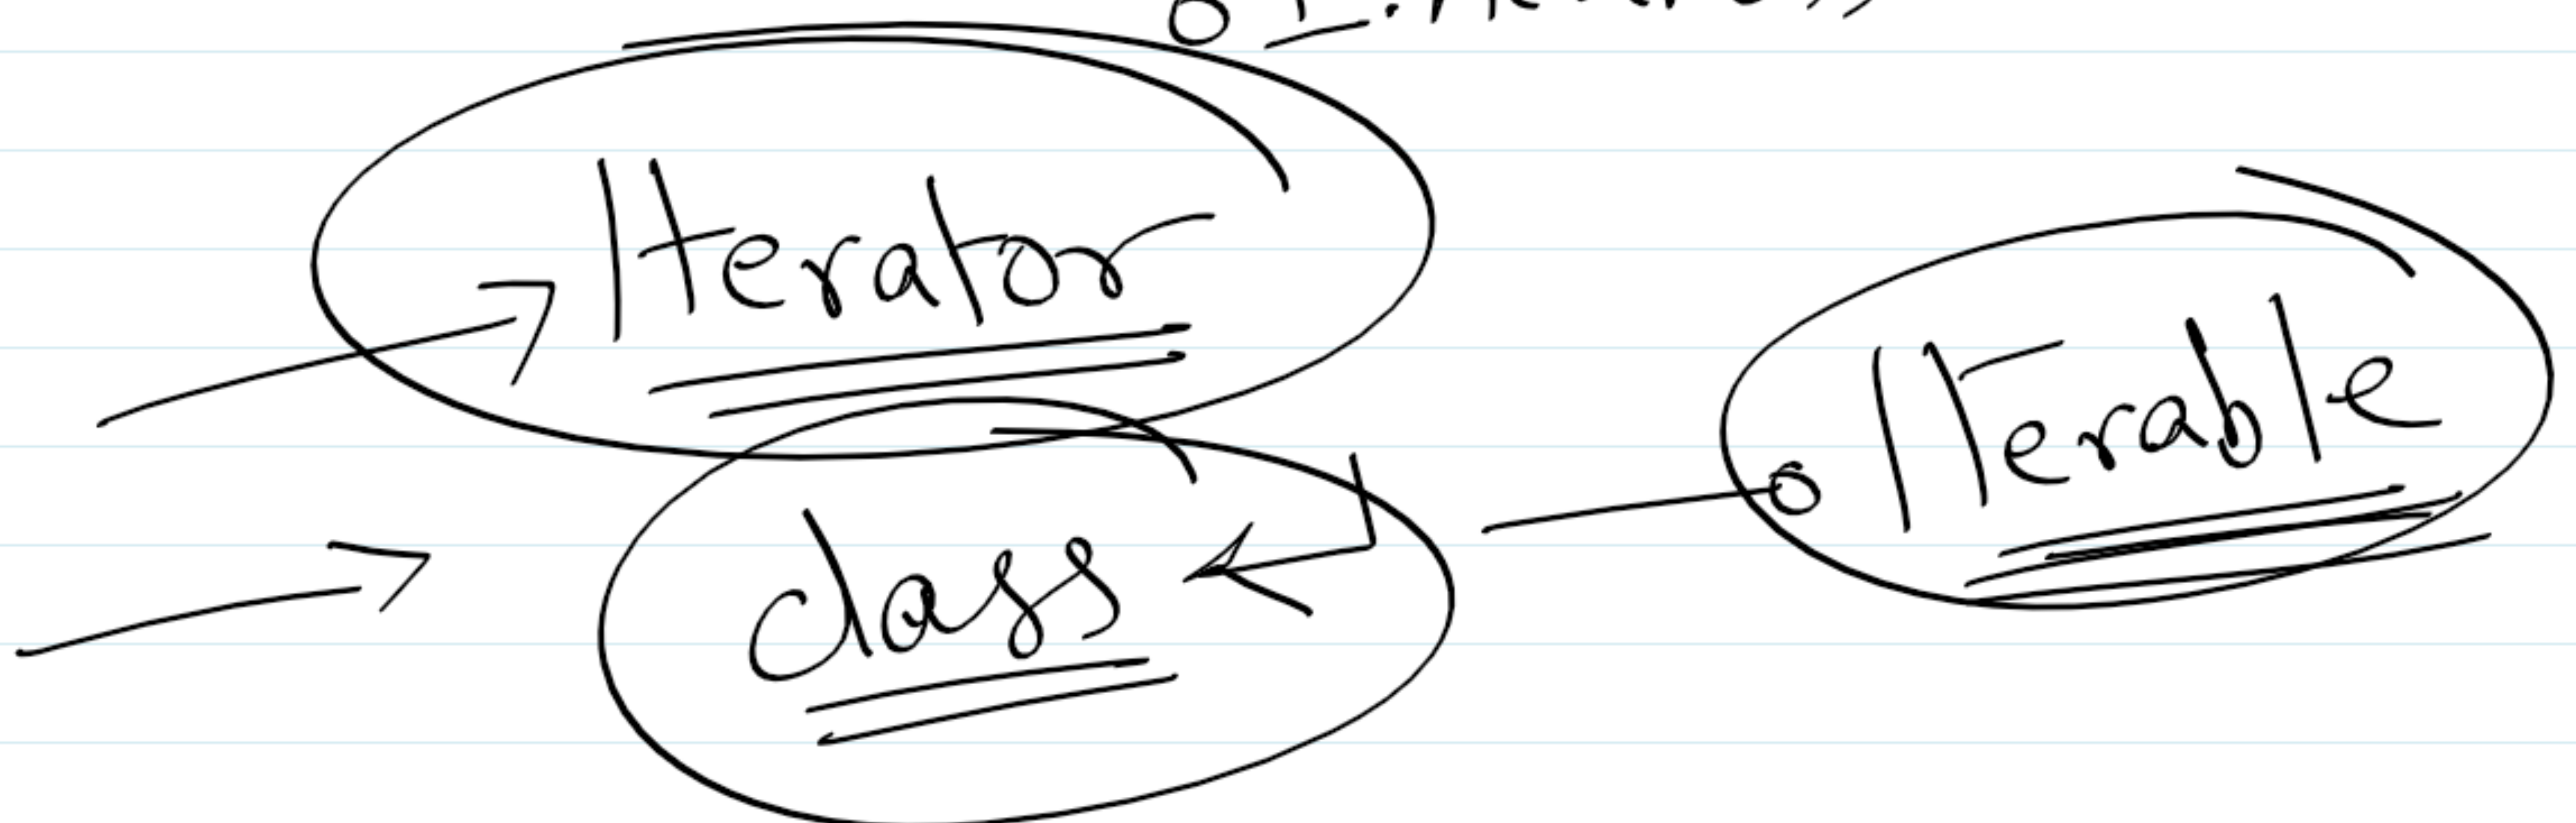


ArrayList first = ...

1, 2, 3, 4, 5, 6

ArrayList test = ... 3, 4, 5

first.contains(test);

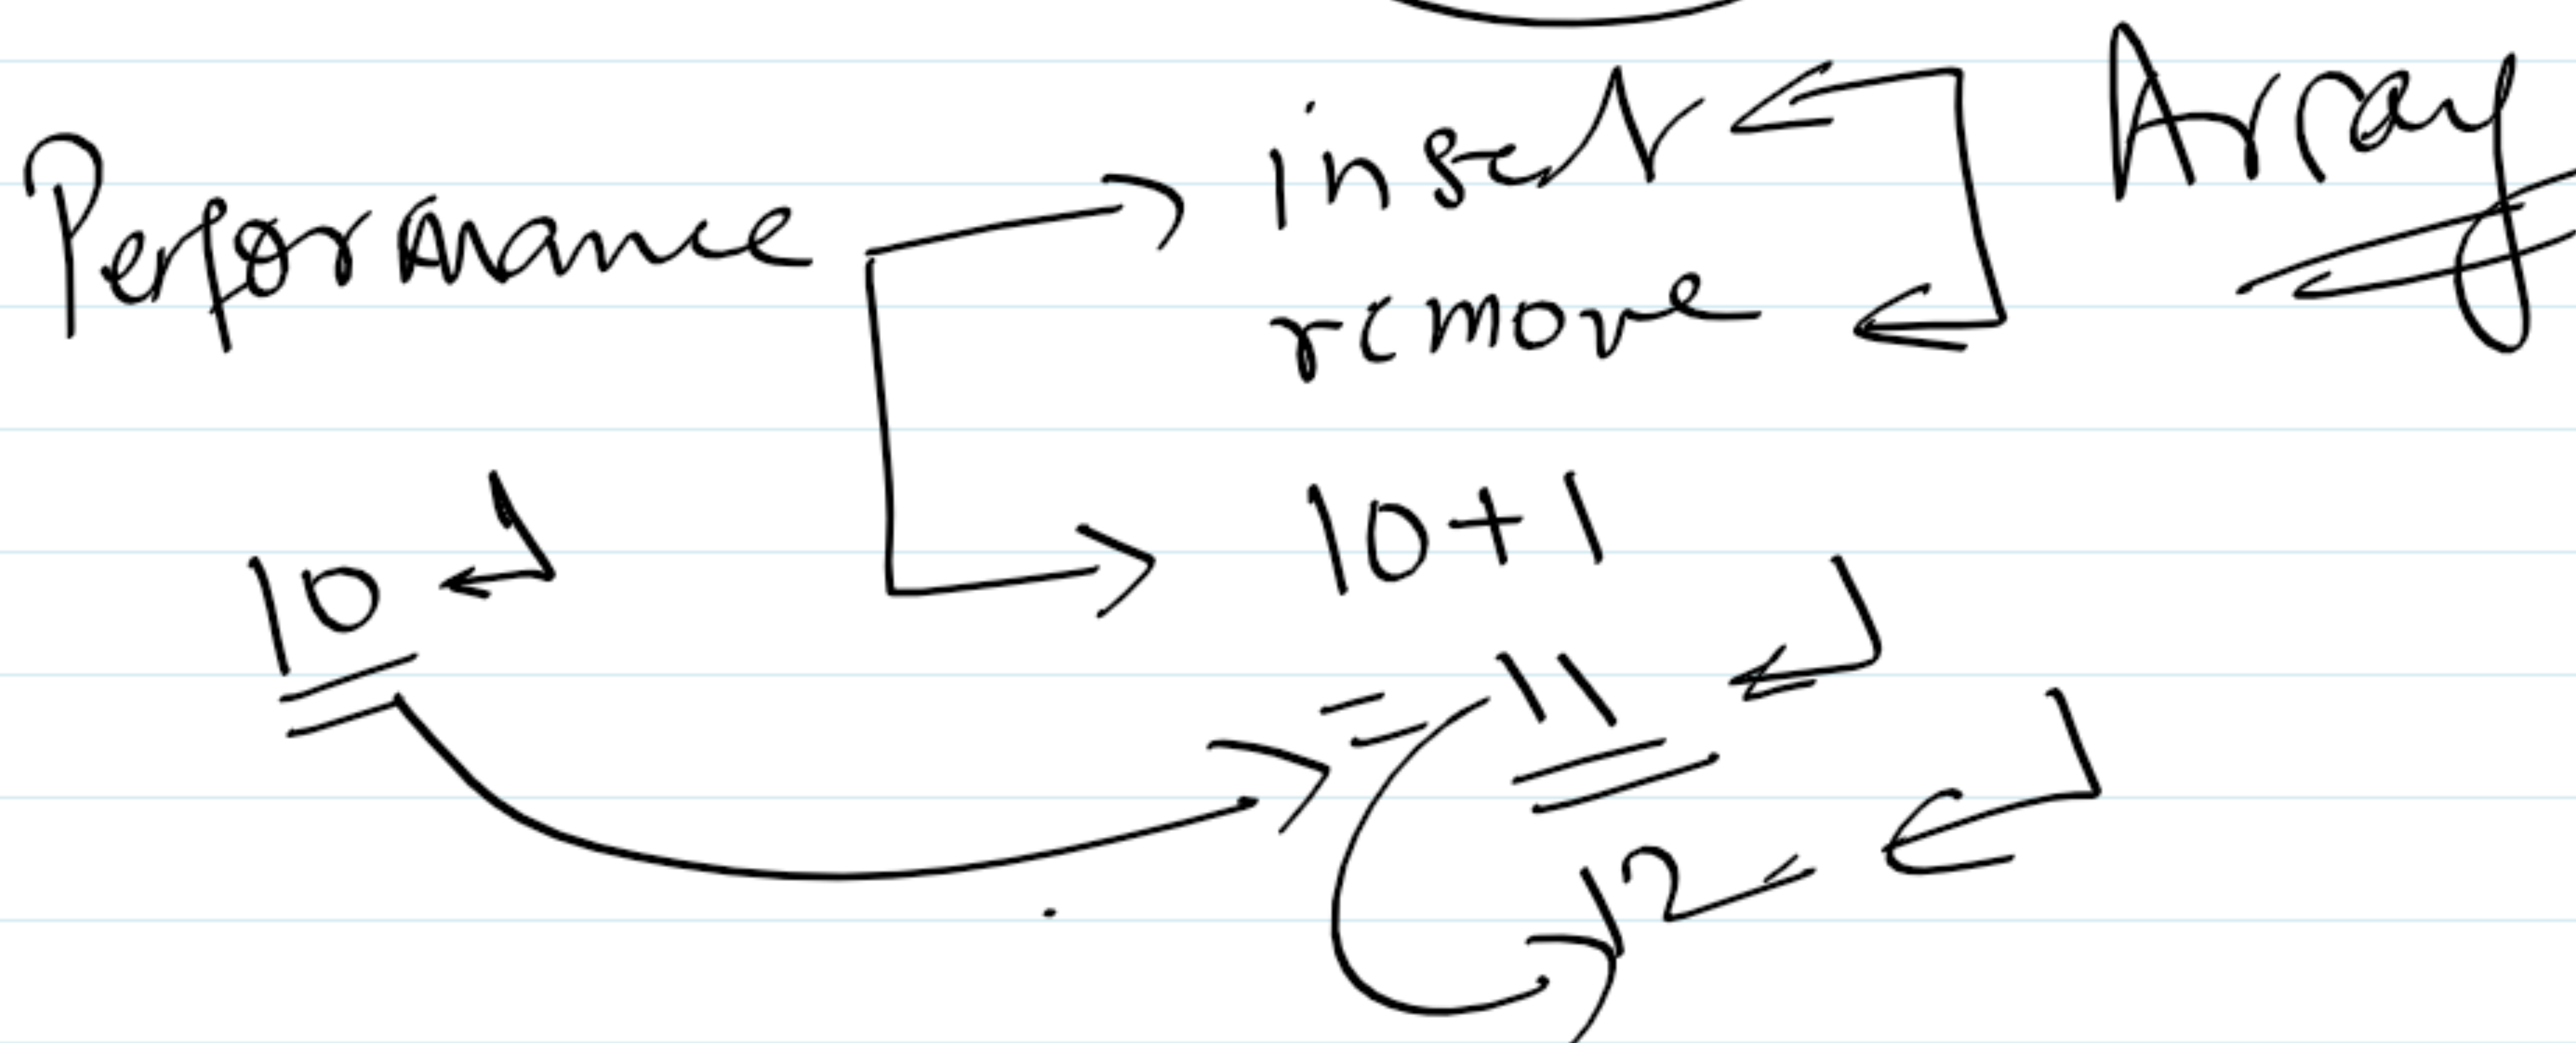


LinkedList → add(1)

a) Doubly list

b) Bi-dir

c) Hetro

d) insertion order

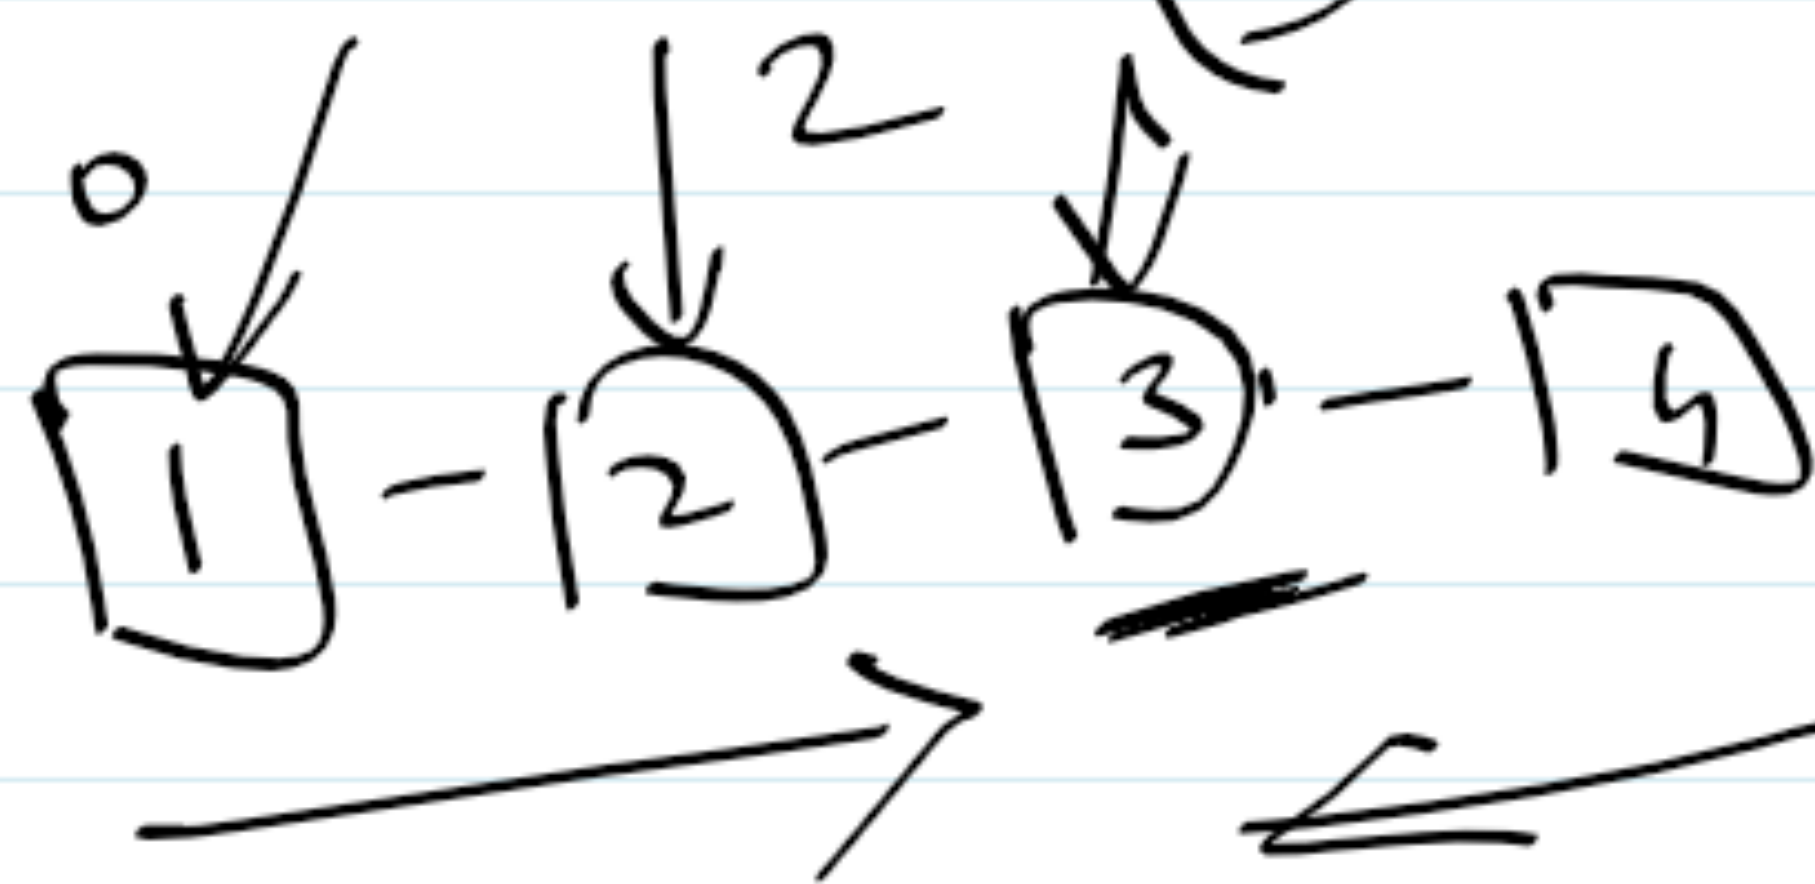

(legacy)

Vector

→ List

① Growable Array  
Thread Safe

Synchronized

→ ArrayList  
XTS

Stack ← Legacy


⑧ Vector

a) LIFO

→ b) push(Object) → add  
c) pop(); → retrieves / deletes  
from top

Stack

obj -

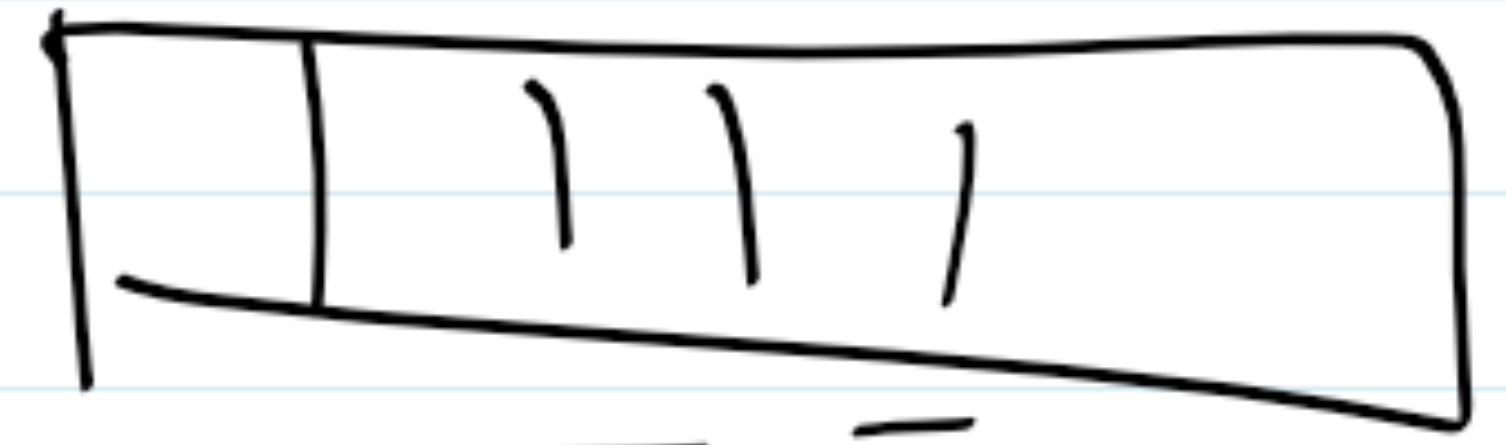

Array

obj.push(1);  
obj.push(2);  
obj.push(3);




Object ← obj.pop(); ✓ 3

→ obj. peek(); 2

→ pop(); 2  
peek(); → ✓

offset → search(Object)


Singly linked list

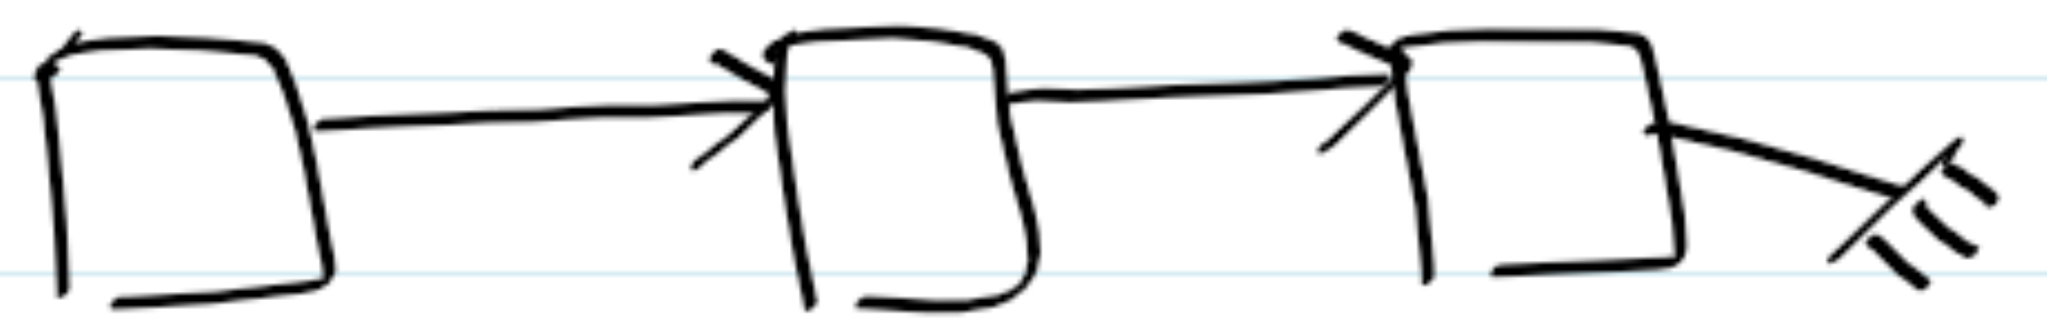



Doubly  
Stack



Queue

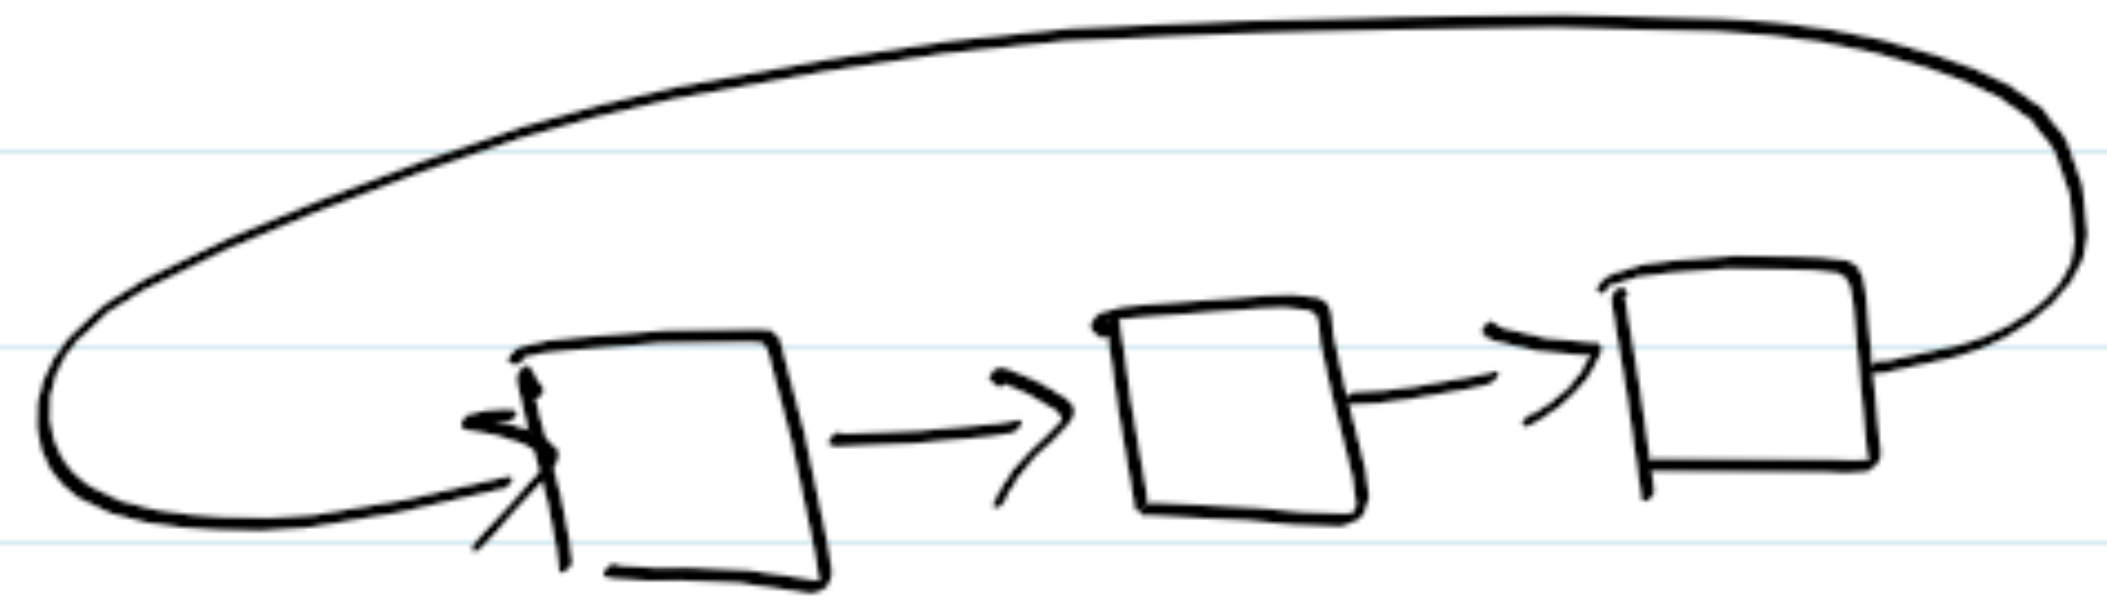


Circular Singly  
Doubly

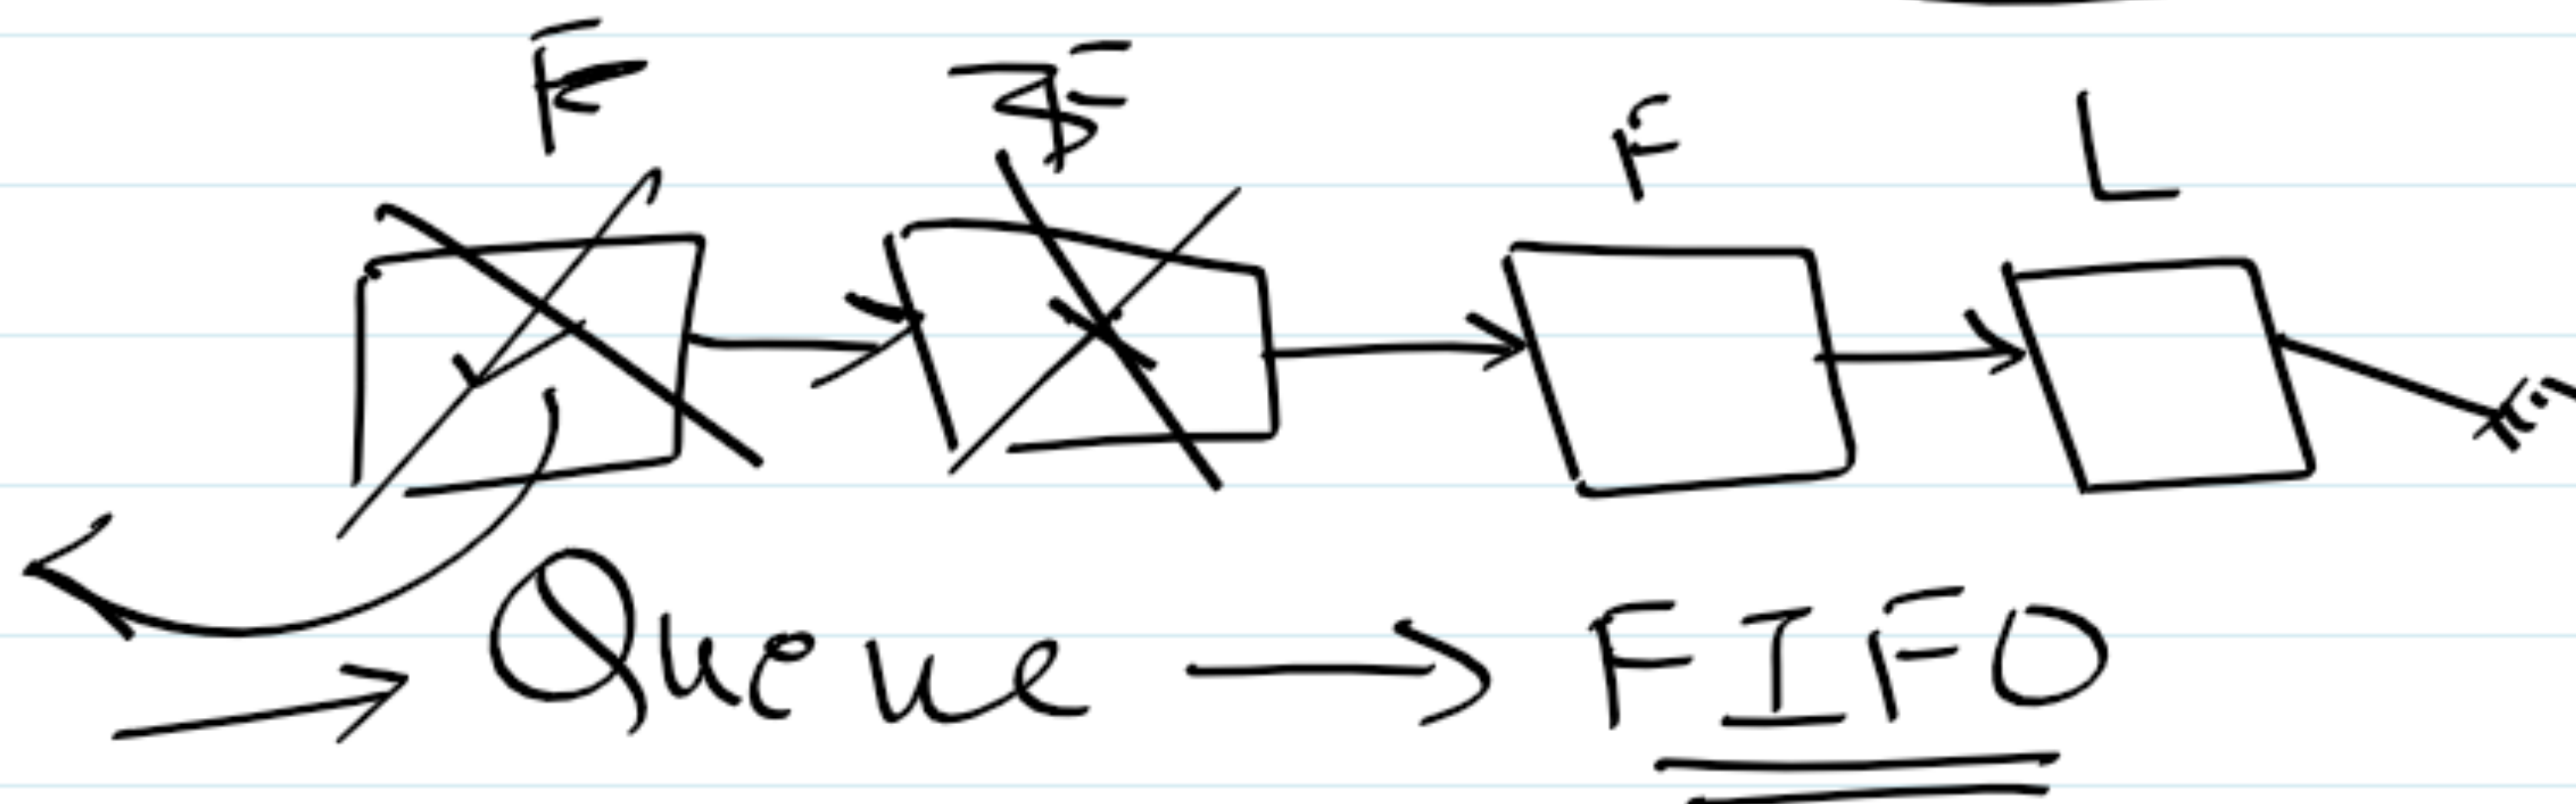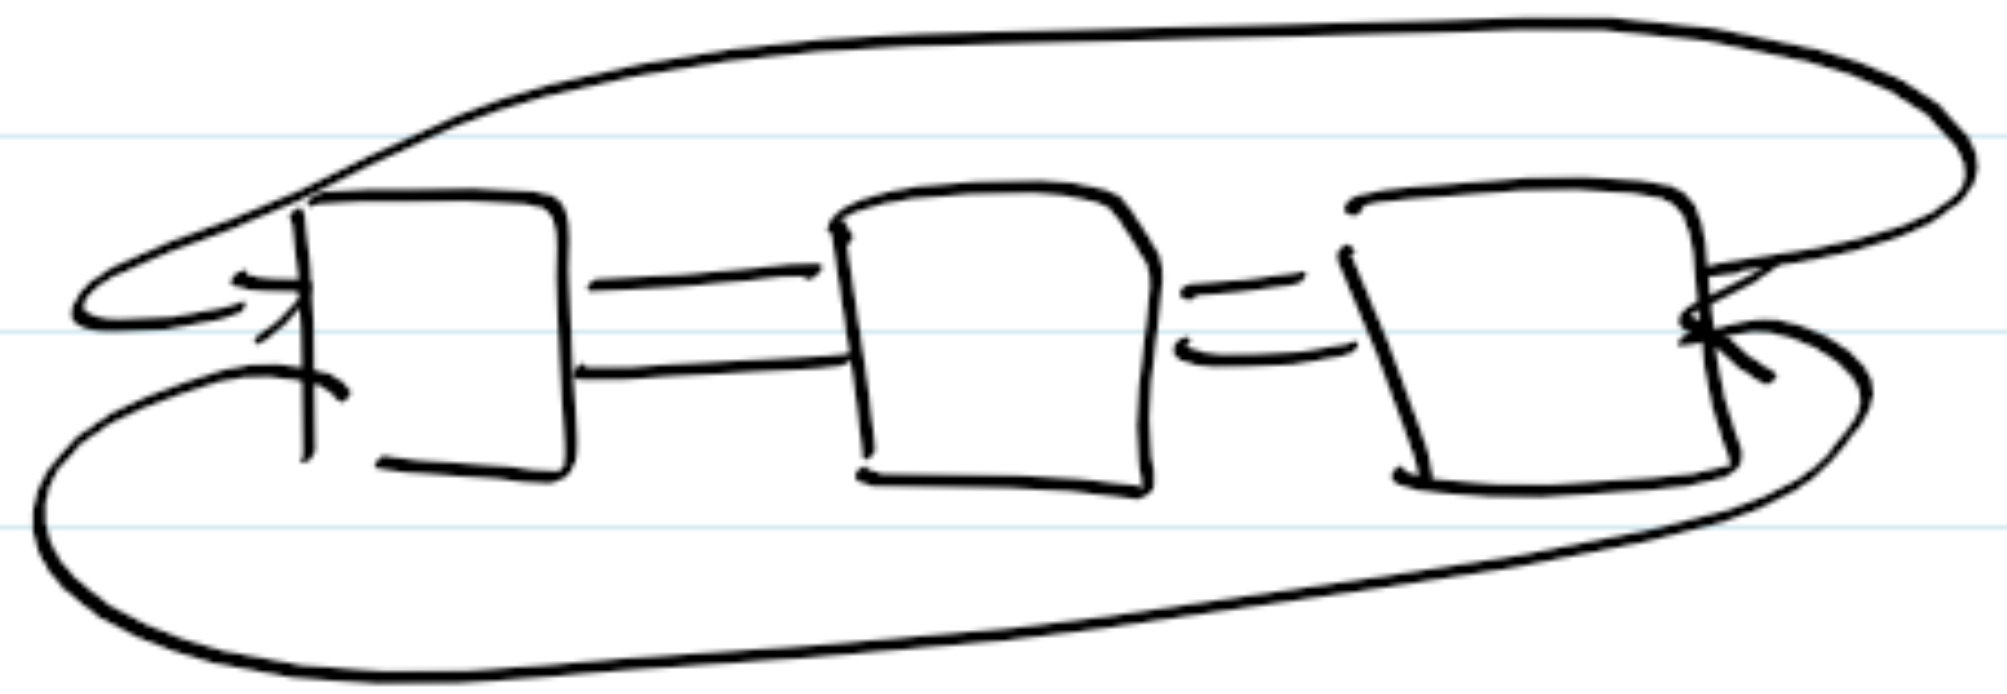

pop()

Stack

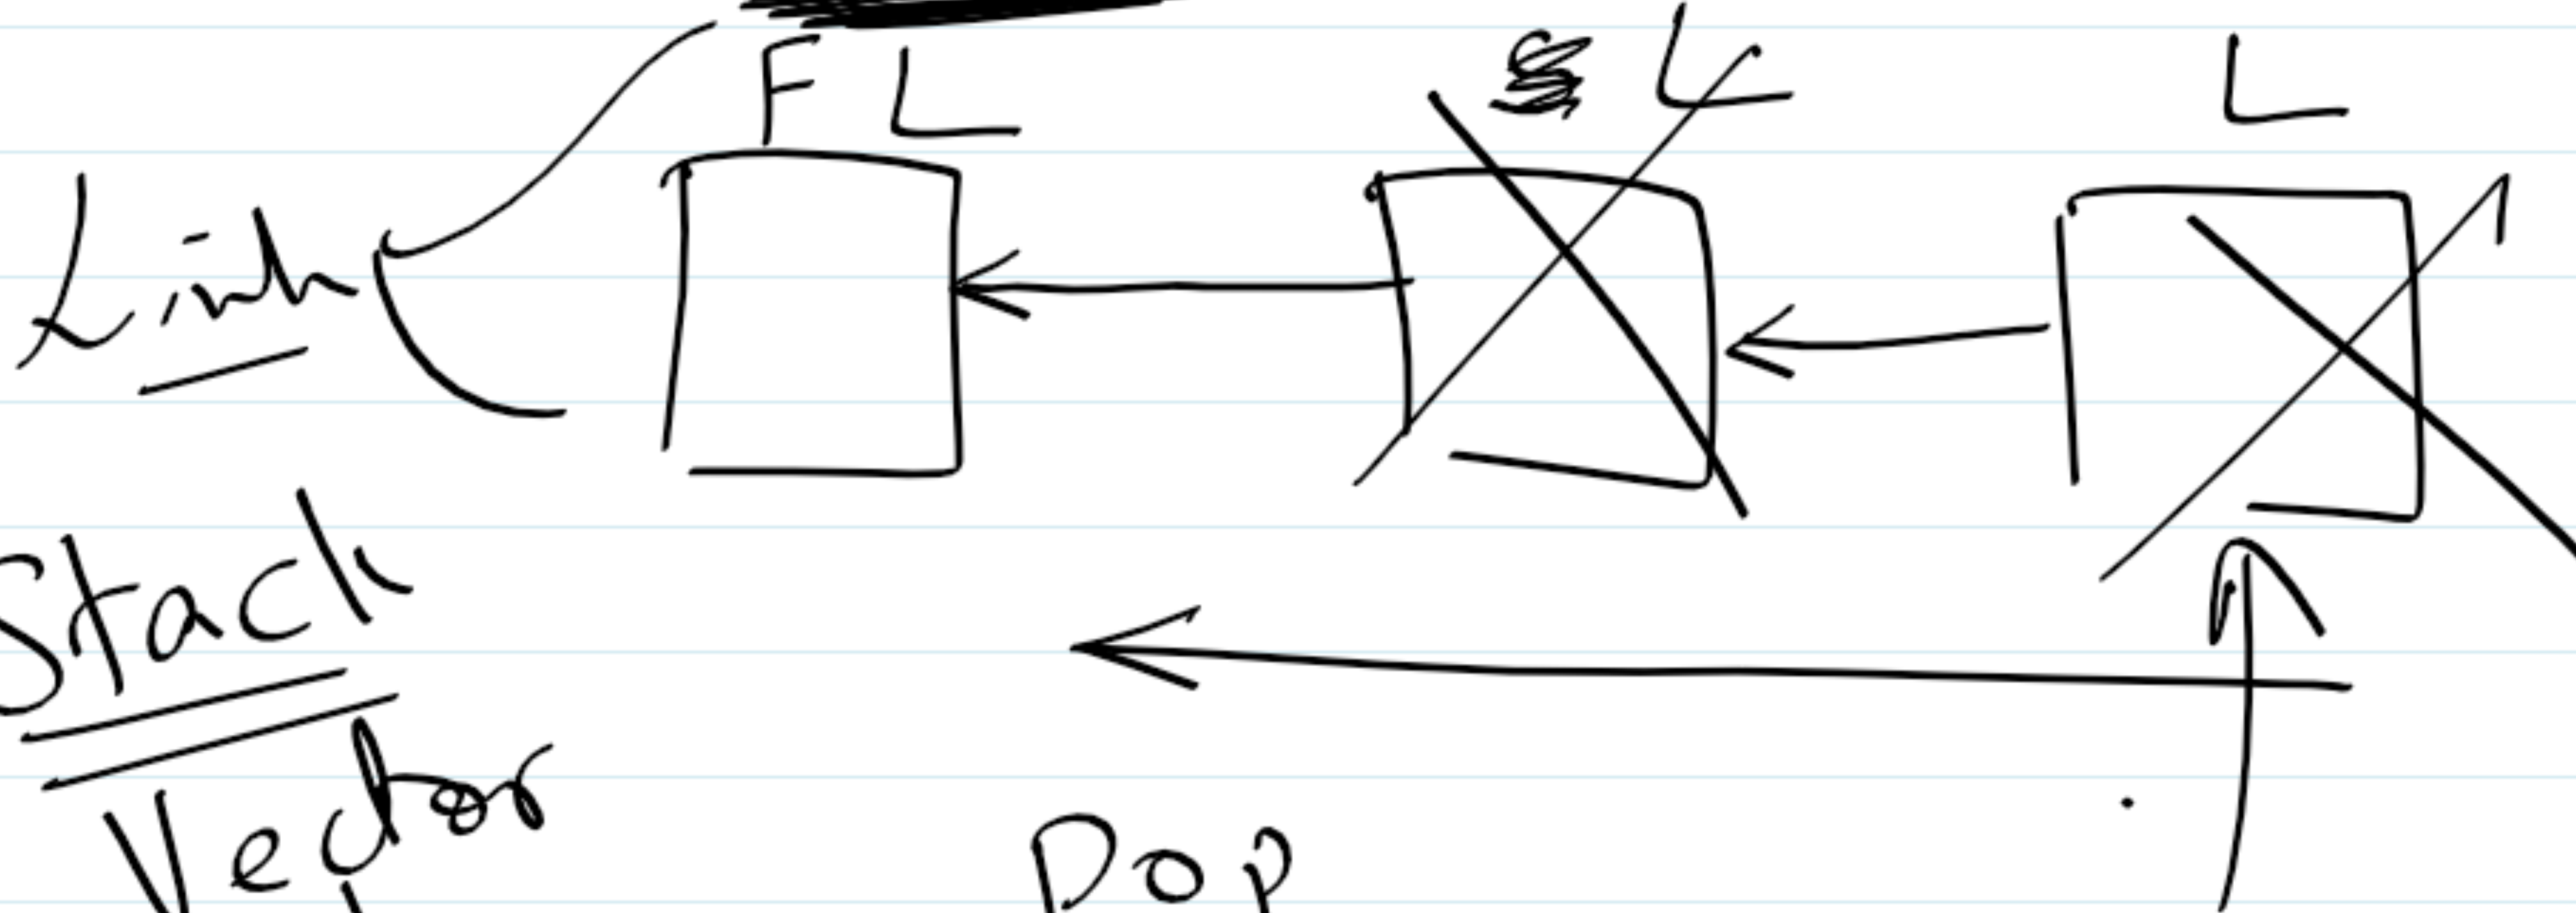

Last in  
First out

Stack  
Vector  
Array

asList ( T... a )  
 ellipses  
 variable arg. list

Function  
 overloaded  
 X asList (1);  
 asList (1, 2);  
 1, 2, 3  
 (1, 4, 5, 6, 7)

# Set → Interface

- a) group of objects as a single entity
- b) Duplicate are not allowed
- c) null is allowed → ①
- d) insertion order is not preserved

— Iterable

Collection

Collection

Set (1.2)

Set

HashSet (1.2)

SortedSet

LinkedHashSet (1.4)

NavigableSet

TreeSet


55, 22, 1

77

33, 19

21

25

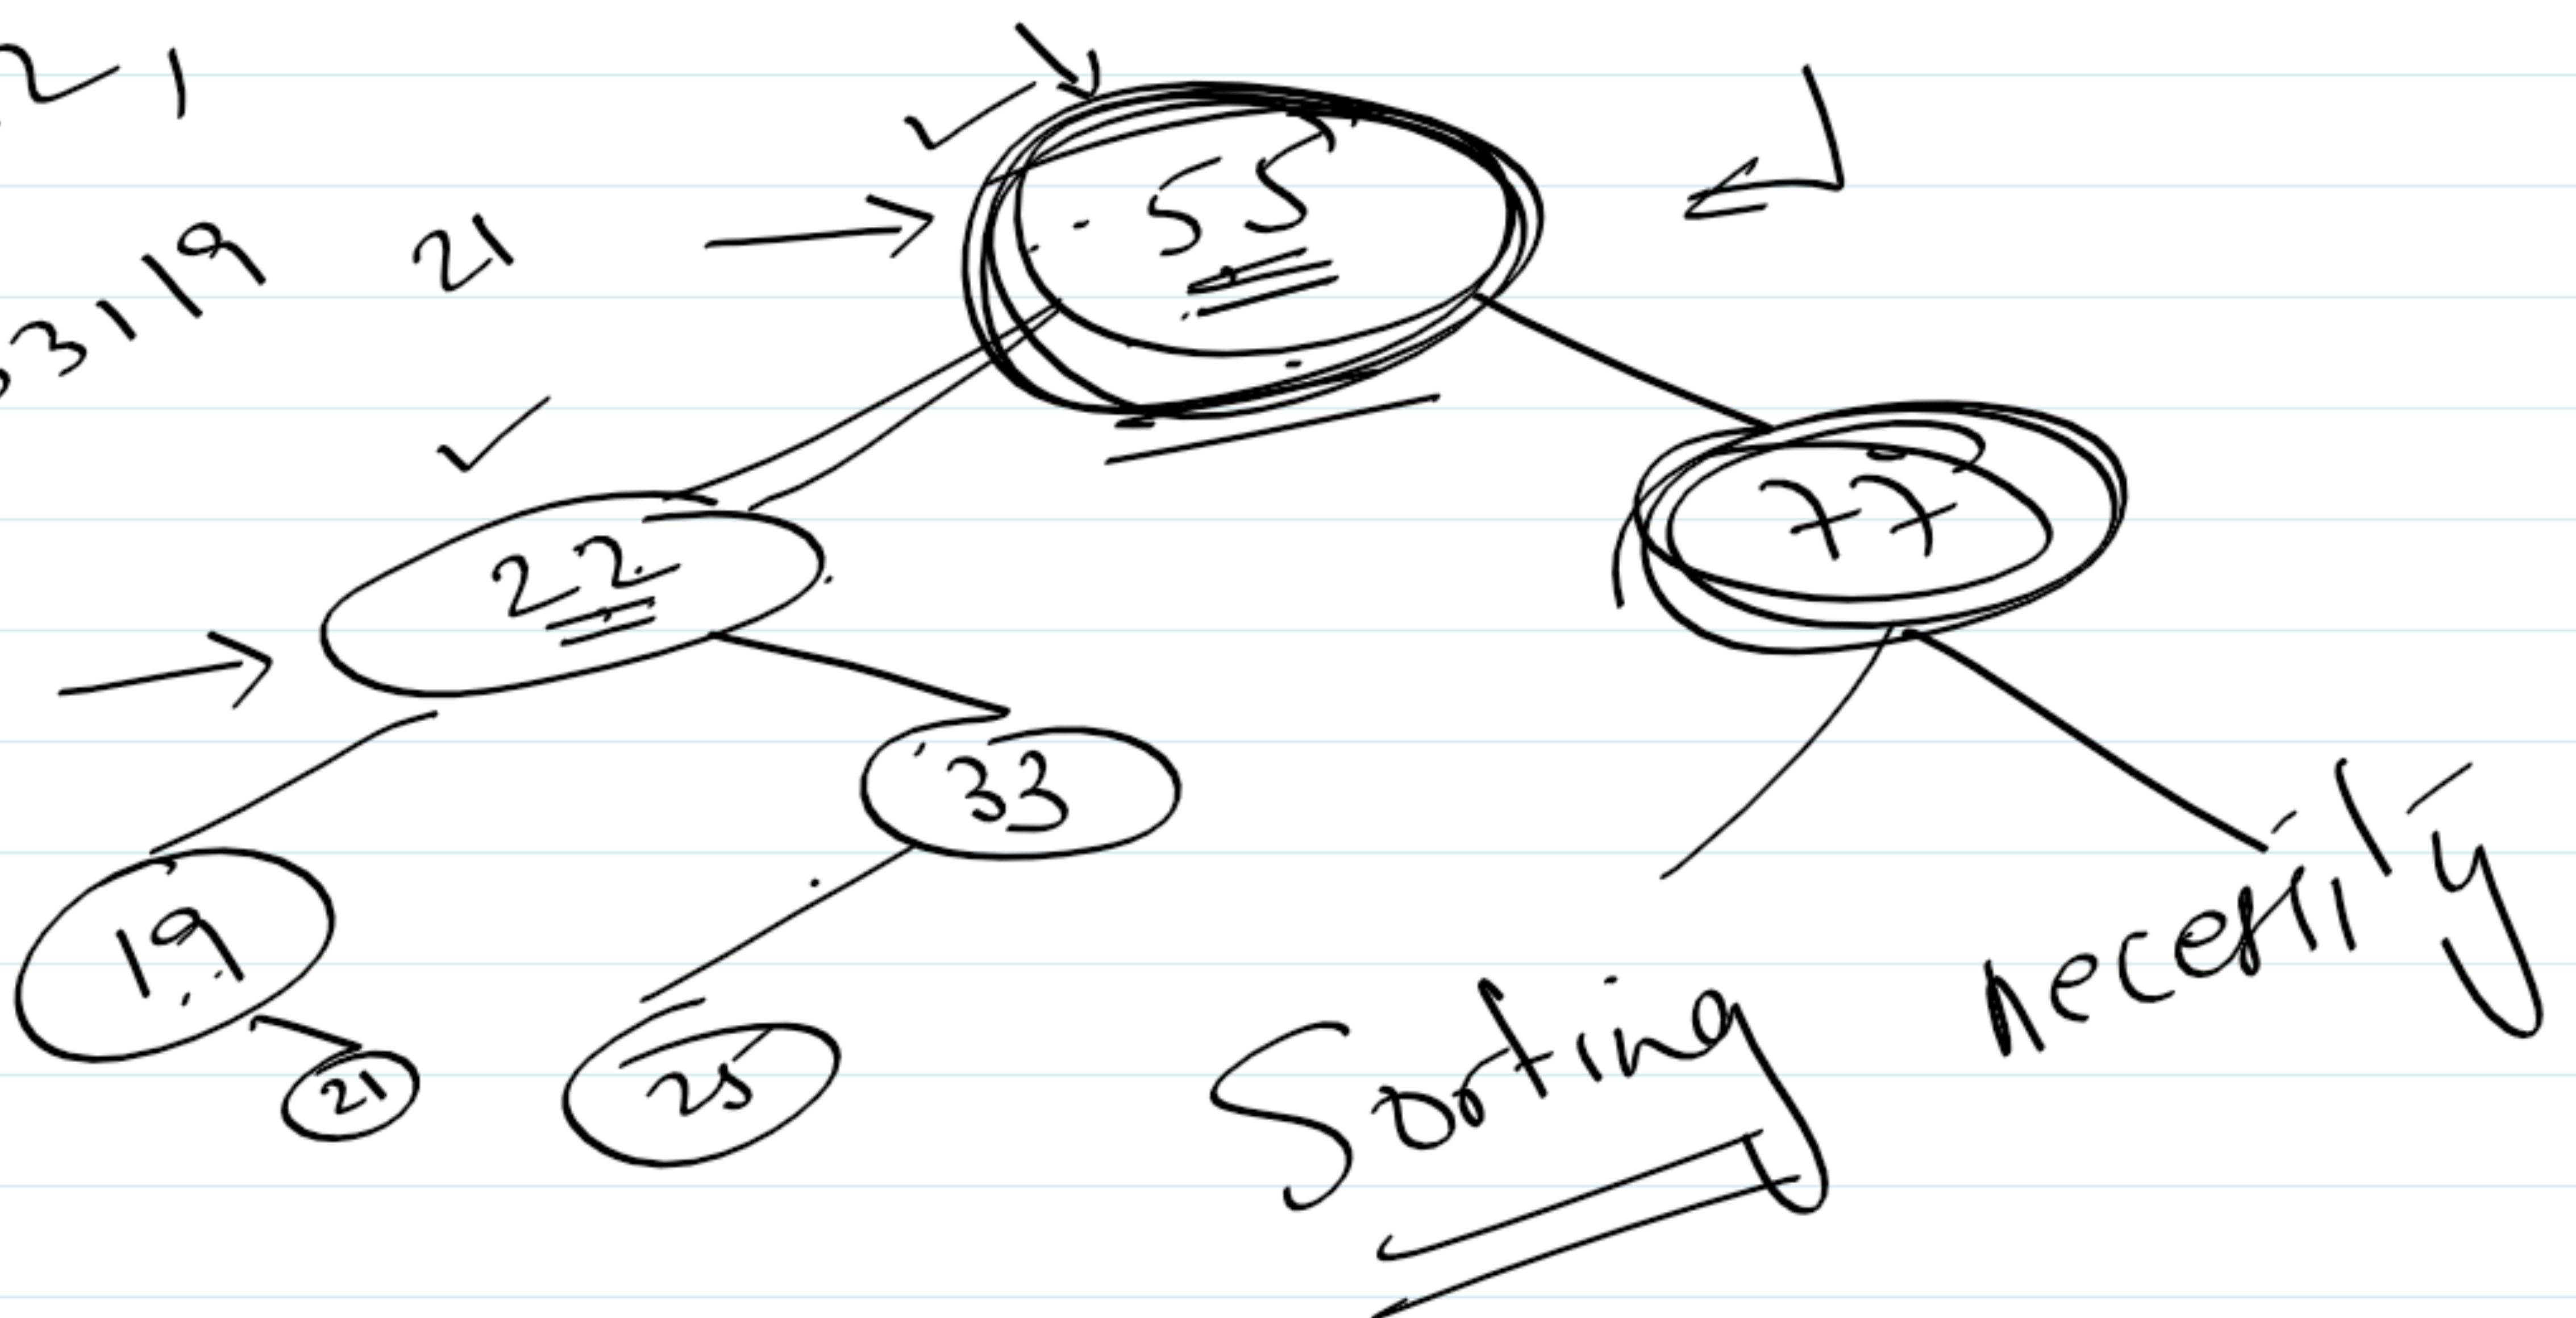

Collection Framework

Map - Interface  
does not inherit Collection ⑦

- a) Key  $\rightarrow$  Value Pair
  - b) Both Key & Value objects
  - c) Duplicates for keys  $\rightarrow$  not allowed
  - d) Duplicates for values  $\rightarrow$  allowed
  - e) inserting null key
- = Map

Map.Entry  $\rightarrow$

| Key  | Value  |
|------|--------|
| 1001 | First  |
| 1002 | Second |
|      |        |
|      |        |