


①




②

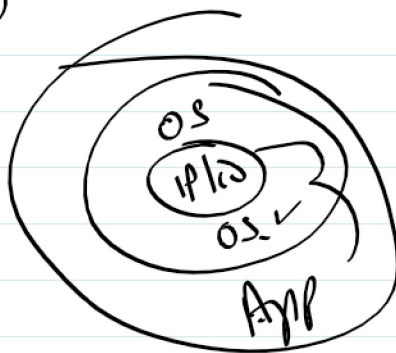

~~bin~~
~~exe~~ → kenova
 Windows
 Linux

2a

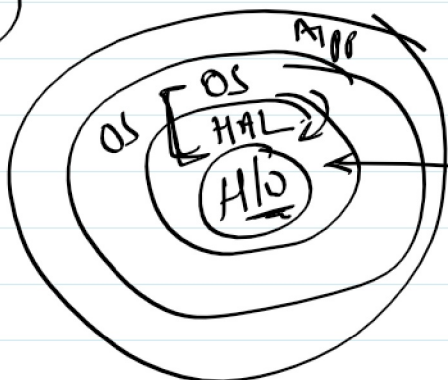

Device Drivers

Bon Jour


French

COFF → Windows

① Format of binary

② API

API
OS

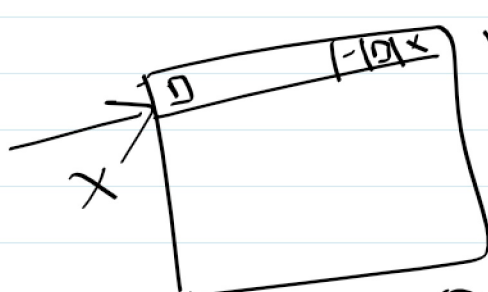

Windows

CreateWindow (1)

files
 → Linux
OpenWindow (3)

James Gosling → Sun Microsystems

1990 → 2000 → 200 microprocessors


* Platform Independent

→ DAK

Java

③

Virtual Machine

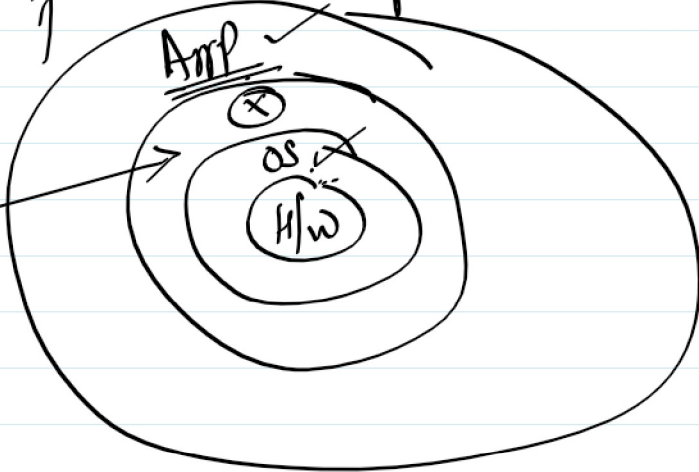

1994 → OOP → Java 1.0
↳ Syntax OOP C C++

- ① Compiled → C/C++
- ② Interpreted → Basic
- ③ passed →

.java ← compiler
↓
.class

Byte Code

Assembly Language Code

JVM (JRE)

Java App

Byte Code



OS → H/W
Linux
Windows
Solaris


JRE → OS W
↳ S

① J2SE

New.

② J2EE

③ J2ME

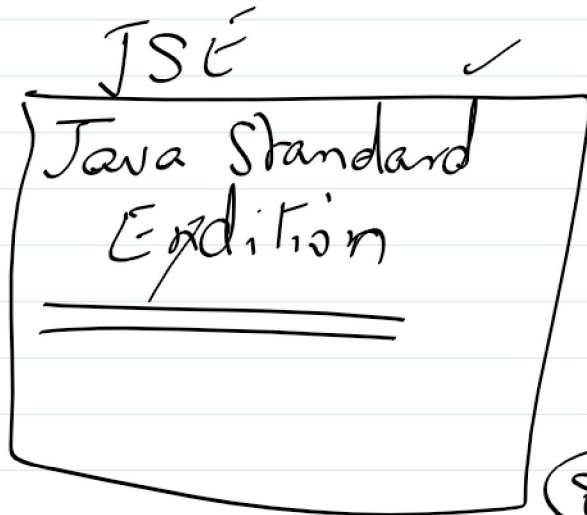

Java Enterprise Ed.

'N' Tier

800 2 1100

Java X
Micro Ed

PDA, mobile
Blu Ray
Telev
Set Box


JDK 1.0
25.0
17.0

Java SE

✓ a) JDK

→ b) JRE

JDK

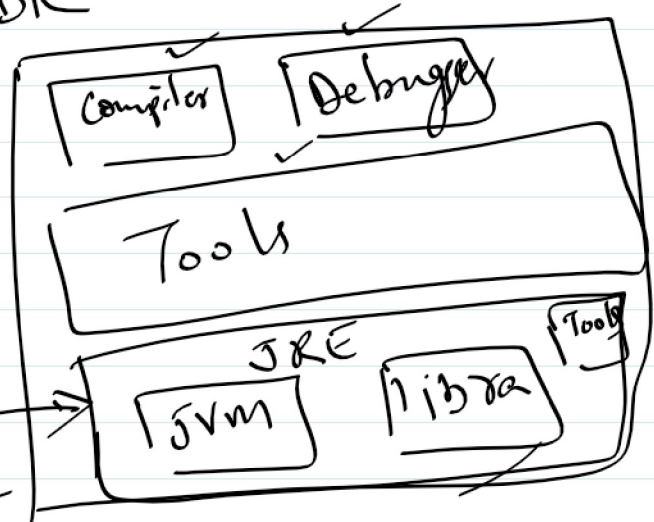

→ C:\javase
d:\javase

100% oop

① everything shd be an object

② nothing shd be global

③ All features of OOPs to be supported