


1998 - J2SE ← Java 2.0
Jitters Just In Time Compilers

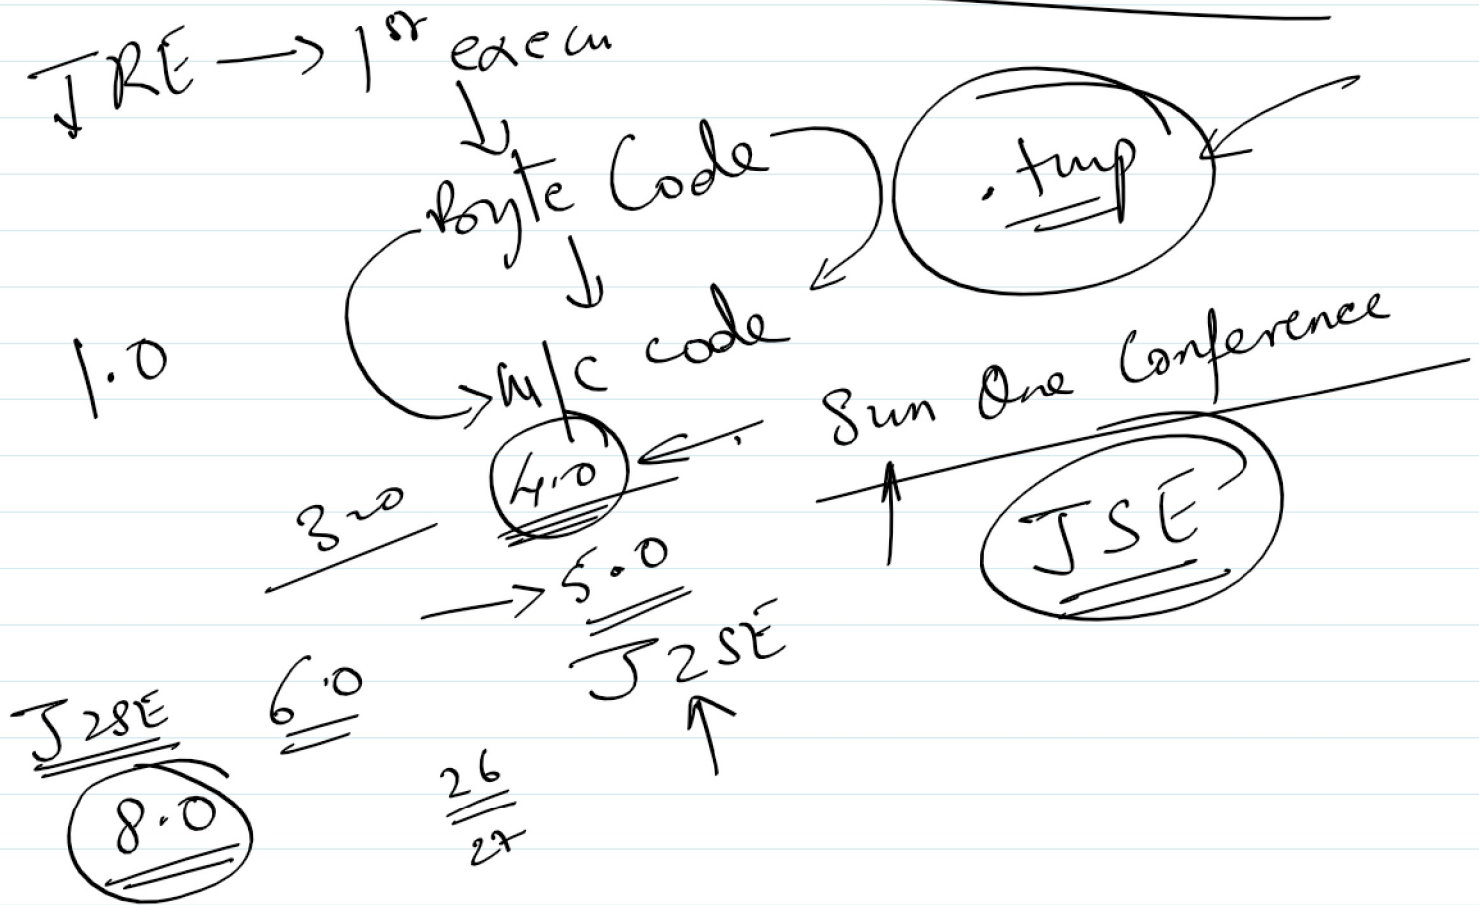

① Java SE

② Java EE

③ Java ME

① Primitive Data Type

- a) short - 2
- b) int - 4
- c) long - 8
- d) float - 4
- e) double - 8
- f) boolean - 1 bit
- g) byte - 1 byte
- h) char - 2 byte
- i) var -

② Object

UTF-8 char → short
 UTF-16 char = 1

'H' 2 bytes


Unicode
 ASCII

0 - 255
 $2^8 =$

a = 97
 A = 65
 0 - 9

① String [] args

args[1]

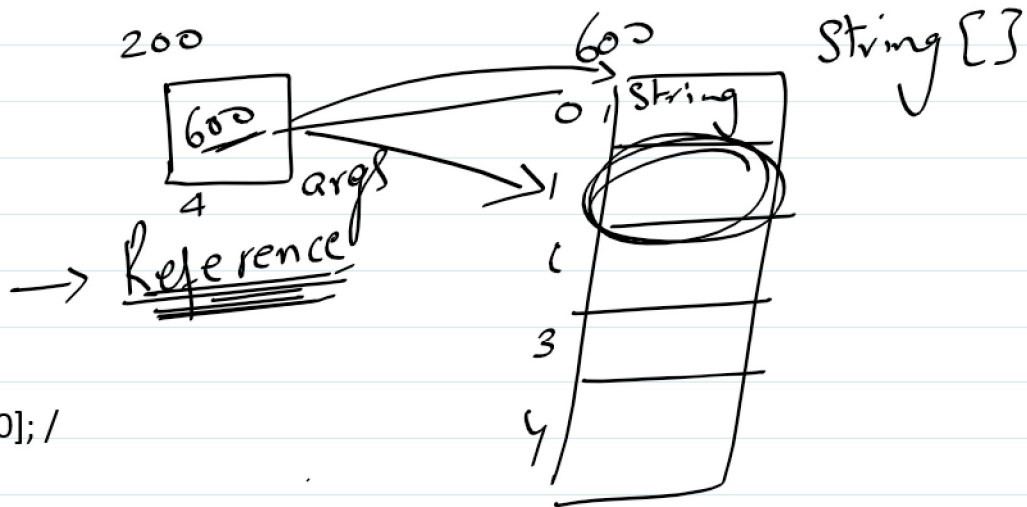


byte arrInput[] = new byte[100]; /

C++

int arr[100];

arr[0] = 5;

$$200 + (0 \times 4) = 200 = 5$$

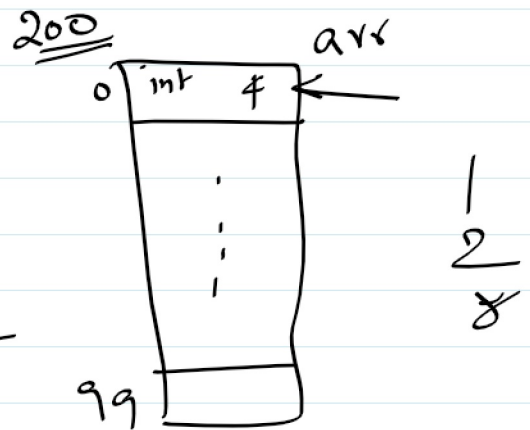


Arrays Object

Reference

Object Memory

J Data obj = new Data();

C Data ptr = new Data();

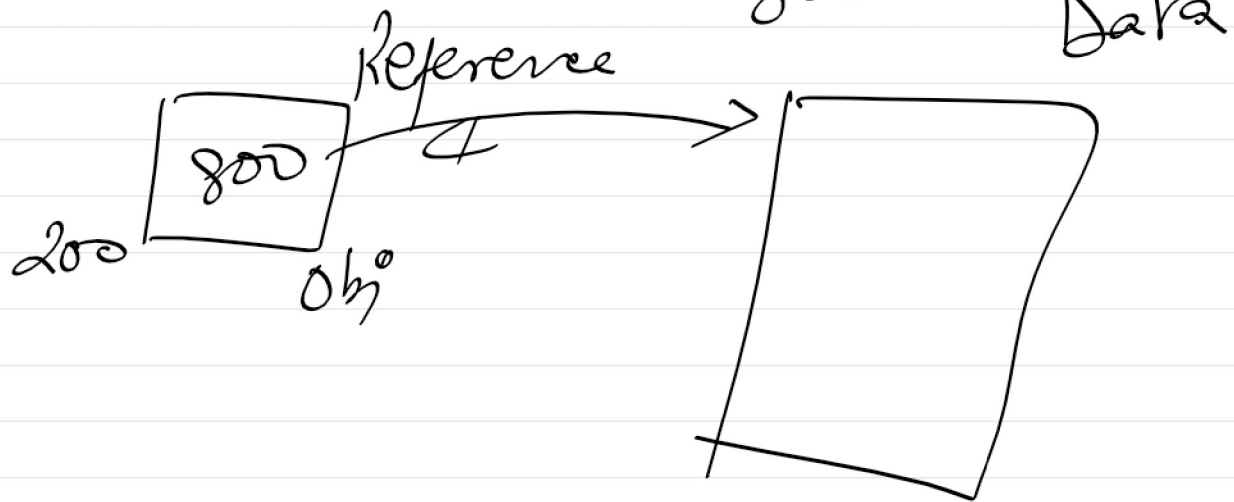

Arrays Objects

byte arrInput [] = new byte [100];

