



① Primitive

↳ Stack

② Object

p s v main (---)
int num1;
num1 = 5;
200 = 5;

Primitive

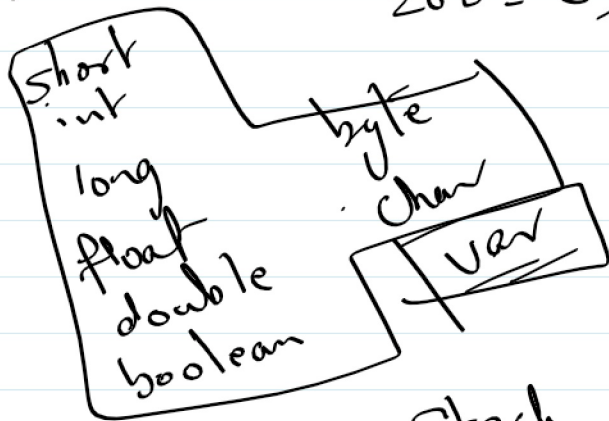

num1
Symbol Table



name	MA
num1	200
args	300

2) Object
↳ instance of a class

new Calculator();

Stack
class Calculator {
int memory;
int x; int z;
int y;
}


C++
fn() {
1
Calculator obj;
}

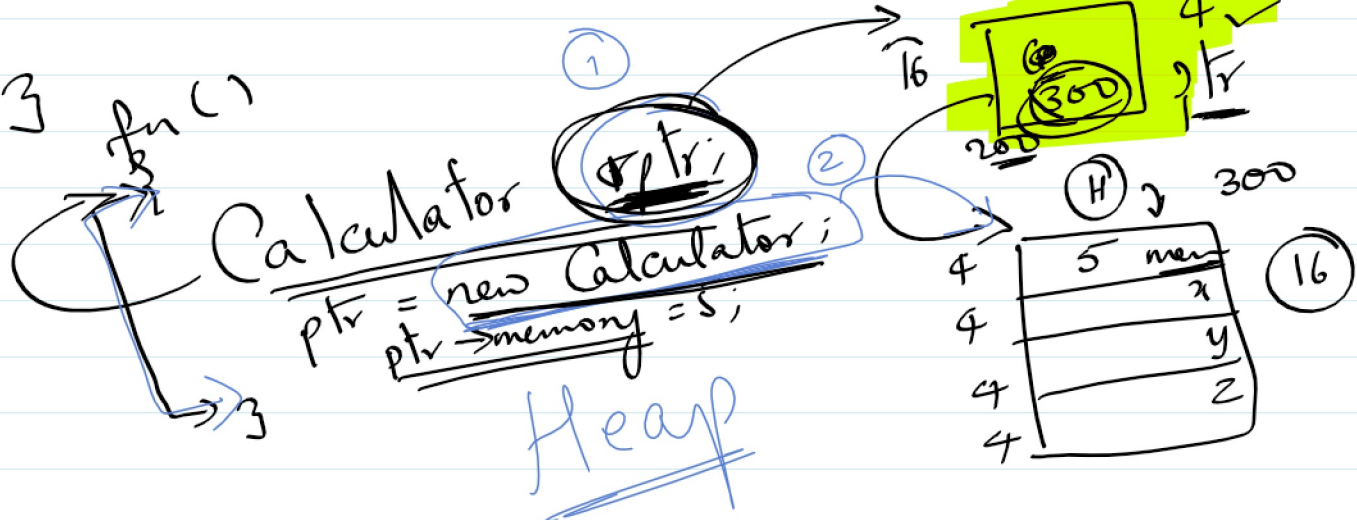

Java ① Calculator obj; X create object
No

C++ ① Calculator *ptr;
obj. x = 5
ptr → x = 5


Java



Calculator obj = new Calculator ();
obj. x = 5;

	m	4
	x	4
	y	4
	z	4


public void main (—)
{
Calculator obj = new Calculator (—);

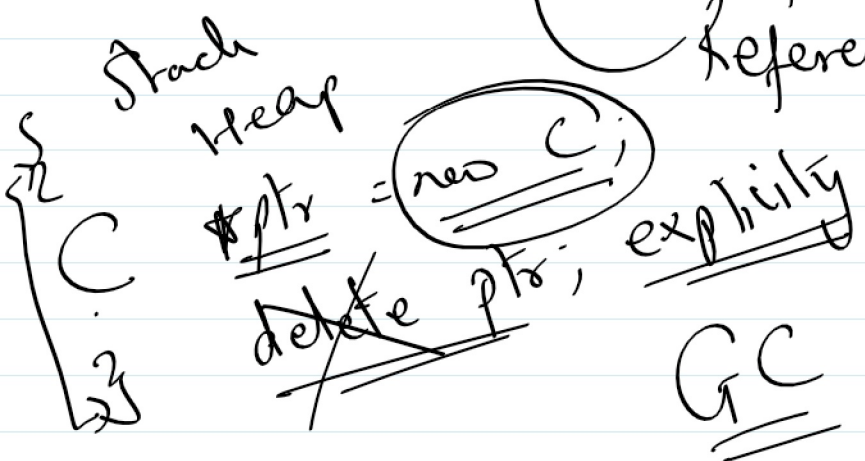

④ Stack
Dynamically
@
Heap

C++ Pointer
Java Reference ?


C++
int num1;

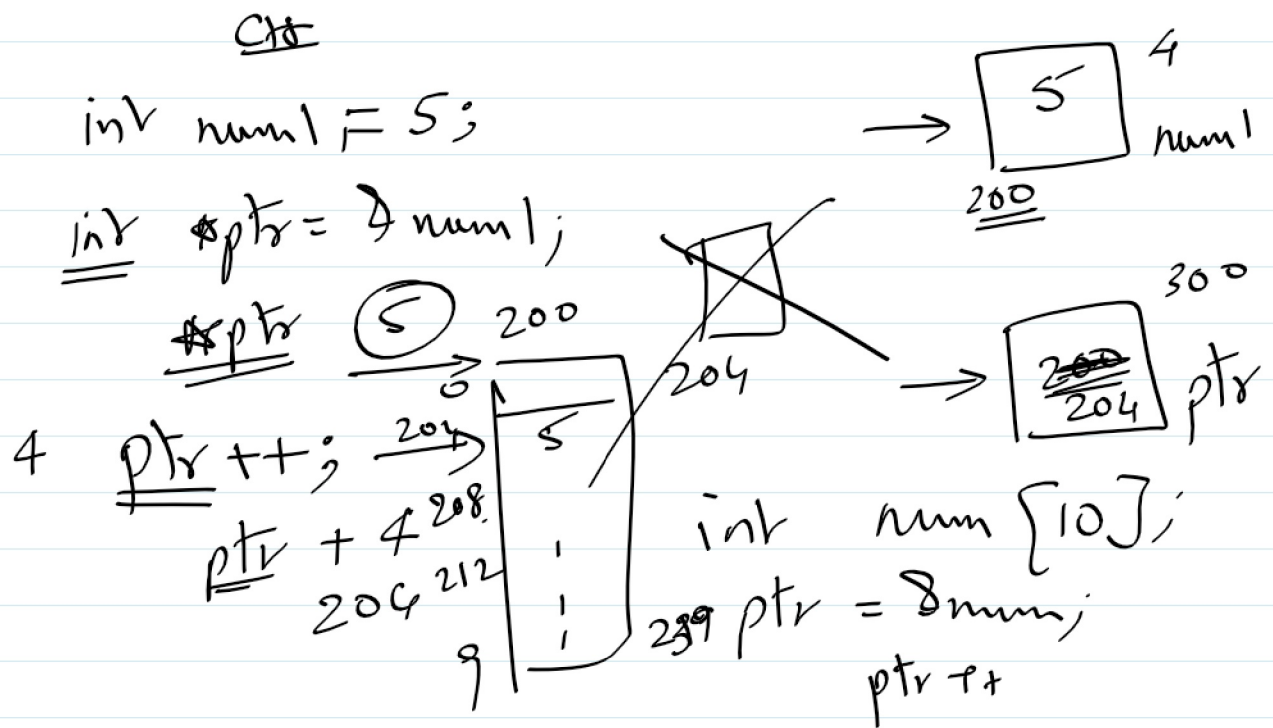


Java
Calculator (obj;)

~~obj++~~
Calculator

~~---~~
hashCode

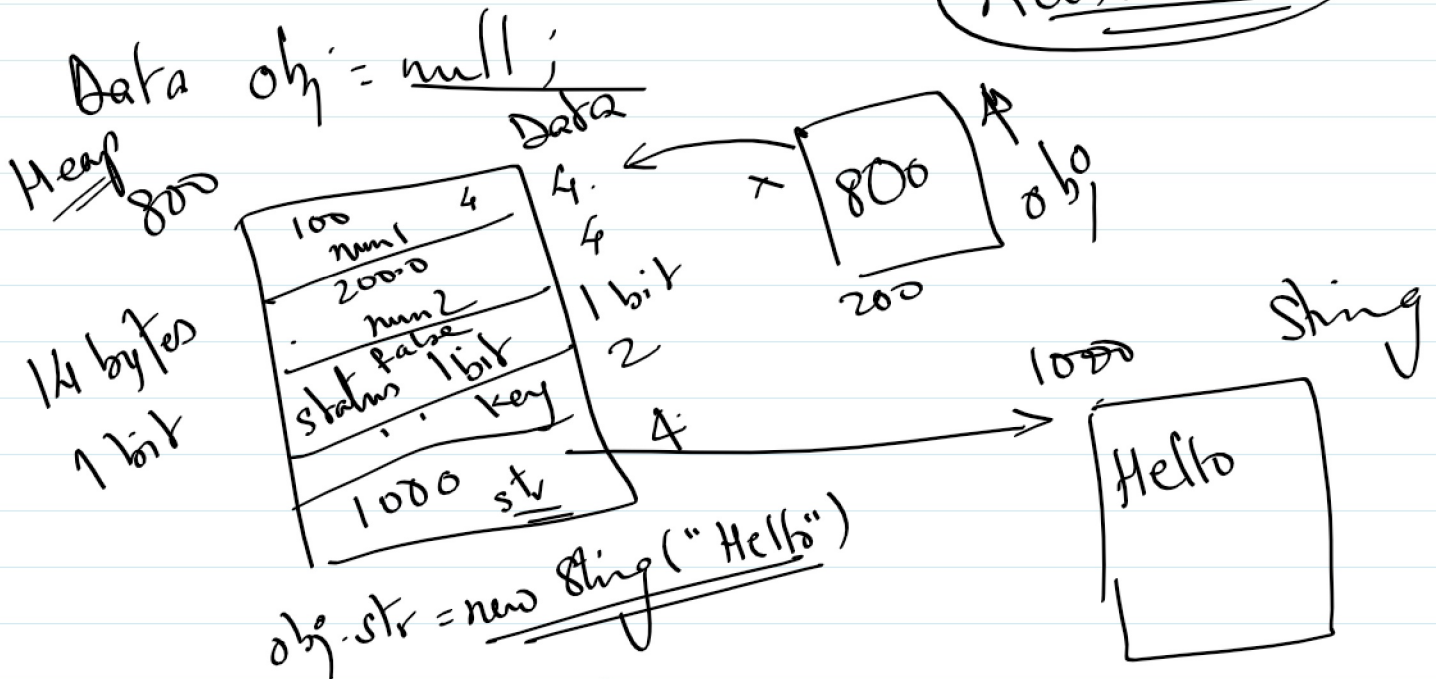

Data obj = new Data();
obj.num1

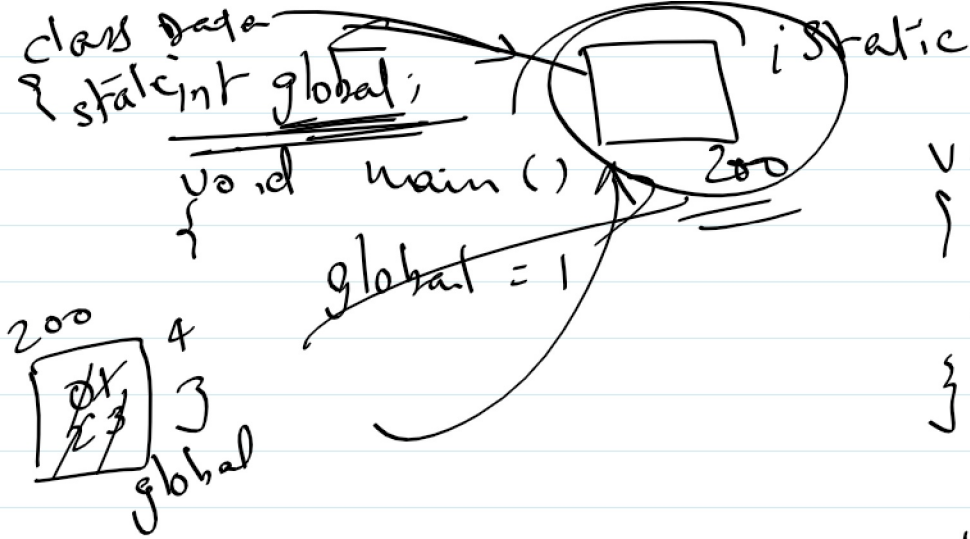


```
void display()
{
  global = 2;
}


void show()
{
  global = 3;
}
```

Array

- ① Single Dimensional Array
- ② Multi Dimensional
 - a) Matrix
 - b) Jagged

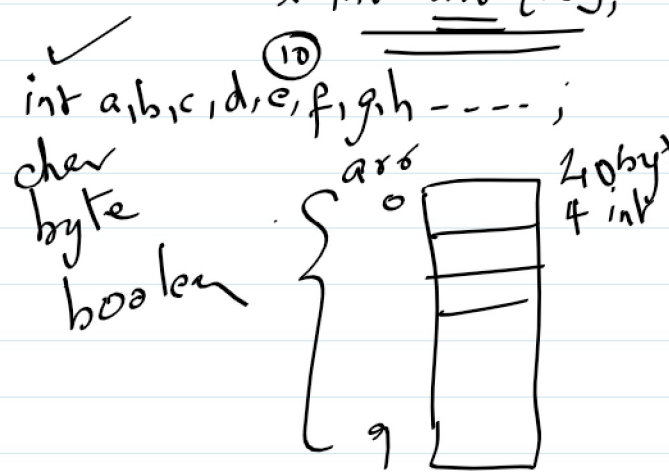

Jagged

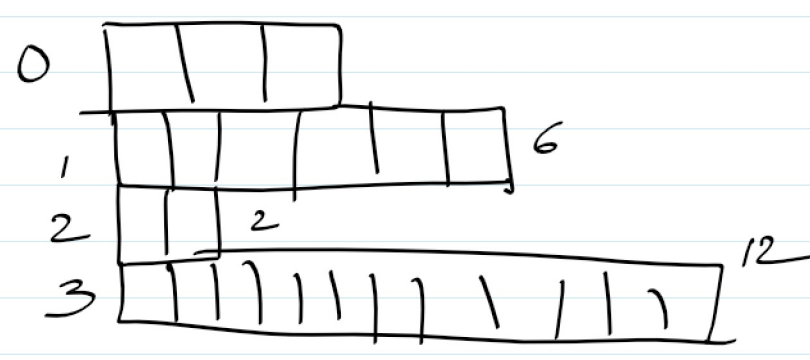

Matrix

