
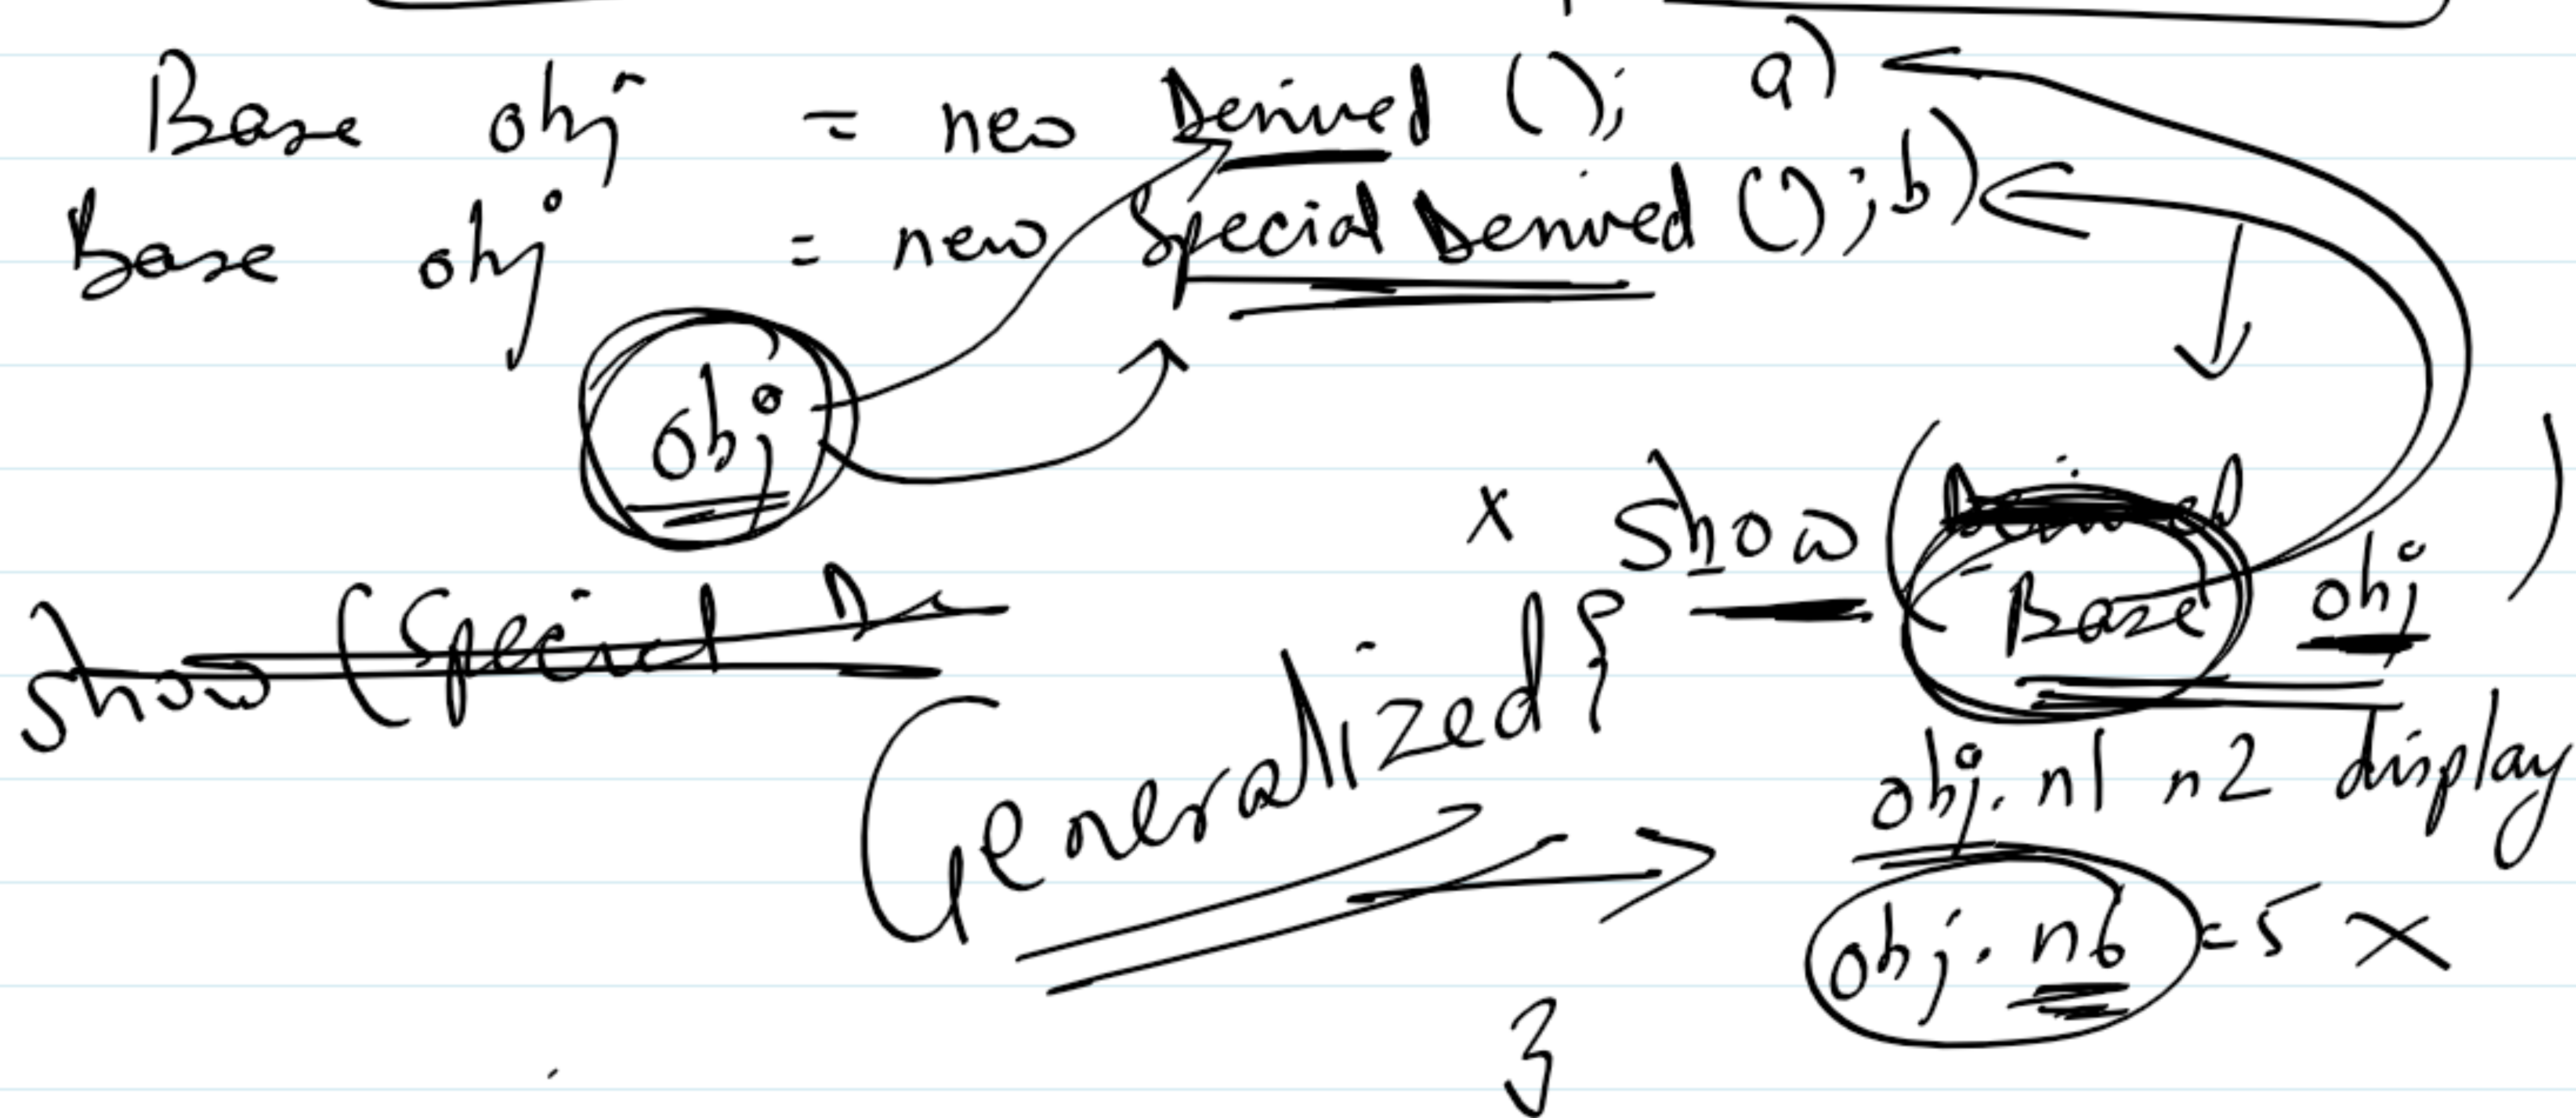


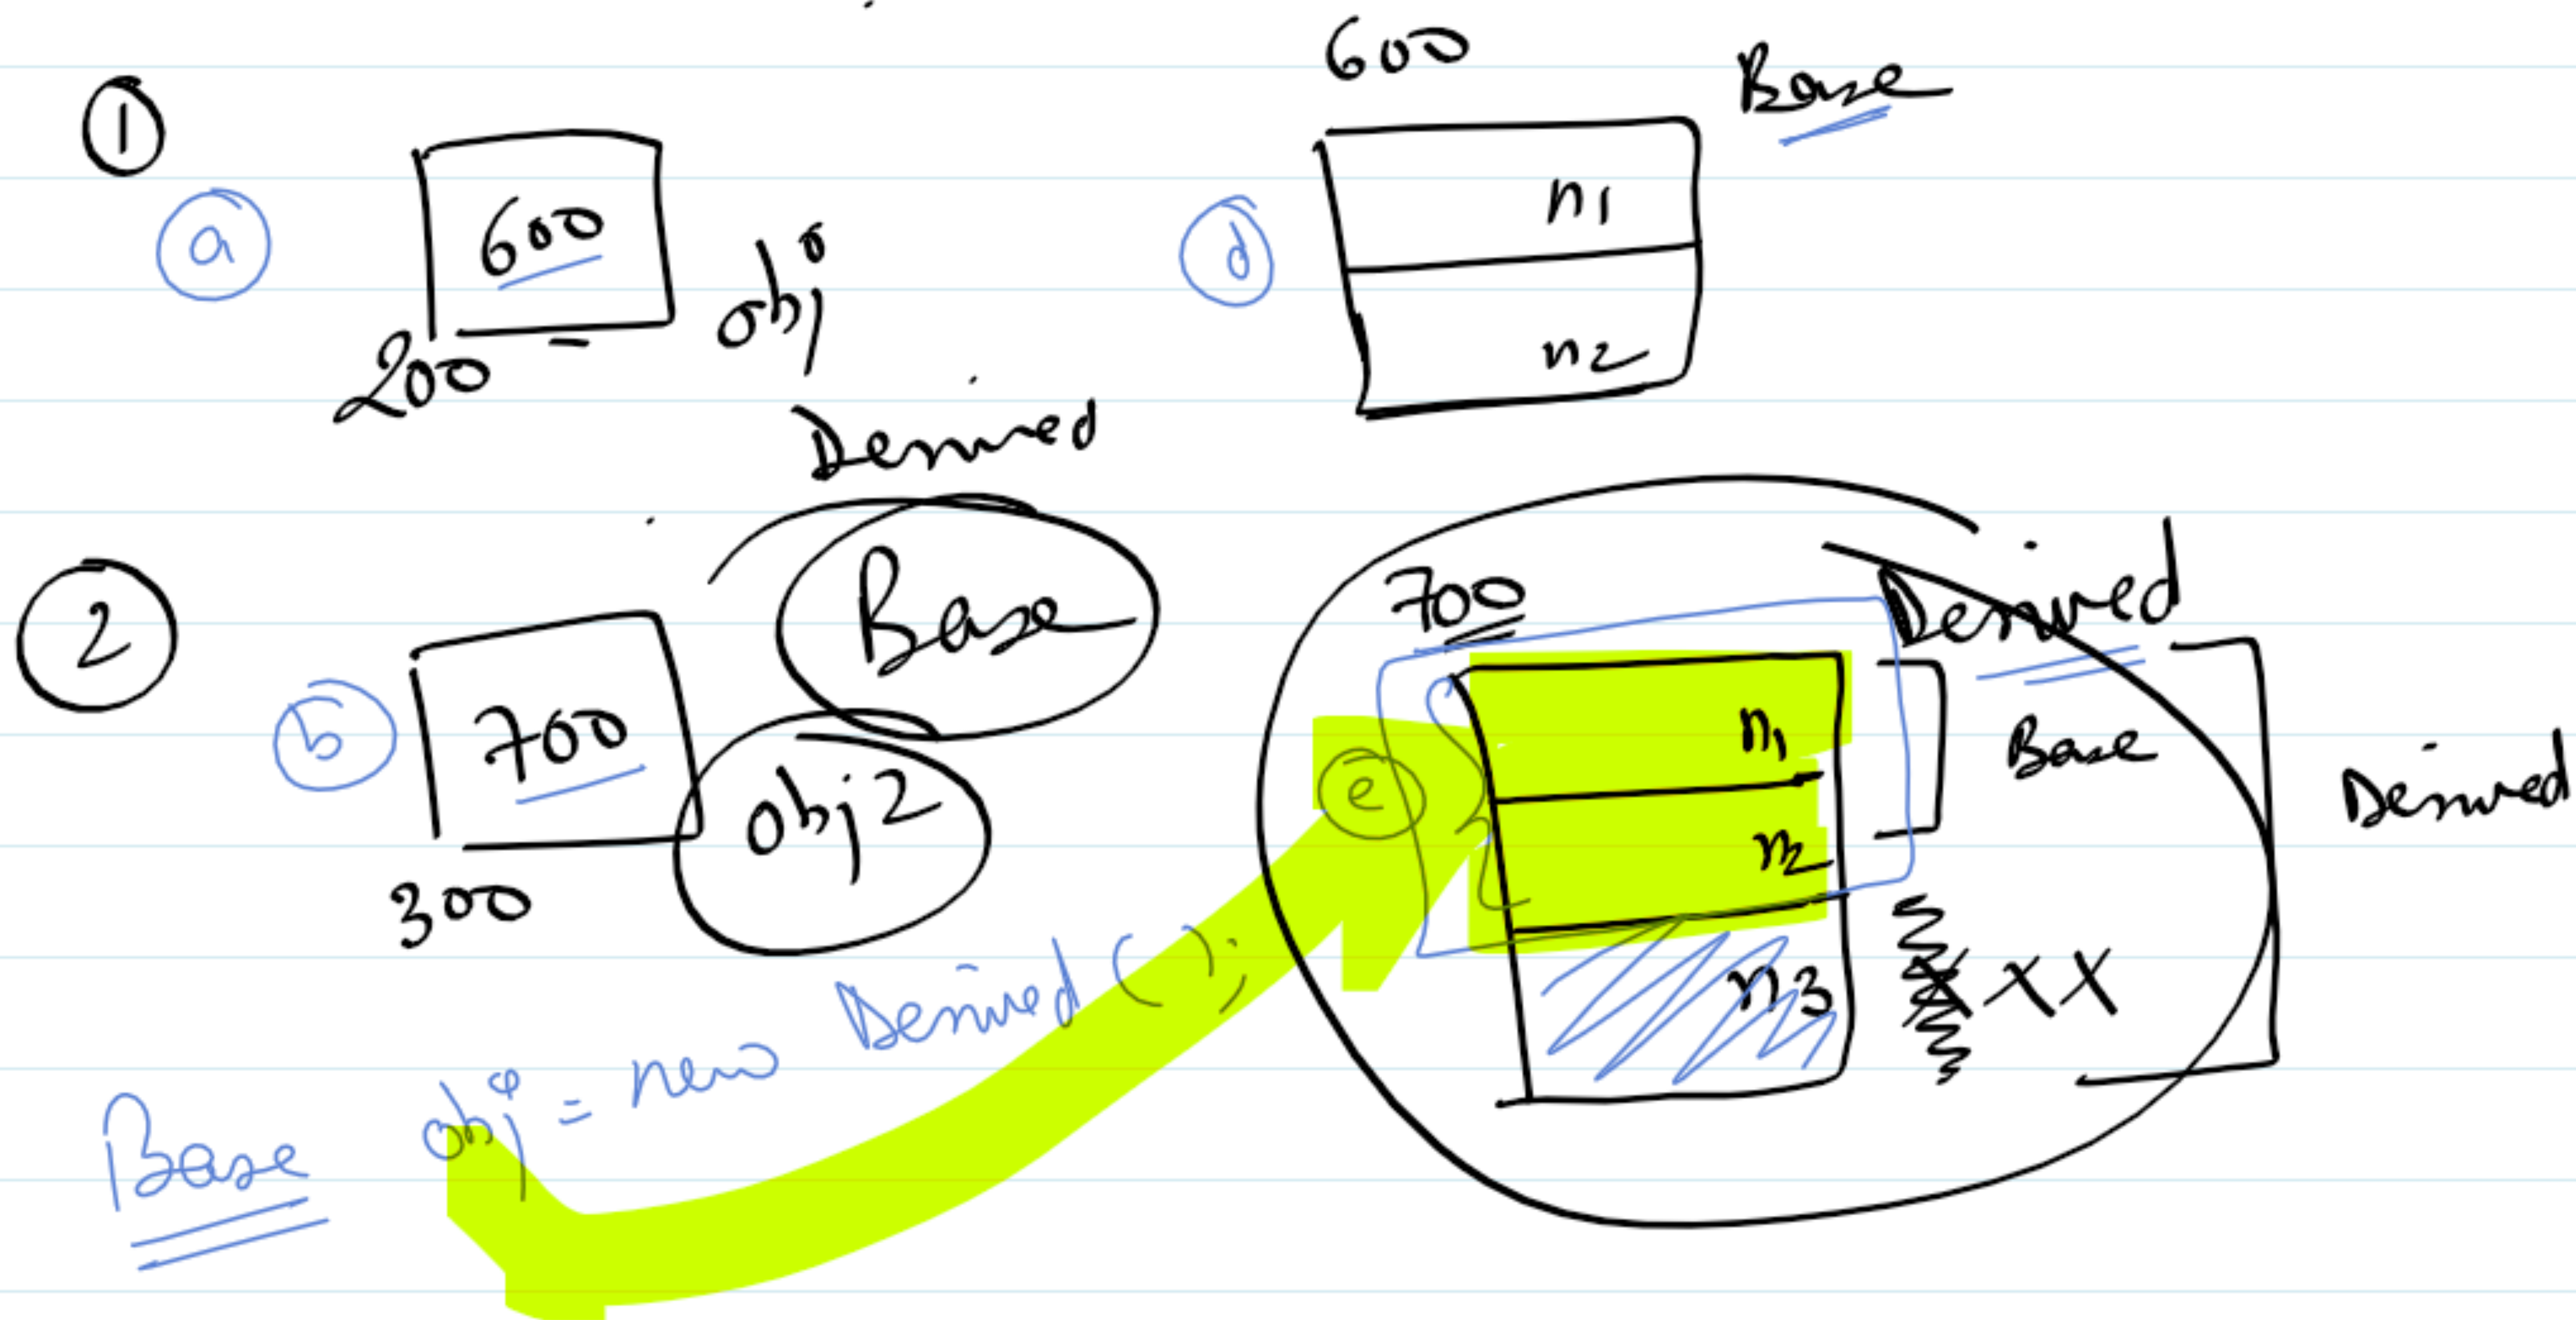

show (Base obj)

{


Sp. Der x obj = (Sp. Der) obj;

x obj.n6 = 5;

}

C++


```
class Base
{
    int num; virtual void show() {}
public:
    virtual void display()
    {
        cout << "Base";
    }
    void add()
    {
        // ...
    }
};
```

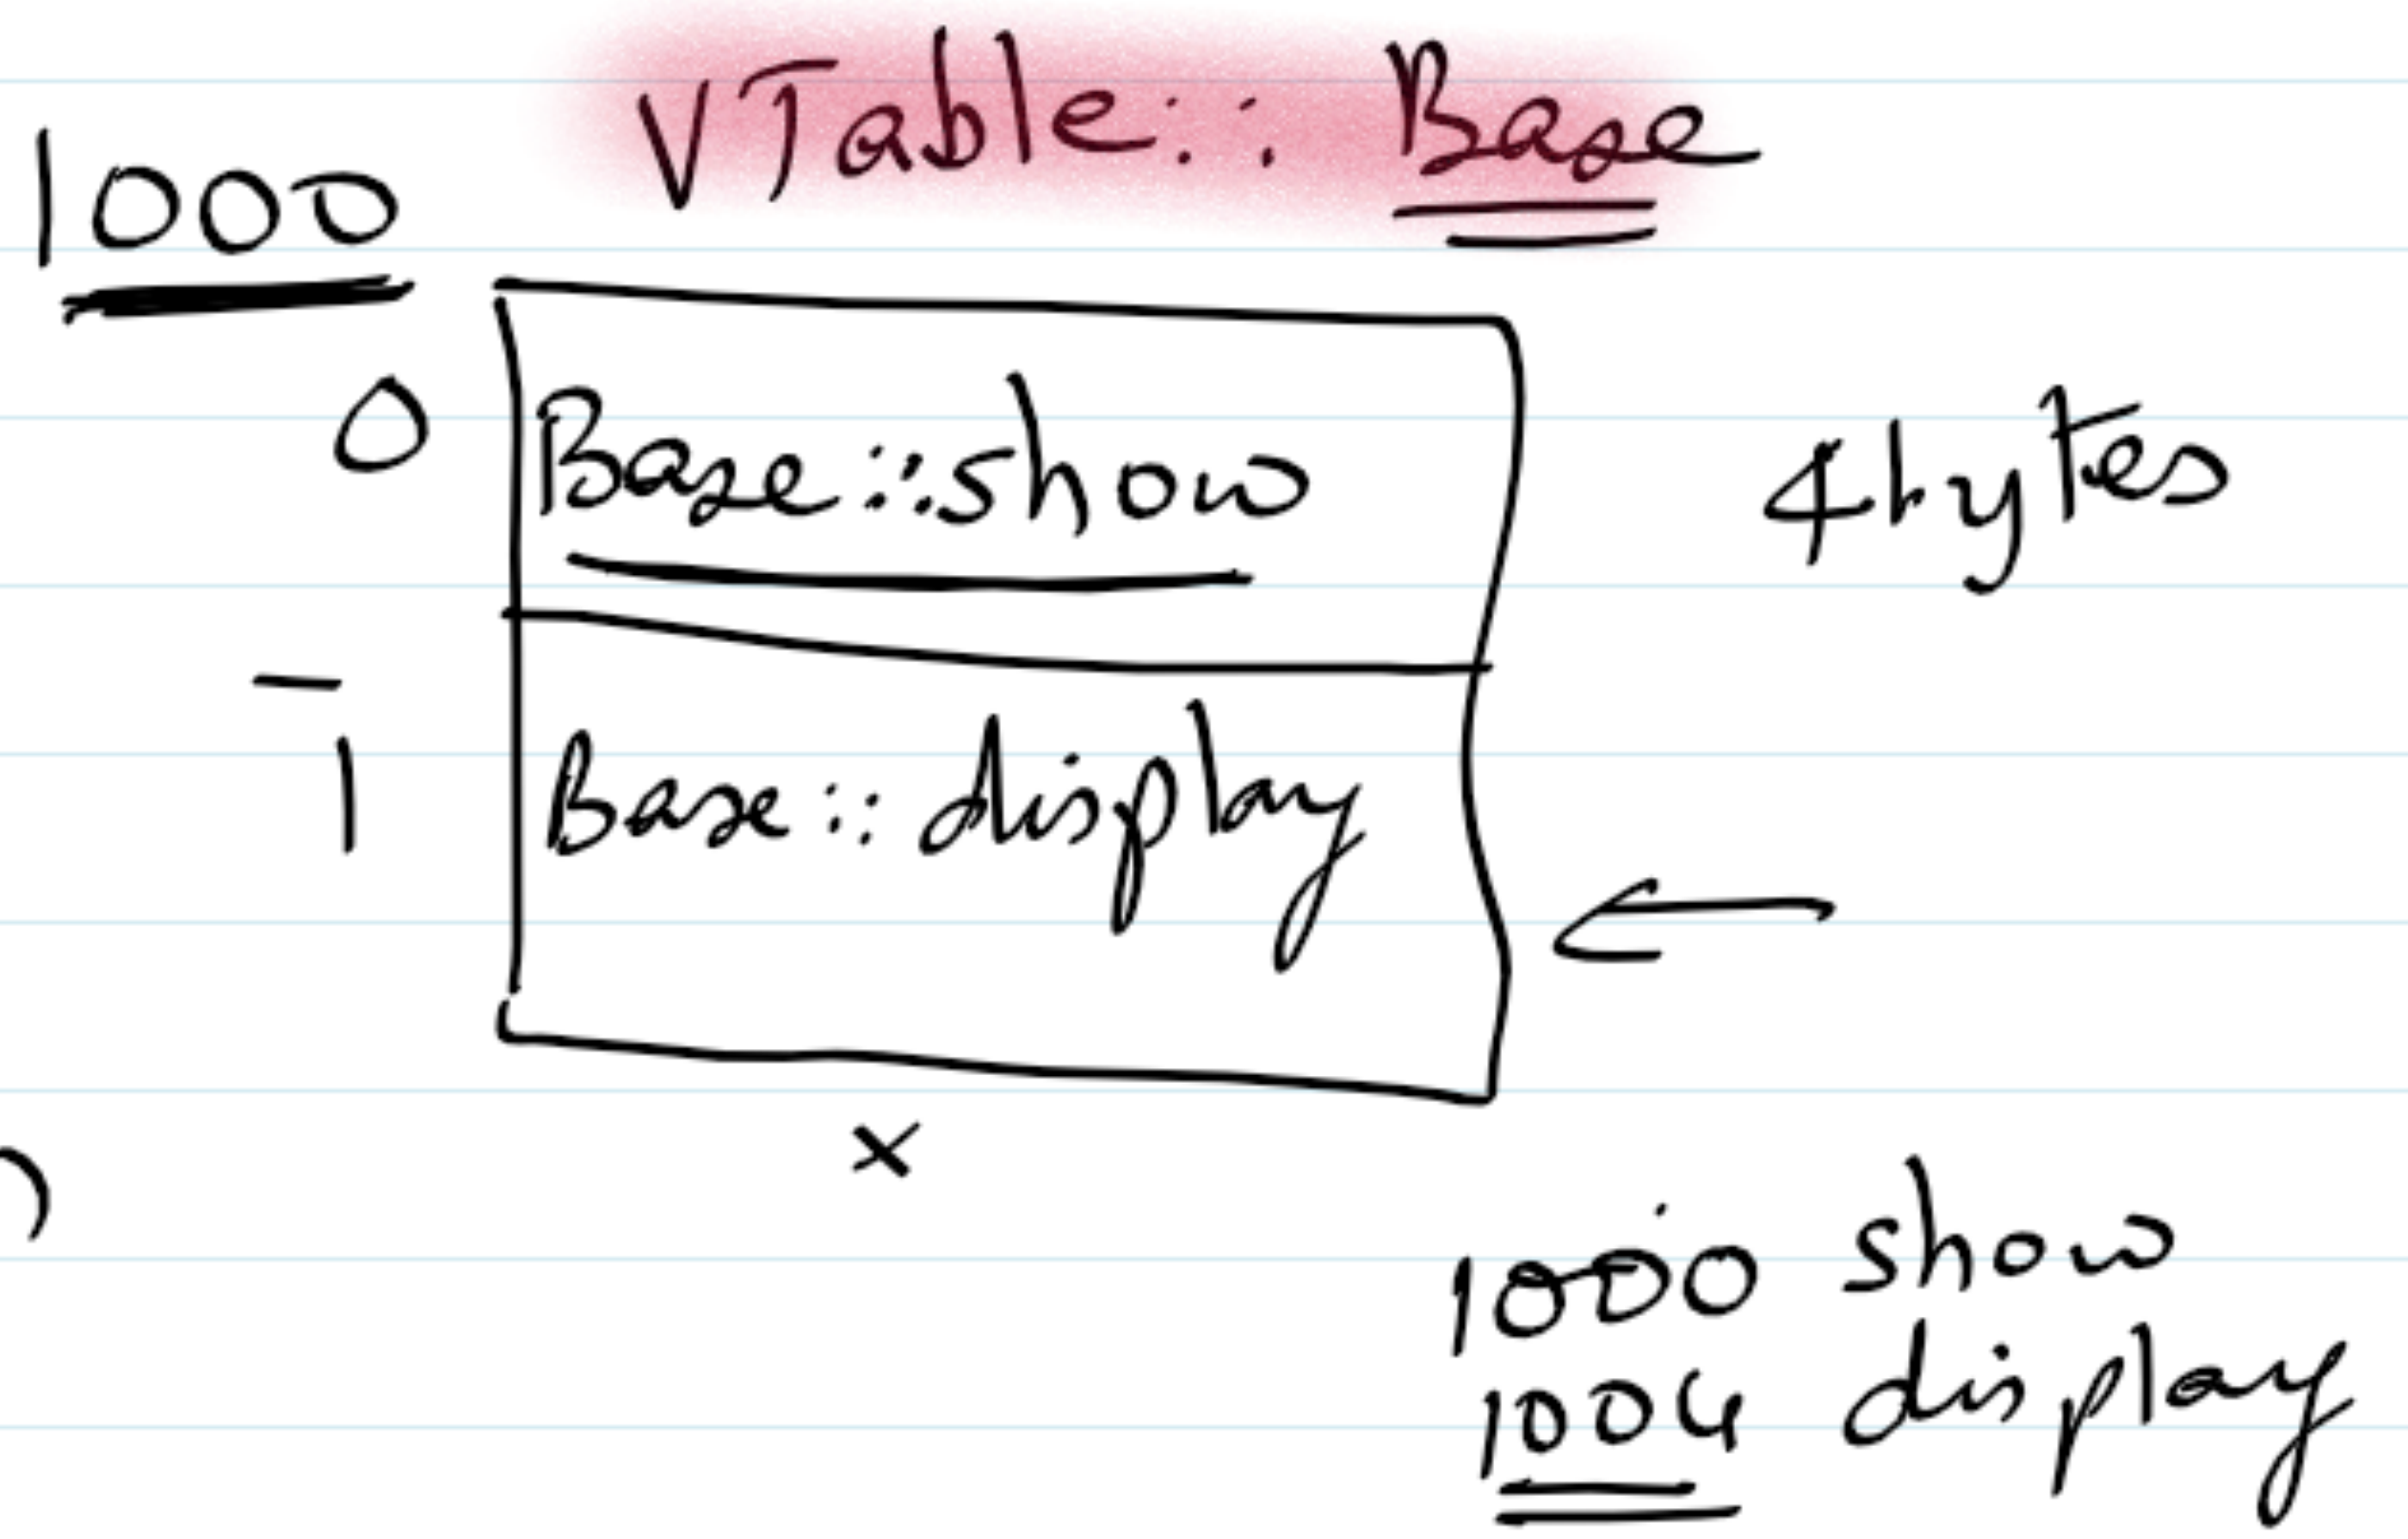

```
class Deriv : public Base
{
    int value;
public:
    void display()
    {
        // ...
    }
    virtual void multiply()
    {
        // ...
    }
};
```

Base *ptr = new Deriv;

ptr->display();

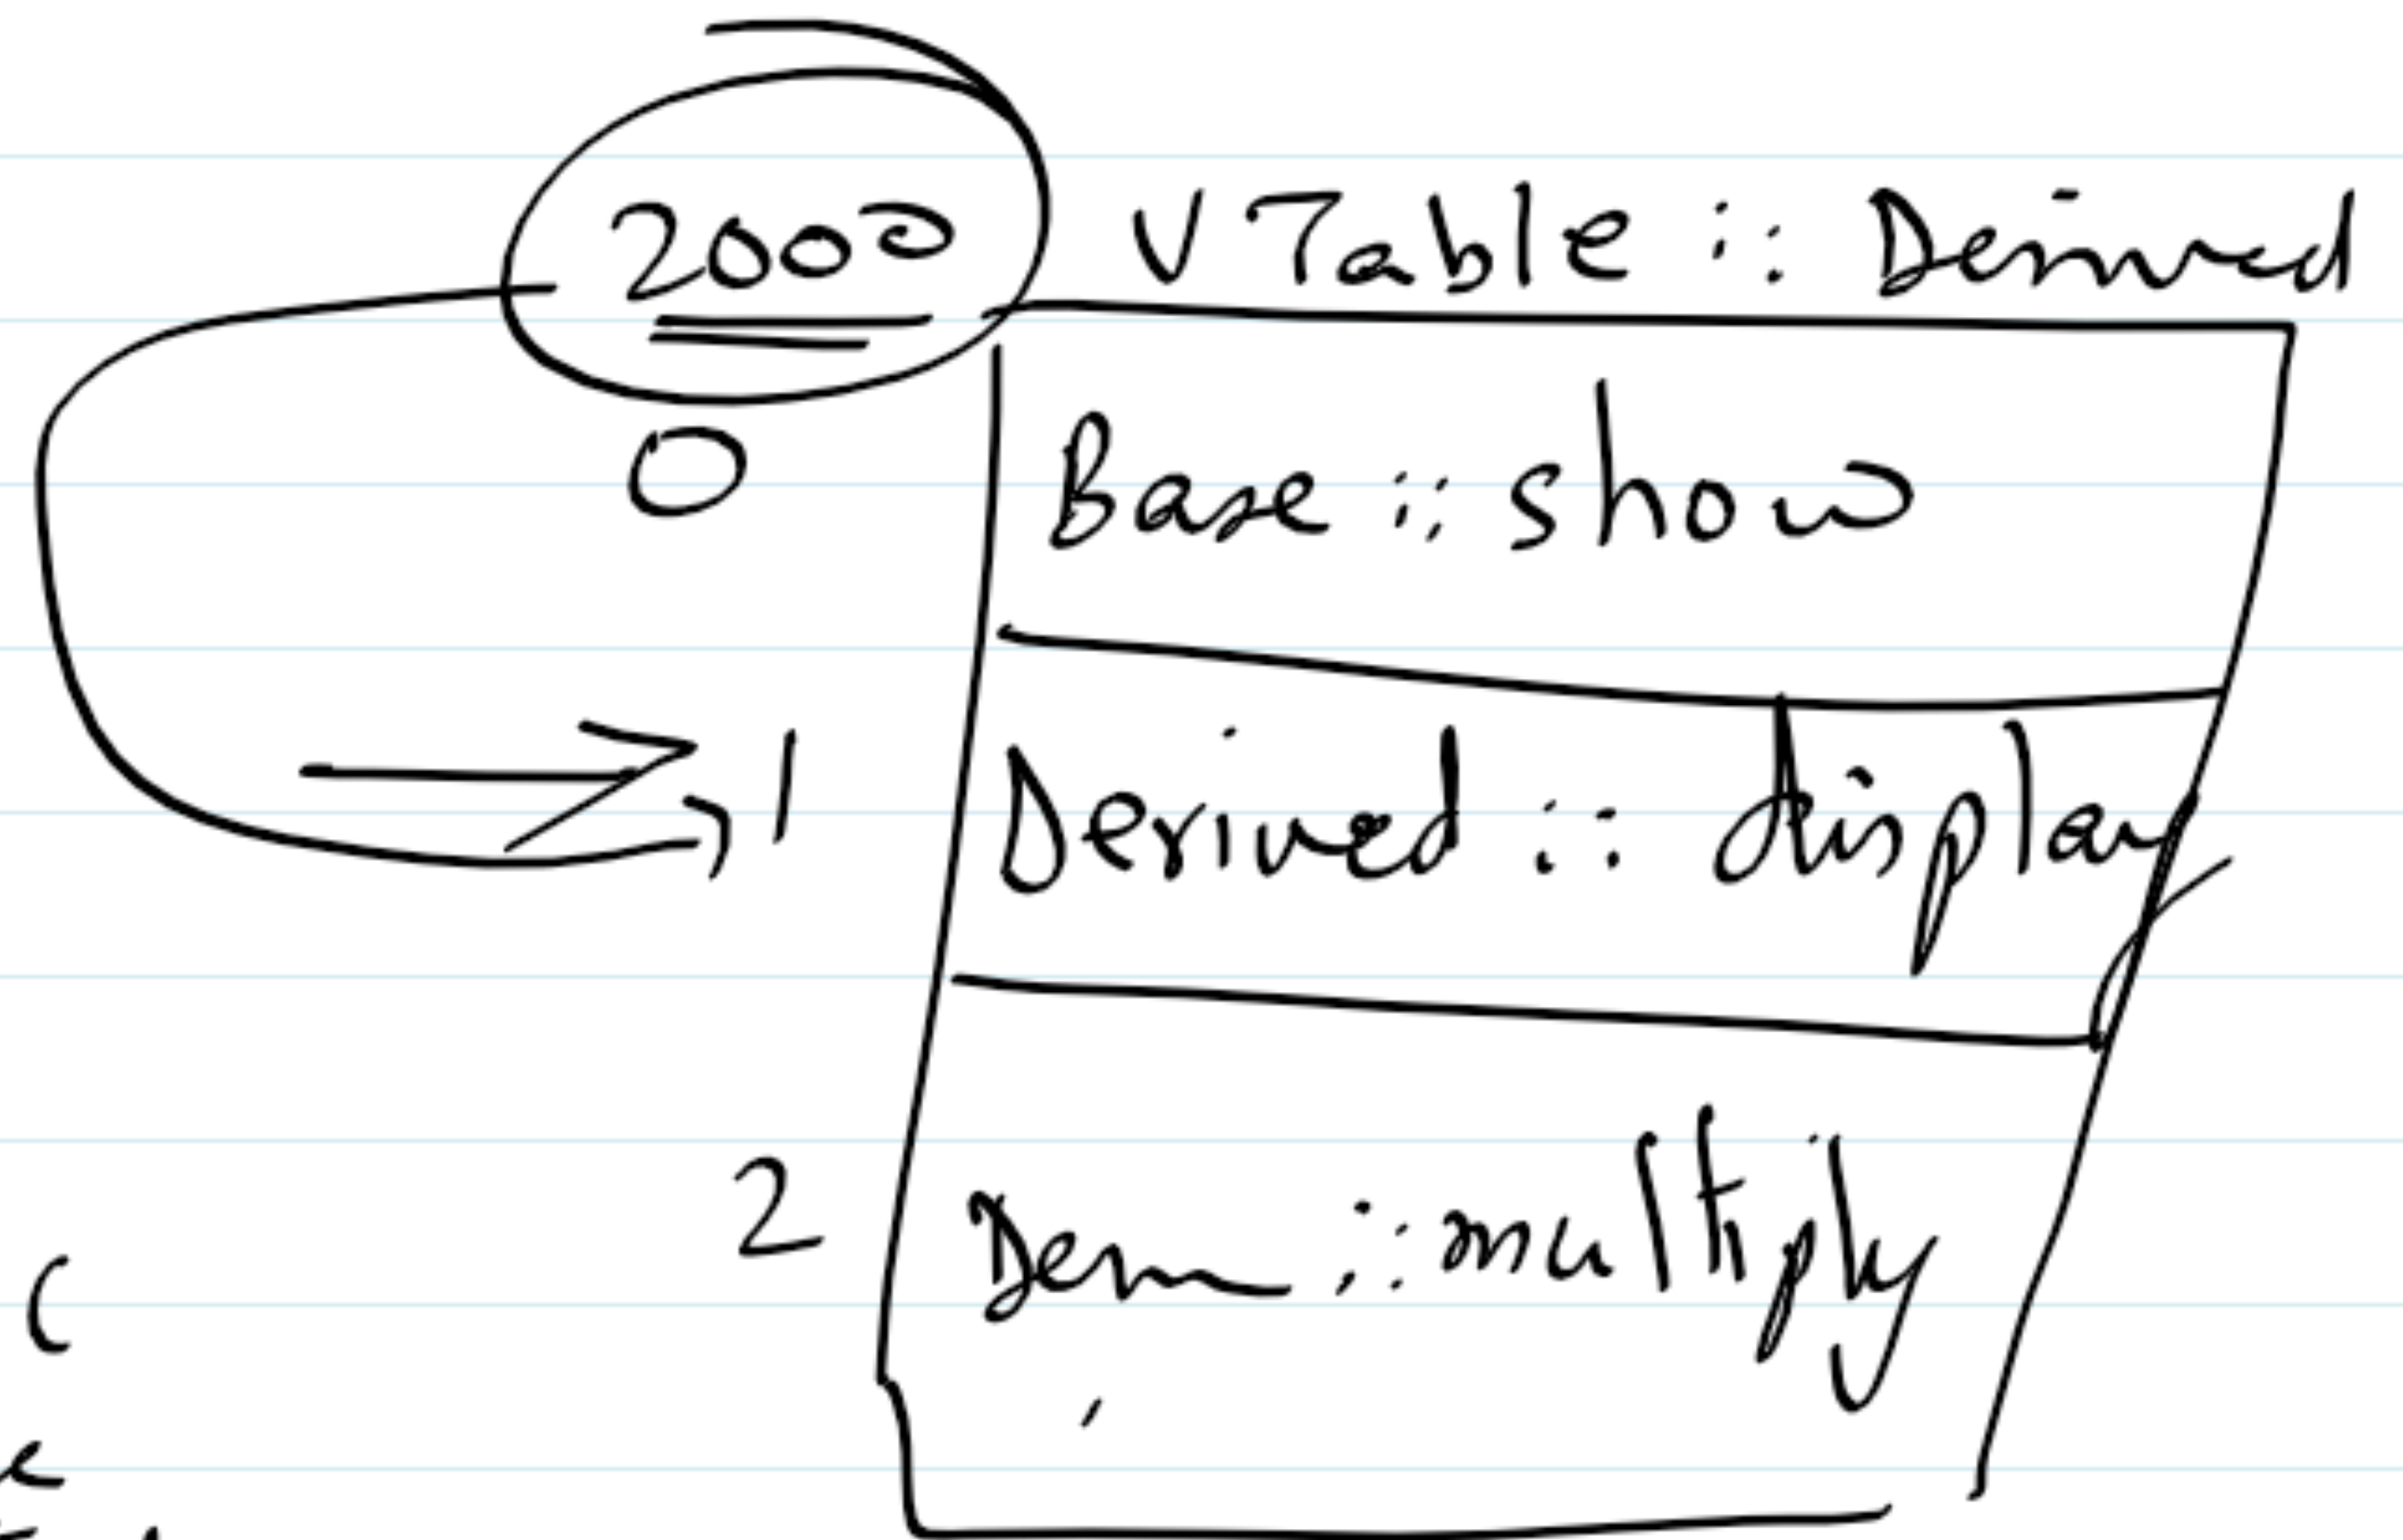

Base *ptr = ? x

ptr->display();

Static

X Base::display();

ptr -> --vptr + display x 4

① ptr = new Base;

ptr -> --vptr + display x 4

1000 + (1 * 4)

= 1004(); Base display

ptr = new Derived;

ptr -> display();

ptr -> --vptr + &dis * 4

~~2000~~

(1 * 4)

Runtime
object

= 2004();

late b

Run
Dyna -

1000
2000

C++

n1
n2
n3

class A.

int num;
4

8

3;
8 bytes

8

16



64


8 bytes

32
4 bytes

- ① **Manager**
- a) Name
 - b) Address ①
 - c) age
 - d) gender
 - e) basic Salary
 - f) hra
- Manager


- ② **Engineer**
- a) - e) ②
 - f) Overtime

- ③ **Sales Person**
- a) - e) ③
 - f) commission

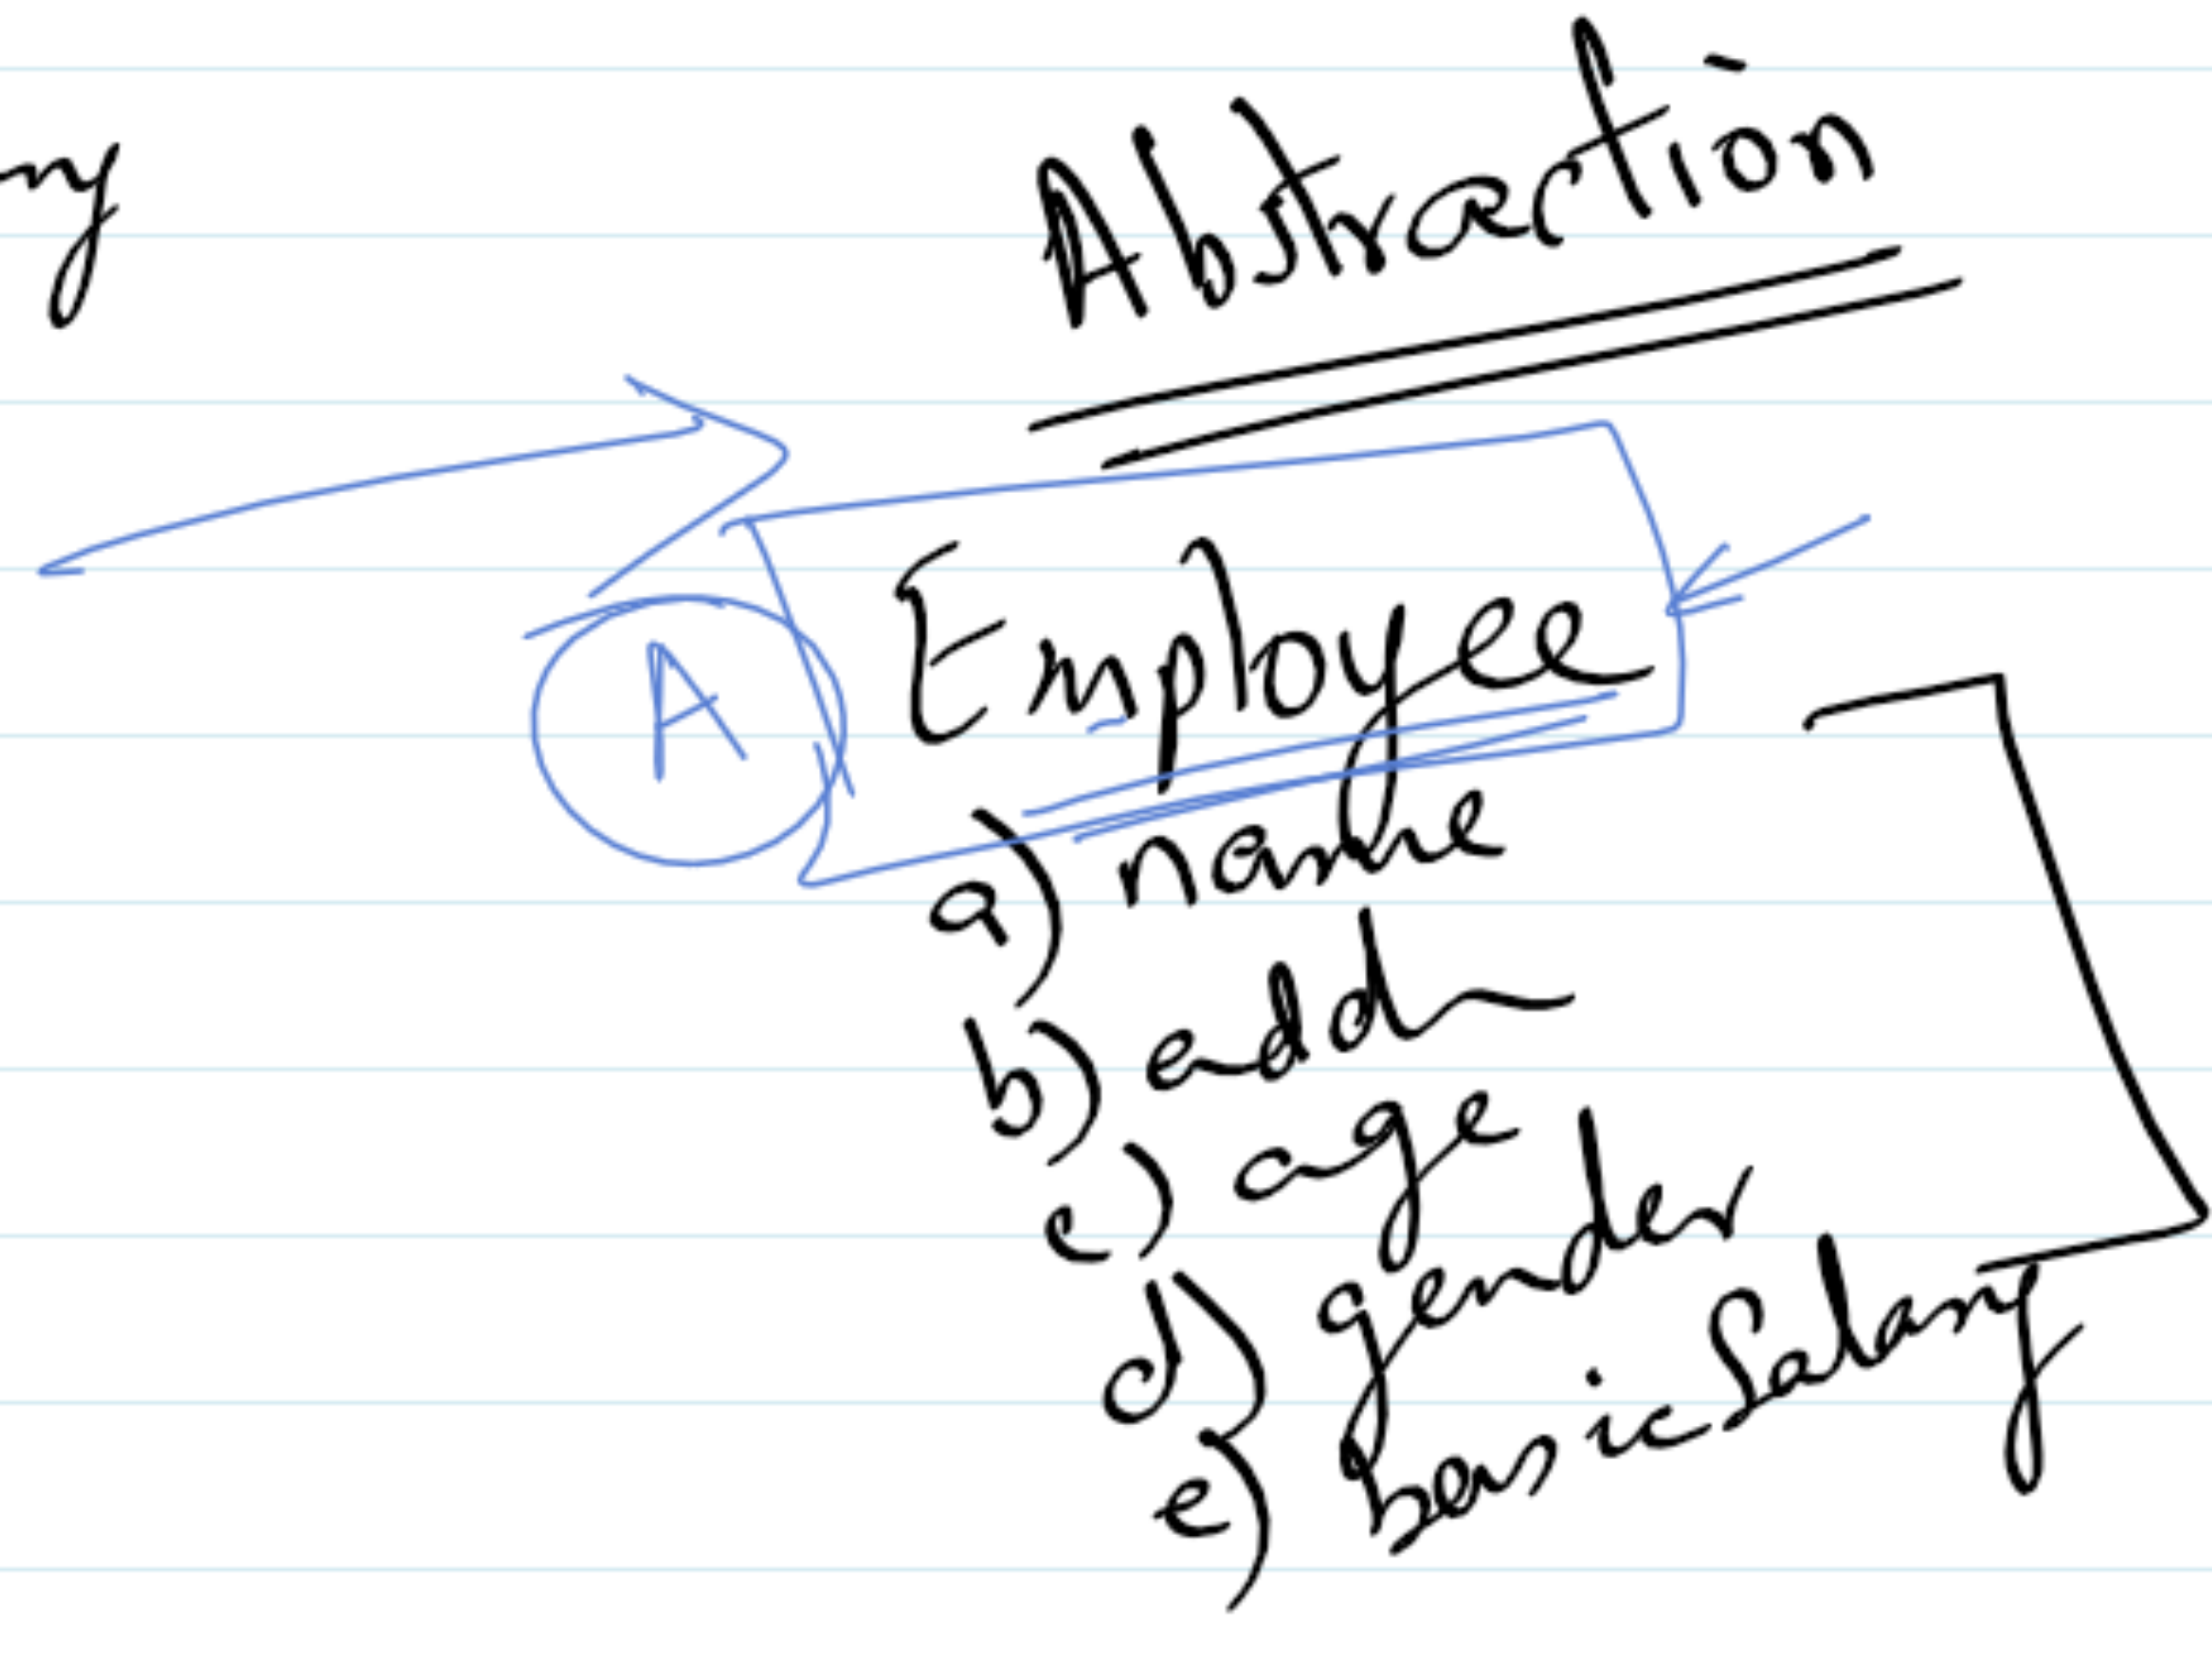

Naming Conventions

Manager [] arr M - = new Manager [10];

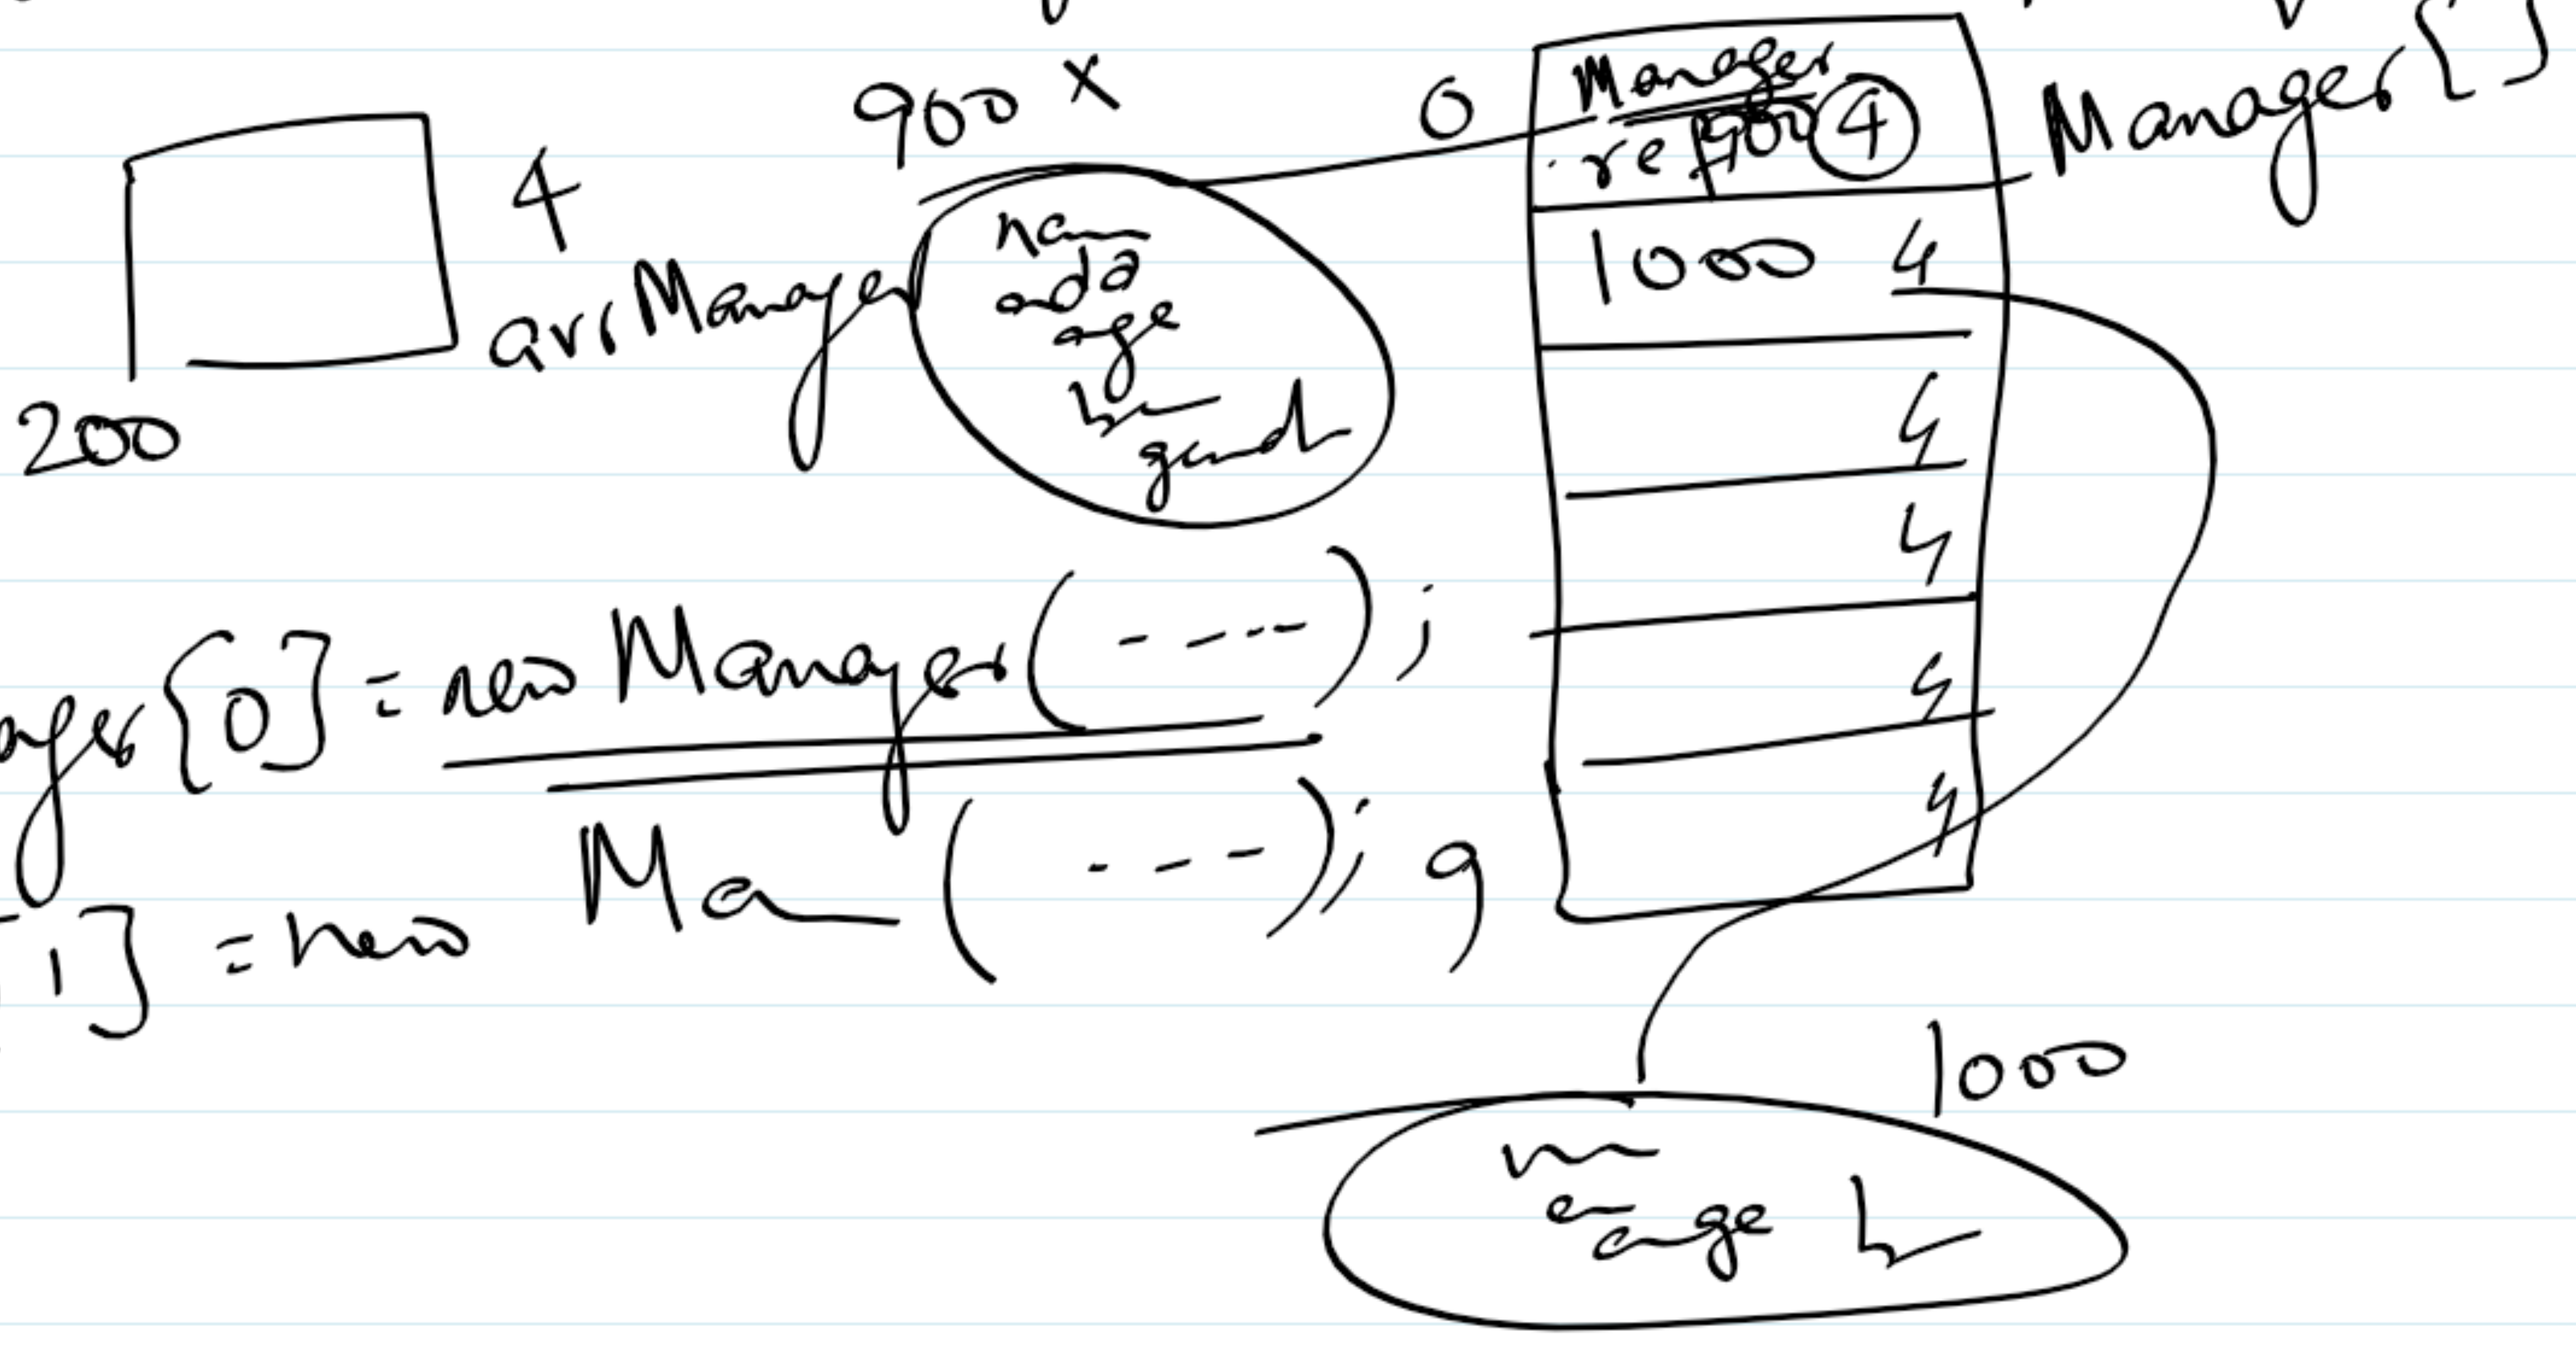

arr Manager [0] = new Manager (---);

arr Manager [1] = new Ma (---); 9