Name - Shubham Rajendra Gorade

PRN - 260840320163

create database restaurant;

use restaurant;

Q1


create table res_department (dept_id int, dept_name varchar(30));

create table res_employee (emp_id int, emp_name varchar(30), mob_no int, emp_dep_id int);

create table res_menu (menu_id int, menu_name varchar(20), taste varchar(30));

create table res_customer (cus_id int, cus_name varchar(30), food_name varchar(10), food_id int);

create table res_rating (rating int, rat_name varchar(30), rat_id_cus int);

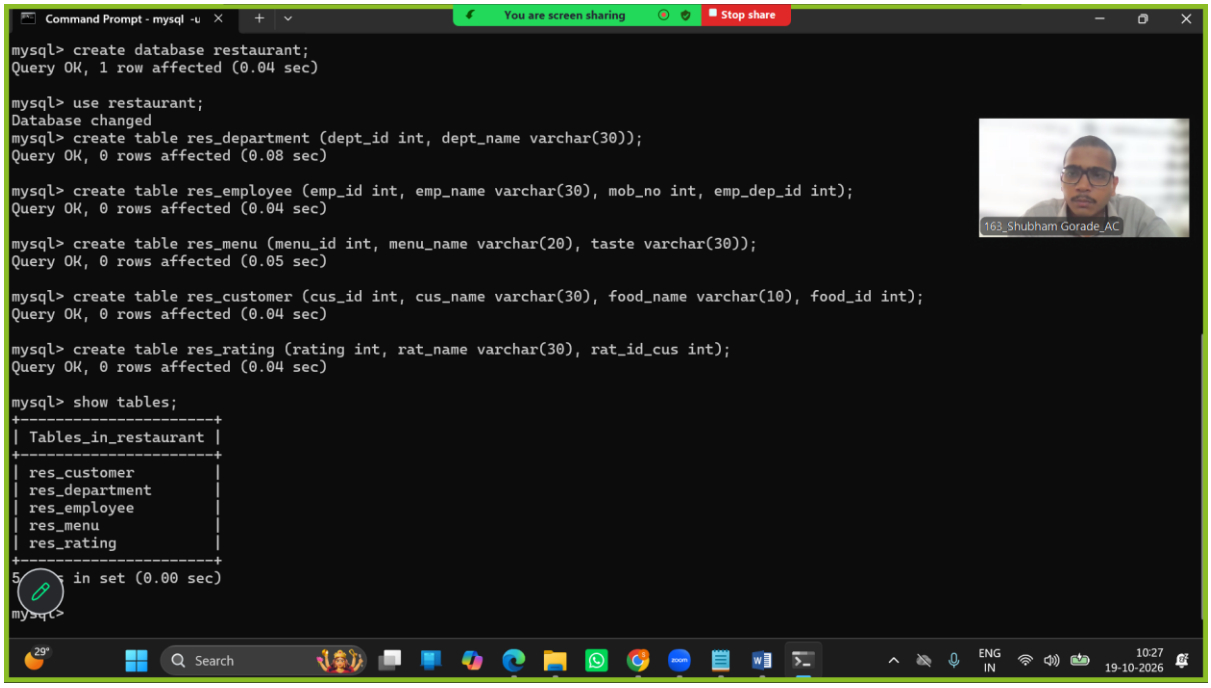

Q2

alter table res_department

add primary key(dept_id);

alter table res_employee

add primary key(emp_id);

alter table res_menu


add primary key(menu_id);


alter table res_customer

add primary key(cus_id);

alter table res_rating

add primary key(rat_name);

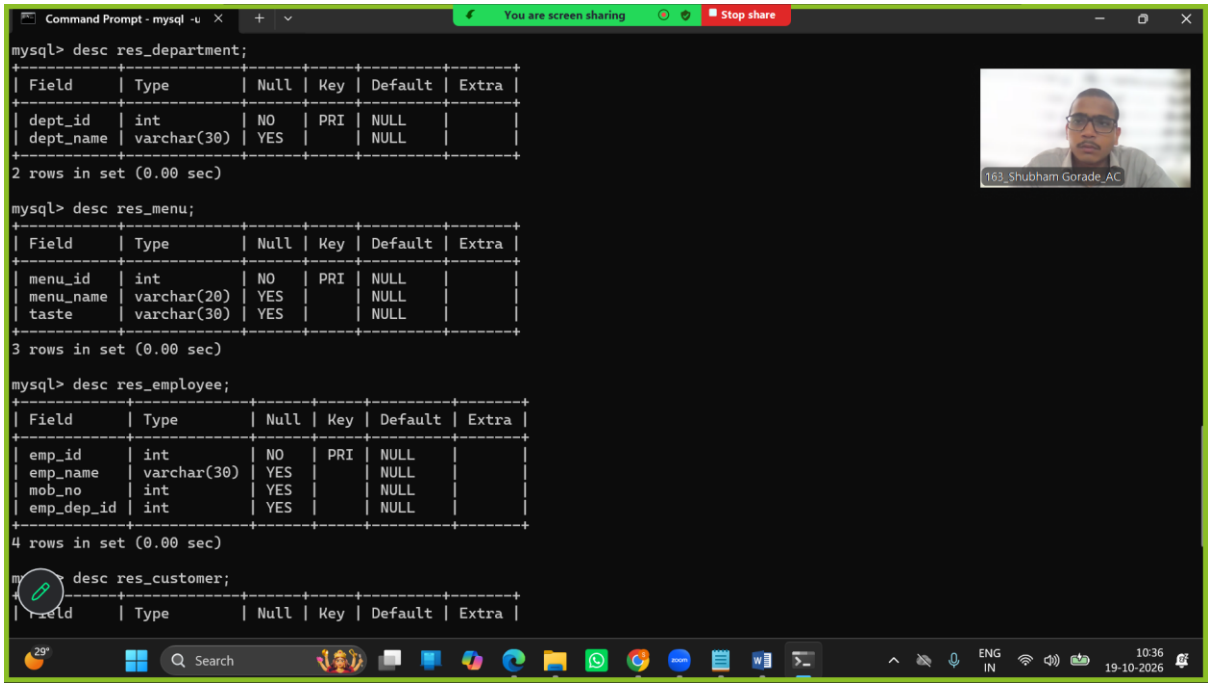

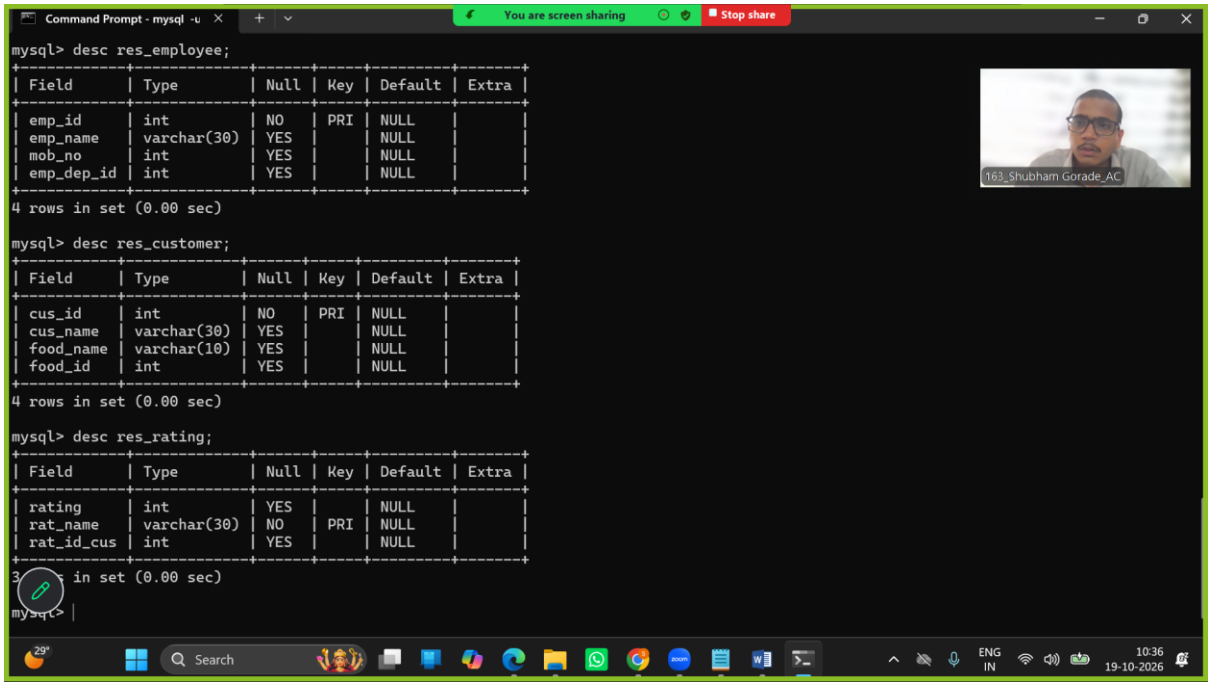

Q3

insert into res_department values

(1, 'owner'),

(2, 'manager'),

(3, 'server'),

(4, 'foodmaker'),

(5, 'cashier');

insert into res_employee values

(1, 'Shubham', 1234, 1),

(2, 'Sujal', 12345, 2),

(3, 'Sai', 123456, 3),

(4, 'Rahul', 12345543, 4),

(5, 'Shau', 123, 5),

(6, 'Rahul', 12344646, 4);

insert into res_menu values

(1, 'paneer', 'spicy'),

(2, 'chineese', 'hot'),

(3, 'chiken', 'spicy'),

(4, 'fish', 'spicy and tasty'),

(5, 'milk', 'hot');

insert into res_customer values

(1, 'Shu', 'paneer', 1),

(2, 'Suj', 'paneer', 1),

(3, 'Pushkar', 'milk', 5),

(4, 'Raj', 'fish', 4),

(5, 'Sid', 'chiken', 3);

insert into res_rating values


(5, 'Shu', 1),

(4, 'Suj', 2),

(4, 'Pushkar', 3),

(5, 'Raj', 4),

(5, 'Sid', 5);

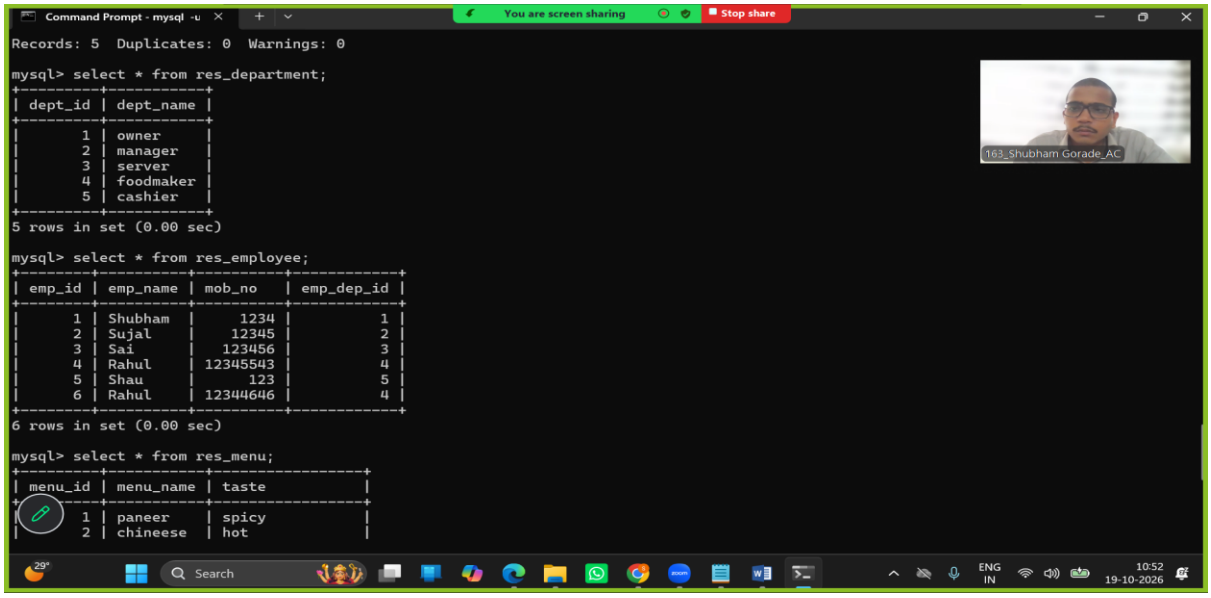





Q4

alter table res_employee


add foreign key(emp_dep_id) references res_department(dept_id);

alter table res_customer

add foreign key(food_id) references res_menu(menu_id);

alter table res_rating


add foreign key(rat_id_cus) references res_customer(cus_id);

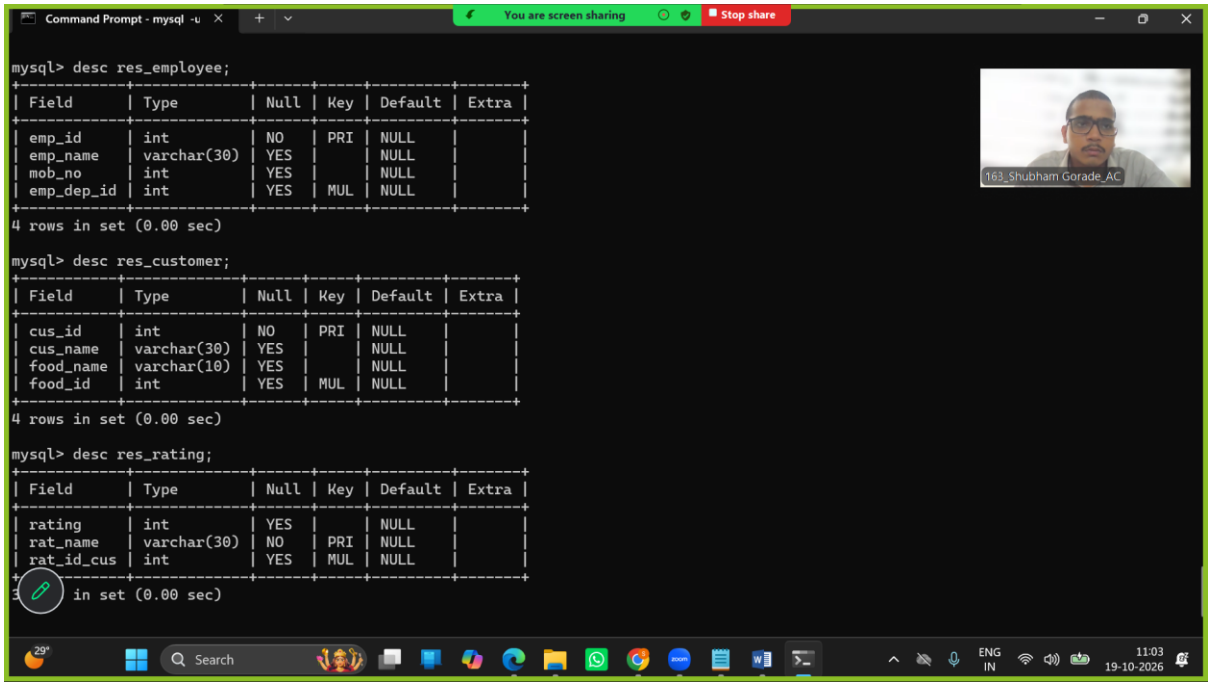

Q5

select emp_id, emp_name, emp_dep_id from res_employee

where emp_id>=2 or emp_dep_id >=3;

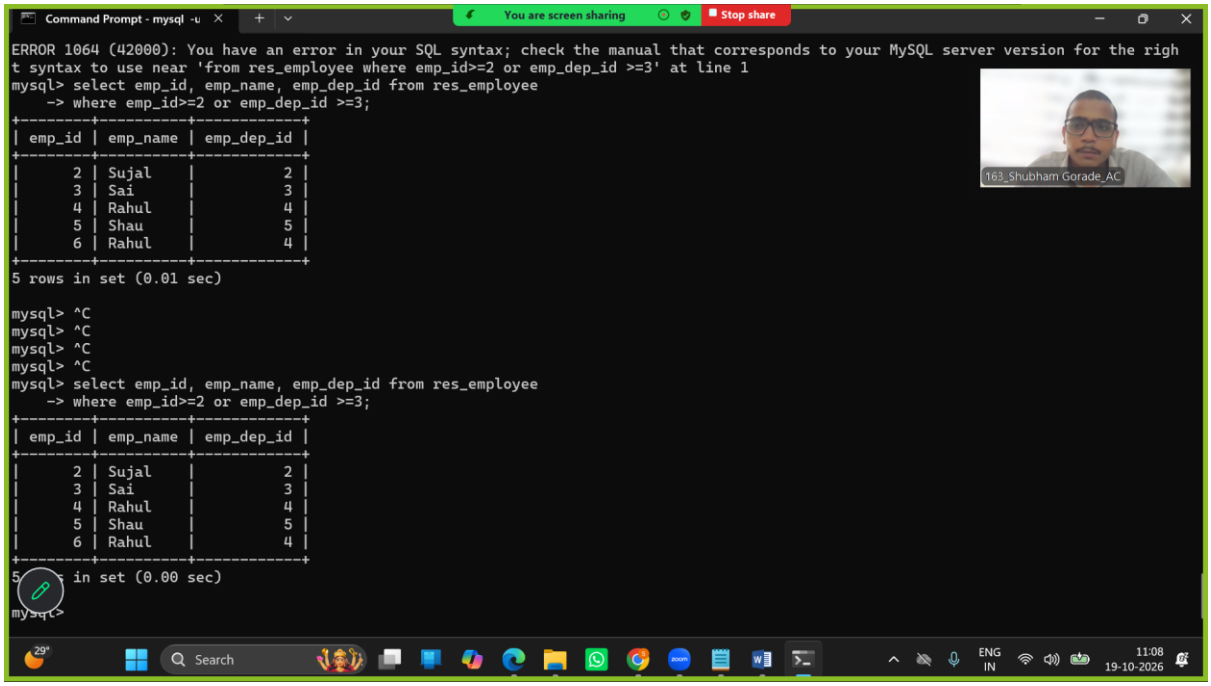


Q6

Q7

select count(emp_id) as total_no_of_foodmaker from res_employee

group by emp_dep_id;

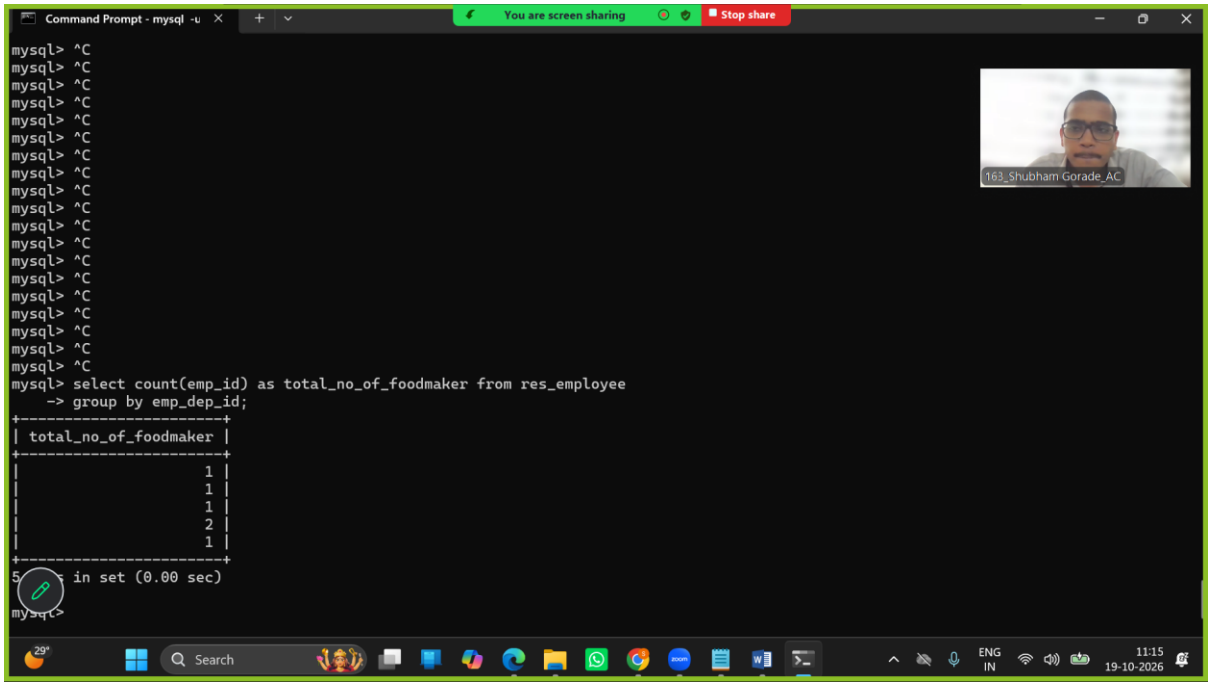

Q8

alter table res_menu

add column cost int;

update res_menu set cost = 150 where menu_id=1;


update res_menu set cost = 250 where menu_id=2;


update res_menu set cost = 300 where menu_id=3;

update res_menu set cost = 150 where menu_id=4;

update res_menu set cost = 10 where menu_id=5;

select max(cost) as costliest_dish from res_menu;

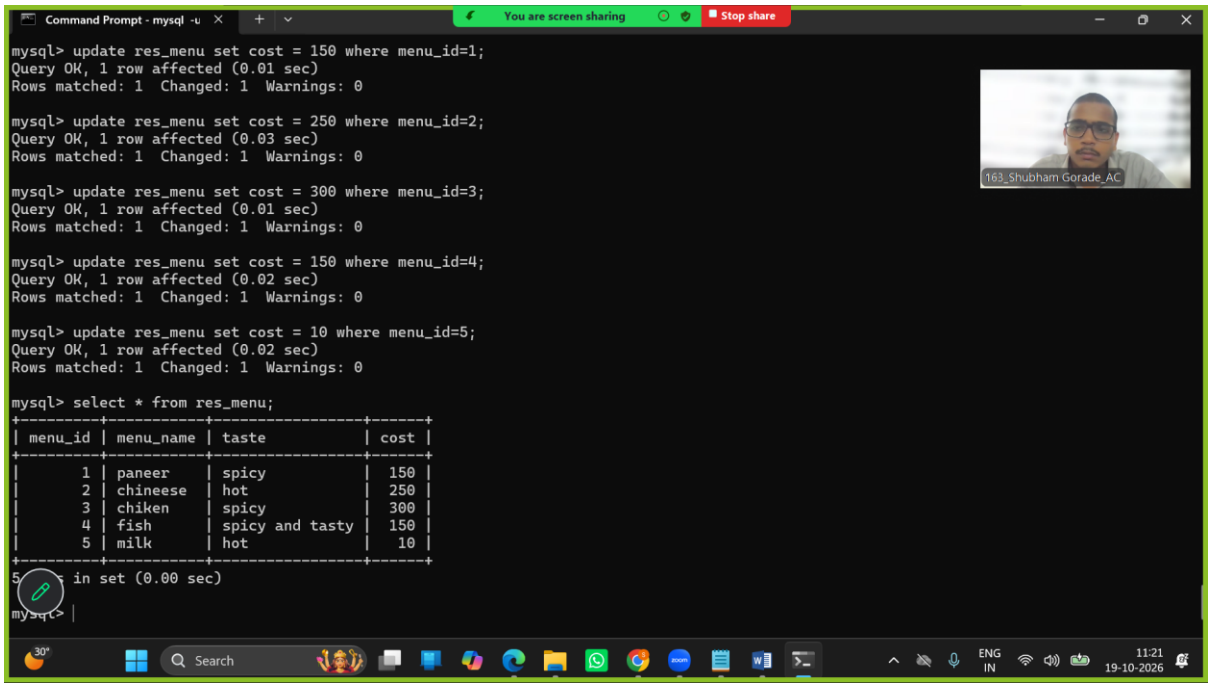

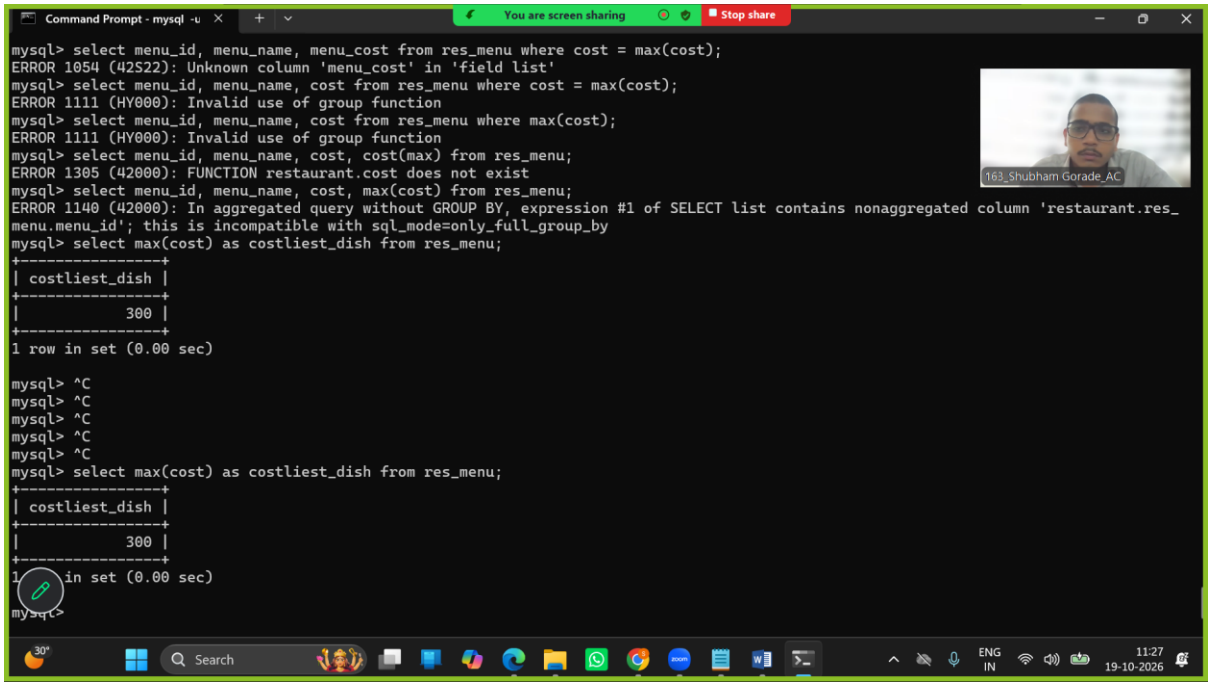


Q9


create view res_emp_view as

select * from res_employee;

select * from res_emp_view;

update res_emp_view set emp_name = 'Rahul Talole' where emp_id=6;

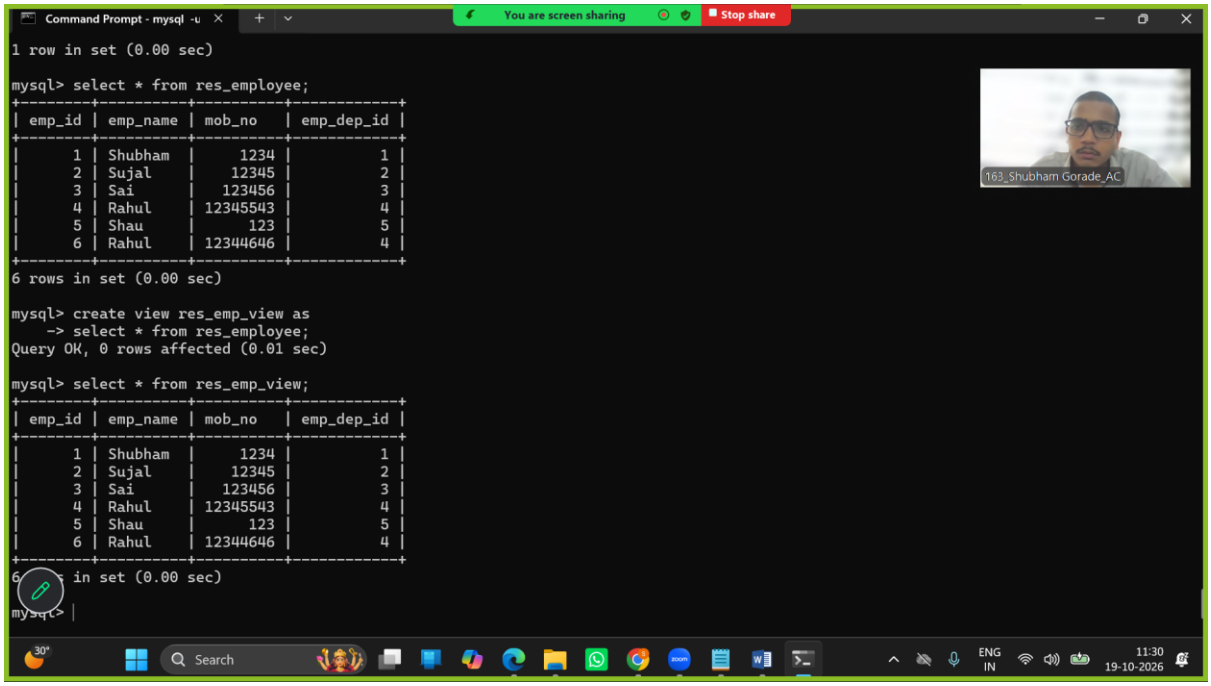

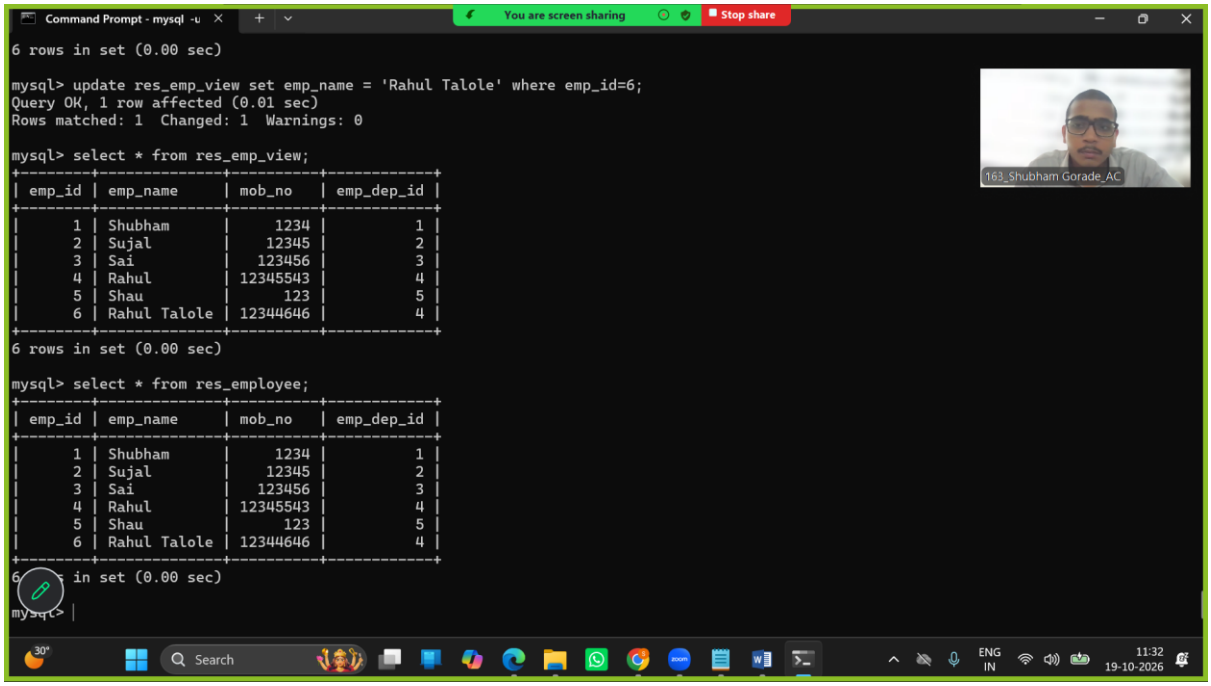


Q10

select d.dept_name, e.emp_id, e.emp_name from

res_department as d

left join res_employee as e

on d.dept_id=e.emp_dep_id;

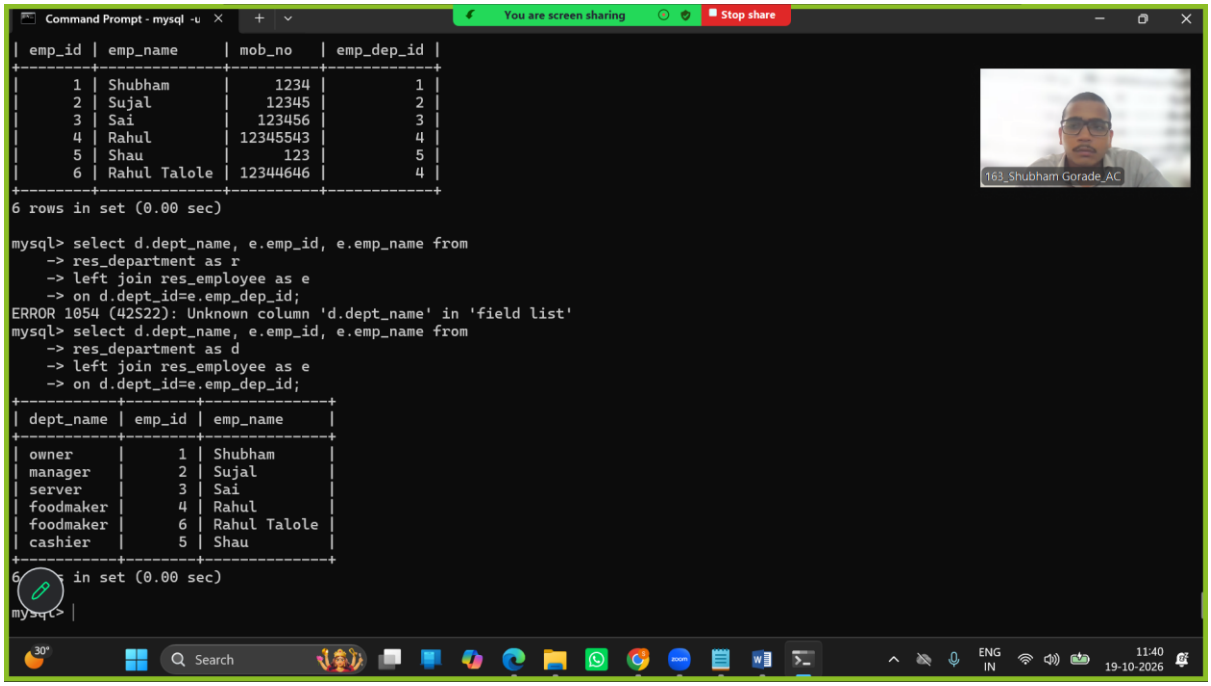


Q11

create temporary table menu_chinese (Chinese varchar(30));

insert into menu_chinese values ('chiken lollipop'), ('noodles');

drop table menu_chienese;

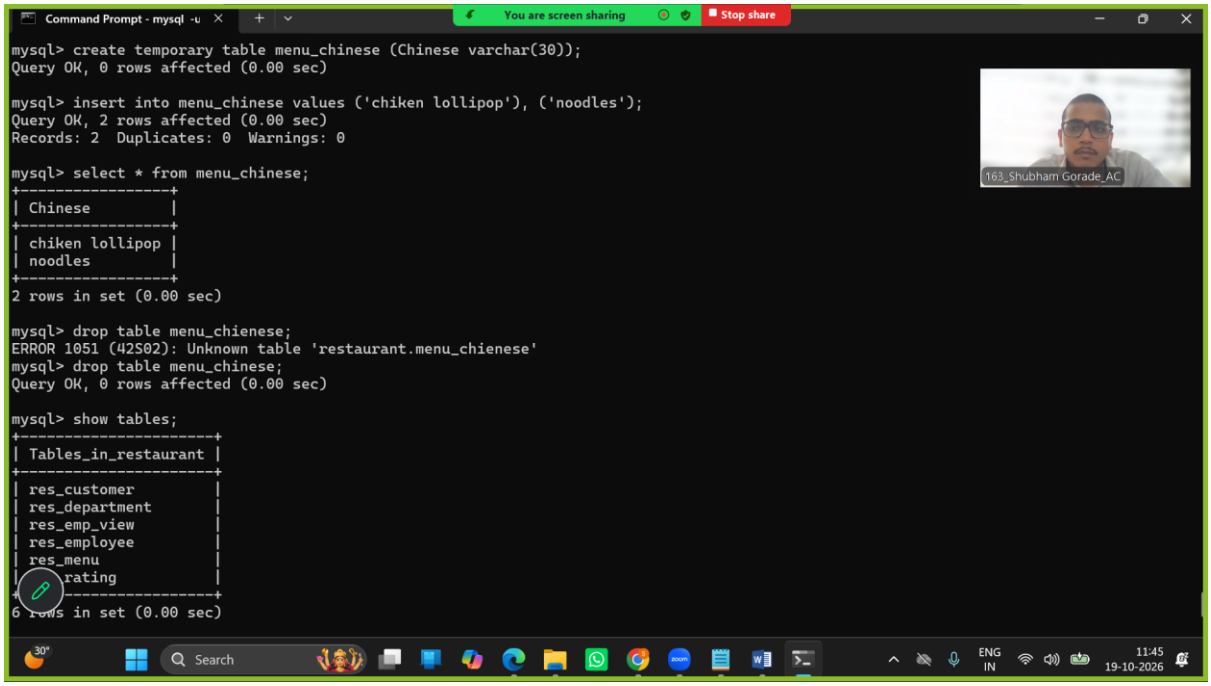

Q12

Q13

delimiter //

create procedure even_no

begin

declare i int default 1;

loop_even : loop

if mod(i,2)=0

then select i as evenno;

end if;


set i=i+1;

leave i=11;

end loop loop_even;

end //

delimiter ;

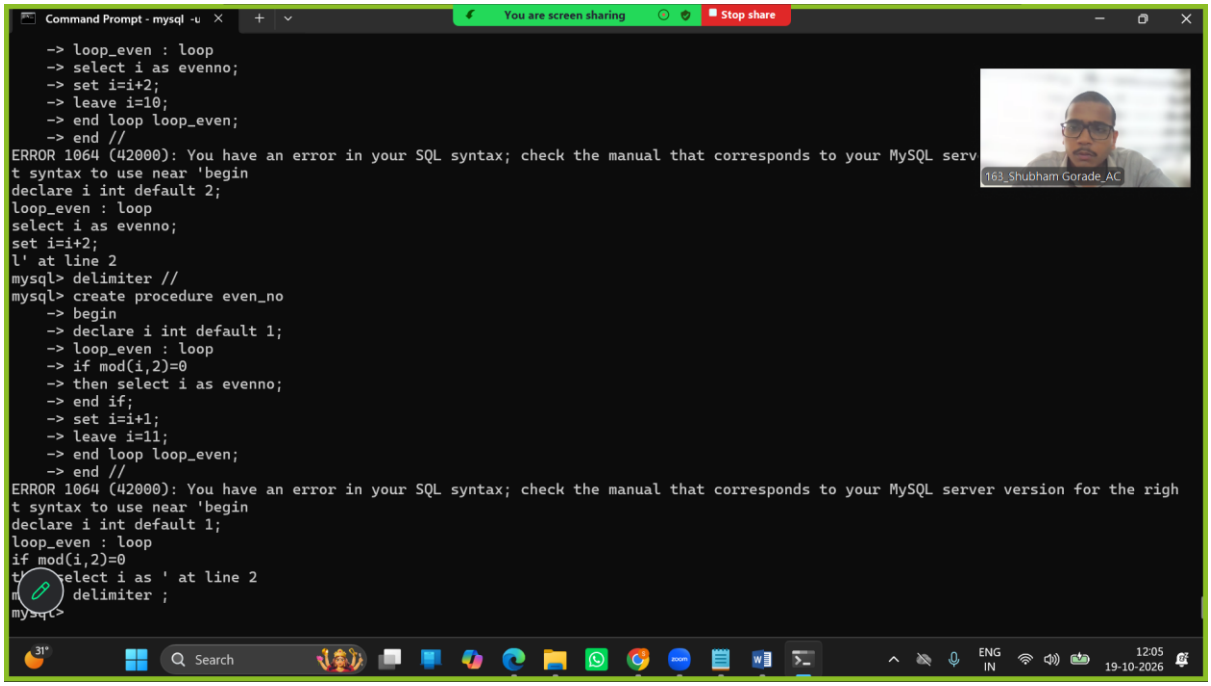

Q14