

HandsOn1

```
PS C:\Users\kpre0> cd
PS C:\Users\kpre0\myfirstreact> npm

> myfirstreact@0.1.0 start
> react-scripts start

(node:4940) [DEP_WEBPACK_DEV_SERVER_ON_AFTER_SETUP_MIDDLEWARE] DeprecationWarning: 'onAfterSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
(Use 'node --trace-deprecation ...' to show where the warning was created)
(node:4940) [DEP_WEBPACK_DEV_SERVER_ON_BEFORE_SETUP_MIDDLEWARE] DeprecationWarning: 'onBeforeSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
Starting the development server...
Failed to compile.

Attempted import error: 'App' is not exported from './App' (imported as 'App').
ERROR in ./src/index.js 12:33-36
export 'App' (imported as 'App') was not found in './App' (module has no exports)

webpack compiled with 1 error
Compiling...
Failed to compile.

Attempted import error: './App' does not contain a default export (imported as 'App').
ERROR in ./src/index.js 12:33-36
export 'default' (imported as 'App') was not found in './App' (module has no exports)


webpack compiled with 1 error
Compiling...
Compiled successfully!

You can now view myfirstreact in the browser.

  Local:            http://localhost:3000
  On Your Network:  http://10.1.2.95:3000


Note that the development build is not optimized.
To create a production build, use npm run build.


webpack compiled successfully
Compiling...
Compiled successfully!
```

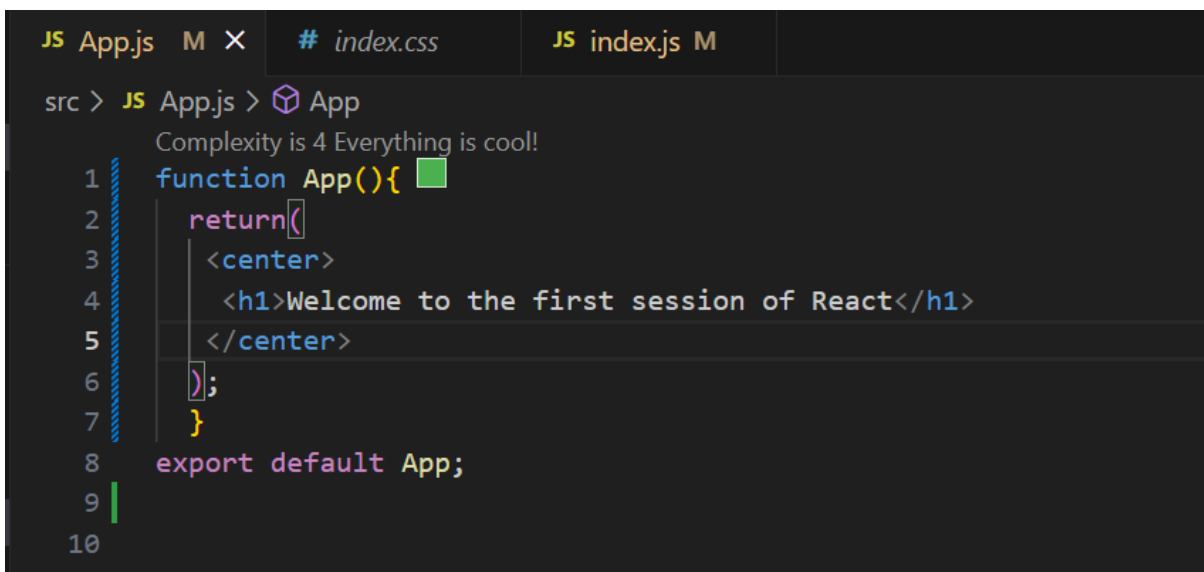

The screenshot shows a code editor with three tabs at the top: 'JS App.js M X', '# index.css', and 'JS index.js M'. The 'App.js' tab is active, showing the following code:


```
src > JS App.js > App
Complexity is 4 Everything is cool!
1 function App(){
2   return(
3     <center>
4       <h1>Welcome to the first session of React</h1>
5     </center>
6   );
7 }
8 export default App;
9
10
```

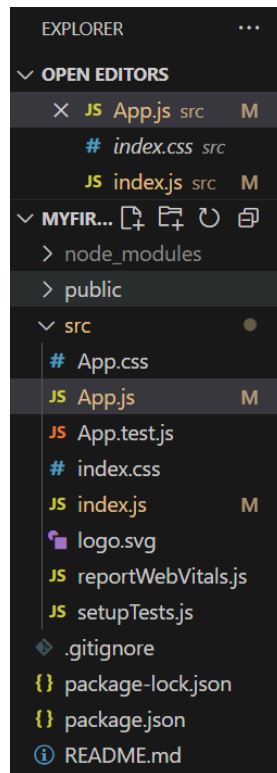



Welcome to the first session of React

HandsOn 2

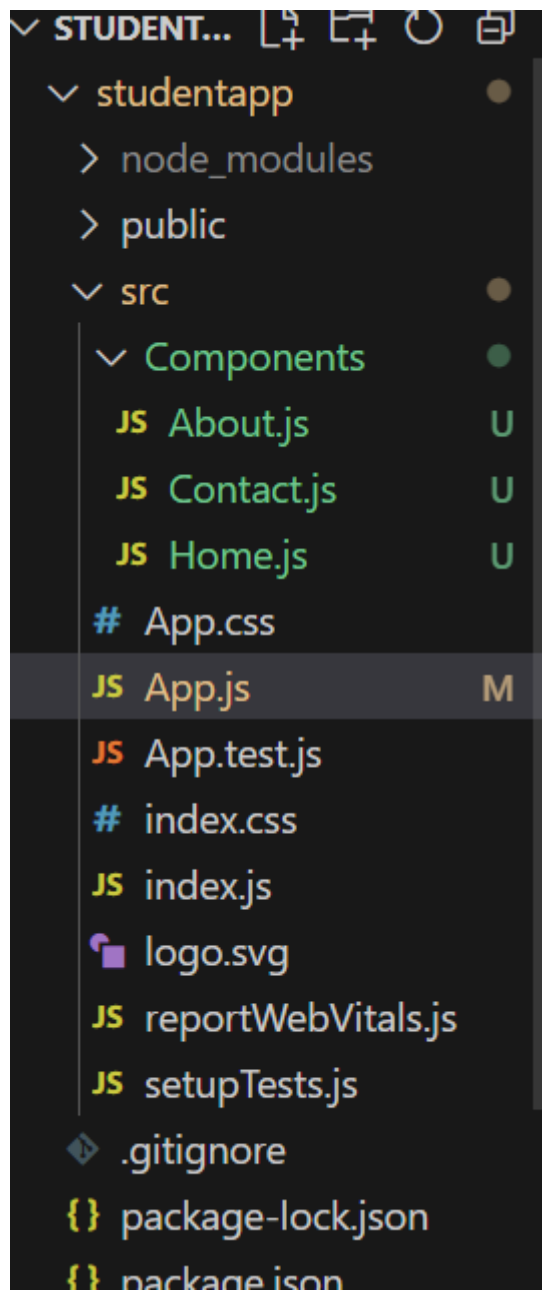

```
JS App.js M JS Home.js U X JS About.js U JS Contact.js U
studentapp > src > Components > JS Home.js > ...
1 import React from 'react'; 7.9k (gzipped: 3.1k)
2
3 Complexity is 4 Everything is cool!
4 function Home() {
5   return (
6     <div>
7       <h2>Welcome to the Home page of Student Management Portal</h2>
8     </div>
9   );
10 }
11 export default Home;
12
```

```
JS App.js M X JS Home.js U JS About.js U JS Contact.js U
studentapp > src > JS App.js > ...
1 import React from 'react'; 7.9k (gzipped: 3.1k)
2 import './App.css';
3 import Home from './Components/Home';
4 import About from './Components/About';
5 import Contact from './Components/Contact';
6
7 Complexity is 7 It's time to do something...
8 function App() {
9   return (
10     <div className="App">
11       <h1>Student Management Portal</h1>
12       <Home />
13       <About />
14       <Contact />
15     </div>
16   );
17 }
18 export default App;
19
```

```
JS App.js M JS Home.js U JS About.js U X JS Contact.js U
studentapp > src > Components > JS About.js > ...
1 import React from 'react'; 7.9k (gzipped: 3.1k)
2
3 Complexity is 4 Everything is cool!
4 function About() {
5   return (
6     <div>
7       <h2>Welcome to the Home page of Student Management Portal</h2>
8     </div>
9   );
10 }
11 export default About;
12
```

```
JS App.js M JS Home.js U JS About.js U JS Contact.js U X
studentapp > src > Components > JS Contact.js > [0] default
1 import React from 'react'; 7.9k (gzipped: 3.1k)
2
3 Complexity is 4 Everything is cool!
4 function Contact() {
5   return (
6     <div>
7       <h2>Welcome to the Home page of Student Management Portal</h2>
8     </div>
9   );
10 }
11 export default Contact;
12
```

```
PS C:\Users\kpre0\studentapp> cd studentapp
PS C:\Users\kpre0\studentapp\studentapp> npm start

> studentapp@0.1.0 start
> react-scripts start

(node:17512) [DEP_WEBPACK_DEV_SERVER_ON_AFTER_SETUP_MIDDLEWARE] DeprecationWarning: 'onAfterSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
(Use `node --trace-deprecation ...` to show where the warning was created)
(node:17512) [DEP_WEBPACK_DEV_SERVER_ON_BEFORE_SETUP_MIDDLEWARE] DeprecationWarning: 'onBeforeSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
Starting the development server...
Compiled successfully!

You can now view studentapp in the browser.


Local:      http://localhost:3000
On Your Network:  http://192.168.0.100:3000

Note that the development build is not optimized.
To create a production build, use npm run build.


webpack compiled successfully

```

Output

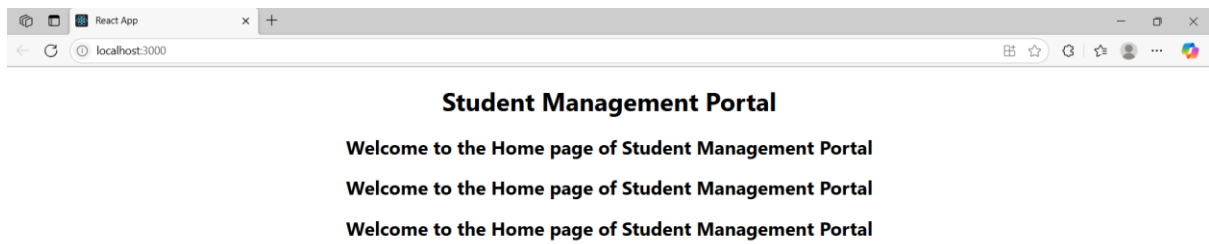

HandsOn 3

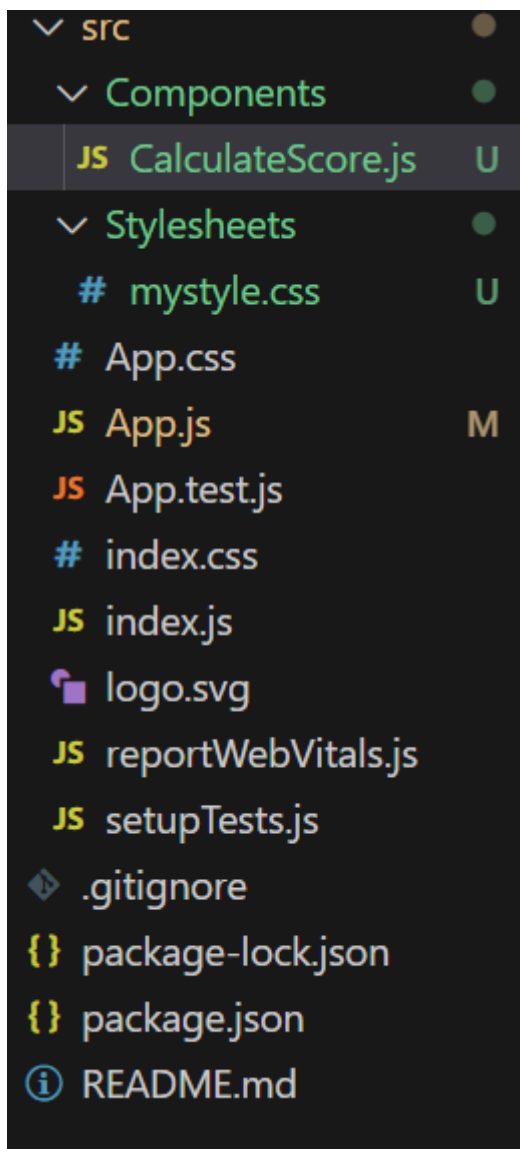

```
JS CalculateScore.js U X # mystyle.css U JS App.js M
src > Components > JS CalculateScore.js > [6] CalculateScore
1 import '../Stylesheets/mystyle.css'
2
3 const percentToDecimal=(decimal)=>{
4   return(decimal.toFixed(2)+'%')
5 }
6 const calcScore = (total,goal)=>{
7   return percentToDecimal(total/goal)
8 }
9 Complexity is 19 You must be kidding
10 export const CalculateScore = ({Name,School,total,goal})=>{
11   <div className="formatstyle">
12     <h1>
13       <font color ="Brown">Student Details:</font>
14     </h1>
15     <div className="Name">
16       <b><span>Name:</span></b>
17       <span>{Name}</span>
18     </div>
19     <div className="School">
20       <b><span>School:</span></b>
```

```
CalculateScore.js U # mystyle.css U JS App.js M X
JS App.js > ...
import CalculateScore from './Components/CalculateScore';

Complexity is 4 Everything is cool!
function App()
{
  return(
    <div>
      <CalculateScore Name={"Steeve"}
        School={"DNV PUblic School"}
        total={284}
        goal={3}
      />
    </div>
  )
}
export default App;
```



```
JS CalculateScore.js U # mystyle.css U X JS App.js M
src > Stylesheets > # mystyle.css > .Score
1 Name
2 {
3     font-weight:300;
4     color:blue;
5 }
6 .School
7 {
8     color:crimson;
9 }
10 .Total
11 {
12     color:darkmagenta;
13 }
14 .formatstyle
15 {
16     text-align:center;
17     font-size:large;
18 }
```

OUTPUT



Student Management Portal

Student Score Report

Name: Preethi


School: DNV Public School

Total Marks: 284

Goal %: 90

Average Score: 255.60

HandsON 4

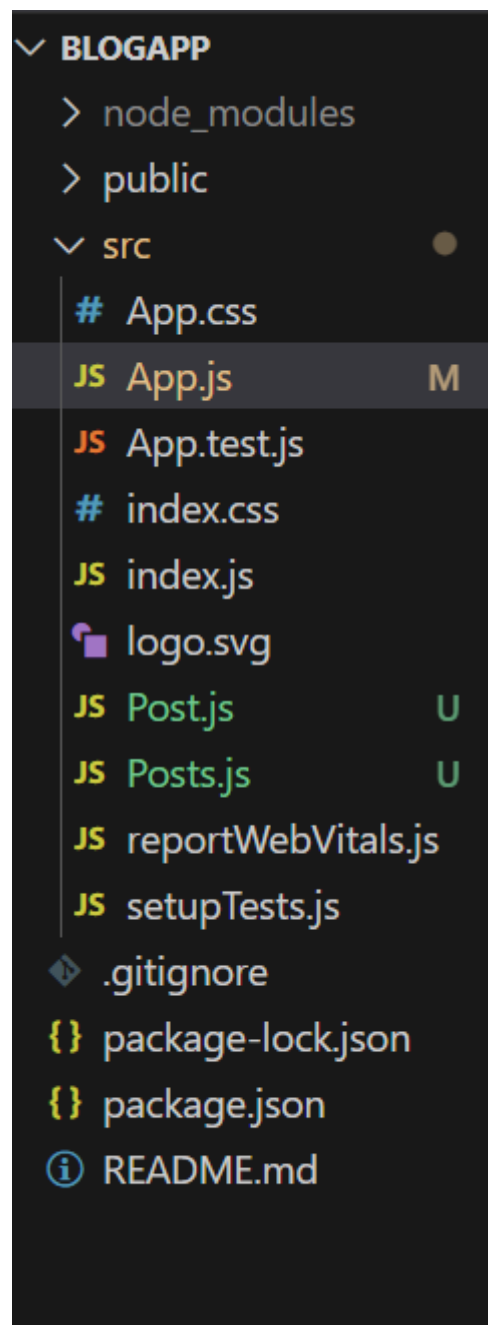

```
JS Post.js U X JS Posts.js U JS App.js M
src > JS Post.js > ...
1 // src/Post.js
2 import React from 'react'; 7.9k (gzipped: 3.1k)
3
4 Complexity is 5 Everything is cool!
5 class Post extends React.Component {
6   render() {
7     const { title, body } = this.props;
8     return (
9       <div>
10        <h2>{title}</h2>
11        <p>{body}</p>
12      </div>
13    );
14  }
15
16 export default Post;
```

```
JS Post.js U JS Posts.js U X JS App.js M
src > JS Posts.js > ...
1 // src/Posts.js
2 import React from 'react'; 7.9k (gzipped: 3.1k)
3 import Post from './Post';
4
5 Complexity is 6 It's time to do something...
6 class Posts extends React.Component {
7   constructor(props) {
8     super(props);
9     this.state = {
10       posts: [],
11       hasError: false
12     };
13   }
14
15   loadPosts = () => {
16     fetch('https://jsonplaceholder.typicode.com/posts')
17       .then(response => response.json())
18       .then(data => this.setState({ posts: data }))
19       .catch(error => this.setState({ hasError: true }));
20   };
21
22   componentDidMount() {
23     this.loadPosts();
24   }
25
26   componentDidCatch(error, info) {
27     alert("An error occurred while rendering the component.");
28     console.error("Error:", error);
29     console.error("Info:", info);
30   }
31 }
```

```
componentDidCatch(error, info) {  
  alert("An error occurred while rendering the component.");  
  console.error("Error:", error);  
  console.error("Info:", info);  
}
```


Complexity is 6 It's time to do something...

```
render() {  
  return (  
    <div>  
      <h1>All Posts</h1>  
      {this.state.posts.map(post => (  
        <Post key={post.id} title={post.title} body={post.body} />  
      ))}  
    </div>  
  );  
}  
}  
  
export default Posts;
```


○ PS C:\Users\kpre0\blogapp> npm start

```
> blogapp@0.1.0 start  
> react-scripts start
```

OUTPUT

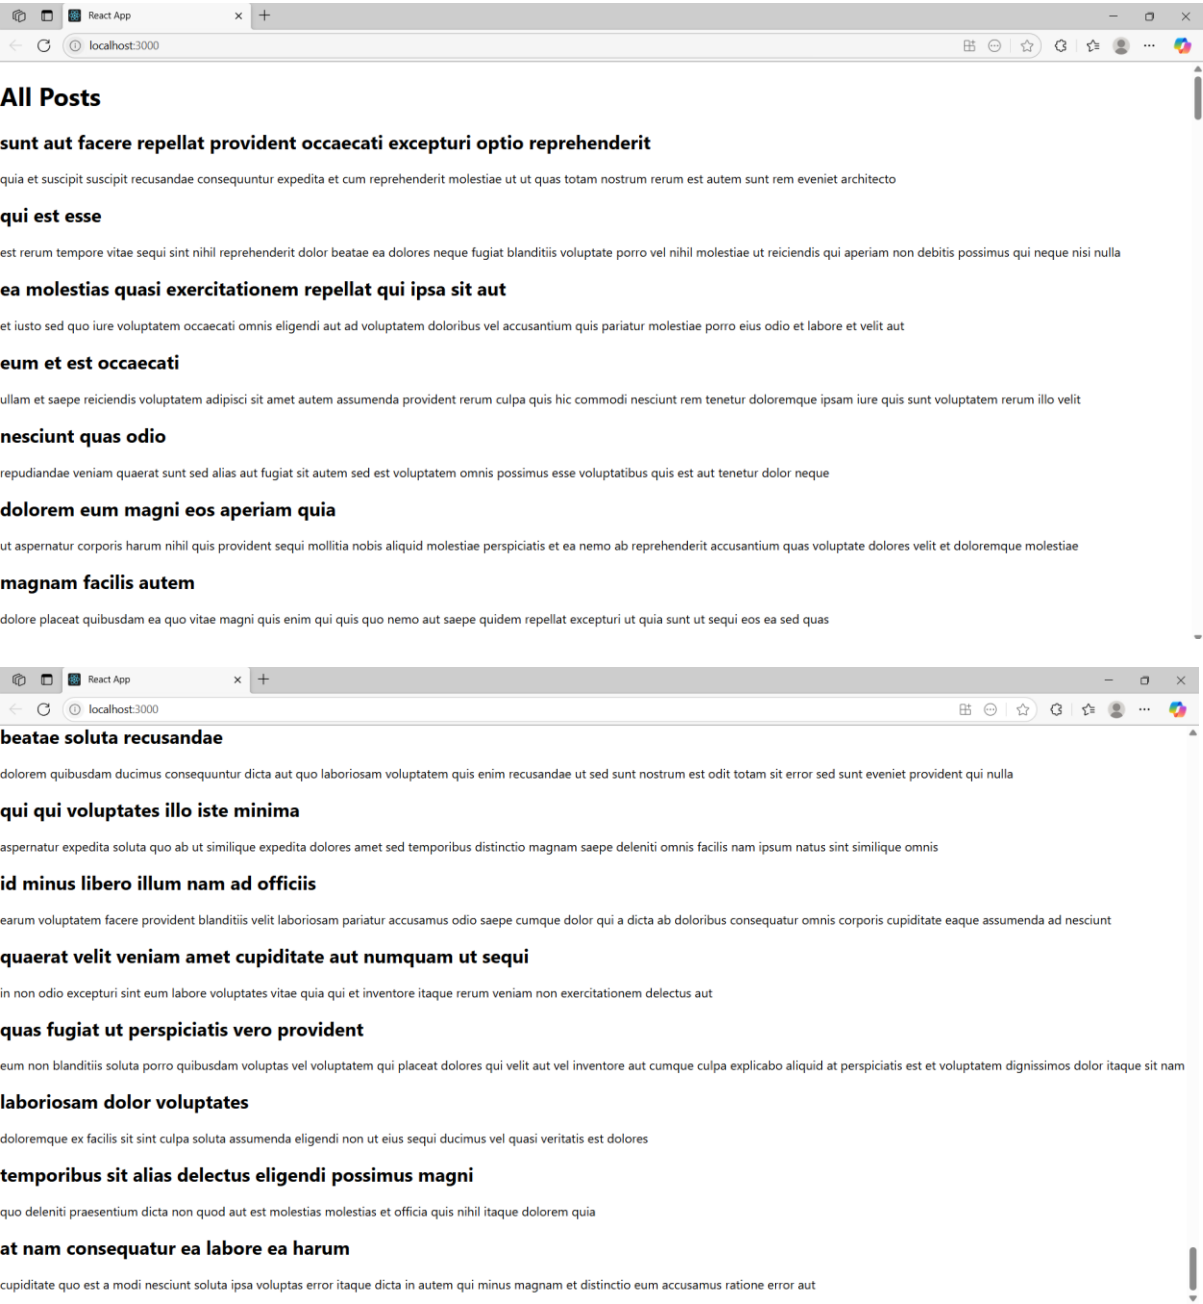

HandsOn 5

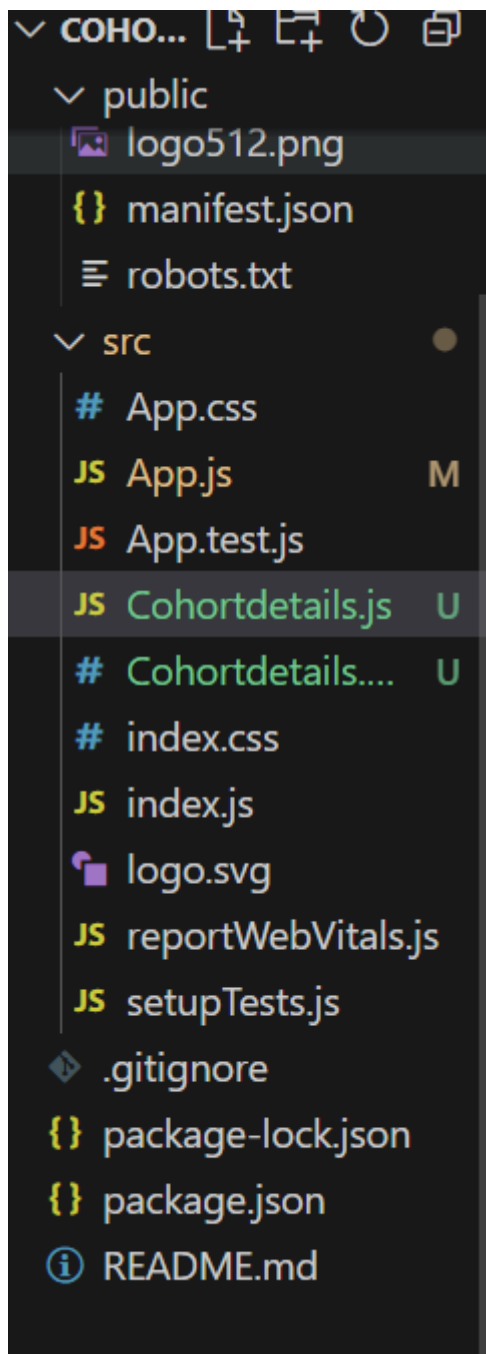

```
# Cohortdetails.module.css U • JS Cohortdetails.js U X JS App.js M
src > JS Cohortdetails.js > ...
1
2 import React from 'react'; 7.9k (gzipped: 3.1k)
3 import styles from './Cohortdetails.module.css';
4
5 Complexity is 14 You must be kidding
6 function Cohortdetails({ name, startDate, status, coach, trainer }) {
7   // Debug print to confirm props
8   console.log('Received props:', { name, startDate, status, coach, trainer });
9
10  const headingStyle = {
11    color: status.toLowerCase() === 'ongoing' ? 'green' : 'blue'
12    // NOTE: Lowercased to avoid case mismatch
13  };
14
15  return (
16    <div className={styles.box}>
17      <h3 style={headingStyle}>{name}</h3>
18      <dl>
19        <dt>Started On:</dt>
20        <dd>{startDate}</dd>
21        <dt>Current Status:</dt>
22        <dd>{status}</dd>
23        <dt>Coach:</dt>
24        <dd>{coach}</dd>
25        <dt>Trainer:</dt>
26        <dd>{trainer}</dd>
27      </dl>
28    </div>
29  );
30 }
```

```
# Cohortdetails.module.css U • JS Cohortdetails.js U JS App.js
src > # Cohortdetails.module.css > ...
1
2 .box {
3   width: 300px;
4   display: inline-block;
5   margin: 10px;
6   padding: 10px 20px;
7   border: 1px solid black;
8   border-radius: 10px;
9 }
10
11 dt {
12   font-weight: 500;
13 }
14
```



```
# Cohortdetails.module.css U • JS Cohortdetails.js U JS App.js M X
src > JS App.js > App
1 // App.js
2 import React from 'react'; 7.9k (gzipped: 3.1k)
3 import Cohortdetails from './Cohortdetails';
4
5 Complexity is 7 It's time to do something...
6 function App() {
7   return (
8     <div>
9       <h1>Cohort Details</h1>
10      <Cohortdetails
11        name="INTADMDF_.NET FSD"
12        startDate="2025-07-01"
13        status="Scheduled"
14        coach="Aathma"
15        trainer="Kannan"
16      />
17      <Cohortdetails
18        name="ADM21JF014-Java FSD"
19        startDate="2025-06-01"
20        status="ongoing"
21        coach="Apoorv"
22        trainer="Preethi"
23      />
24      <Cohortdetails
25        name="CDBJF21025-Java FSD"
26        startDate="2025-06-15"
27        status="ongoing"
28        coach="John"
29        trainer="Preethi"
30      />
31    </div>
32  );
33}
```

OUTPUT

INTADMDF_.NET FSD

Started On: 2026-07-15

Current Status: Scheduled

Coach: Aathma

Trainer: Kannan

ADM21JF014-Java FSD

Started On: 2026-07-15

Current Status: ongoing

Coach: Apoorv

Trainer: Preethi

CDBJF21025-Java FSD


Started On: 2026-07-15

Current Status: ongoing

Coach: John

Trainer: Preethi

HandsOn 9

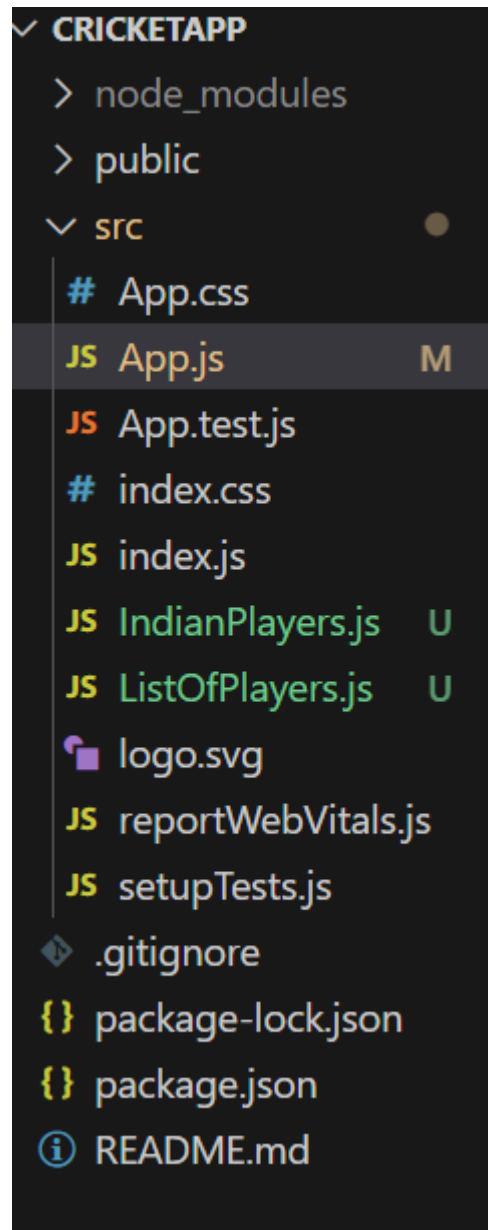

```
JS ListOfPlayers.js U X JS IndianPlayers.js U JS App.js M •
src > JS ListOfPlayers.js > ...
1 // src/ListofPlayers.js
2 import React from 'react'; 7.9k (gzipped: 3.1k)
3
4 Complexity is 12 You must be kidding
5 function ListofPlayers() {
6   const players = [
7     { name: "Virat", score: 85 },
8     { name: "Rohit", score: 60 },
9     { name: "Dhoni", score: 90 },
10    { name: "Jadeja", score: 55 },
11    { name: "Kohli", score: 78 },
12    { name: "Hardik", score: 45 },
13    { name: "Pant", score: 95 },
14    { name: "Ashwin", score: 88 },
15    { name: "Rahul", score: 35 },
16    { name: "Ishant", score: 76 },
17    { name: "Shami", score: 67 },
18  ];
19
20  // Filter players with score below 70
21  const filteredPlayers = players.filter(player => player.score < 70);
22
23  return (
24    <div>
25      <h2>All Players</h2>
26      <ul>
27        {players.map((player, index) => (
28          <li key={index}>{player.name} - {player.score}</li>
29        ))}
30      </ul>
31    </div>
32  );
33 }
```

```
    {players.map((player, index) => (
      <li key={index}>{player.name} - {player.score}</li>
    ))}
  </ul>

  <h3>Filtered Players (score < 70)</h3>
  <ul>
    {filteredPlayers.map((player, index) => (
      <li key={index}>{player.name} - {player.score}</li>
    ))}
  </ul>
</div>
);
}

export default ListofPlayers;
```

```
import React from 'react'; 7.9k (gzipped: 3.1k)
```

Complexity is 13 You must be kidding

```
function IndianPlayers() {  
  const oddTeam = ["Virat", "Dhoni", "Hardik", "Pant", "Shami"];  
  const evenTeam = ["Rohit", "Jadeja", "Ashwin", "Rahul", "Ishant"];  
  
  const [p1, p2, ...restOdd] = oddTeam;  
  const [e1, e2, ...restEven] = evenTeam;  
  
  const T20Players = ["Kohli", "Bumrah", "Rishabh"];  
  const RanjiPlayers = ["Pujara", "Rahane"];  
  
  const allPlayers = [...T20Players, ...RanjiPlayers]; // merge using spread  
  
  return (  
    <div>  
      <h2>Odd Team</h2>  
      <p>Captain: {p1}, Vice Captain: {p2}</p>  
      <p>Others: {restOdd.join(", ")}</p>  
  
      <h2>Even Team</h2>  
      <p>Captain: {e1}, Vice Captain: {e2}</p>  
      <p>Others: {restEven.join(", ")}</p>  
  
      <h2>Merged Players (T20 + Ranji)</h2>  
      <ul>  
        {allPlayers.map((player, idx) => (  
          <li key={idx}>{player}</li>
```

JS ListOfPlayers.js U

JS IndianPlayers.js U ●

JS App.js M ●

src > JS App.js > ...

```
1 |
2 | import React from 'react'; 7.9k (gzipped: 3.1k)
3 | import ListOfPlayers from './ListOfPlayers';
4 | import IndianPlayers from './IndianPlayers';
5 |
   | Complexity is 7 It's time to do something...
6 | function App() {
7 |   const flag = true;
8 |
9 |   return (
10 |     <div>
11 |       <h1>Cricket App</h1>
12 |       {flag ? <ListOfPlayers /> : <IndianPlayers />}
13 |     </div>
14 |   );
15 | }
16 |
17 | export default App;
18 |
```

OUTPUT



Cricket App


All Players

- Virat - 85
- Rohit - 60
- Dhoni - 90
- Jadeja - 55
- Kohli - 78
- Hardik - 45
- Pant - 95
- Ashwin - 88
- Rahul - 35
- Ishant - 76
- Shami - 67

Filtered Players (score < 70)

- Rohit - 60
- Jadeja - 55
- Hardik - 45
- Rahul - 35
- Shami - 67

If flag == false

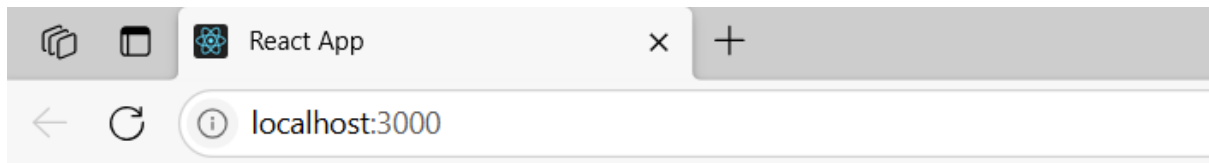

Cricket App

Odd Team

Captain: Virat, Vice Captain: Dhoni

Others: Hardik, Pant, Shami

Even Team


Captain: Rohit, Vice Captain: Jadeja

Others: Ashwin, Rahul, Ishant

Merged Players (T20 + Ranji)

- Kohli
- Bumrah
- Rishabh
- Pujara
- Rahane


HandsOn 10

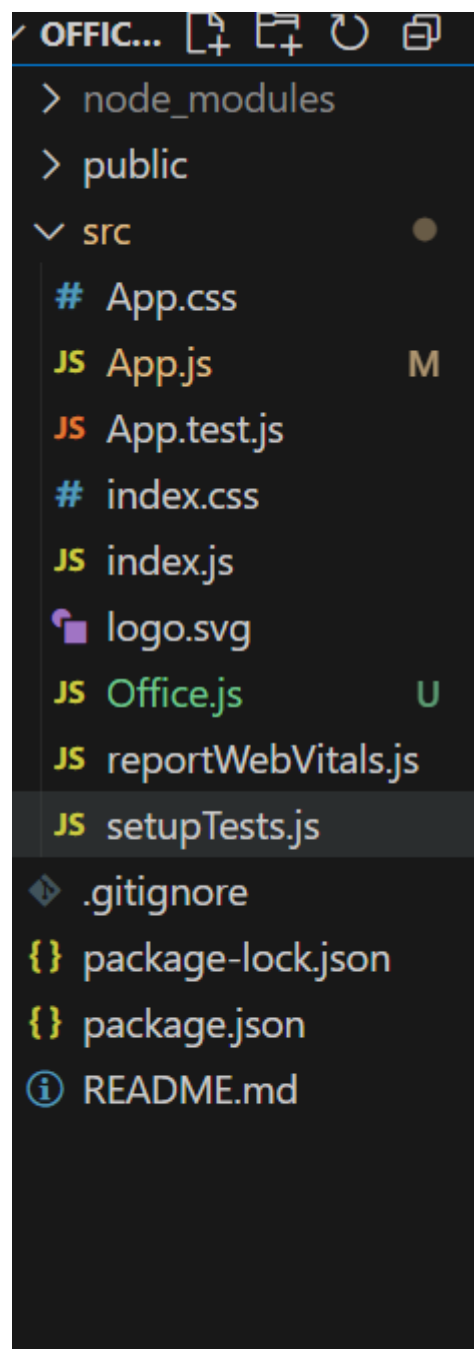


```
JS Office.js U JS App.js M X
src > JS App.js > ...
1
2 import React from 'react'; 7.9k (gzipped: 3.1k)
3 import Office from './Office';
4
5 Complexity is 4 Everything is cool!
6 function App() {
7   return (
8     <div className="App">
9       <Office />
10    </div>
11  );
12 }
13 export default App;
14
```

```
JS Office.js U X JS App.js M
src > JS Office.js > ...
1
2 import React from 'react'; 7.9k (gzipped: 3.1k)
3
4 Complexity is 14 You must be kidding
5 function Office() {
6   const heading = <h1>Office Space Rental Portal</h1>;
7
8   const officeList = [
9     {
10       id: 1,
11       name: "Indiranagar Workspace",
12       rent: 55000,
13       address: "Bangalore",
14       image: "https://www.bagmanegroup.com/media/filer_public/f6/16/f616d655-4ae1-4f13-ae0a-71f915527f8e/tech_park_ba
15     },
16     {
17       id: 2,
18       name: "Tide1 Park Office"
19     }
20   ];
21 }
22 export default Office;
```

OUTPUT

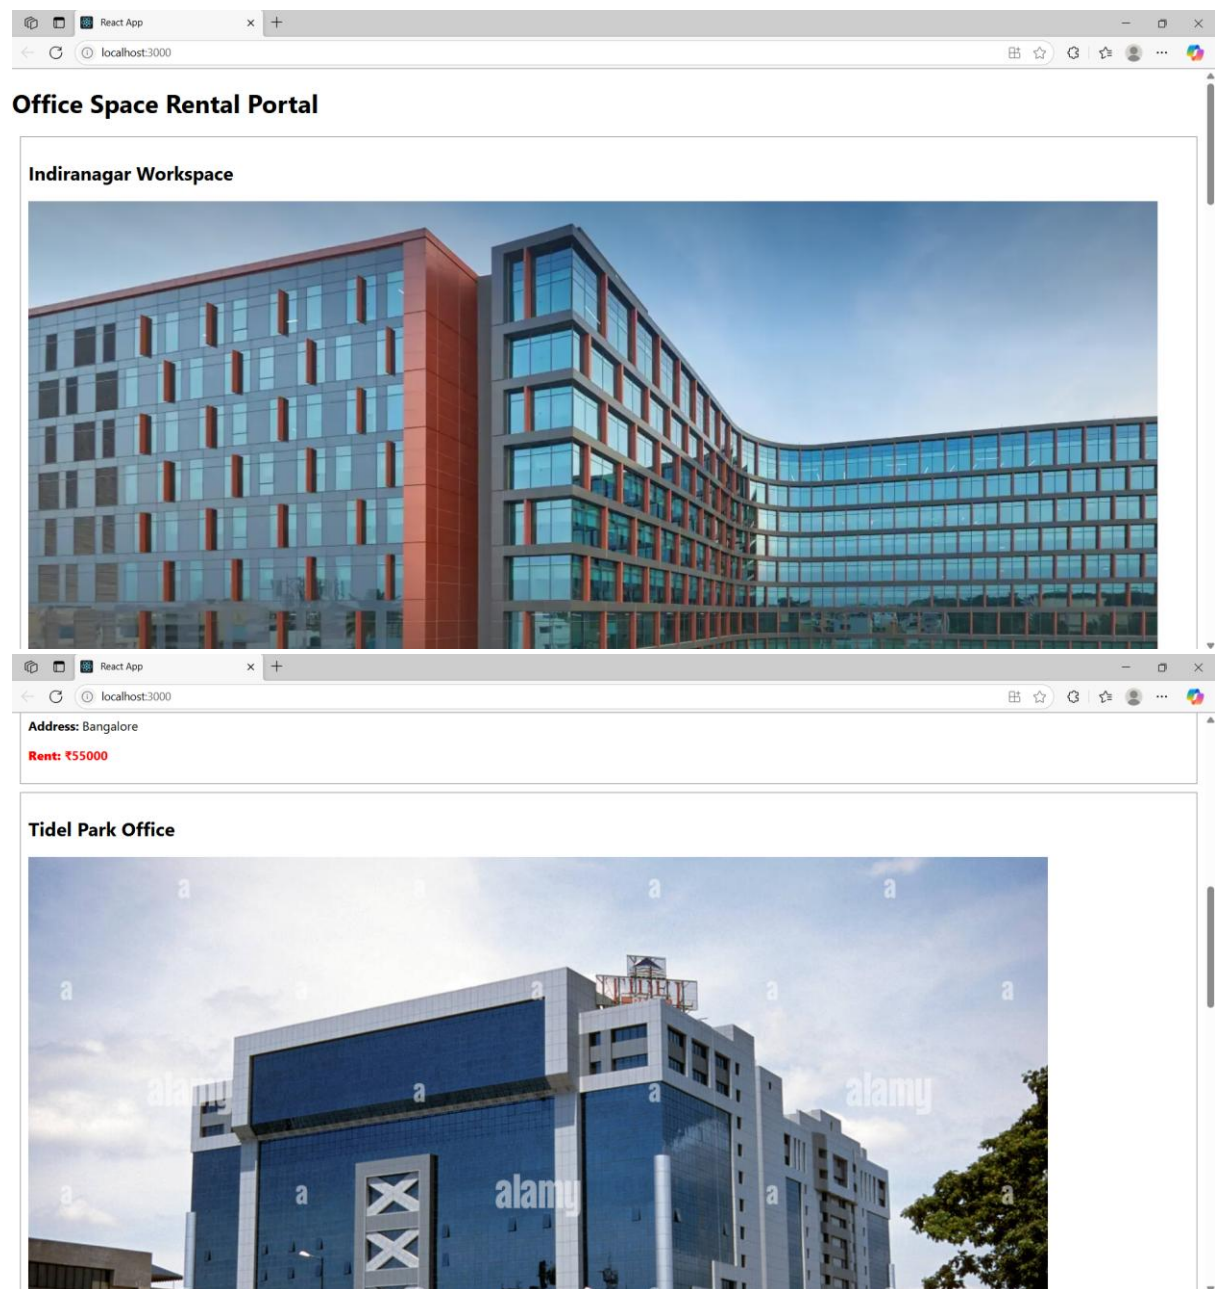

React App

localhost:3000

Address: Chennai

Rent: ₹70000

Cyberhub Space



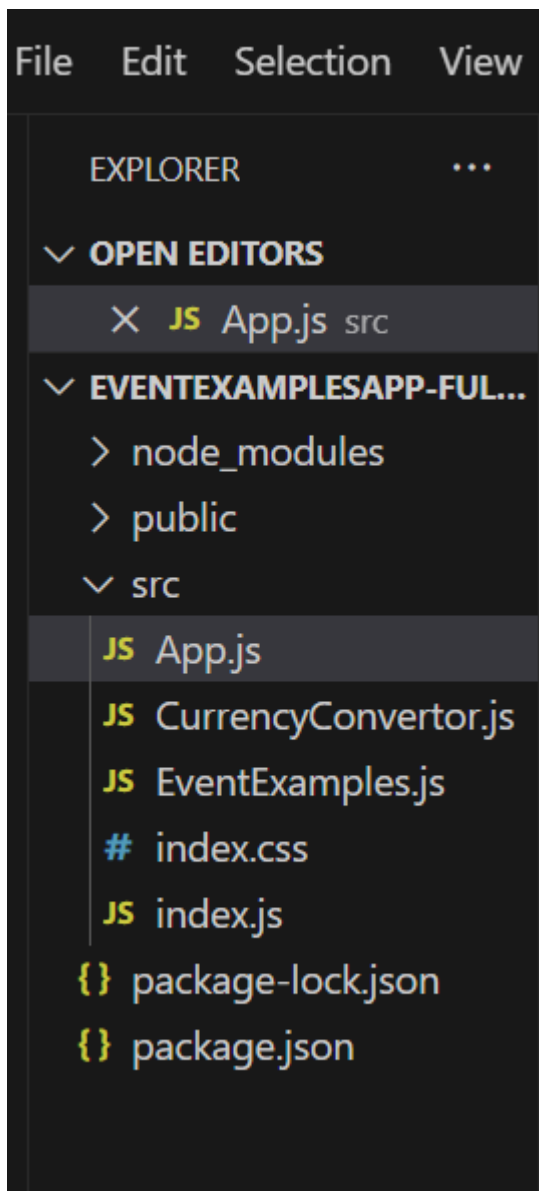


Image ID: ET0DT7
www.alamy.com

Address: Gurgaon

Rent: ₹45000

HandsOn 11




```
JS App.js  X  JS CurrencyConvertor.js  JS EventExamples.js
src > JS App.js > ...
1  import React from 'react'; 6.9k (gzipped: 2.7k)
2  import EventExamples from './EventExamples';
3  import CurrencyConvertor from './CurrencyConvertor';
4
Complexity is 7 It's time to do something...
5  function App() {
6      return (
7          <div>
8              <h1>React Event Handling Examples</h1>
9              <EventExamples />
10             <hr />
11             <CurrencyConvertor />
12         </div>
13     );
14 }
15
16 export default App;
17
```

src > JS CurrencyConvertor.js > ...

```
1 import React, { useState } from 'react'; 6.9k (gzipped: 2.7k)
2
3 Complexity is 10 It's time to do something...
4 function CurrencyConvertor() {
5   const [rupees, setRupees] = useState('');
6   const [euro, setEuro] = useState(null);
7
8   const handleSubmit = () => {
9     const euroValue = (parseFloat(rupees) / 90).toFixed(2);
10    setEuro(euroValue);
11  };
12
13  return (
14    <div>
15      <h2>Currency Converter</h2>
16      <input
17        type="number"
18        placeholder="Enter INR"
19        value={rupees}
20        onChange={(e) => setRupees(e.target.value)}
21      />
22      <button onClick={handleSubmit}>Convert</button>
23      {euro} && <p>€ {euro}</p>
24    </div>
25  );
26
27 export default CurrencyConvertor;
28
```

```
JS App.js    JS CurrencyConveror.js    JS EventExamples.js X
src > JS EventExamples.js > ...
1  import React from 'react'; 6.9k (gzipped: 2.7k)
2  ⚠
   Complexity is 14 You must be kidding
3  class EventExamples extends React.Component {
4      constructor(props) {
5          super(props);
6          this.state = { count: 0 };
7      }
8
9      increment = () => {
10         this.setState({ count: this.state.count + 1 });
11         this.sayHello();
12     };
13
14     decrement = () => {
15         this.setState({ count: this.state.count - 1 });
16     };
17
18     sayHello = () => {
19         alert("Hello! This is a static message.");
20     };
21
22     sayWelcome = (msg) => {
23         alert(`Welcome Message: ${msg}`);
24     };
25
26     handleSyntheticEvent = (event) => {
27         alert("I was clicked");
28         console.log("Synthetic Event:", event);
29     };
30 }
```

OUTPUT

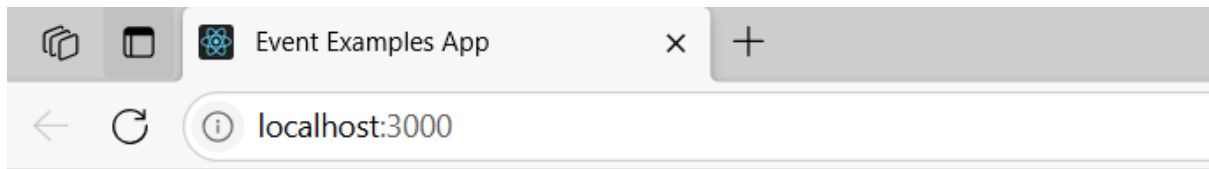

React Event Handling Examples

Event Handling Demo

Counter: 1

Increase Decrease

Say Welcome

Synthetic Click

Currency Convertor

900 Convert

€ 10.00



React Event Handling Examples

Event Handling Demo

Counter: 1

Increase Decrease


Say Welcome

Synthetic Click

Currency Convertor

900 Convert

€ 10.00

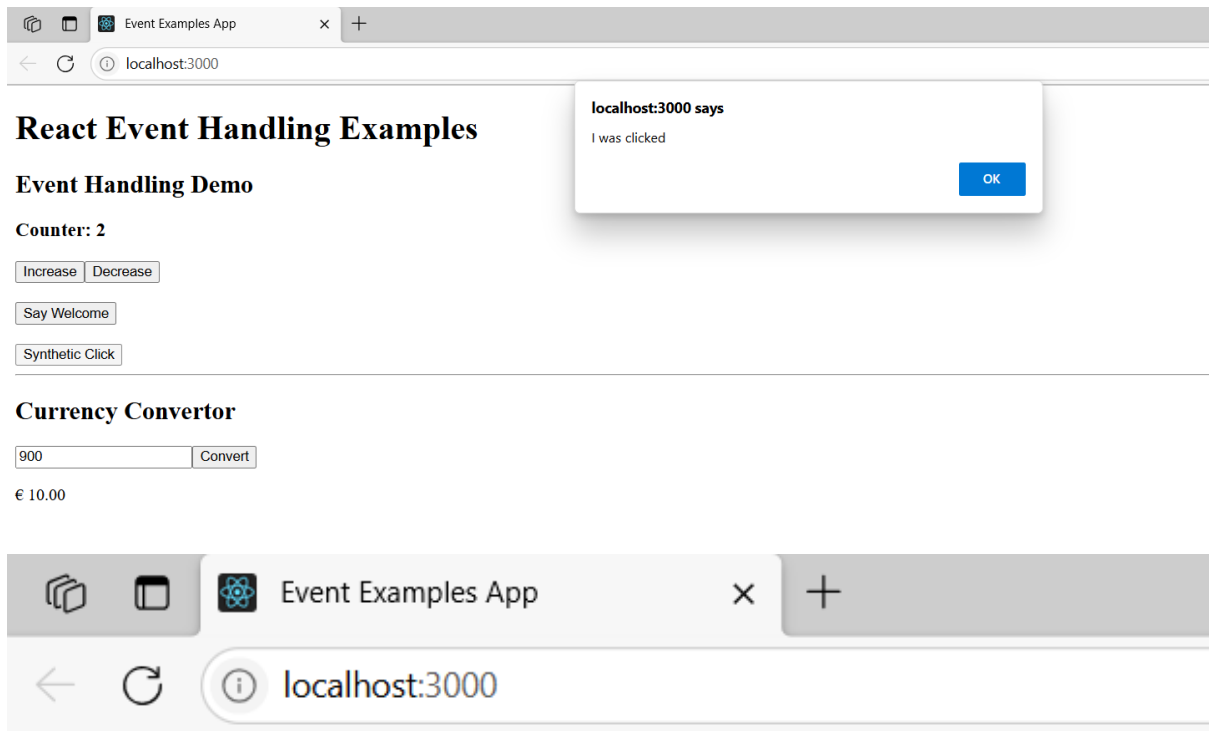

React Event Handling Examples

Event Handling Demo

Counter: 2

Increase Decrease

Say Welcome


Synthetic Click

Currency Convertor

100000 Convert

€ 1111.11

HandsOn 12

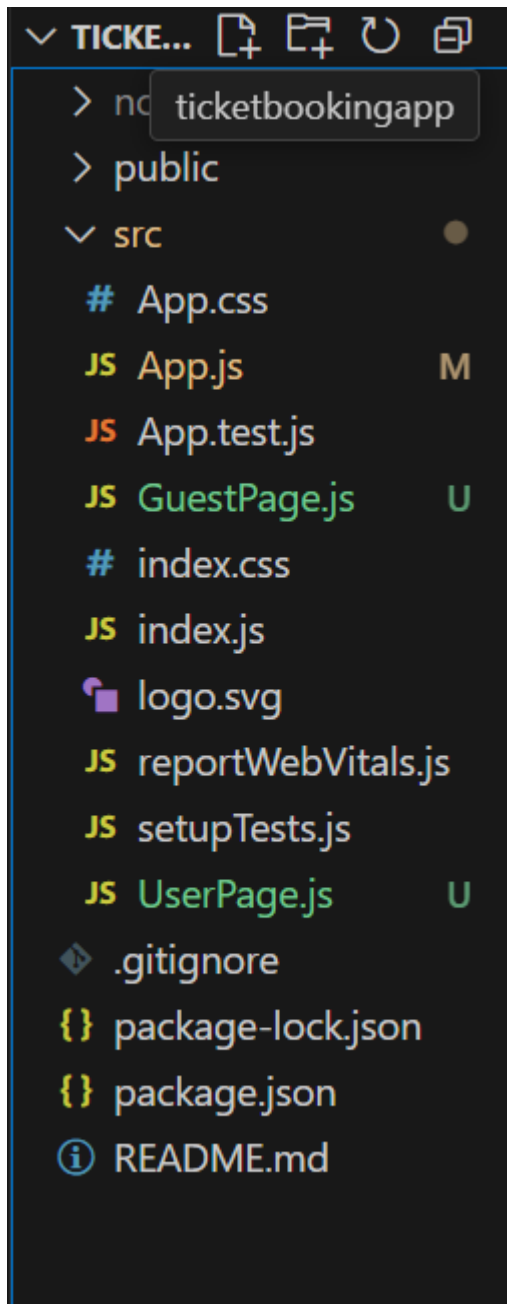

```
5 App.js M X JS GuestPage.js U JS UserPage.js U
src > JS App.js > ...
1 import React, { useState } from 'react'; 7.9k (gzipped: 3.1k)
2 import GuestPage from './GuestPage';
3 import UserPage from './UserPage';
4
Complexity is 11 You must be kidding
5 function App() {
6   const [isLoggedIn, setIsLoggedIn] = useState(false);
7
8   const handleLogin = () => setIsLoggedIn(true);
9   const handleLogout = () => setIsLoggedIn(false);
10
11   return (
12     <div>
13       <h1>Flight Booking Portal</h1>
14       {isLoggedIn ? (
15         <>
16           <button onClick={handleLogout}>Logout</button>
17           <UserPage />
18         </>
19       ) : (
20         <>
21           <button onClick={handleLogin}>Login</button>
22           <GuestPage />
23         </>
24       )}
25     </div>
26   );
27 }
28
29 export default App;
30
31
```

```
App.js M JS GuestPage.js U X JS UserPage.js U
> JS GuestPage.js > ...
1 import React from 'react'; 7.9k (gzipped: 3.1k)
2
Complexity is 9 It's time to do something...
3 function GuestPage() {
4   return (
5     <div>
6       <h2>Welcome, Guest!</h2>
7       <p>You can view flight details, but must log in to book tickets.</p>
8       <ul>
9         <li>Flight A: Chennai → Delhi</li>
10        <li>Flight B: Bangalore → Mumbai</li>
11        <li>Flight C: Hyderabad → Kolkata</li>
12      </ul>
13    </div>
14  );
15 }
16
17 export default GuestPage;
```

```
App.js M JS GuestPage.js U JS UserPage.js U X
> JS UserPage.js > ...
1 import React from 'react'; 7.9k (gzipped: 3.1k)
2
Complexity is 16 You must be kidding
3 function UserPage() {
4   const handleBook = (flightName) => {
5     alert(`You have successfully booked ${flightName}`);
6   };
7
8   return (
9     <div>
10      <h2>Welcome, Logged-in User!</h2>
11      <p>You can now book tickets.</p>
12      <ul>
13        <li>
14          Flight A - <button onClick={() => handleBook('Flight A')}>Book</button>
15        </li>
16        <li>
17          Flight B - <button onClick={() => handleBook('Flight B')}>Book</button>
18        </li>
19      </ul>
20    </div>
21  );
22 }
23
24 export default UserPage;
```

```
function UserPage() {  
  <ul>  
    <li>  
      Flight A - <button onClick={() => handleBook('Flight A')}>Book</button>  
    </li>  
    <li>  
      Flight B - <button onClick={() => handleBook('Flight B')}>Book</button>  
    </li>  
    <li>  
      Flight C - <button onClick={() => handleBook('Flight C')}>Book</button>  
    </li>  
  </ul>  
</div>  
);  
}  
  
export default UserPage;
```

OUTPUT




Flight Booking Portal

Login

Welcome, Guest!

You can view flight details, but must log in to book tickets.

- Flight A: Chennai → Delhi
- Flight B: Bangalore → Mumbai
- Flight C: Hyderabad → Kolkata

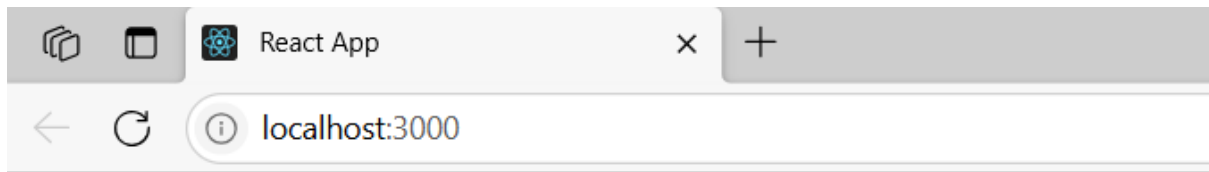


Flight Booking Portal

Logout

Welcome, Logged-in User!

You can now book tickets.

- Flight A -
- Flight B -
- Flight C -

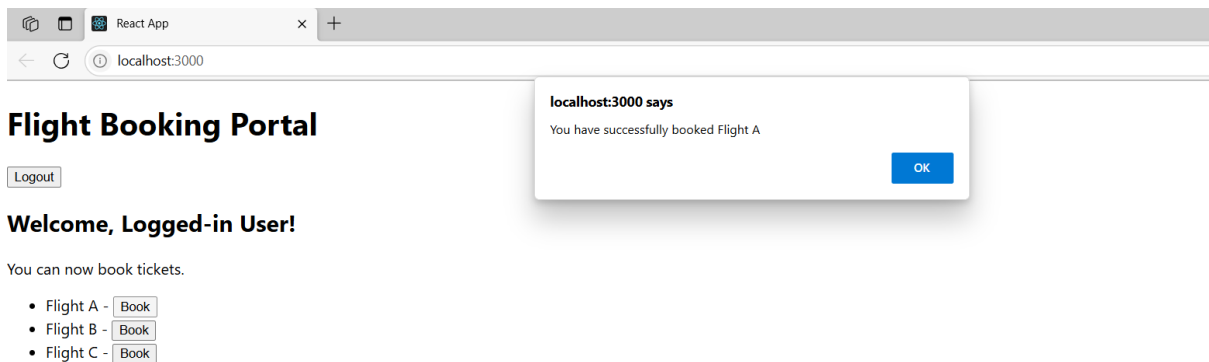



Flight Booking Portal

[Logout](#)

Welcome, Logged-in User!

You can now book tickets.

- Flight A - [Book](#)
- Flight B - [Book](#)
- Flight C - [Book](#)



Flight Booking Portal


[Logout](#)

Welcome, Logged-in User!

You can now book tickets.

- Flight A - [Book](#)
- Flight B - [Book](#)
- Flight C - [Book](#)

HandsOn 13

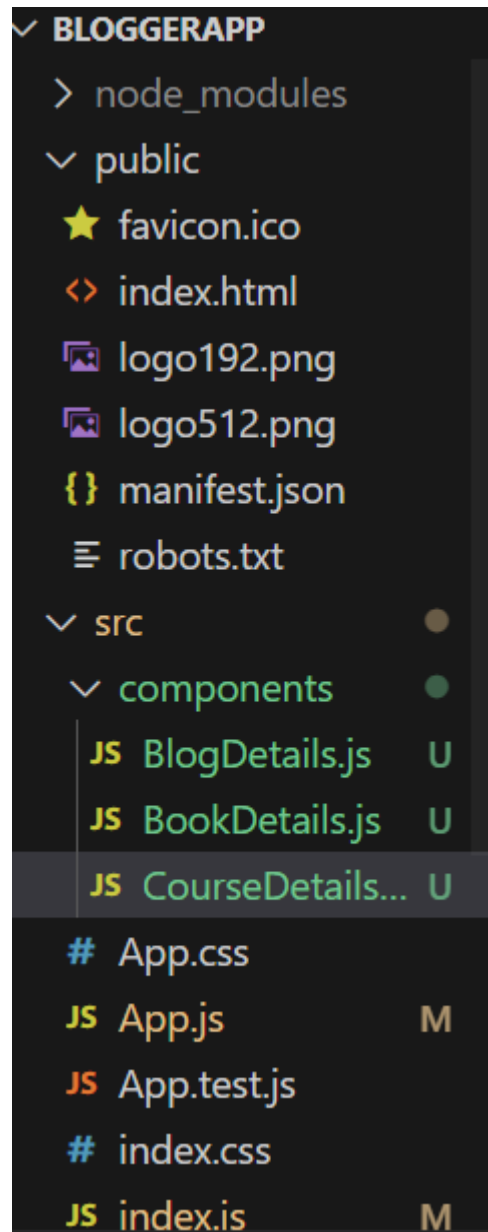


```
JS BookDetails.js U X JS BlogDetails.js U JS CourseDetails.js U JS App.js M JS index.js M
src > components > JS BookDetails.js > ...
1 import React from 'react'; 7.9k (gzipped: 3.1k)
2
3 const books = [
4   { id: 1, title: 'React Basics', author: 'Dan Abramov' },
5   { id: 2, title: 'Learning React', author: 'Alex Banks' },
6 ];
7
8 Complexity is 7 It's time to do something...
9 const BookDetails = () => {
10   return (
11     <div>
12       <h2>Book Details</h2>
13       <ul>
14         {books.map(book => (
15           <li key={book.id}>
16             {book.title} by {book.author}
17           </li>
18         ))}
19       </ul>
20     </div>
21   );
22 };
23 export default BookDetails;
24
```

```
JS BookDetails.js U JS BlogDetails.js U X JS CourseDetails.js U JS App.js M JS index.js M
src > components > JS BlogDetails.js > ...
1 import React from 'react'; 7.9k (gzipped: 3.1k)
2
3 Complexity is 7 It's time to do something...
4 const BlogDetails = () => {
5   const isPublished = true;
6
7   return (
8     <div>
9       <h2>Blog Details</h2>
10       {isPublished ? (
11         <p>The blog is published.</p>
12       ) : (
13         <p>The blog is still in draft.</p>
14       )}
15     </div>
16   );
17 };
18 const BlogDetails: () => JSX.Element
19 export default BlogDetails;
```

```
JS BookDetails.js U JS BlogDetails.js U JS CourseDetails.js U X JS App.js M JS index.js M
src > components > JS CourseDetails.js > ...
1 import React from 'react'; 7.9k (gzipped: 3.1k)
2
Complexity is 8 It's time to do something...
3 const CourseDetails = () => {
4   const showInfo = false;
5
6   return (
7     <div>
8       <h2>Course Details</h2>
9       {showInfo && <p>Course content is available here.</p>}
10      {!showInfo && <p>Course details are currently unavailable.</p>}
11     </div>
12   );
13 };
14
15 export default CourseDetails;
16
```

```
JS BookDetails.js U X JS BlogDetails.js U JS CourseDetails.js U JS App.js M X JS index.js M
src > JS App.js > [e] default
1 import React, { useState } from 'react'; 7.9k (gzipped: 3.1k)
2 import BookDetails from './components/BookDetails';
3 import BlogDetails from './components/BlogDetails';
4 import CourseDetails from './components/CourseDetails';
5
Complexity is 26 Bloody hell...
6 function App() {
7   const [showComponent, setShowComponent] = useState('book');
8
Complexity is 14 You must be kidding
9   const renderComponent = () => {
10     // Switch case conditional rendering
11     switch (showComponent) {
12       case 'book':
13         return <BookDetails />;
14       case 'blog':
15         return <BlogDetails />;
16       case 'course':
17         return <CourseDetails />;
18       default:
19         return <p>Select a component to render.</p>;
20     }
21   };
22
23   return (
24     <div className="p-4">
25       <h1>Blogger App</h1>
26       <div>
27         <button onClick={() => setShowComponent('book')}>Show Book Details</button>
28         <button onClick={() => setShowComponent('blog')}>Show Blog Details</button>
```

```

    return <p>Select a component to render.</p>;
  }
};

return (
  <div className="p-4">
    <h1>Blogger App</h1>
    <div>
      <button onClick={() => setShowComponent('book')}>Show Book Details</button>
      <button onClick={() => setShowComponent('blog')}>Show Blog Details</button>
      <button onClick={() => setShowComponent('course')}>Show Course Details</button>
    </div>
    <hr />
    {renderComponent()}
  </div>
);
}

export default App;


```

```

JS BookDetails.js U    JS BlogDetails.js U    JS CourseDetails.js U    JS App.js M    JS index.js M X
src > JS index.js > ...
1  import React from 'react';    7.9k (gzipped: 3.1k)
2  import ReactDOM from 'react-dom/client';    172.5k (gzipped: 54.5k)
3  import App from './App';
4
5  const root = ReactDOM.createRoot(document.getElementById('root'));
6  root.render(
7    <React.StrictMode>
8      <App />
9    </React.StrictMode>
10 );
11

```

OUTPUT

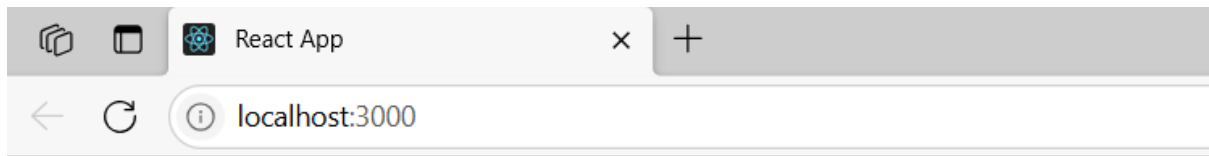

Blogger App

[Show Book Details](#) [Show Blog Details](#) [Show Course Details](#)

Book Details

- React Basics by Dan Abramov
- Learning React by Alex Banks



Blogger App

[Show Book Details](#) [Show Blog Details](#) [Show Course Details](#)

Blog Details

The blog is published.



Blogger App

[Show Book Details](#) [Show Blog Details](#) [Show Course Details](#)

Course Details

Course details are currently unavailable.