

**Final Year Project Report  
on**

## **Face Recognition System with Face Detection**

**submitted in fulfillment of  
the requirement of the Degree of Bachelor of Technology**

*by*

**Pratik Karbhal**

(181090029)

**Shailesh Giripunje**

(181090053)

**Vinod Joshi**

(181090028)

**Shubham Jadhav**

(181090061)

Under the guidance of

**Dr. D. P. Rathod**



DEPARTMENT OF ELECTRICAL ENGINEERING  
**VEERMATA JIJABAI TECHNOLOGICAL INSTITUTE**  
(An Autonomous Institute Affiliated to Mumbai University)  
Matunga, MUMBAI – 400019

## DECLARATION OF STUDENT

I declare that the work embodied in this Project titled “**Face Recognition System with Face Detection**” comes from our group’s contribution under the guidance of Dr. D. P. Rathod at the Department of Electrical Engineering, Veermata Jijabai Technological Institute, Mumbai. Wherever we have used the work of any existing resource, the citations and the corresponding references are mentioned.

Pratik Karbhal

ID: 181090029

Date:

Place: VJTI, Mumbai

Shailesh Giripunje

ID: 181090053

Date:

Place: VJTI, Mumbai

Vinod Joshi

ID: 181090028

Date:

Place: VJTI, Mumbai

Shubham Jadhav

ID: 181090061

Date:

Place: VJTI, Mumbai

## **ACKNOWLEDGEMENT**

Taking the challenging task and then finishing it satisfactorily requires the support and faith in the team from the mentor. This project would not have been finished without the help and support of the below-mentioned people who aided us with their efforts and blessings.

We start by showing our gratitude to our project mentor, Dr. D. P. Rathod. He has been a constant force in guiding us throughout the project. He provided us with suggestions that kept our project developing seamlessly.

Last but not least, we would like to express our deep sense of gratitude and earnest thanksgiving to our dear parents for their moral support and heartfelt cooperation in doing the main project.

Thank you all for making this journey so memorable.

## APPROVAL SHEET

The credit report “***Face Recognition System with Face Detection***” by Pratik Karbhal, Shailesh Giripunje, Vinod Joshi, and Shubham Jadhav is found to be satisfactory and is approved for the Degree of Bachelor of Technology.

Dr. D. P. Rathod

***Supervisor***

***Examiner***

***Examiner***

***Examiner***

Place: *Veermata Jijabai Technological Institute, Mumbai*

Date:     /     /2021

## **CERTIFICATE**

This is to certify that Pratik Karbhal (181090029), Shailesh Giripunje (181090053), Vinod Joshi (181090028), and Shubham Jadhav (181090061), students of B.Tech (Electronics and Telecommunication), Veermata Jijabai Technological Institute, Mumbai have completed the project titled ***“Face Recognition System with Face Detection”*** under the guidance of Dr. D. P. Rathod.

Dr. D. P. Rathod

***Supervisor***

Place: *Veermata Jijabai Technological Institute, Mumbai*

Date:     /     /2021

# Contents

<b>1</b>	<b>SYNOPSIS</b>	<b>1</b>
1.1	Abstract.....	1
1.2	Technical Keywords .....	1
<b>2</b>	<b>ABOUT THE PROJECT</b>	<b>2</b>
2.1	Introduction.....	2
2.2	Face Recognition .....	8
2.2.1	Geometric.....	8
2.2.2	Photometric.....	8
2.3	Face Detection .....	9
2.3.1	Pre-Processing .....	9
2.3.2	Classification .....	11
2.3.3	Localization .....	12
<b>3</b>	<b>LITERATURE SURVEY</b>	<b>14</b>
3.1	Feature Base Approach.....	14
3.1.1	Deformable Templates .....	15
3.1.2	Point Distribution Model (PDM).....	15
3.1.3	Low-Level Analysis .....	18
3.2	Motion Base .....	21
3.2.1	Gray Scale Base .....	18
3.2.2	Edge Base .....	21
3.3	Feature Analysis .....	21
3.3.1	Feature Searching .....	18
3.4	Constellation Method.....	21
3.4.1	Neural Network .....	21
3.5	Linear Sub-Space Method .....	18
3.6	Statistical Approach .....	21
<b>4</b>	<b>DIGITAL IMAGE PROCESSING</b>	<b>25</b>
4.1	Digital Image Processing .....	25
4.2	Fundamental Steps in Image Processing.....	30
4.3	Elements of Digital Image Processing System .....	30
4.4	A Simple Image Formation Model .....	30
<b>5</b>	<b>MATLAB</b>	<b>25</b>
5.1	Introduction.....	25
5.2	Matlab's Power of Computational Mathematics .....	30
5.3	Features of Matlab .....	30
5.4	Uses of Matlab .....	25
5.5	Understanding the Matlab Environment .....	30
5.6	Commonly Used Operations and Special Characters .....	30
5.7	Commands.....	30
5.7.1	Commands for Managing a Session .....	25

5.8	Input and Output Command.....	30
5.9	.M Files.....	30
5.10	Data Types Available in Matlab.....	30
<b>6</b>	<b>FACE DETECTION</b>	<b>38</b>
6.1	Face Detection in Image .....	38
6.2	Real-Time Face Detection .....	39
6.3	Face Detection Process .....	39
6.4	Face Detection Algorithm.....	39
<b>7</b>	<b>FACE RECOGNITION</b>	<b>38</b>
7.1	Face Recognition Using Geometrical Features .....	38
7.1.1	Face Recognition Using Template Matching.....	39
7.2	Brief Outline of The Implemented System.....	39
7.3	Face Recognition Difficulties.....	40
7.3.1	Inter-Class Similarity .....	41
7.3.2	Intra-Class Similarity .....	42
7.4	Principal Component Analysis.....	44
7.5	Under Standing Eigen Faces .....	44
7.6	Pose Invariant Face Recognition.....	45
<b>8</b>	<b>RESULTS AND ANALYSIS</b>	<b>38</b>
8.1	Loading the Database.....	38
8.2	Sample Outputs .....	39
<b>9</b>	<b>FUTURE SCOPE</b>	<b>46</b>
<b>10</b>	<b>CONCLUSION</b>	<b>46</b>
<b>11</b>	<b>REFERENCES</b>	<b>47</b>
<b>12</b>	<b>APPENDIX</b>	<b>47</b>

# Chapter 1

## SYNOPSIS

### 1.1 Abstract

The face is one of the easiest ways to distinguish the individual identity of each other. Face recognition is a personal identification system that uses the personal characteristics of a person to identify the person's identity. The human face recognition procedure consists of two phases, namely face detection, where this process takes place very rapidly in humans, except under conditions where the object is located at a short distance away, the next is the introduction, which recognizes a face of individuals. Stage is then replicated and developed as a model for facial image recognition (face recognition) is one of the much-studied biometrics technology and developed by experts. There are two kinds of methods that are currently popular in developed face recognition pattern namely, Eigenface method and Fisherface method. Facial image recognition Eigenface method is based on the reduction of face- dimensional space using Principal Component Analysis (PCA) for facial features. The main purpose of the use of PCA on face recognition using Eigen faces was formed (face space) by finding the eigenvector corresponding to the largest eigenvalue of the face image. The area of this project face detection system with face recognition is Image processing. The software requirements for this project is matlab software.

### 1.2 Technical Keywords

Face detection, Eigen face, PCA (Principal Component Analysis), Matlab.



## Chapter 2

# ABOUT THE PROJECT

### 2.1 Introduction

Face recognition is the task of identifying an already detected object as a known or unknown face. Often the problem of face recognition is confused with the problem of face detection. Face Recognition on the other hand is to decide if the "face" is someone known, or unknown, using for this purpose a database of faces in order to validate this input face.

### 2.2 Face Recognition

Different approaches of face recognition:

There are two predominant approaches to the face recognition problem: Geometric (feature based) and photometric (view based). As researcher interest in face recognition continued, many different algorithms were developed, three of which have been well studied in face recognition literature.

A Recognition algorithm can be divided into two main approaches:

- 1 **Geometric:** Is based on geometrical relationship between facial landmarks, or in other words the spatial configuration of facial features. That means that the main geometrical features of the face such as the eyes, nose and mouth are first located and then faces are classified on the basis of various geometrical distances and angles between features. (Figure 3)
- 2 **Photometric stereo:** Used to recover the shape of an object from a number of images taken under different lighting conditions. The shape of the recovered object is defined by a gradient map, which is made up of an array of surface normals (Zhao and Chellappa, 2006) (Figure 2)

Popular recognition algorithms include:

1. Principal Component Analysis using Eigenfaces (PCA)
2. Linear Discriminate Analysis
3. Elastic Bunch Graph Matching using the Fisherface algorithm



Figure 2.1 – Photometric Stereo Image

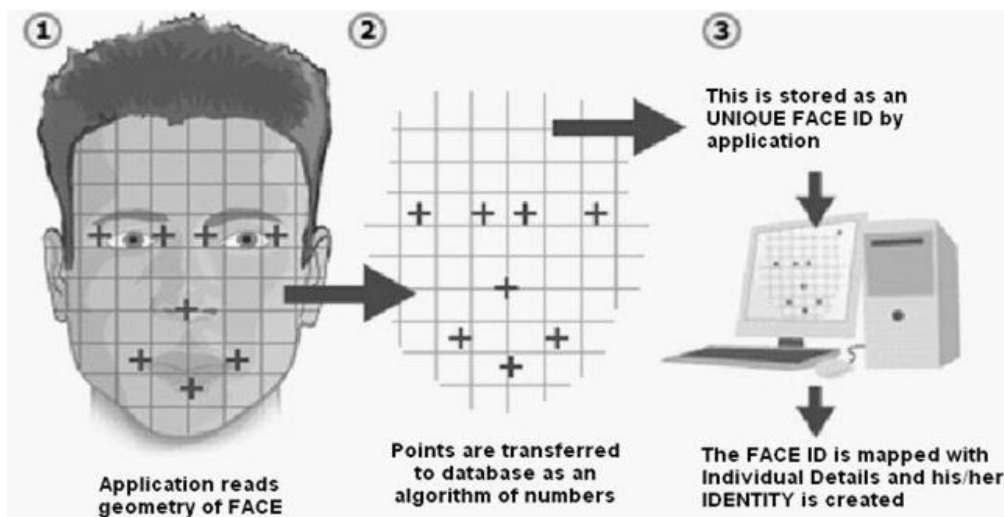


Figure 2.2 – Geometric Facial Recognition

## 2.3 Face Detection

Face detection involves separating image windows into two classes; one containing faces (turning the background (clutter)). It is difficult because although commonalities exist between faces, they can vary considerably in terms of age, skin colour and facial expression. The problem is further complicated by differing lighting conditions, image qualities and geometries, as well as the possibility of partial occlusion and disguise. An ideal face detector would therefore be able to detect the presence of any face under any set of lighting conditions, upon any background. The face detection task can be broken down into two steps. The first step is a classification task that takes some arbitrary image as input and outputs a binary value of yes or no, indicating whether there are any faces present in the image. The second step is the face localization task that aims to take an image as input and output the location of any face or faces within that image as some bounding box with (x, y, width, height).

The face detection system can be divided into the following steps:-

- 1 Pre-Processing:** To reduce the variability in the faces, the images are processed before they are fed into the network. All positive examples that is the face images are obtained by cropping images with frontal faces to include only the front view. All the cropped images are then corrected for lighting through standard algorithms.
- 2 Classification:** Neural networks are implemented to classify the images as faces or non-faces by training on these examples. We use both our implementation of the neural network and the Matlab neural network toolbox for this task. Different network configurations are experimented with to optimize the results.
- 3 Localization:** The trained neural network is then used to search for faces in an image and if present localize them in a bounding box. Various Feature of Face on which the work has done on 'Position Scale Orientation Illumination'.


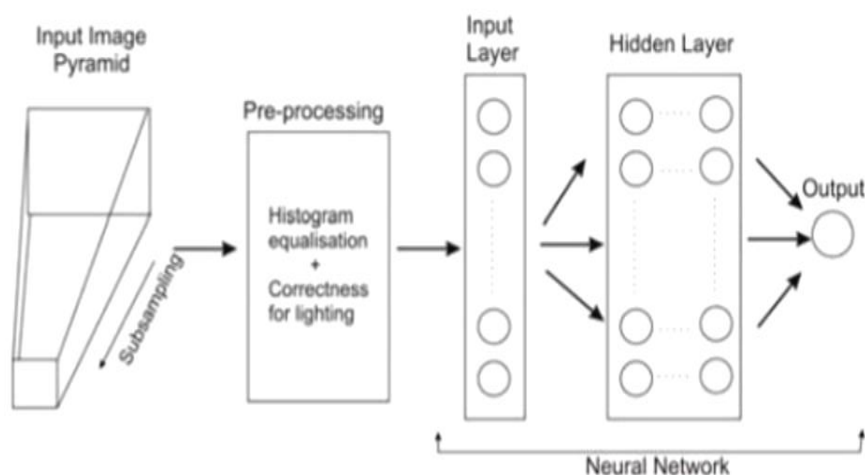


Figure 2.3 – Face Detection Algorithm

## Chapter 3

# LITERATURE SURVEY

Face detection is a computer technology that determines the location and size of human face in arbitrary (digital) image. The facial features are detected and any other objects like trees, buildings and bodies etc are ignored from the digital image. It can be regarded as a ‘specific’ case of object-class detection, where the task is finding the location and sizes of all objects in an image that belong to a given class. Face detection, can be regarded as a more ‘general’ case of face localization. In face localization, the task is to find the locations and sizes of a known number of faces (usually one). Basically there are two types of approaches to detect facial part in the given image i.e. feature base and image base approach. Feature base approach tries to extract features of the image and match it against the knowledge of the face features. While image base approach tries to get best match between training and testing images.

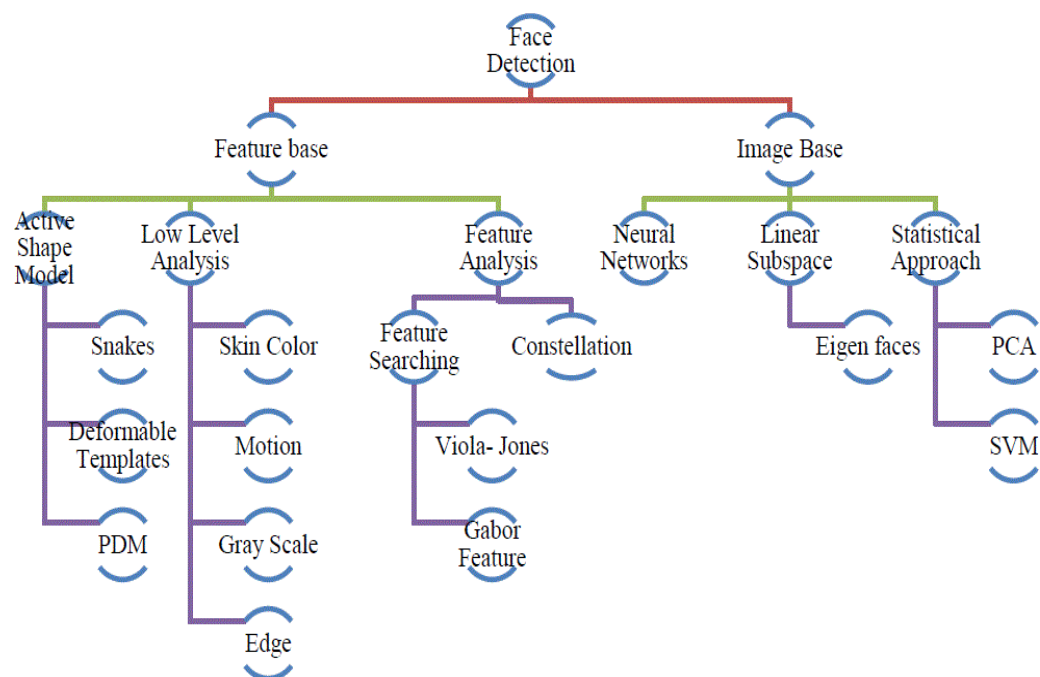

**Fig. 3.1 – Detection Methods**

### 3.1 Feature Base Approach

Active Shape Models focus on complex non-rigid features like actual physical and higher level appearance of features. Means that Active Shape Models (ASMs) are aimed at automatically locating landmark points that define the shape of any statistically modeled object in an image. When of facial features such as the eyes, lips, nose, mouth and eyebrows. The training stage of an ASM involves the building of a statistical

- a) Facial model from a training set containing images with manually annotated landmarks. ASMs is classified into three groups i.e. snakes, PDM, Deformable templates
- b) Snakes: The first type uses a generic active contour called snakes, first introduced by Kass et al. in 1987. Snakes are used to identify head boundaries [8,9,10,11,12]. In order to achieve the task, a snake is first initialized at the proximity around a head boundary. It then locks onto nearby edges and subsequently assume the shape of the head. The evolution of a snake is achieved by minimizing an energy function,  $E_{snake}$  (analogy with physical systems), denoted as  $E_{snake} = E_{internal} + E_{External}$ . Where  $E_{internal}$  and  $E_{External}$  are internal and external energy functions. Internal energy is the part that depends on the intrinsic properties of the snake and defines its natural evolution. The typical natural evolution in snakes is shrinking or expanding. The external energy counteracts the internal energy and enables the contours to deviate from the natural evolution and eventually assume the shape of nearby features—the head boundary at a state of equilibria. Two main consideration for forming snakes i.e. selection of energy terms and energy minimization. Elastic energy is used commonly as internal energy. Internal energy is varying with the distance between control points on the snake, through which we get contour an elastic-band characteristic that causes it to shrink or expand. On other side external energy relay on image features. Energy minimization process is done by optimization techniques such as the steepest gradient descent. This needs highest computations. Huang and Chen and Lam and Yan both employ fast iteration methods by greedy algorithms. Snakes have some demerits like contour often becomes trapped onto false image features and another one is that snakes are not suitable in extracting non convex features.

#### 3.1.1 Deformable Templates

Deformable templates were then introduced by Yuille et al. to take into account the a priori of facial features and to better the performance of snakes. Locating a facial feature boundary is not an easy task because the local evidence of facial edges is difficult to organize into a sensible global entity using generic contours. The low brightness contrast around some of these features also makes the edge detection process. Yuille et al. took the concept of snakes a step further by incorporating global information of the eye to improve the reliability of the extraction process.

Deformable templates approaches are developed to solve this problem. Deformation is based on local valley, edge, peak, and brightness. Other than face boundary, salient feature (eyes, nose, mouth and eyebrows) extraction is a great challenge of face recognition

$$E = E_v + E_e + E_p + E_i + E_{\text{internal}} ;$$

where  $E_v$ ,  $E_e$ ,  $E_p$ ,  $E_i$ ,  $E_{\text{internal}}$  are external energy due to valley, edges, peak and image brightness and internal energy respectively.

### 3.1.2 PDM (Point Distribution Model)


Independently of computerized image analysis, and before ASMs were developed, researchers developed statistical models of shape. The idea is that once you represent shapes as vectors, you can apply standard statistical methods to them just like any other multivariate object. These models learn allowable constellations of shape points from training examples and use principal components to build what is called a Point Distribution Model. These have been used in diverse ways, for example for categorizing Iron Age broaches. Ideal Point Distribution Models can only deform in ways that are characteristic of the object. Cootes and his colleagues were seeking models which do exactly that so if a beard, say, covers the chin, the shape model can "override the image" to approximate the position of the chin under the beard. It was therefore natural (but perhaps only in retrospect) to adopt Point Distribution Models. This synthesis of ideas from image processing and statistical shape modeling led to the Active Shape Model. The first parametric statistical shape model for image analysis based on principal components of inter-landmark distances were presented by Cootes and Taylor in. On this approach, Cootes, Taylor, and their colleagues, then released a series of papers that cumulated in what we call the classical Active Shape Model.

## 3.2 Low Level Analysis

Based on low level visual features like color, intensity, edges, motion etc. Skin Color Base Color is vital feature of human faces. Using skin-color as a feature for tracking a face has several advantages. Color processing is much faster than processing other facial features. Under certain lighting conditions, color is orientation invariant. This property makes motion estimation much easier because only a translation model is needed for motion estimation. Tracking human faces using color as a feature has several problems like the color representation of a face obtained by a camera is influenced by many factors (ambient light, object movement, etc).

Majorly three different face detection algorithms are available based on RGB, YCbCr, and HIS color space models. In the implementation of the algorithms there are three main steps viz.

- (1) Classify the skin region in the color space
- (2) Apply threshold to mask the skin region
- (3) Draw bounding box to extract the face image

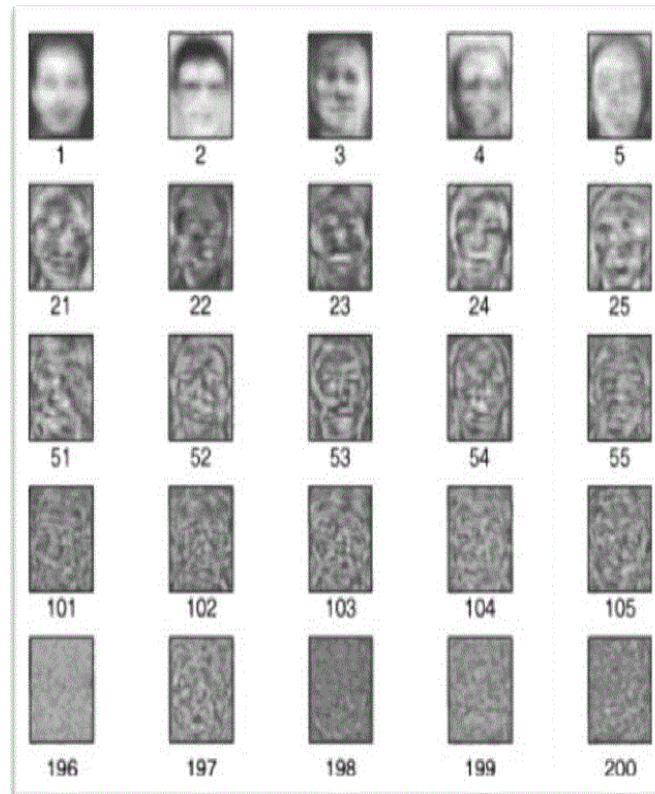

**Figure 3.2 – Face Detection**

Crowley and Coutaz suggested simplest skin color algorithms for detecting skin pixels. The perceived human color varies as a function of the relative direction to the illumination.

The pixels for skin region can be detected using a normalized color histogram, and can be normalized for changes in intensity on dividing by luminance. Converted an  $[R, G, B]$  vector is converted into an  $[r, g]$  vector of normalized color which provides a fast means of skin detection. This algorithm fails when there are some more skin region like legs, arms, etc. Cahi and Ngan [27] suggested skin color classification algorithm with YCbCr color space. Research found that pixels belonging to skin region having similar Cb and Cr values. So that the thresholds be chosen as  $[Cr_1, Cr_2]$  and  $[Cb_1, Cb_2]$ , a pixel is classified to have skin tone if the values  $[Cr, Cb]$  fall within the thresholds. The skin color distribution gives the face portion in the color image. This algorithm is also having the constraint that the image should be having only face as the skin region. Kjeldson and Kender defined a color predicate in HSV color space to separate skin regions from background. Skin color classification in HSI color space is the same as YCbCr color space but here the responsible values are hue (H) and saturation (S). Similar to above the threshold be chosen as  $[H_1, S_1]$  and  $[H_2, S_2]$ , and a pixel is classified to have skin tone if the values  $[H, S]$  fall within the threshold and this distribution gives the localized face image. Similar to above two algorithm this algorithm is also having the same constraint.



### 3.3 Motion Base

When use of video sequence is available, motion information can be used to locate moving objects. Moving silhouettes like face and body parts can be extracted by simply thresholding accumulated frame differences. Besides face regions, facial features can be located by frame differences.

#### 3.3.1 Gray Scale Base

Gray information within a face can also be treated as important features. Facial features such as eyebrows, pupils, and lips appear generally darker than their surrounding facial regions. Various recent feature extraction algorithms search for local gray minima within segmented facial regions. In these algorithms, the input images are first enhanced by contrast-stretching and gray-scale morphological routines to improve the quality of local dark patches and thereby make detection easier. The extraction of dark patches is achieved by low-level gray-scale thresholding. Based method and consist three levels. Yang and huang presented new approach i.e. faces gray scale behavior in pyramid (mosaic) images. This system utilizes hierarchical Face location consist three levels. Higher two level based on mosaic images at different resolution. In the lower level, edge detection method is proposed. Moreover this algorithm gives fine response in complexbackground where size of the face is unknown.

#### 3.3.2 Edge Base

Face detection based on edges was introduced by Sakai et al. This work was based on analyzing line drawings of the faces from photographs, aiming to locate facial features. Than later Craw et al. proposed a hierarchical framework based on Sakai et al.'s work to trace a human head outline. Then after remarkable works were carried out by many researchers in this specific area. Method suggested by Anila and Devarajan was very simple and fast. They proposed frame work which consist three stepwise. Initially the images are enhanced by applying median filter for noise removal and histogram equalization for contrast adjustment. In the second step the edge image is constructed from the enhanced image by applying sobel operator. Then a novel edge tracking algorithm is applied to extract the sub windows from the enhanced image based on edges. Further they used Back propagation Neural Network (BPN) algorithm to classify the sub-window as either face or non-face

### 3.4 Feature Analysis

These algorithms aim to find structural features that exist even when the pose, viewpoint, or lighting conditions vary, and then use these to locate faces. These methods are designed mainly for face localization



### 3.4.1 Feature Searching

Viola Jones Method:

Paul Viola and Michael Jones presented an approach for object detection which minimizes computation time while achieving high detection accuracy. Paul Viola and Michael Jones [39] proposed a fast and robust method for face detection which is 15 times quicker than any technique at the time of release with 95% accuracy at around 17 fps. The technique relies on the use of simple Haar-like features that are evaluated quickly through the use of a new image representation. Based on the concept of an Integral Image it generates a large set of features and uses the boosting algorithm Add Boost to reduce the over complete set and the introduction of a degenerative tree of the boosted classifiers provides for robust and fast interferences. The detector is applied in a scanning fashion and used on gray-scale images, the scanned window that is applied can also be scaled, as well as the features evaluated.

Gabor Feature Method:

Sharif et al proposed an Elastic Bunch Graph Map (EBGM) algorithm that successfully implements face detection using Gabor filters. The proposed system applies 40 different Gabor filters on an image. As a result of which 40 images with different angles and orientation are received. Next, maximum intensity points in each filtered image are calculated and mark them as fiducially points. The system reduces these points in accordance to distance between them. The next step is calculating the distances between the reduced points using distance formula. At last, the distances are compared with database. If match occurs, it means that the faces in the image are detected. Equation of Gabor filter [40] is shown below`

$$\psi_{u,v}(z) = \frac{\|k_{u,v}\|^2}{\sigma^2} e^{\left( \frac{\|k_{u,v}\|^2 \|z\|^2}{2\sigma^2} \right)} \left[ e^{i\vec{k}_{u,v}z} - e^{-\frac{\sigma^2}{2}} \right]$$

Where

$$\phi_u = \frac{u\pi}{8}, \quad \phi_u \in [0, \pi) \quad \text{gives the frequency,}$$

## 3.5 Constellation Method

All methods discussed so far are able to track faces but still some issue like locating faces of various poses in complex background is truly difficult. To reduce this difficulty investigator form a group of facial features in face-like constellations using more robust modeling approaches such as statistical analysis. Various types of face constellations have been proposed by Burl et al. They establish use of statistical shape theory on the features detected from a multiscale Gaussian derivative filter. Huang et al. also apply a Gaussian filter for pre-processing in a framework based on image feature analysis. Image Base Approach.

### 3.5.1 Neural Network

Neural networks gaining much more attention in many pattern recognition problems, such as OCR, object recognition, and autonomous robot driving. Since face detection can be treated as a two class pattern recognition problem, various neural network algorithms have been proposed.

The advantage of using neural networks for face detection is the feasibility of training a system to capture the complex class conditional density of face patterns. However, one demerit is that the network architecture has to be extensively tuned (number of layers, number of nodes, learning rates, etc.) to get exceptional performance. In early days most hierarchical neural network was proposed by Agui et al. [43]. The first stage having two parallel sub networks in which the inputs are filtered intensity values from an original image. The inputs to the second stage network consist of the outputs from the sub networks and extracted feature values. An output at the second stage shows the presence of a face in the input region. Propp and Samal developed one of the earliest neural networks for face detection [44]. Their network consists of four layers with 1,024 input units, 256 units in the first hidden layer, eight units in the second hidden layer, and two output units. Feraud and Bernier presented a detection method using auto associative neural networks [45], [46], [47]. The idea is based on [48] which show an auto associative network with five layers is able to perform a nonlinear principal component analysis. One auto associative network is used to detect frontal-view faces and another one is used to detect faces turned up to 60 degrees to the left and right of the frontal view. After that Lin et al. presented a face detection system using probabilistic decision-based neural network (PDBNN) [49]. The architecture of PDBNN is similar to a radial basis function (RBF) network with modified learning rules and probabilistic interpretation.

## 3.6 Linear Sub-space Method


Eigen faces Method:

An early example of employing eigen vectors in face recognition was done by Kohonen in which a simple neural network is demonstrated to perform face recognition for aligned and normalized face images. Kirby and Sirovich suggested that images of faces can be linearly encoded using a modest

number of basis images. The idea is arguably proposed first by Pearson in 1901 and then by HOTELLING in 1933 .Given a collection of n by m pixel training.

Images represented as a vector of size  $m \times n$ , basis vectors spanning an optimal subspace are determined such that the mean square error between the projection of the training images onto this subspace and the original images is minimized. They call the set of optimal basis vectors Eigen pictures since these are simply the eigen vectors of the covariance matrix computed from the vectorized face images in the training set. Experiments with a set of 100 images show that a face image of  $91 \times 50$  pixels can be effectively encoded using only 50 Eigen pictures.

A reasonable likeness (i.e. capturing 95 percent of the variance).

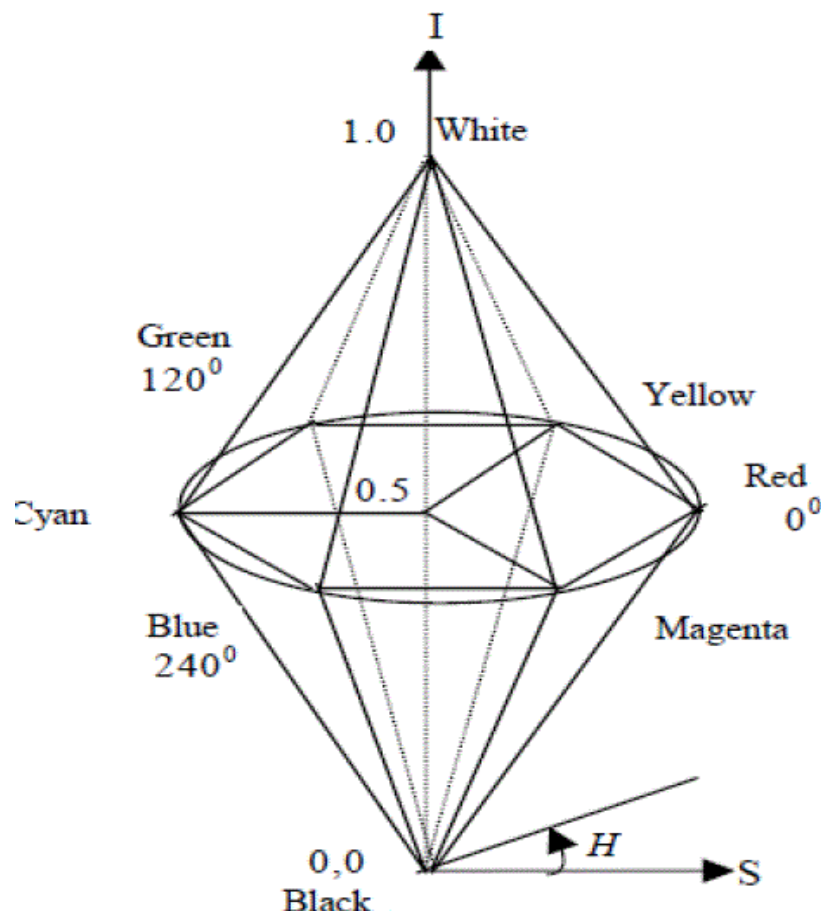

### Figure 3.3 – Double Cone Model for Color System

### **3.7 Statistical Approach**

Support Vector Machine (SVM):

SVMs were first introduced by Osuna et al. for face detection. SVMs work as a new paradigm to train polynomial function, neural networks, or radial basis function (RBF) classifiers. SVMs work on induction principle, called structural risk minimization, which targets to minimize an upper bound on the expected generalization error. An SVM classifier is a linear classifier where the separating hyper plane is chosen to minimize the expected classification error of the unseen test patterns. In Osuna et al. developed an efficient method to train an SVM for large scale problems, and applied it to face detection. Based on two test sets of 10,000,000 test patterns of 19 X 19 pixels, their system has slightly lower error rates and runs approximately 30 times faster than the system by Sung and Poggio . SVMs have also been used to detect faces and pedestrians in the wavelet domain.

## Chapter 4

# DIGITAL IMAGE PROCESSING

### 4.1 Digital Image Processing

**Interest in digital image processing methods stems from two principal application areas:**

1. Improvement of pictorial information for human interpretation
2. Processing of scene data for autonomous machine perception

In this second application area, interest focuses on procedures for extracting image information in a form suitable for computer processing.

Examples includes automatic character recognition, industrial machine vision for product assembly and inspection, military recognizance, automatic processing of fingerprints etc.

#### **Image:**

An image refers a 2D light intensity function  $f(x, y)$ , where  $(x, y)$  denotes spatial coordinates and the value of  $f$  at any point  $(x, y)$  is proportional to the brightness or gray levels of the image at that point. A digital image is an image  $f(x, y)$  that has been discretized both in spatial coordinates and brightness. The elements of such a digital array are called image elements or pixels.

#### **A simple image model:**

To be suitable for computer processing, an image  $f(x, y)$  must be digitalized both spatially and in amplitude. Digitization of the spatial coordinates  $(x, y)$  is called image sampling. Amplitude digitization is called gray-level quantization. The storage and processing requirements increase rapidly with the spatial resolution and the number of gray levels.

Example: A 256 gray-level image of size 256x256 occupies 64k bytes of memory.

Types of image processing


- Low level processing
- Medium level processing
- High level processing

Low level processing means performing basic operations on images such as reading an image, resize, rotate, image rotate, RGB to gray level conversion, histogram equalization etc. The output image obtained after low level processing is raw image. Medium level processing means extracting regions of interest from output of low level processed image. Medium level processing deals with identification of boundaries i.e. edges. This process is called segmentation. High level processing deals with adding of artificial intelligence to medium level processed signal.

## 4.2 Fundamental Steps Image Processing


**Fundamental steps in image processing are:**

1. Image acquisition: to acquire a digital image
2. Image pre-processing: to improve the image in ways that increases the chances for success of the other processes.
3. Image segmentation: to partition an input image into its constituent parts of objects.
4. Image segmentation: to convert the input data to a form suitable for computer processing.
5. Image description: to extract the features that result in some quantitative information of interest of features that are basic for differentiating one class of objects from another.
6. Image recognition: to assign a label to an object based on the information provided by its description.

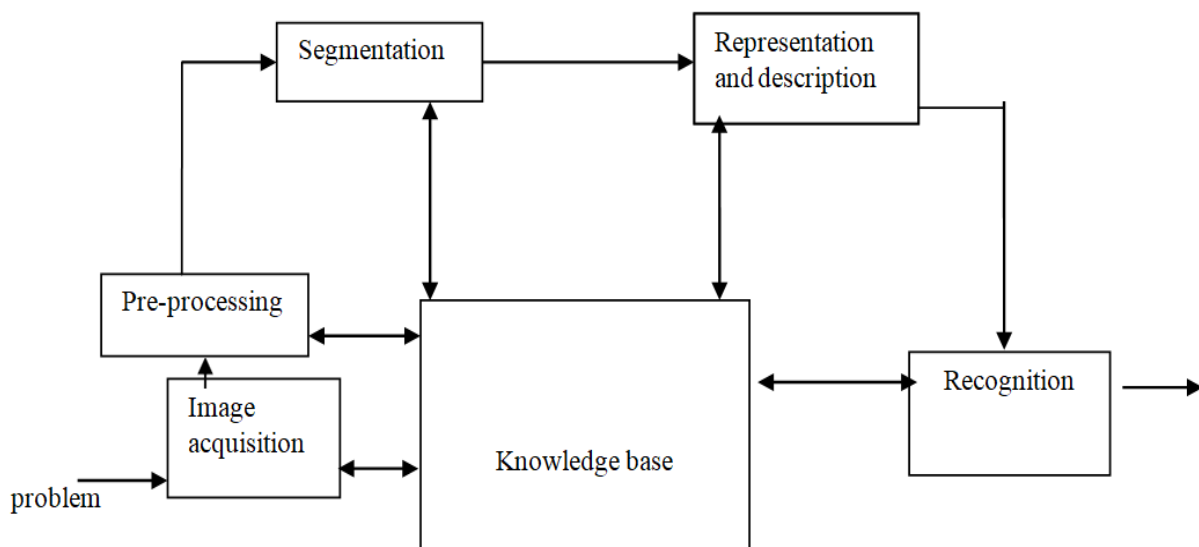

### 4.3 Elements of Digital Image Processing Systems

A digital image processing system contains the following blocks as shown in the figure:

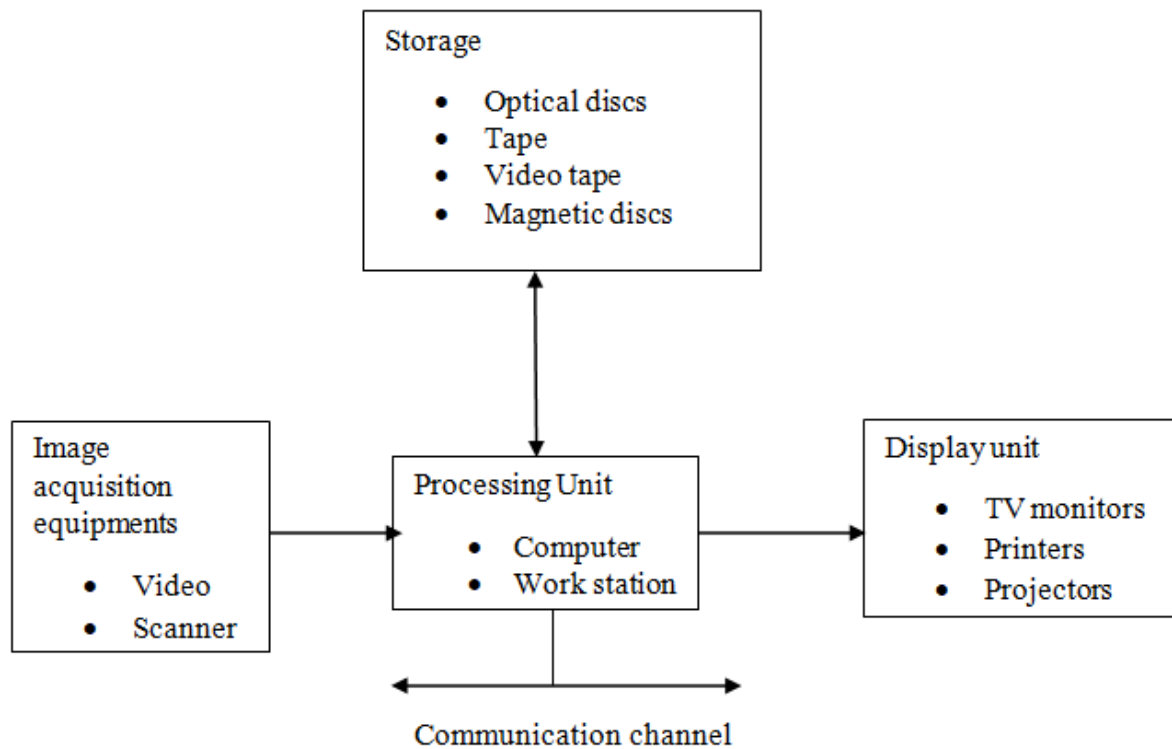

**Figure 3.4 – Fundamental Steps in Image Processing**

The basic operations performed in a digital image processing system include

1. Acquisition
2. Storage
3. Processing
4. Communication
5. Display

#### 4.3.1 A simple image formation model

Images are denoted by two-dimensional function  $f(x, y)$ .  $f(x, y)$  may be characterized by 2 components:

1. The amount of source illumination  $i(x, y)$  incident on the scene
2. The amount of illumination reflected  $r(x, y)$  by the objects of the scene
3.  $f(x, y) = i(x, y)r(x, y)$ , where  $0 < i(x, y) < \infty$  and  $0 < r(x, y) < 1$

Typical values of reflectance  $r(x, y)$ :

- for black velvet
  - 0.65 for stainless steel
  - 0.8 for flat white wall paint
  - 0.9 for silver-plated metal
  - 0.93 for snow
- Example of typical ranges of illumination  $i(x, y)$  for visible light (average values)
- Sun on a clear day:  $\sim 90,000 \text{ lm/m}^2$ , down to  $10,000 \text{ lm/m}^2$  on a cloudy day
  - Full moon on a clear evening:  $\sim 0.1 \text{ lm/m}^2$
  - Typical illumination level in a commercial office.  $\sim 1000 \text{ lm/m}^2$

Image Formats (supported by MATLAB Image Processing Toolbox):

Format name	Full name	Description	Recognized extensions
TIFF	Tagged Image File Format	A flexible file format supporting a variety image compression standards including JPEG	.tif, .tiff
JPEG	Joint Photographic Experts Group	A standard for compression of images of photographic quality	.jpg, .jpeg
GIF	Graphics Interchange Format	Frequently used to make small animations on the internet	.gif
BMP	Windows Bitmap	Format used mainly for simple uncompressed images	.bmp
PNG	Portable Network Graphics	Compresses full color images with transparency (up to 48bits/p)	.png

**Table 3.1 – Image Formats Supported by Matlab**



## Chapter 5

# MATLAB

### 5.1 Introduction

The name MATLAB stands for MATrix LABoratory. MATLAB was written originally to provide easy access to matrix software developed by the LINPACK (linear system package) and EISPACK (Eigen system package) projects. MATLAB is a high-performance language for technical computing. It integrates computation, visualization, and programming environment. MATLAB has many advantages compared to conventional computer languages (e.g., C, FORTRAN) for solving technical problems. MATLAB is an interactive system whose basic data element is an array that does not require dimensioning. Specific applications are collected in packages referred to as toolbox. There are tool boxes for signal processing, symbolic computation, control theory, simulation, optimization, and several other fields of applied science and engineering.

#### A simple image model:

To be suitable for computer processing, an image  $f(x, y)$  must be digitalized both spatially and in amplitude. Digitization of the spatial coordinates  $(x, y)$  is called image sampling. Amplitude digitization is called gray-level quantization. The storage and processing requirements increase rapidly with the spatial resolution and the number of gray levels.

### 5.1 Introduction

The name MATLAB stands for MATrix LABoratory. MATLAB was written originally to provide easy access to matrix software developed by the LINPACK (linear system package) and EISPACK (Eigen system package) projects. MATLAB is a high-performance language for technical computing. It integrates computation, visualization, and programming environment. MATLAB has many advantages compared to conventional computer languages (e.g., C, FORTRAN) for solving technical problems. MATLAB is an interactive system whose basic data element is an array that does not require dimensioning. Specific applications are collected in packages referred to as toolbox. There are tool boxes for signal processing, symbolic computation, control theory, simulation, optimization, and several other fields of applied science and engineering.

## 5.2 Matlab's Power of Computational Mathematics

MATLAB is used in every facet of computational mathematics. Following are some commonly used mathematical calculations where it is used most commonly:

- Dealing with Matrices and Arrays
- 2-D and 3-D Plotting and graphics
- Linear Algebra
- Algebraic Equations
- Non-linear Functions
- Statistics
- Data Analysis
- Calculus and Differential Equations Numerical Calculations
- Integration
- Transforms
- Curve Fitting
- Various other special functions

## 5.3 Features of Matlab

**Following are the basic features of MATLAB:**

It is a high-level language for numerical computation, visualization and application development.

- It also provides an interactive environment for iterative exploration, design and problem solving.
- It provides vast library of mathematical functions for linear algebra, statistics, Fourier analysis, filtering, optimization, numerical integration and solving ordinary differential equations.
- It provides built-in graphics for visualizing data and tools for creating custom plots.
- MATLAB's programming interface gives development tools for improving code quality, maintainability, and maximizing performance.
- It provides tools for building applications with custom graphical interfaces.
- It provides functions for integrating MATLAB based algorithms with external applications and languages such as C, Java, .NET and Microsoft Excel.

## 5.4 Uses of Matlab

MATLAB is widely used as a computational tool in science and engineering encompassing the fields of physics, chemistry and math. It is used in a range of applications including:

- signal processing and Communications
- image and video Processing
- control systems
- test and measurement
- computational finance
- computational biology

## 5.5 Understanding the Matlab Environment

MATLAB development IDE can be launched from the icon created on the desktop. The main working window in MATLAB is called the desktop. When MATLAB is started, the desktop appears in its default layout.

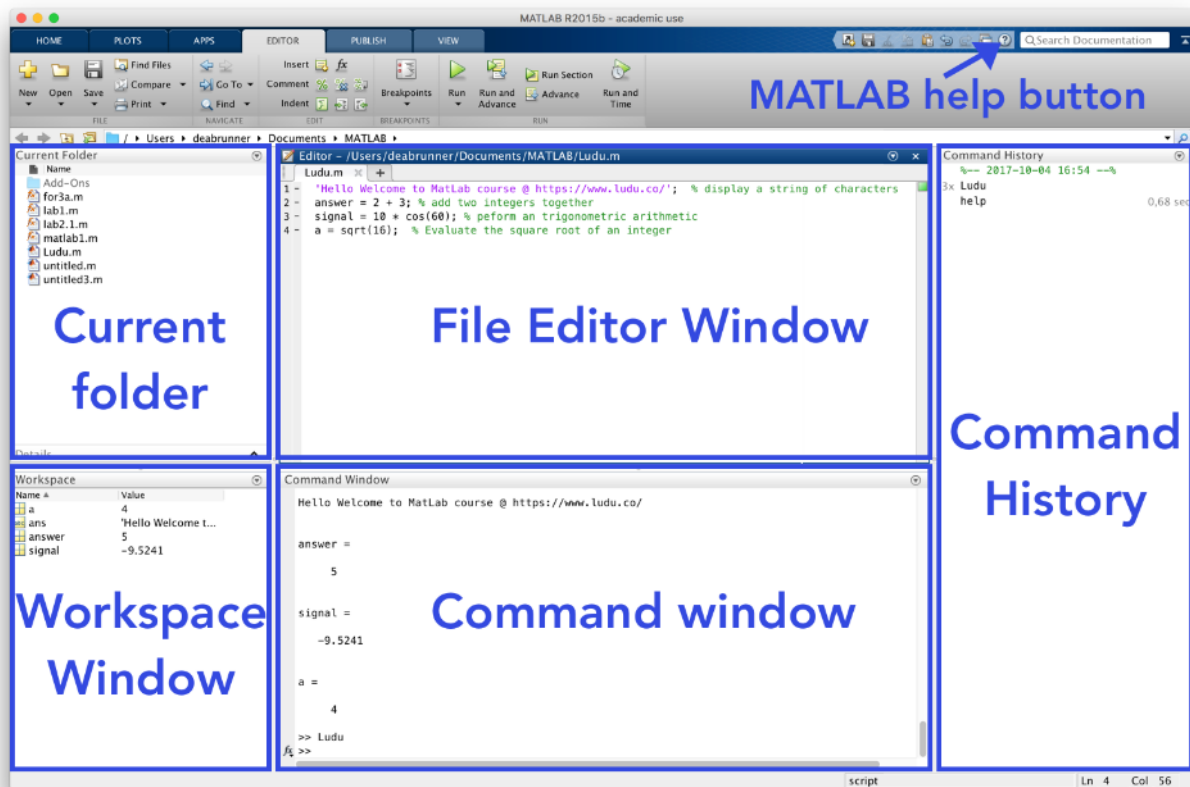


Figure 4.1 – Matlab Online Environment

**Current Folder** - This panel allows you to access the project folders and files.

**File Editor Window** - This panel allows you to write code.

**Command Window** - This is the main area where commands can be entered at the command line. It is indicated by the command prompt (`>>`).

**Workspace window** - The workspace shows all the variables created and/or imported from files.

**Command History** - This panel shows or rerun commands that are entered at the command line.

## 5.6 Commonly Used Operators and Spatial Characters

MATLAB supports the following commonly used operators and special characters:

Operator	Purpose
+	Plus; addition operator.
-	Minus, subtraction operator.
*	Scalar and matrix multiplication operator.
.*	Array and multiplication operator.
^	Scalar and matrix exponentiation operator.
.^	Array exponentiation operator.
\	Left-division operator.
/	Right-division operator.
.\	Array left-division operator.
./	Array right-division operator.

Figure 5.1 – Matlab Operators and Special Character

## 5.7 Commands

MATLAB is an interactive program for numerical computation and data visualization. You can enter a command by typing it at the MATLAB prompt '>>' on the Command Window.

### 5.6.1 Commands for Managing a Session

MATLAB provides various commands for managing a session. The following table provides all

Commands	Purpose
Cle	Clear command window
Clear	Removes variables from memory
Exist	Checks for existence of file or variable.

Global	Declare variables to be global.
Help	Searches for help topics.
Look for	Searches help entries for a keyword.
Quit	Stops MATLAB.
Who	Lists current variable.
Whos	Lists current variables (Long Display).

Table 5.2 – Commands for Managing a Session

## 5.8 Input and Output Command

MATLAB provides the following input and output related commands:

Command	Purpose
Disp	Displays content for an array or string.
Fscanf	Read formatted data from a file.
Format	Control screen-display format.
Fprintf	Performs formatted write to screen or a file.
Input	Displays prompts and waits for input.
;	Suppresses screen printing.

Table 5.3 – Input and Output Commands

## 5.9 .M Files

MATLAB allows writing two kinds of program files:

### Scripts:

Script files are program files with .m extension. In these files, you write series of commands, which you want to execute together. Scripts do not accept inputs and do not return any outputs. They operate on data in the workspace.

## Functions:

Functions files are also program files with .m extension. Functions can accept inputs and return outputs. Internal variables are local to the function.

## Creating and Running Script File:

To create scripts files, you need to use a text editor. You can open the MATLAB editor in two ways:

- Using the command prompt
- Using the IDE

You can directly type edit and then the filename (with .m extension).

## 5.10 Data Types Available in Matlab

MATLAB provides 15 fundamental data types. Every data type stores data that is in the form of a matrix or array. The size of this matrix or array is a minimum of 0-by-0 and this can grow up to a matrix or array of any size.

The following table shows the most commonly used data types in MATLAB:

Datatype	Description
Int8	8-bit signed integer
Unit8	8-bit unsigned integer
Int16	16-bit signed integer
Unit16	16-bit unsigned integer
Int32	32-bit signed integer
unit32	32-bit unsigned integer
Int64	64-bit signed integer
Unit64	64-bit unsigned integer
Single	Single precision numerical data

Double	Double precision numerical data
Logical	Logical variables are 1or0,represent true & false respectively
Char	Character data(strings are stored as vector of characters)
Cell array	Array of indexed cells, each capable of storing array of a different dimension and data type
Structure	C-like structure each structure having named fields capable of storing an array of a different dimension and data type
Function handle	Pointer to a function
User classes	Object constructed from a user-defined class
Java classes	Object constructed from a java class

**Table 5.4 – Data Types in Matlab**

## Chapter 6


### FACE DETECTION

The problem of face recognition is all about face detection. This is a fact that seems quite bizarre to new researchers in this area. However, before face recognition is possible, one must be able to reliably find a face and its landmarks. This is essentially a segmentation problem and in practical systems, most of the effort goes into solving this task. In fact the actual recognition based on features extracted from these facial landmarks is only a minor last step.

There are two types of face detection problems:

1. Face detection in images
2. Real-time face detection

#### 6.1 Face Detection in Images

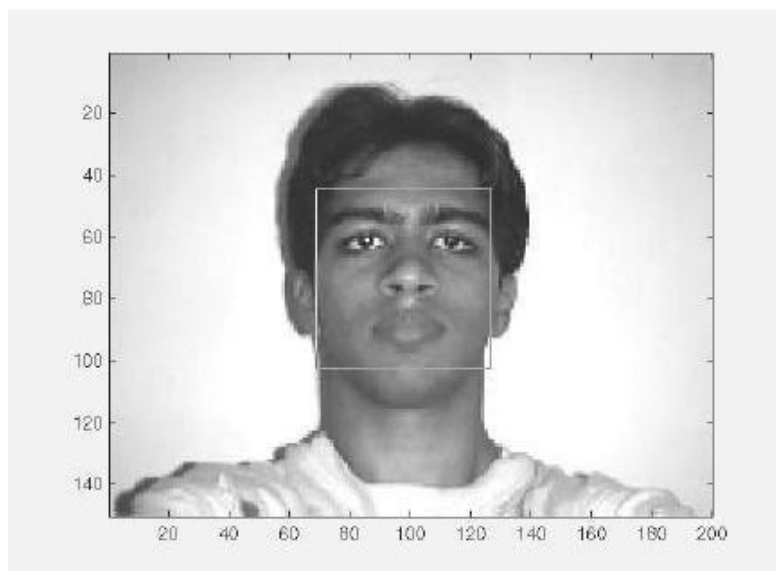

**Figure 6.1 – Successful Face Detection in an Image with a Frontal View of a Human Face**

The Most face detection systems attempt to extract a fraction of the whole face, thereby eliminating most of the background and other areas of an individual's head such as hair that are not necessary for the face recognition task. With static images, this is often done by running a across the image. The face detection system then judges if a face is present inside the window (Brunelli and Poggio, 1993). Unfortunately, with static images there is a very large search space of possible locations of a face in an image.



Most face detection systems use an example based learning approach to decide whether or not a face is present in the window at that given instant (Sung and Poggio,1994 and Sung,1995). A neural network or some other classifier is trained using supervised learning with 'face' and 'non- face' examples, thereby enabling it to classify an image (window in face detection system) as a 'face' or 'non-face'.. Unfortunately, while it is relatively easy to find face examples, how would one find a representative sample of images which represent non-faces (Rowley et al., 1996)? Therefore, face detection systems using example based learning need thousands of 'face' and 'non- face' images for effective training. Rowley, Baluja, and Kanade (Rowley et al.,1996) used 1025 face images and 8000 non-face images (generated from 146,212,178 sub-images) for their training set!

There is another technique for determining whether there is a face inside the face detection system's window - using Template Matching. The difference between a fixed target pattern (face) and the window is computed and thresholded. If the window contains a pattern which is close to the target pattern (face) then the window is judged as containing a face. An implementation of template matching called Correlation Templates uses a whole bank of fixed sized templates to detect facial features in an image (Bichsel, 1991 & Brunelli and Poggio, 1993). By using several templates of different (fixed) sizes, faces of different scales (sizes) are detected. The other implementation of template matching is using a deformable template (Yuille, 1992). Instead of using several fixed size templates, we use a deformable template (which is non-rigid) and thereby change the size of the template hoping to detect a face in an image.

A face detection scheme that is related to template matching is image invariants. Here the fact that the local ordinal structure of brightness distribution of a face remains largely unchanged under different illumination conditions (Sinha, 1994) is used to construct a spatial template of the face which closely corresponds to facial features. In other words, the average grey-scale intensities in human faces are used as a basis for face detection. For example, almost always an individual's eye region is darker than his forehead or nose. Therefore an image will match the template if it satisfies the 'darker than' and 'brighter than' relationships (Sung and Poggio, 1994).

## 6.2 Real-Time Face Detection

Real-time face detection involves detection of a face from a series of frames from a video- capturing device. While the hardware requirements for such a system are far more stringent, from a computer vision stand point, real-time face detection is actually a far simpler process than detecting a face in a static image. This is because unlike most of our surrounding environment, people are continually moving. We walk around, blink, fidget, wave our hands about, etc.



**Figure 6.2 – Frames from Camera**




**Figure 6.3 – Spatio-Temporally Filtered Image**

Since in real-time face detection, the system is presented with a series of frames in which to detect a face, by using spatio-temporal filtering (finding the difference between subsequent frames), the area of the frame that has changed can be identified and the individual detected (Wang and Adelson, 1994 and Adelson and Bergen 1986). Further more as seen in Figure exact face locations can be easily identified by using a few simple rules, such as,

1. the head is the small blob above a larger blob -the body
2. head motion must be reasonably slow and contiguous -heads won't jump around erratically (Turk and Pentland 1991a, 1991b).


Real-time face detection has therefore become a relatively simple problem and is possible even in unstructured and uncontrolled environments using these very simple image processing techniques and reasoning rules.

### 6.3 Face Detection Process

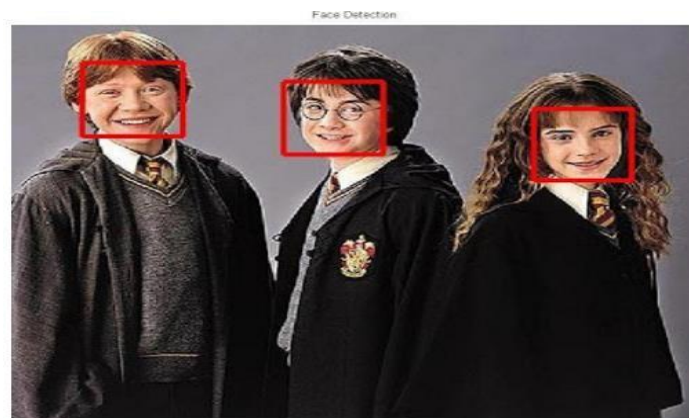


**Figure 6.4 – Face Detection**

It is process of identifying different parts of human faces like eyes, nose, mouth, etc. this process can be achieved by using MATLAB code In this project the author will attempt to detect faces in still images by using image invariants. To do this it would be useful to study the grey- scale intensity distribution of an average human face. The following 'average human face' was constructed from a sample of 30 frontal view human faces, of which 12 were from females and 18 from males. A suitably scaled color map has been used to highlight grey-scale intensity differences.

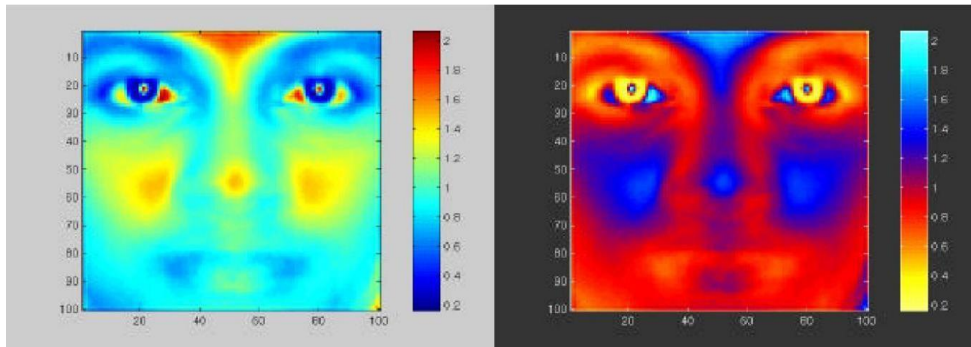


**Figure 6.5 – Average Human Face in Colormap**

The grey-scale differences, which are invariant across all the sample faces are strikingly apparent. The eye-eyebrow area seem to always contain dark intensity (low) gray-levels while nose forehead and cheeks contain bright intensity (high) grey-levels. After a great deal of experimentation, the researcher found that the following areas of the human face were suitable for a face detection system based on image invariants and a deformable template.

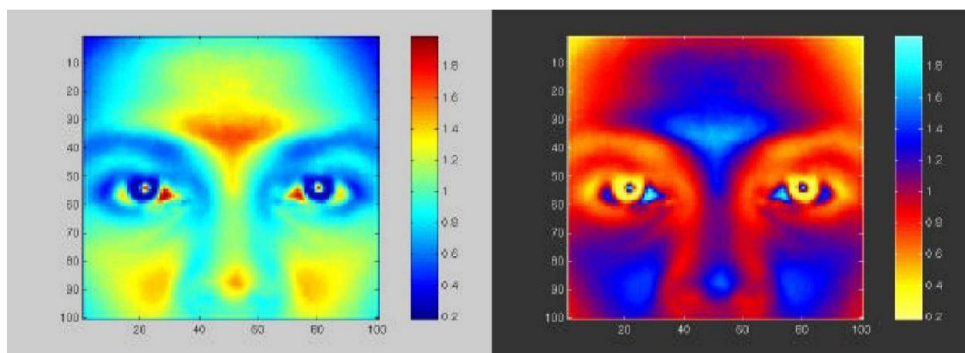


**Figure 6.6 – Area Chosen for Face Detection**

The above facial area performs well as a basis for a face template, probably because of the clear divisions of the bright intensity invariant area by the dark intensity invariant regions. Once this pixel area is located by the face detection system, any particular area required can be segmented based on the proportions of the average human face. After studying the above images it was subjectively decided by the author to use the following as a basis for dark intensity sensitive and bright intensity sensitive templates. Once these are located in a subject's face, a pixel area 33.3% (of the width of the square window) below this

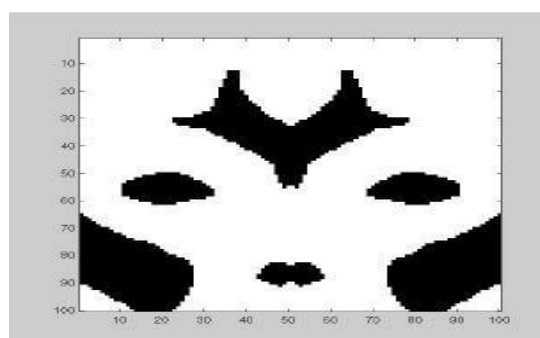

**Figure 6.7 – Basis for a bright intensity invariant sensitive template**


Note the slight differences which were made to the bright intensity invariant sensitive template (compare Figures 3.4 and 3.2) which were needed because of the pre-processing done by the system to overcome irregular lighting (chapter six). Now that a suitable dark and bright intensity invariant templates have been decided on, it is necessary to find a way of using these to make 2 A-units for a perception, i.e. a computational model is needed to assign neurons to the distributions displayed.

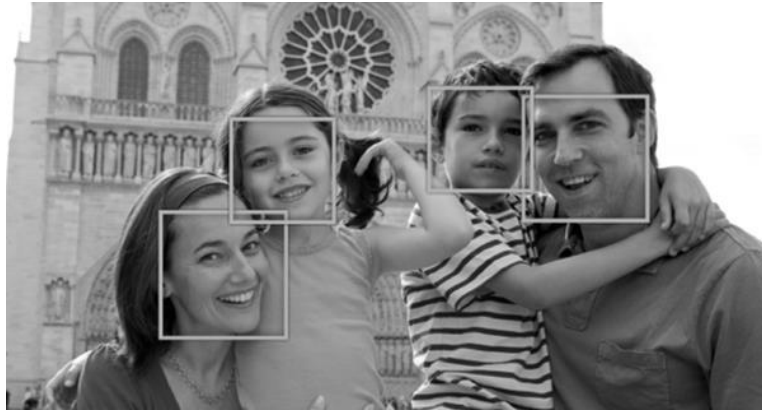

**Figure 6.8 – Scanned Image Detection**


- San window over image
- Classify window as either
  - Face
  - Non - Face

## 6.4 Face Detection Algorithm

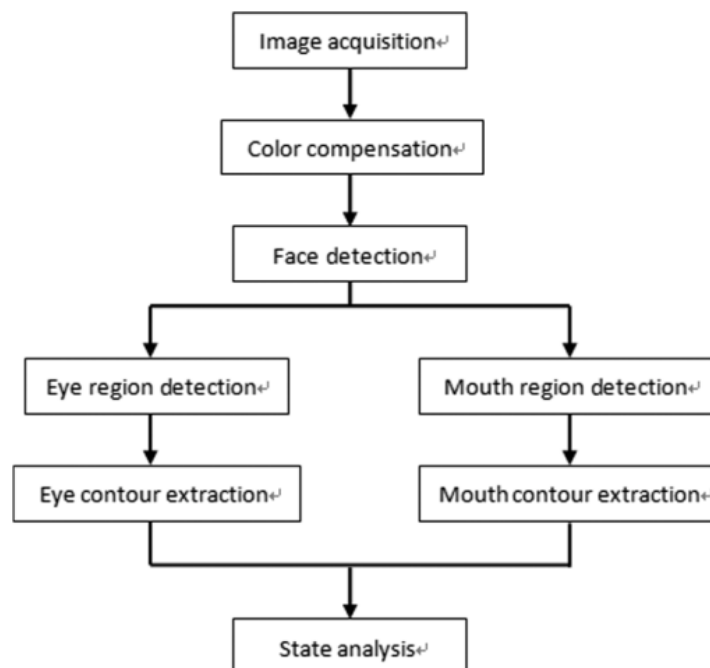

**Figure 6.9 – Face Detection Algorithm**



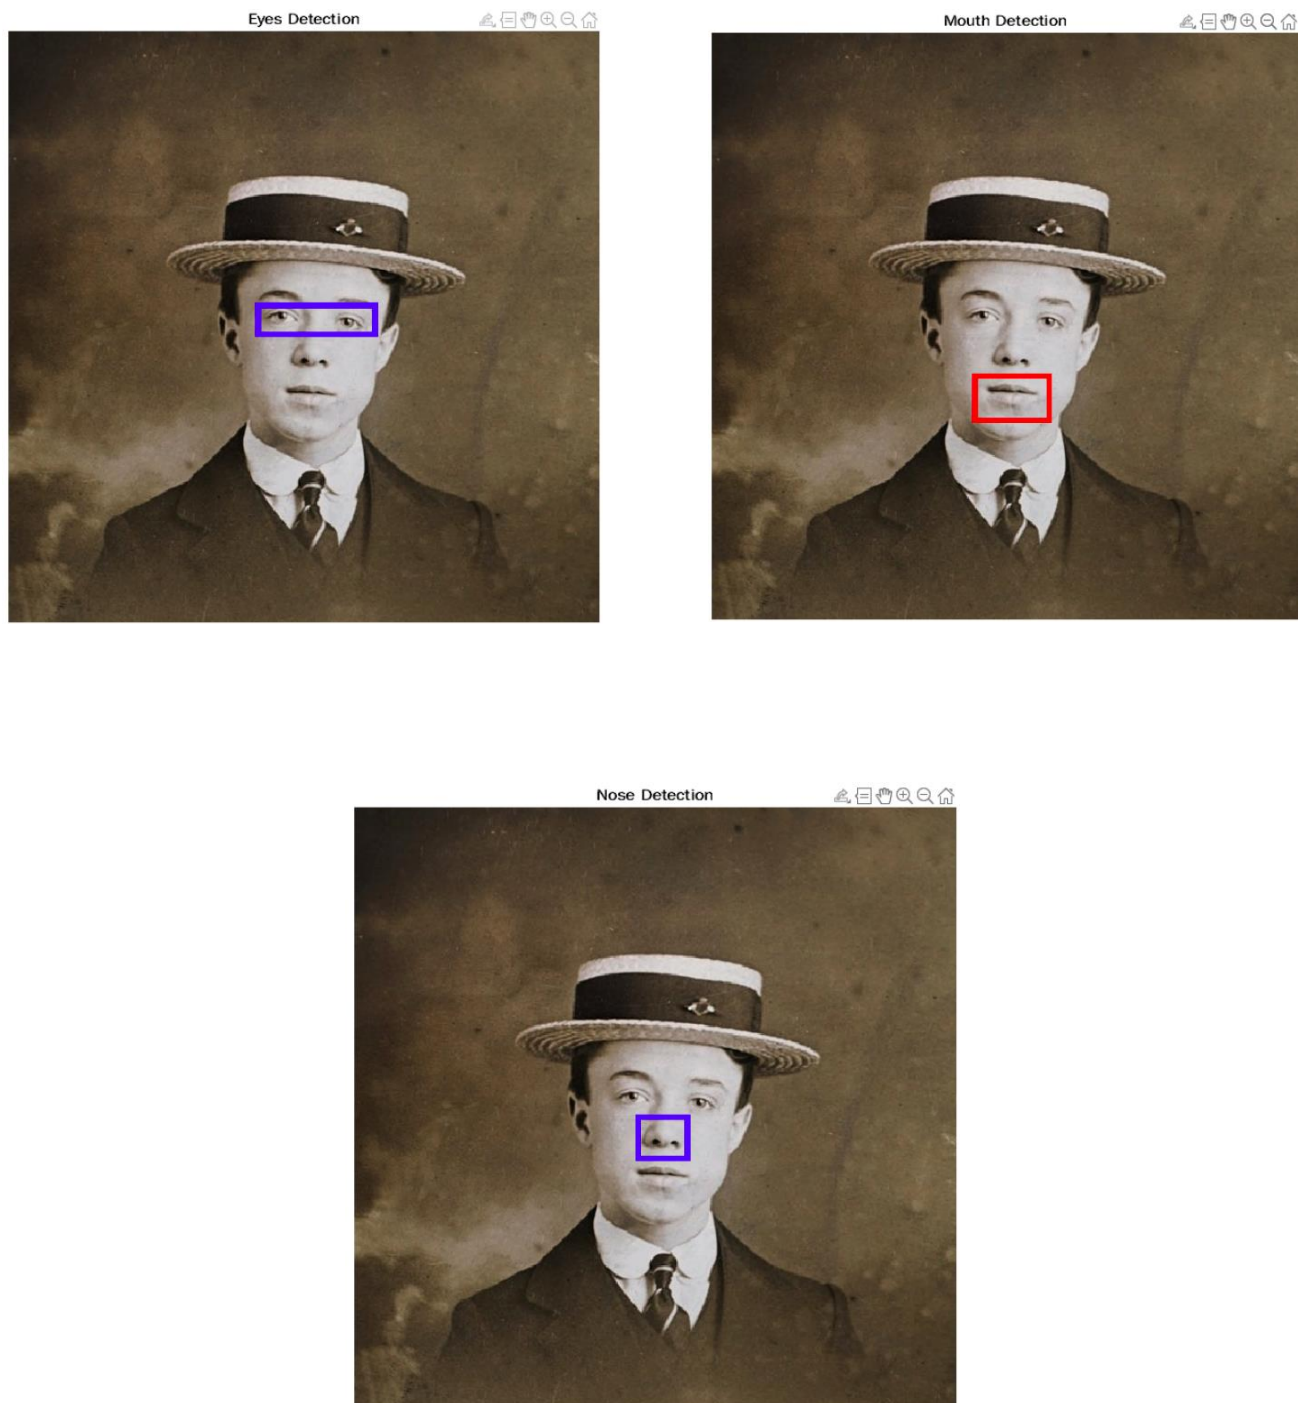

**Figure 6.10 – Eyes, Mouth and Nose Detection**

## Chapter 7


# FACE RECOGNITION

Over the last few decades many techniques have been proposed for face recognition. Many of the techniques proposed during the early stages of computer vision cannot be considered successful, but almost all of the recent approaches to the face recognition problem have been creditable. According to the research by Brunelli and Poggio (1993) all approaches to human face recognition can be divided into two strategies:

1. Geometrical features
2. Template matching.

### 7.1 Face Recognition Using Geometrical Features

This technique involves computation of a set of geometrical features such as nose width and length, mouth position and chin shape, etc. from the picture of the face we want to recognize. This set of features is then matched with the features of known individuals. A suitable metric such as Euclidean distance (finding the closest vector) can be used to find the closest match. Most pioneering work in face recognition was done using geometric features (Kanade, 1973), although Craw et al. (1987) did relatively recent work in this area.

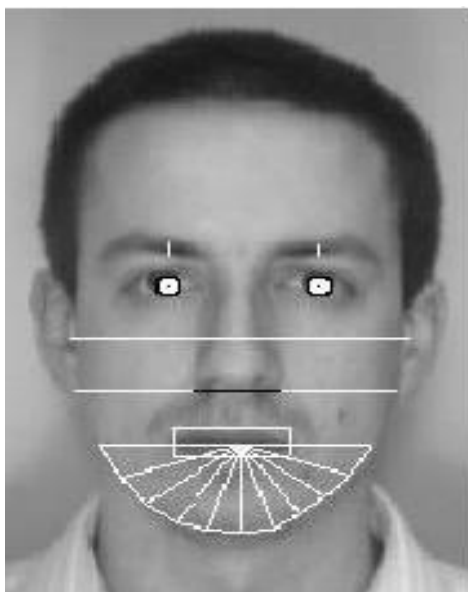

**Figure 7.1 – Geometrical features (white) which could be used for face recognition**

The advantage of using geometrical features as a basis for face recognition is that recognition is possible even at very low resolutions and with noisy images (images with many disorderly pixel intensities). Although the face cannot be viewed in detail its overall geometrical configuration can be extracted for face recognition. The technique's main disadvantage is that automated extraction of the facial geometrical features is very hard. Automated geometrical feature extraction based recognition is also very sensitive to the scaling and rotation of a face in the image plane (Brunelli and Poggio, 1993). This is apparent when we examine Kanade's(1973) results where he reported a recognition rate of between 45-75 % with a database of only 20 people. However if these features are extracted manually as in Goldstein et al. (1971), and Kaya and Kobayashi (1972) satisfactory results may be obtained.

### 7.1.1 Face recognition using template matching

This is similar the template matching technique used in face detection, except here we are not trying to classify an image as a 'face' or 'non-face' but are trying to recognize a face.



**Figure 7.2 – Face recognition using template matching**

Whole face, eyes, nose and mouth regions which could be used in a template matching strategy. The basis of the template matching strategy is to extract whole facial regions (matrix of pixels) and compare these with the stored images of known individuals. Once again Euclidean distance can be used to find the closest match. The simple technique of comparing grey-scale intensity values for face recognition was used by Baron (1981). However there are far more sophisticated methods of template matching for face recognition. These involve extensive pre- processing and transformation of the extracted grey-level intensity values. For example, Turk and Pentland (1991a) used Principal Component Analysis, sometimes known as the eigenfaces approach, to pre-process the gray-levels and Wiskott et al. (1997) used Elastic Graphs encoded using Gabor filters to pre-process the extracted regions. An investigation of geometrical features versus template matching for face recognition by Brunelli and Poggio (1993) came to the conclusion that although a feature based strategy may offer higher recognition speed and smaller memory requirements, template based techniques offer superior recognition accuracy.

## 7.2 Brief outline of the Implemented System

Fully automated face detection of frontal view faces is implemented using a deformable template algorithm relying on the image invariants of human faces. This was chosen because a similar neural-network based face detection model would have needed far too much training data to be implemented and would have used a great deal of computing time. The main difficulties in implementing a deformable template based technique were the creation of the bright and dark intensity sensitive templates and designing an efficient implementation of the detection algorithm.

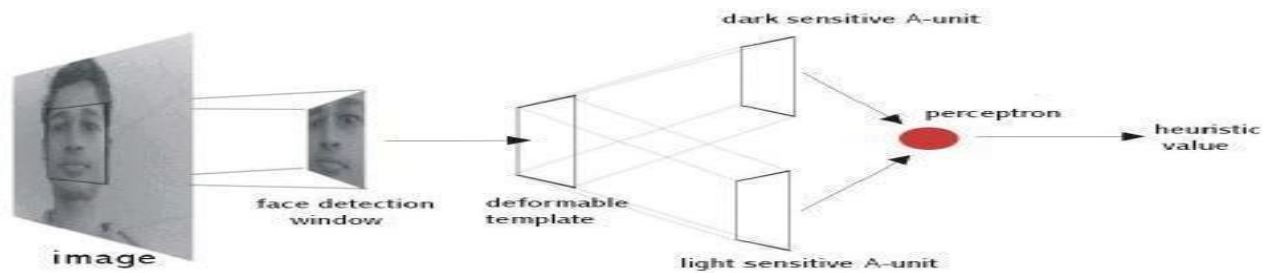


Figure 7.3 – Implemented fully automated frontal view face detection model

A manual face detection system was realised by measuring the facial proportions of the average face, calculated from 30 test subjects. To detect a face, a human operator would identify the locations of the subject's eyes in an image and using the proportions of the average face, the system would segment an area from the image

A template matching based technique was implemented for face recognition. This was because of its increased recognition accuracy when compared to geometrical features based techniques and the fact that an automated geometrical feature based technique would have required complex feature detection pre-processing.

Of the many possible template matching techniques, Principal Component Analysis was chosen because it has proved to be a highly robust in pattern recognition tasks and because it is relatively simple to implement. The author would also liked to have implemented a technique based on Elastic Graphs but could not find sufficient literature about the model to implement such a system during the limited time available for this project.

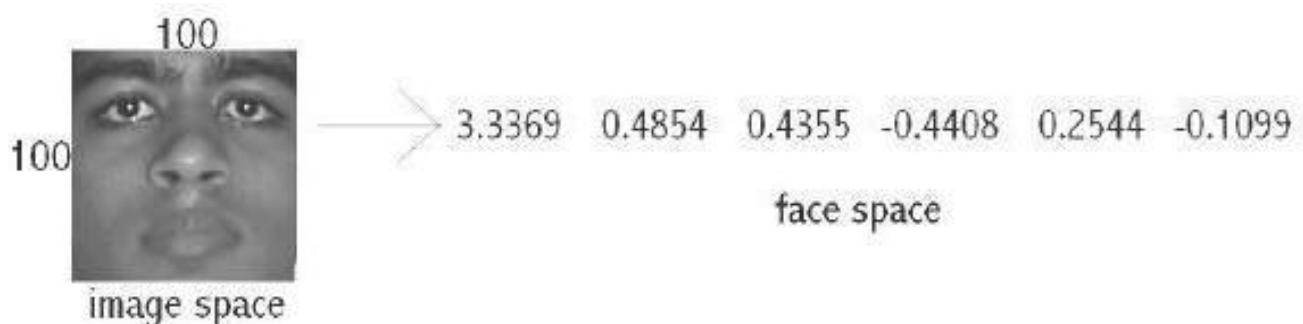


Figure 7.4 – Principal Component Analysis transform from 'image space' to 'face space'



Using Principal Component Analysis, the segmented frontal view face image is transformed from what is sometimes called 'image space' to 'face space'. All faces in the face database are transformed into face space. Then face recognition is achieved by transforming any given test image into face space and comparing it with the training set vectors. The closest matching training set vector should belong to the same individual as the test image. Principal Component Analysis is of special interest because the transformation to face space is based on the variation of human faces (in the training set). The values of the 'face space' vector correspond to the amount certain 'variations' are present in the test image. Face recognition and detection system is a pattern recognition approach for personal identification purposes in addition to other biometric approaches such as fingerprint recognition, signature, retina and so forth. Face is the most common biometric used by humans applications ranges from static, mug-shot verification in a cluttered background.

## 7.3 Face Recognition Difficulties

1. Identify similar faces (inter-class similarity)
2. Accommodate intra-class variability due to
  - a. Head pose
  - b. Illumination conditions
  - c. Expressions
  - d. Facial accessories
  - e. Aging effects
3. Cartoon faces

### 7.3.1 Inter - class Similarity

- Different persons may have very similar appearance



Figure 7.5 – Face recognition in twins

Face recognition and detection system is a pattern recognition approach for personal identification purposes in addition to other biometric approaches such as fingerprint recognition, signature, retina and so forth. The variability in the faces, the images are processed before they are fed into the network. All positive examples that is the face images are obtained by cropping images with frontal faces to include only the front view. All the cropped images are then corrected for lighting through standard algorithms.

### **7.3.2 Inter - class Variability**


Faces with intra-subject variations in pose, illumination, expression, accessories, color, occlusions, and brightness

## **7.4 Principal Component Analysis (PCA)**

Principal Component Analysis (or Karhunen-Loeve expansion) is a suitable strategy for face recognition because it identifies variability between human faces, which may not be immediately obvious. Principal Component Analysis (hereafter PCA) does not attempt to categorize faces using familiar geometrical differences, such as nose length or eyebrow width. Instead, a set of human faces is analyzed using PCA to determine which 'variables' account for the variance of faces. In face recognition, these variables are called eigen faces because when plotted they display an eerie resemblance to human faces. Although PCA is used extensively in statistical analysis, the pattern recognition community started to use PCA for classification only relatively recently. As described by Johnson and Wichern (1992), 'principal component analysis is concerned with explaining the variance- covariance structure through a few linear combinations of the original variables.' Perhaps PCA's greatest strengths are in its ability for data reduction and interpretation. For example a 100x100 pixel area containing a face can be very accurately represented by just 40 eigen values. Each eigen value describes the magnitude of each eigen face in each image. Furthermore, all interpretation (i.e. recognition) operations can now be done using just the 40 eigen values to represent a face instead of the manipulating the 10000 values contained in a 100x100 image. Not only is this computationally less demanding but the fact that the recognition information of several thousand.


## **7.5 Understanding Eigenfaces**

Any grey scale face image  $I(x,y)$  consisting of a  $N \times N$  array of intensity values may also be considered as a vector of  $N^2$ . For example, a typical 100x100 image used in this thesis will have to be transformed into a 10000 dimension vector.

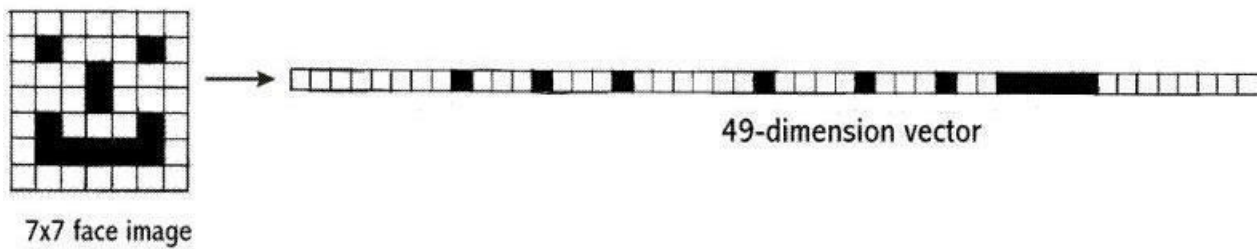


**Figure 7.6 – A 7x7 face image transformed into a 49 dimension vector**

This vector can also be regarded as a point in 10000 dimension space. Therefore, all the images of subjects' whose faces are to be recognized can be regarded as points in 10000 dimensions space. Face recognition using these images is doomed to failure because all human face images are quite similar to one another so all associated vectors are very close to each other in the 10000 dimension space.

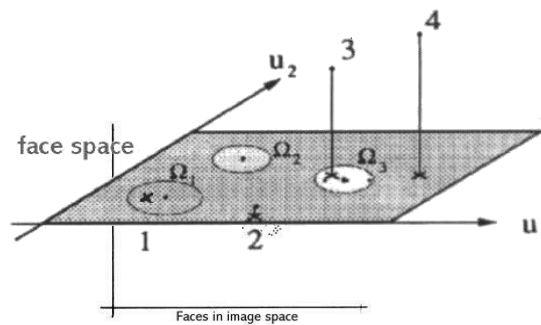

**Figure 7.7 – Eigen Vector in PCA Algorithm**

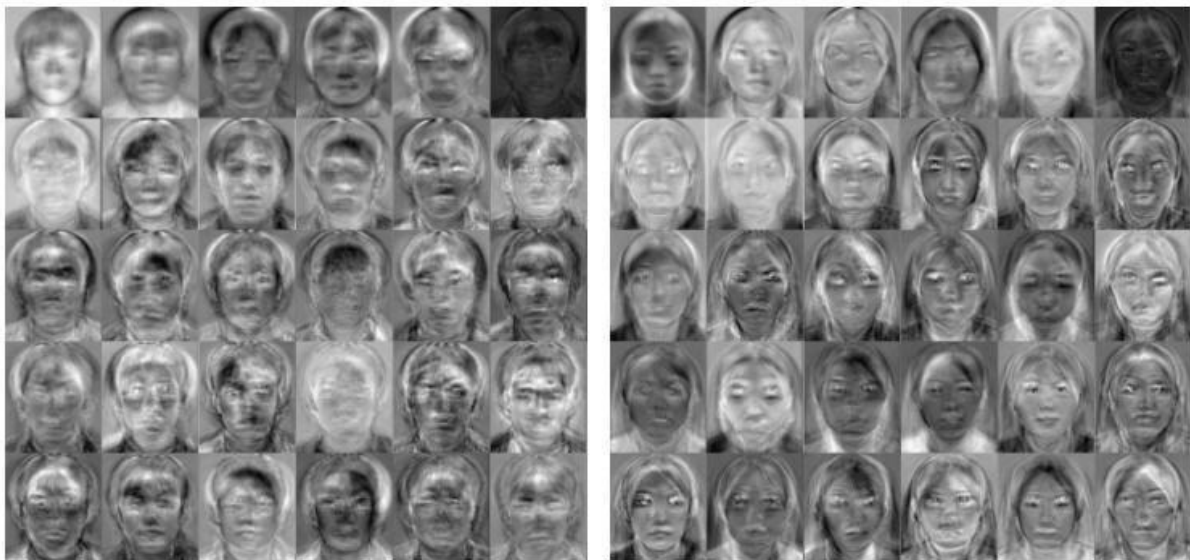

**Figure 7.8 – Example of Eigenfaces in PCA**

The transformation of a face from image space (I) to face space (f) involves just a simple matrix multiplication. If the average face image is A and U contains the (previously calculated) eigenfaces,

$$f = U * (I - A)$$

This is done to all the face images in the face database (database with known faces) and to the image (face of the subject) which must be recognized. The possible results when projecting a face into face space are given in the following figure.

There are four possibilities:

1. Projected image is a face and is transformed near a face in the face database
2. Projected image is a face and is not transformed near a face in the face database
3. Projected image is not a face and is transformed near a face in the face database
4. Projected image is not a face and is not transformed near a face in the face database

While it is possible to find the closest known face to the transformed image face by calculating the Euclidean distance to the other vectors, how does one know whether the image that is being transformed actually contains a face? Since PCA is a many-to-one transform, several vectors in the image space (images) will map to a point in face space (the problem is that even non-face images may transform near a known face image's faces space vector). Turk and Pentland (1991a), described a simple way of checking whether an image is actually of a face. This is by transforming an image into face space and then transforming it back (reconstructing) into image space. Using the previous notation,

$$I' = U^T * U * (I - A)$$

With these calculations it is possible to verify that an image is of a face and recognise that face. O'Toole et al. (1993) did some interesting work on the importance of eigen faces with large and small eigenvalues. They showed that the eigen vectors with larger eigenvalues convey information relative to the basic shape and structure of the faces. This kind of information is most useful in categorising faces according to sex, race etc. Eigen vectors with smaller eigenvalues tend to capture information that is specific to single or small subsets of learned faces and are useful for distinguishing a particular face from any other face. Turk and Pentland (1991a) showed that about 40 eigen faces were sufficient for a very good description of human faces since the reconstructed image have only about 2% RMS. pixel-by-pixel errors.

## 7.6 Pose Invariant Face Recognition

Extending the frontal view face recognition system to a pose-invariant recognition system is quite simple if one of the proposed specifications of the face recognition system is relaxed. Successful pose-invariant recognition will be possible if many images of a known individual are in the face database. Nine images from each known individual can be taken as shown below. Then if an image of the same individual is submitted within a 300 angle from the frontal view he or she can be identified.

Nine images in face database from a single known individual



**Figure 7.9 – Sample Database**

Unknown image from same individual to be identified



**Figure 7.10 – Pose Invariant Face Recognition**

Pose invariant face recognition highlights the generalization ability of PCA. For example, when an individual's frontal view and 300 left view known, even the individual's 150 left view can be recognized



## Chapter 8

# RESULTS AND ANALYSIS

### Loading the Database:

25	26	24	22	51	32	18	21	77	71	77	91	93	89	93	92	87	89	29	21	18	46	30	27	49	22	35	26
27	30	23	22	54	32	21	18	78	75	71	87	89	86	87	93	86	88	28	23	18	69	27	28	56	29	33	28
24	30	24	25	38	25	18	18	71	68	69	86	89	94	91	89	87	86	28	23	11	79	31	24	57	29	27	23
21	30	21	24	38	18	20	20	72	60	68	87	86	92	89	85	80	88	21	11	9	74	29	27	33	22	24	28
24	29	22	22	34	28	24	21	69	60	64	86	82	88	81	88	84	87	9	16	12	70	26	34	16	25	30	37
29	27	18	19	34	32	23	18	67	58	61	81	85	82	84	93	82	87	14	21	20	75	24	32	10	25	28	42
22	29	26	21	38	31	21	24	70	63	61	78	87	83	82	82	79	81	15	24	23	75	23	31	13	33	30	42
27	29	17	19	34	29	27	23	63	58	61	81	85	89	80	80	79	81	18	21	20	62	25	37	21	34	28	41
27	35	24	24	34	29	19	20	59	51	52	81	81	84	80	79	73	82	15	16	19	59	34	37	25	35	29	32
25	33	28	26	37	27	17	21	60	54	56	79	82	82	80	76	76	72	17	20	19	60	36	41	29	37	38	22
26	39	25	22	35	25	18	23	52	53	62	78	79	79	80	76	76	74	20	15	22	57	33	31	21	40	39	23
23	44	20	26	40	15	23	23	54	46	54	79	80	77	79	77	71	74	24	20	25	39	24	33	23	37	44	17
20	47	25	23	30	16	21	24	56	43	53	78	75	74	77	74	70	75	23	21	23	31	18	33	31	34	50	21
16	41	21	22	26	17	22	25	53	45	46	75	76	76	77	73	75	70	24	20	17	52	20	37	32	39	49	25
18	39	18	22	31	22	18	20	55	43	47	73	76	74	74	75	74	72	18	21	19	53	23	33	47	37	51	26
19	38	18	22	31	18	19	24	49	44	45	71	72	76	72	71	78	73	15	17	20	61	23	34	43	34	52	27
20	36	15	18	24	15	18	24	51	39	55	73	76	78	71	70	73	75	19	21	16	67	19	32	49	29	50	33
17	32	14	16	25	14	17	20	44	41	58	73	84	73	73	74	74	74	17	23	16	63	22	29	49	28	51	31
18	32	19	14	27	16	14	24	52	39	55	72	83	75	72	71	74	74	15	20	12	62	17	28	46	24	51	28
17	36	16	16	27	19	18	29	62	36	57	70	86	72	74	69	66	73	19	26	18	68	16	26	42	22	42	29
21	29	15	16	30	17	17	29	57	36	60	86	76	72	70	70	70	91	15	20	24	55	16	24	28	18	35	28
32	29	16	14	31	16	19	22	62	45	63	84	85	77	74	68	82	85	11	25	30	51	20	22	12	19	28	29
50	32	13	14	33	27	21	32	63	58	59	88	82	85	70	71	84	81	13	19	31	48	21	19	13	20	26	35
64	30	21	40	40	49	31	40	60	53	64	87	80	90	84	69	89	84	14	12	45	54	20	17	31	20	26	35
76	30	51	54	51	67	46	38	68	59	67	83	85	90	82	68	84	86	19	19	50	61	17	21	59	21	20	41
75	31	62	65	47	76	54	38	66	64	67	86	86	87	86	76	77	82	22	19	43	61	17	16	78	17	22	37
79	19	71	72	46	75	61	39	65	63	65	91	90	87	93	84	83	88	27	22	22	68	19	16	81	17	22	32
87	20	72	76	41	82	66	47	67	56	67	91	90	87	94	88	88	87	36	25	26	71	19	16	81	17	19	31
91	30	77	80	40	82	77	68	75	59	74	86	90	89	92	92	90	90	49	35	41	62	17	15	81	24	21	26

Figure 8.1 – Images converted to Eigen vectors

### Sample Output:

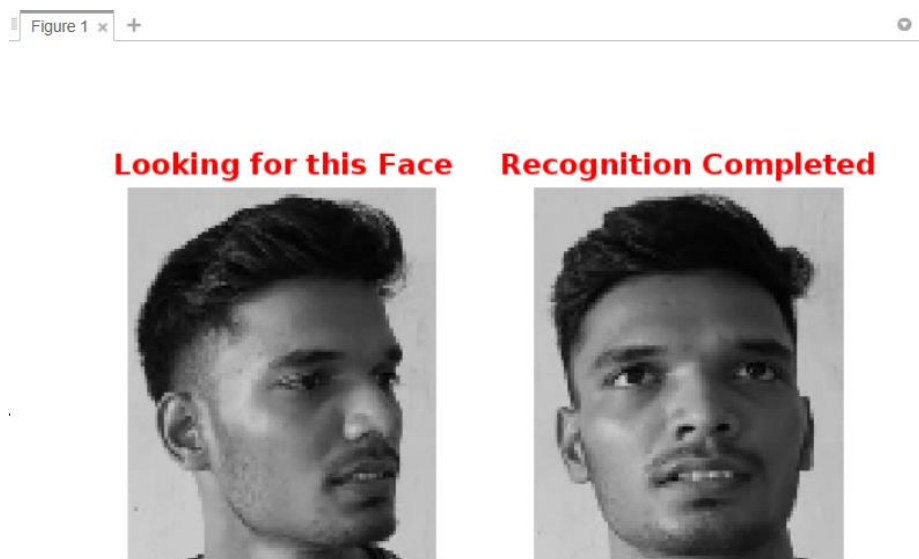


Figure 8.2 – Sample 1 -Matching output from Database

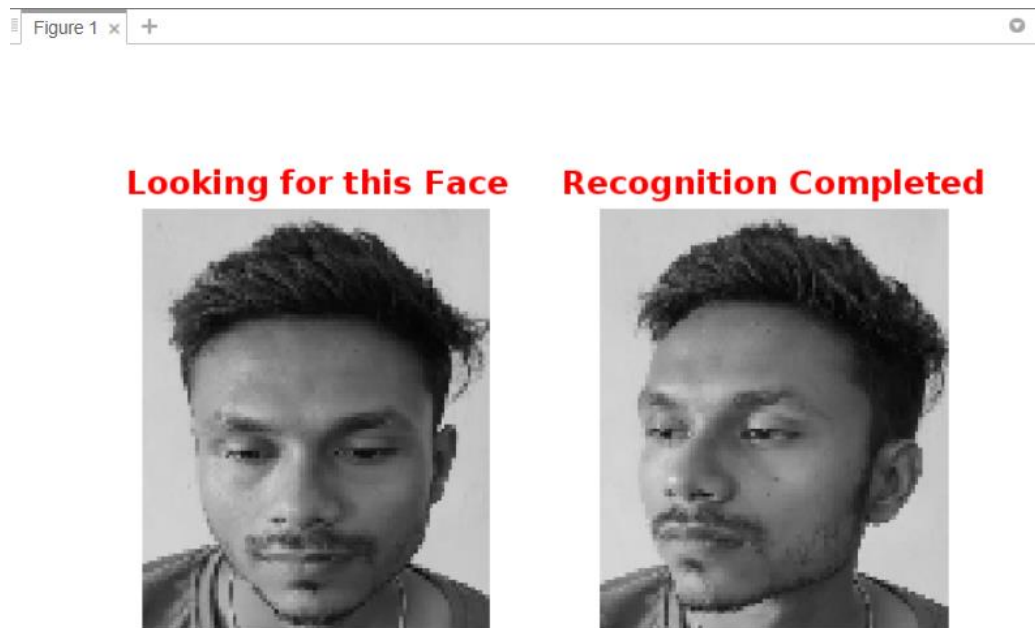


Figure 8.3 – Sample 2 -Matching output from Database

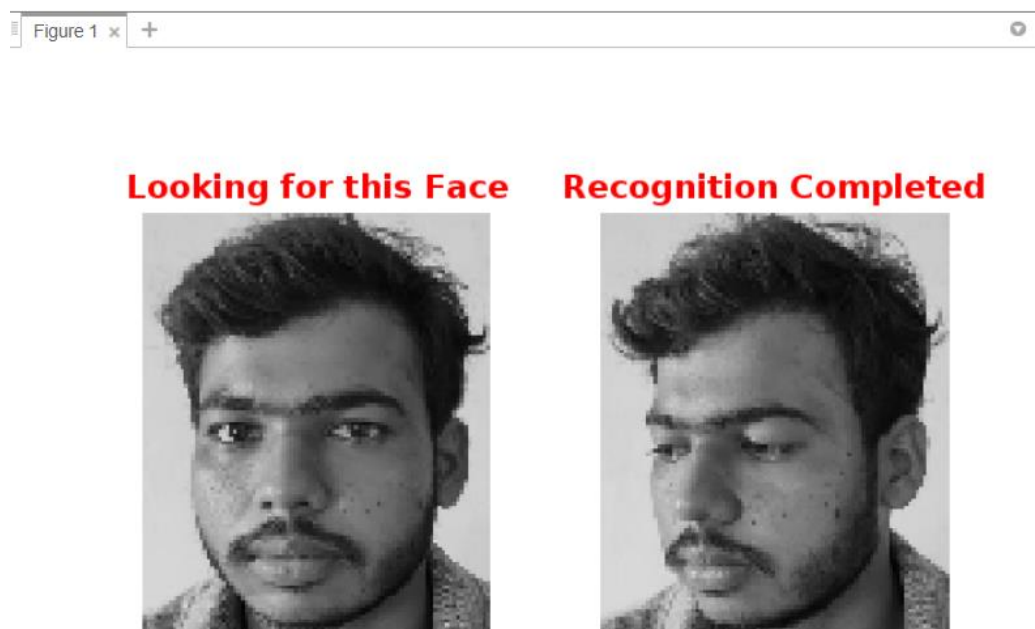


Figure 8.4 – Sample 3 -Matching output from Database



## Chapter 9

### FUTURE SCOPE

Today, one of the fields that use facial recognition the most is security. Facial recognition is very effective tools that can help law enforcers recognize criminals and software companies are leveraging the technology to help users access their technology. This technology can be further developed to be used in other avenues such as ATMs, accessing confidential files, or other sensitive materials. This can make other security measures such as passwords and keys obsolete.

Another way that innovators are looking to implement facial recognition is within subways and other transportation outlets. They are looking to leverage this technology to use faces as credit cards to pay for your transportation fee. Instead of having to go to a booth to buy a ticket for a fare, the face recognition would take your face, run it through a system, and charge the account that you've previously created. This could potentially streamline the process and optimize the flow of traffic drastically.

Face recognition systems used today work very well under constrained conditions, although all systems work much better with frontal mug-shot images and constant lighting. Next generation person recognition systems will be able to recognize people in real-time and in much less constrained situations.

## **Chapter 10**

### **CONCLUSION**

The computational models, which were implemented in this project, were chosen after extensive research, and the successful testing results confirm that the choices made by the researcher were reliable. The system with manual face detection and automatic face recognition did not have recognition accuracy over 90%, due to the limited number of eigenfaces that were used for the PCA transform. This system was tested under very robust conditions in this experimental study and it is envisaged that real-world performance will be far more accurate. The fully automated frontal view face detection system displayed virtually perfect accuracy and in the researcher's opinion further work need not be conducted in this area.

The fully automated face detection and recognition system was not robust enough to achieve high recognition accuracy. The only reason for this was the face recognition subsystem did not display even a slight degree of invariance to scale rotation or shift errors of the segmented face image. This was one of the system requirements. However, if some sort of further processing, such as an eye detection technique, was implemented to further normalize the segmented face image, performance will increase to levels comparable to the manual face detection and recognition system. Implementing an eye detection technique would be a minor extension to the implemented system and would not require a great deal of additional research. All other implemented systems displayed commendable results and reflect well on the deformable template and Principal Component Analysis strategies. The most suitable real-world applications for face detection and recognition systems are for mugshot matching and surveillance. There are better techniques such as iris or retina recognition and face recognition using the thermal spectrum for user access and user verification applications since these need a very high degree of accuracy. The real-time automated pose invariant face detection and recognition system proposed in chapter seven would be ideal for crowd surveillance applications. If such a system were widely implemented its potential for locating and tracking suspects for law enforcement agencies is immense.

# References

- [1] Udit Jain, Kshreyansh Choudhary, Shubham Gupta, M. Jasmine Pemeena Priyadarsini, Analysis of Face Detection and Recognition Algorithms, IEEE Conference Record: # 42666; IEEE Xplore ISBN:978-1-5386-3570-4.
  
- [2] Bhattacharya, Shubhobrata, Nainala, Gowtham Sandeep, Das, Prosenjit, Routray, Aurobinda, Smart Attendance Monitoring System (SAMS): A Face Recognition Based Attendance System for Classroom Environment, IEEE 18th International Conference on Advanced Learning Technologies (ICALT) - Mumbai, India (2018.7.9-2018.7.13)
  
- [3] Brunelli, R. and Poggio, T. (1993), Face Recognition: Features versus Templates. IEEE Transactions on Pattern Analysis and Machine Intelligence, 15(10):1042-1052.
  
- [4] Lawrence, S., Giles, C.L., Ah Chung Tsoi., Back, A.D., Face recognition: a convolutional neural-network approach, IEEE TRANSACTIONS on Neural Networks, Vol. 8, No. 1, January 1997
  
- [5] Goldstein, A.J., Harmon, L.D., and Lesk, A.B. (1971). Identification of human faces. In Proc. IEEE, Vol. 59, page 748.
  
- [6] Baron, R. J. (1981). Mechanisms of human facial recognition. International Journal of Man Machine Studies, 15:137-178.
  
- [7] Beymer, D. and Poggio, T. (1995) Face Recognition From One Example View, A.I. Memo No. 1536, C.B.C.L. Paper No. 121. MIT.

# Appendix

## Face Detection:

```
clear all
clc
%Detect objects using Viola-Jones Algorithm
%To detect Face
FDetect = vision.CascadeObjectDetector;
%Read the input image
I = imread('photo3.jpg');
%Returns Bounding Box values based on number of objects
BB = step(FDetect,I);
figure,
imshow(I);
hold on
for i = 1:size(BB,1)
    rectangle('Position',BB(i,:), 'LineWidth',5, 'LineStyle', '-','EdgeColor','r');
end
title('Face Detection');
hold off;
```

```
%To detect Nose
NoseDetect = vision.CascadeObjectDetector('Nose','MergeThreshold',16);
BB=step(NoseDetect,I);
figure,
imshow(I);
hold on
for i = 1:size(BB,1)
    rectangle('Position',BB(i,:), 'LineWidth',4, 'LineStyle', '-','EdgeColor','b');
end
title('Nose Detection');
hold off;
```

```
%To detect Mouth
MouthDetect = vision.CascadeObjectDetector('Mouth','MergeThreshold',16);
BB=step(MouthDetect,I);
```

```

figure,
imshow(I);
hold on
for i = 1:size(BB,1)
    rectangle('Position',BB(i,:), 'LineWidth',4, 'LineStyle', '- ', 'EdgeColor', 'r');
end
title('Mouth Detection');
hold off;

```

```

%To detect Eyes
EyeDetect = vision.CascadeObjectDetector('EyePairBig');
%Read the input Image
I = imread('photo3.jpg');
BB=step(EyeDetect,I);
figure,imshow(I);
rectangle('Position',BB, 'LineWidth',4, 'LineStyle', '- ', 'EdgeColor', 'b');
title('Eyes Detection');
Eyes=imcrop(I,BB);
figure,
imshow(Eyes);

```

## Load Database:

```

function output_value = load_database();
persistent loaded;
persistent numeric_Image;
if(isempty(loaded))
    all_Images = zeros(10304,40);
    for i=1:10
        cd(strcat('s',num2str(i)));
        for j=1:10
            image_Container = imread(strcat(num2str(j),'.pgm'));
            all_Images(:,(i-
1)*10+j)=reshape(image_Container,size(image_Container,1)*size(image_Container,2),1);
        end
        display('Dloading Database');
        cd ..
    end
    numeric_Image = uint8(all_Images);
end
loaded = 1;
output_value = numeric_Image;

```

## Face Recognition:

```
loaded_Image=load_database();
random_Index=round(100*rand(1,1));
random_Image=loaded_Image(:,random_Index);
rest_of_the_images=loaded_Image(:,[1:random_Index-1 random_Index+1:end]);
image_Signature=20;
white_Image=uint8(ones(1,size(rest_of_the_images,2)));
mean_value=uint8(mean(rest_of_the_images,2));
mean_Removed=rest_of_the_images-uint8(single(mean_value)*single(white_Image));
L=single(mean_Removed)'*single(mean_Removed);
[V,D]=eig(L);
V=single(mean_Removed)*V;
V=V(:,end:-1:end-(image_Signature-1));
all_image_Signature=zeros(size(rest_of_the_images,2),image_Signature);
for i=1:size(rest_of_the_images,2);
    all_image_Signature(i,:)=single(mean_Removed(:,i))'*V;
end
subplot(121);
imshow(reshape(random_Image,112,92));
title('Looking for this Face','FontWeight','bold','FontSize',16,'color','red');
subplot(122);
p=random_Image-mean_value;
s=single(p)*V;
z=[];
for i=1:size(rest_of_the_images,2)
    z=[z,norm(all_image_Signature(i,:)-s,2)];
    if(mod(i,20)==0),imshow(reshape(rest_of_the_images(:,i),112,92)),end;
    drawnow;
end
[a,i]=min(z);
subplot(122);
imshow(reshape(rest_of_the_images(:,i),112,92));
title('Recognition Completed','FontWeight','bold','FontSize',16,'color','red');
```