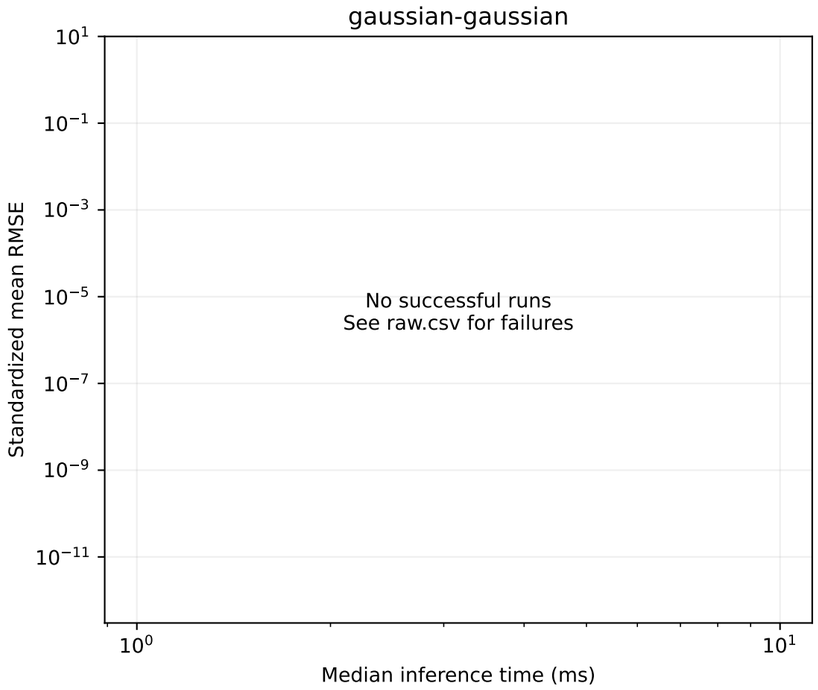

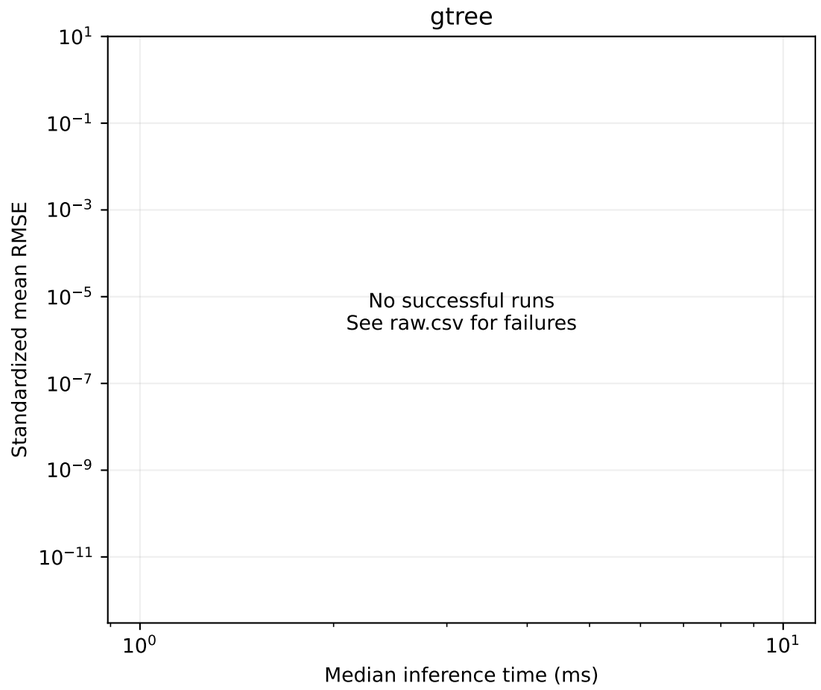

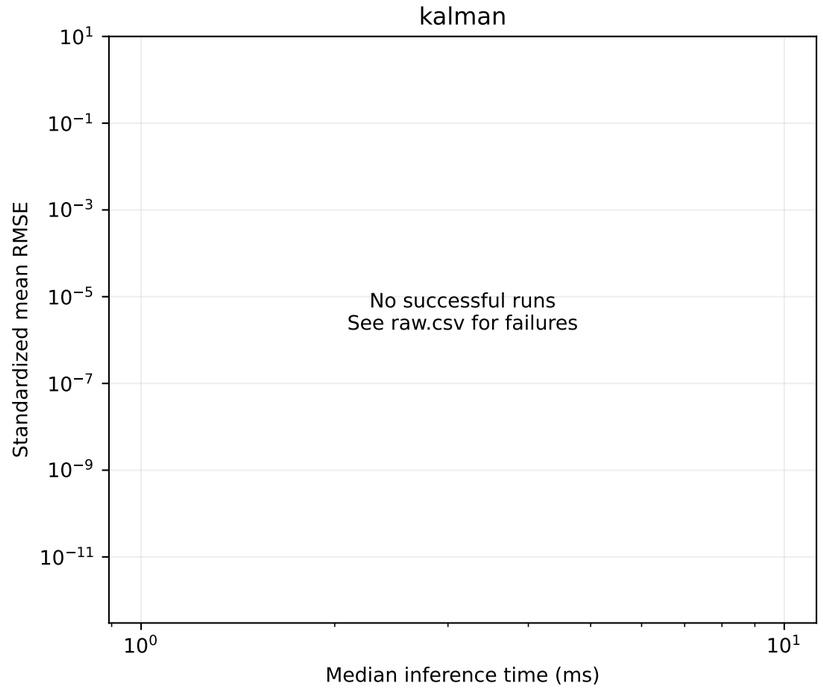

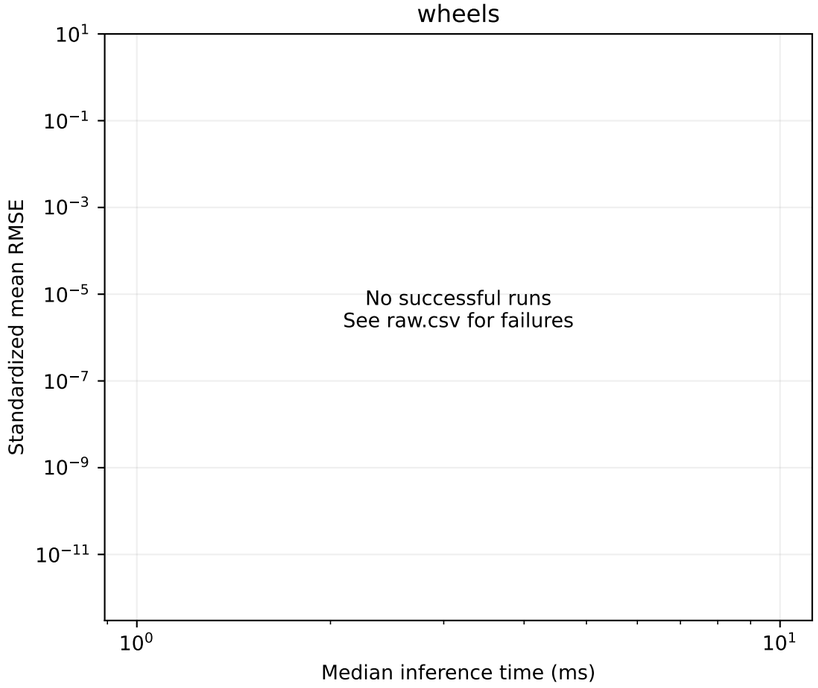

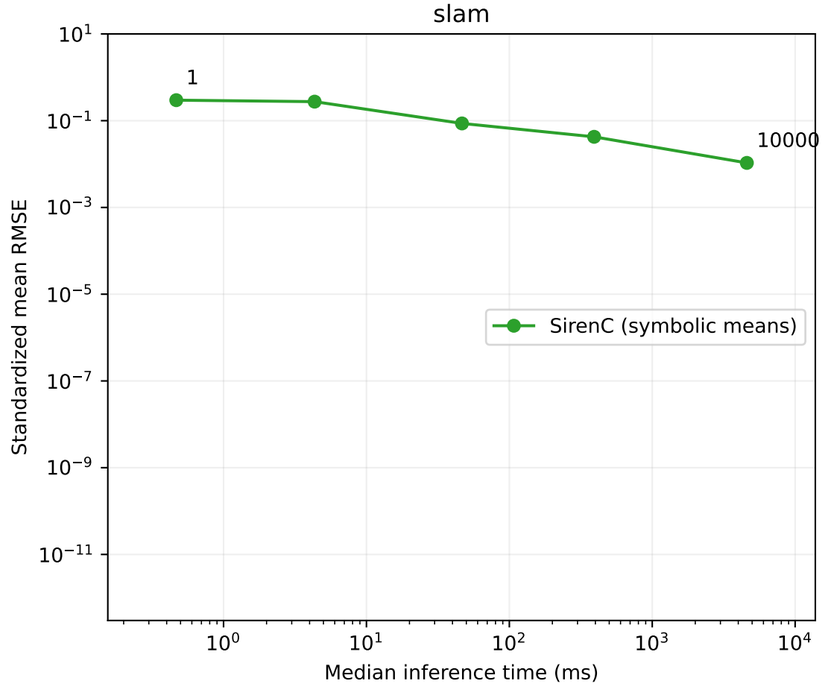

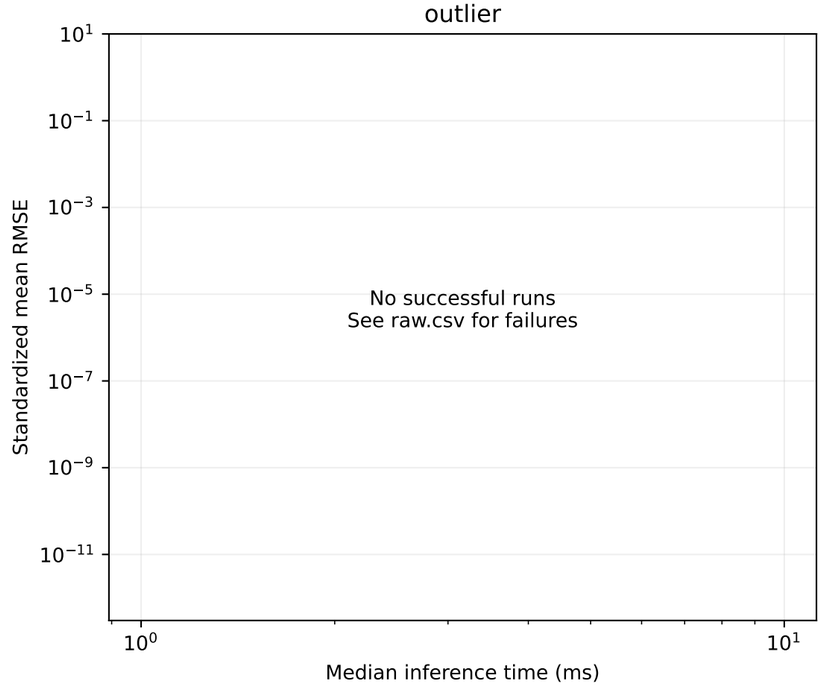

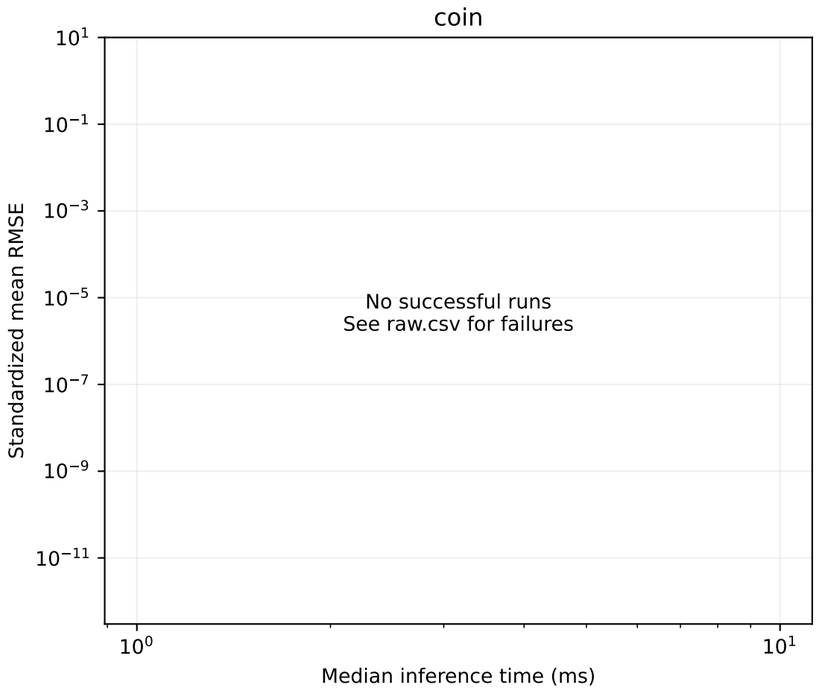

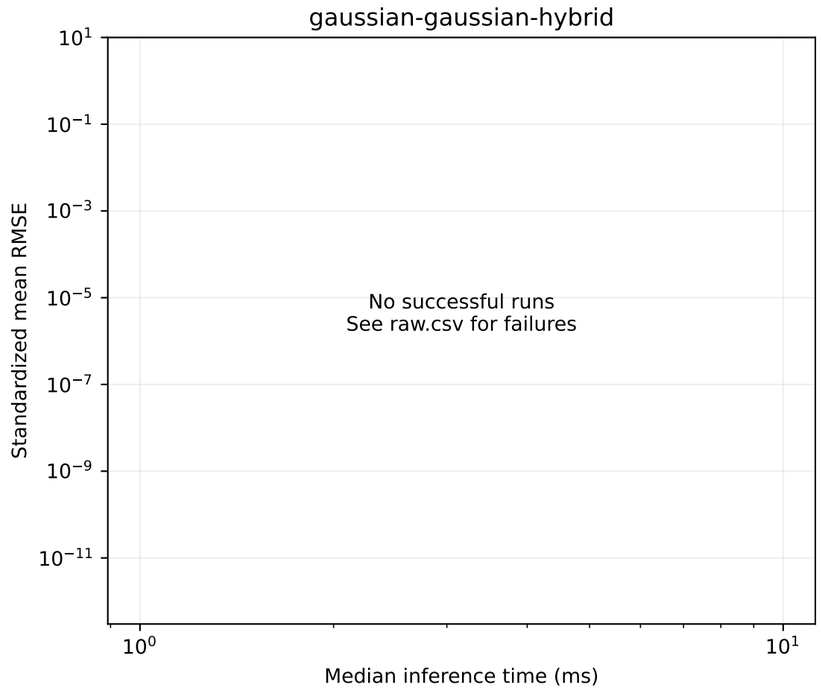

Endpoint labels denote particle counts.
Errors below 1e-12 are displayed at 1e-12.

RMSE uses exact posterior marginal standard deviations.
Timing includes particle creation, execution, and weighted symbolic mean evaluation; excludes imports, program loading, warm-up, and error calculation.

Generated programs and inference interfaces are unchanged.
Reference values are used only to score estimates.
Failures are recorded; successful execution alone does not establish posterior accuracy.