

1. Create one IAM user and assign EC2 and S3 full access roles.

Procedure

1. Open the AWS Management Console and navigate to IAM.

2. Select Users and choose Create user.

3. Create a user named
AdminUser


.

4. Select the option to attach policies directly.

5. Attach
AmazonEC2FullAccess
and
AmazonS3FullAccess

.

6. Review the permissions and create th

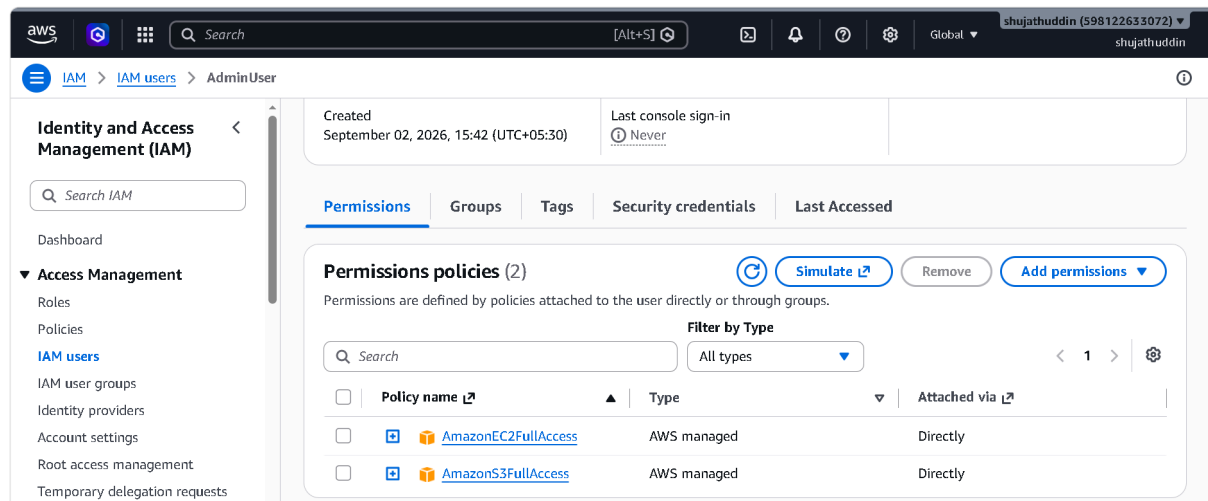

2. Create one group in IAM and assign read access for EC2.

Procedure

1. Navigate to IAM

→

User groups.

2. Select Create group.

3. Enter the group name


EC2ReadOnlyGroup

.

4. Attach the AWS managed policy
AmazonEC2ReadOnlyAccess

.

5. Create the group

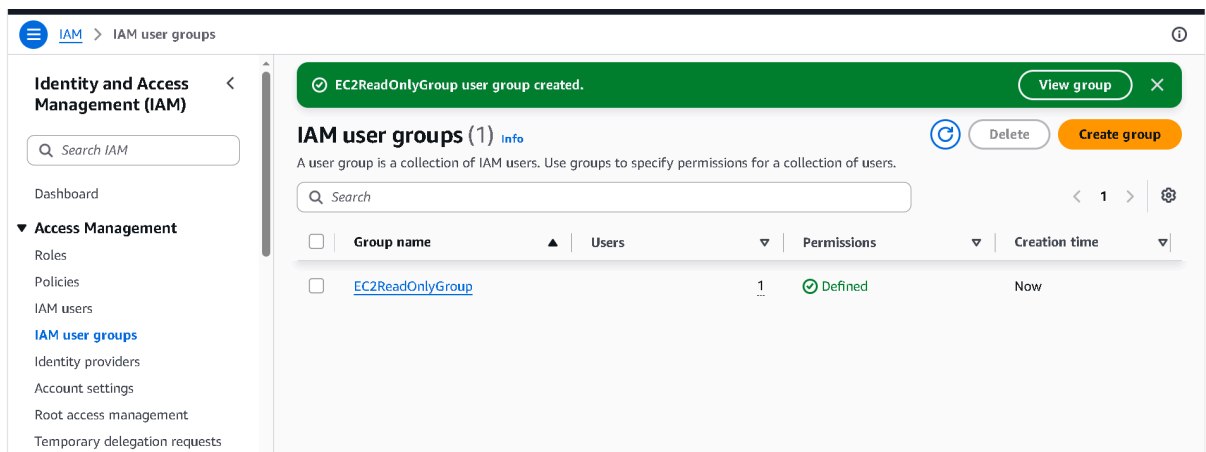

3. Create a new user named "Devops" and add to the group created in task 2.

Procedure

1. Create an IAM user named
Devops

.

2. Select the existing group
EC2ReadOnlyGroup
or add the user after creation.

3. Confirm that Devops is a member of the

Step 1
Specify user details

Step 2
Set permissions

Step 3
Review and create

Step 4
Retrieve password

Review and create

Review your choices. After you create the user, you can view and download the autogenerated password, if enabled.

User details

User name
Devops

Console password type
Custom password

Require password reset
No

Permissions summary

Name ↗	▲	Type	▼	Used as	▼
EC2ReadOnlyGroup		Group		Permissions group	

Tags - optional

4. Write a bash script to create an IAM user with VPC full access.

```
#!/bin/bash
```

```
USERNAME="VPCAdmin"
```

```
echo "Creating IAM user: $USERNAME"
```

```
aws iam create-user \
  --user-name "$USERNAME"
```

```
echo "Attaching VPC Full Access policy"
```

```
aws iam attach-user-policy \
  --user-name "$USERNAME" \
  --policy-arn arn:aws:iam::aws:policy/AmazonVPCFullAccess
```

```
echo "IAM user created successfully."
```

```
echo "Attached policies:"
aws iam list-attached-user-policies \
  --user-name "$USERNAME"
```

```

        "Arn": "arn:aws:iam::598122633072:user/Devops",
        "CreateDate": "2026-09-02T10:19:06+00:00"
    }
}
[root@ip-20-0-0-204 ec2-user]# ./create-vpc-user.sh
Creating IAM user: VPCAdmin
{
  "User": {
    "Path": "/",
    "UserName": "VPCAdmin",
    "UserId": "AIDAYwQXDC5YDFXQUZWLT",
    "Arn": "arn:aws:iam::598122633072:user/VPCAdmin",
    "CreateDate": "2026-09-02T11:23:44+00:00"
  }
}
Attaching VPC Full Access policy
IAM user created successfully.
Attached policies:
{
  "AttachedPolicies": [
    {
      "PolicyName": "AmazonVPCFullAccess",
      "PolicyArn": "arn:aws:iam::aws:policy/AmazonVPCFullAccess"
    }
  ]
}
[root@ip-20-0-0-204 ec2-user]# |

```

5. Create an IAM policy to allow EC2 access for a specific user in specific regions only.

Procedure

1. Open IAM

→

Policies

→

Create policy.

2. Select the JSON editor.

3. Enter the custom policy shown above.

4. Name the policy

EC2SpecificRegionsPolicy

.

5. Attach the policy to the required IAM user, such as Devops.

6. Test EC2 access in an allowed Region and in a Region that is

IAM > IAM users > Devops > Add permissions

Step 1
Add permissions

Step 2
Review

Review

The following policies will be attached to this user. [Learn more](#)

User details

User name
Devops

Permissions summary (1)

Name	Type	Used as
EC2SpecificRegionsPolicy	Customer managed	Permissions policy

Cancel Previous Add permissions

6. We have two accounts: Account A and Account B. Account A user should access an S3 bucket in Account B.

(Collaborate with a team member and execute)

```
[ec2-user@ip-20-0-0-204 ~]$ AC
[ec2-user@ip-20-0-0-204 ~]$ aws sts get-caller-identity
{
  "UserId": "AROAYWQXDC5YO6M7FNHGG:i-0f0a96415eff61814",
  "Account": "598122633072",
  "Arn": "arn:aws:sts::598122633072:assumed-role/EC2-IAM-Admin-Role/i-0f0a96415eff61814"
}
[ec2-user@ip-20-0-0-204 ~]$ aws s3 ls s3://syed-account-b-s3-demo-2026
An error occurred (AccessDenied) when calling the ListObjectsV2 operation: Access Denied
[ec2-user@ip-20-0-0-204 ~]$ aws sts get-caller-identity
{
  "UserId": "AROAYWQXDC5YO6M7FNHGG:i-0f0a96415eff61814",
  "Account": "598122633072",
  "Arn": "arn:aws:sts::598122633072:assumed-role/EC2-IAM-Admin-Role/i-0f0a96415eff61814"
}
[ec2-user@ip-20-0-0-204 ~]$ aws configure --profile Devops
AWS Access Key ID [None]: AKIAYWQXDC5YN5HZDXNK
AWS Secret Access Key [None]: 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
Default region name [None]: us-east-1
Default output format [None]: json
[ec2-user@ip-20-0-0-204 ~]$ aws sts get-caller-identity --profile Devops
{
  "UserId": "AIDAYWQXDC5YM2UJQAOWG",
  "Account": "598122633072",
  "Arn": "arn:aws:iam::598122633072:user/Devops"
}
[ec2-user@ip-20-0-0-204 ~]$ aws s3 ls s3://syed-account-b-s3-demo-2026 --profile Devops
2026-09-02 13:35:14      15 syed-account-b-s3-demo-2026.txt
[ec2-user@ip-20-0-0-204 ~]$
```