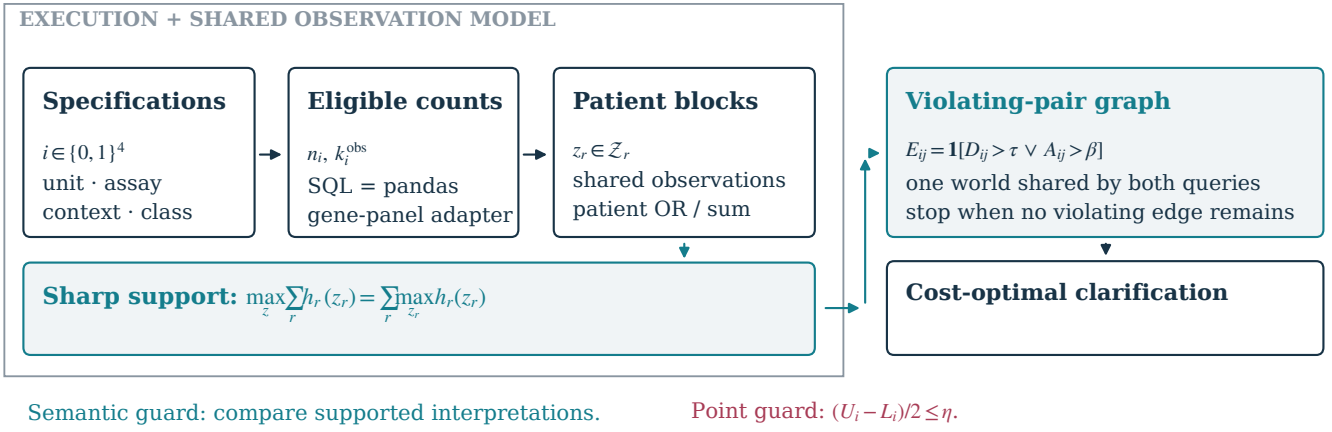
EXECUTION + SHARED OBSERVATION MODEL
Specifications
$i \in \{0,1\}^4$
unit · assay
context · class
Eligible counts
$n_i,\ k_i^{\text{obs}}$
SQL = pandas
gene-panel adapter
Patient blocks
$z_r \in \mathcal{Z}_r$
shared observations
patient OR / sum
Sharp support: $\max_z \sum_r h_r(z_r) = \sum_r \max_{z_r} h_r(z_r)$
Violating-pair graph
$E_{ij} = \mathbf{1}[D_{ij} > \tau \vee A_{ij} > \beta]$
one world shared by both queries
stop when no violating edge remains
Cost-optimal clarification
Semantic guard: compare supported interpretations.
Point guard: $(U_i - L_i)/2 \le \eta$.