

Deploying Windows Agent

1. Select the package to download and install on your system:
 - a. Select the **MSI 32/64 bits** under Windows tab.
2. Server address → **Under this add the Wazuh server IP address** (in my case it's 192.168.198.132)
3. Give some unique name to your windows agent please

The screenshot shows the 'Deploy new agent' form in the Wazuh web interface. The form is divided into three main sections: 'Select the package to download and install on your system:', 'Server address:', and 'Optional settings:'. In the first section, the 'WINDOWS' tab is selected, and the 'MSI 32/64 bits' package is chosen. In the second section, the 'Server address' is set to '192.168.198.132' and the 'Remember server address' checkbox is checked. In the third section, the 'Assign an agent name' field is filled with 'SamWindowsAgent'. A yellow warning banner at the bottom states: 'The agent name must be unique. It can't be changed once the agent has been enrolled.'

W. Endpoints Deploy new agent

< Deploy new agent

Select the package to download and install on your system:

LINUX

RPM amd64 RPM aarch64 DEB amd64 DEB aarch64

WINDOWS

MSI 32/64 bits

macOS

Intel Apple silicon

For additional systems and architectures, please check our [documentation](#).

Server address:

This is the address the agent uses to communicate with the server. Enter an IP address or a fully qualified domain name (FQDN).

Assign a server address

192.168.198.132

Remember server address

Optional settings:

By default, the deployment uses the hostname as the agent name. Optionally, you can use a different agent name in the field below.

Assign an agent name:

SamWindowsAgent

The agent name must be unique. It can't be changed once the agent has been enrolled.

W

EndpointsDeploy new agent

a

This is the address the agent uses to communicate with the server. Enter an IP address or a fully qualified domain name (FQDN).

Assign a server address

192.168.198.132

☒ Remember server address

Optional settings:

By default, the deployment uses the hostname as the agent name. Optionally, you can use a different agent name in the field below.

Assign an agent name:

SamWindowsAgent

The agent name must be unique. It can't be changed once the agent has been enrolled.

Select one or more existing groups:

Default

4 Run the following commands to download and install the agent:

```
Invoke-WebRequest -Uri https://packages.wazuh.com/4.x/windows/wazuh-agent-4.14.0-1.msi -OutFile $env:tmp\wazuh-agent; msixec.exe /i $env:tmp\wazuh-agent /q WAZUH_MANAGER='192.168.198.132' WAZUH_AGENT_NAME='SamWindowsAgent'
```

Requirements

- You will need administrator privileges to perform this installation.
- PowerShell 3.0 or greater is required.

Keep in mind you need to run this command in a Windows PowerShell terminal.

Select one or more existing groups:

Default

4 Run the following commands to download and install the agent:

```
Invoke-WebRequest -Uri https://packages.wazuh.com/4.x/windows/wazuh-agent-4.14.0-1.msi -OutFile $env:tmp\wazuh-agent; msixec.exe /i $env:tmp\wazuh-agent /q WAZUH_MANAGER='192.168.198.132' WAZUH_AGENT_NAME='SamWindowsAgent'
```

Requirements

- You will need administrator privileges to perform this installation.
- PowerShell 3.0 or greater is required.

Keep in mind you need to run this command in a Windows PowerShell terminal.


5 Start the agent:

```
NET START Wazuh
```

6 Go to endpoints to verify the agent connection:

Back to agent list

On windows agent:

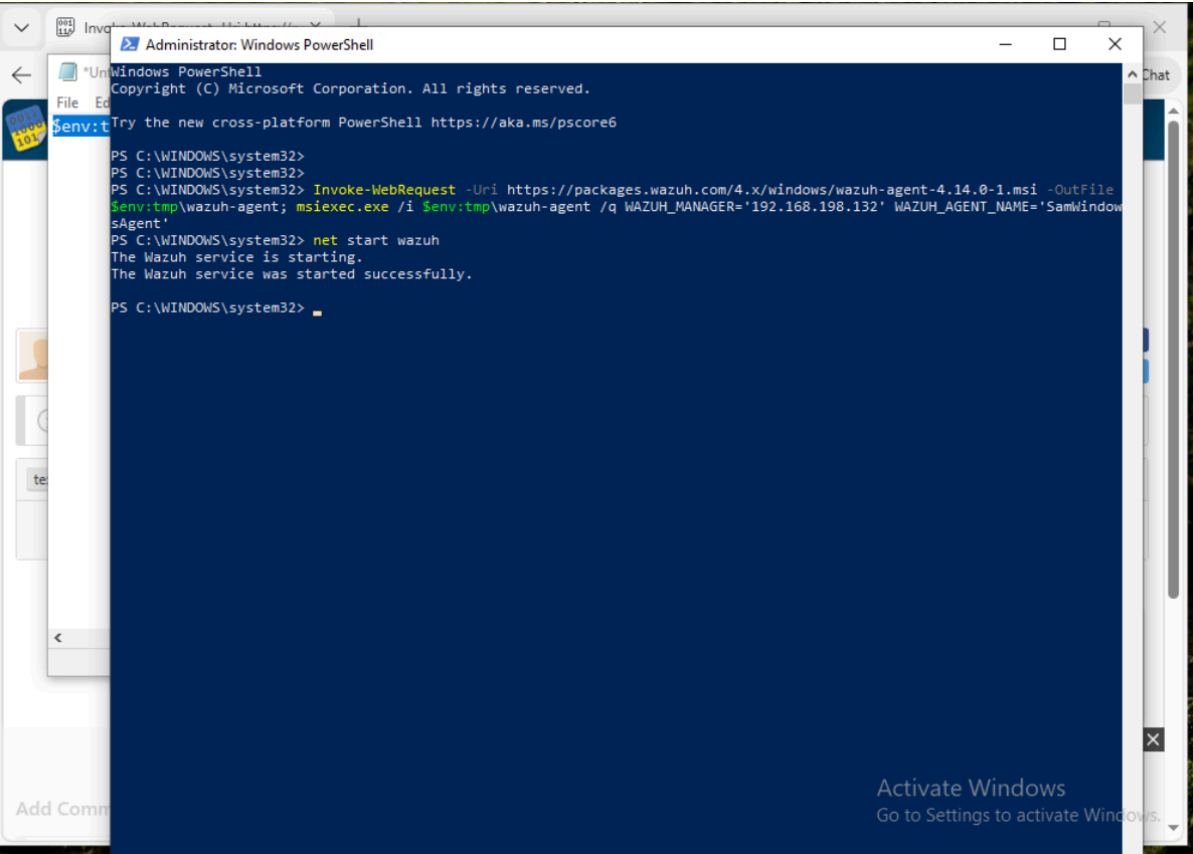

```
Administrator: Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

Try the new cross-platform PowerShell https://aka.ms/pscore6

PS C:\WINDOWS\system32>
PS C:\WINDOWS\system32>
PS C:\WINDOWS\system32> Invoke-WebRequest -Uri https://packages.wazuh.com/4.x/windows/wazuh-agent-4.14.0-1.msi -OutFile
$env:tmp\wazuh-agent; msexec.exe /i $env:tmp\wazuh-agent /q WAZUH_MANAGER='192.168.198.132' WAZUH_AGENT_NAME='SamWindow
sAgent'
PS C:\WINDOWS\system32> net start wazuh
The Wazuh service is starting.
The Wazuh service was started successfully.

PS C:\WINDOWS\system32>
```

Activate Windows
Go to Settings to activate Windows.

Note: Deploying other agents like Ubuntu, macOS, etc, is very much similar to the above steps. Just choose the correct OS in step 1.