

Deploying Windows Agent

1. Log in to the **Wazuh Dashboard**.
2. Navigate to **Agents** → **Deploy new agent**.
3. Under the **Windows** tab, download the appropriate **MSI (32-bit or 64-bit)** installer.
4. In the **Server address** field, enter the IP address of your Wazuh Manager (e.g., **192.168.198.132**).
5. Enter a unique **Agent name** for the Windows machine.
6. Copy the generated installation command or download the MSI package.
7. Run the installer on the Windows machine and complete the installation.
8. Verify that the agent appears as **Active** in the **Wazuh Dashboard** → **Agents**.

The screenshot shows the 'Deploy new agent' page in the Wazuh Dashboard. The page has a top navigation bar with 'W.', 'Endpoints', and 'Deploy new agent' tabs. The main content area is titled 'Deploy new agent' and contains three sections: 'Select the package to download and install on your system:', 'Server address:', and 'Optional settings:'. The 'Select the package' section has three tabs: 'LINUX', 'WINDOWS', and 'macOS'. The 'WINDOWS' tab is selected, showing 'MSI 32/64 bits' as the only option. The 'Server address' section has a text input field containing '192.168.198.132' and a 'Remember server address' checkbox. The 'Optional settings' section has a text input field for 'Assign an agent name' containing 'SanWindowsAgent'. A yellow warning banner at the bottom states: 'The agent name must be unique. It can't be changed once the agent has been enrolled.'

W. Endpoints Deploy new agent

< Deploy new agent

Select the package to download and install on your system:

LINUX

RPM amd64 RPM aarch64 DEB amd64 DEB aarch64

WINDOWS

MSI 32/64 bits

macOS

Intel Apple silicon

For additional systems and architectures, please check our [documentation](#).

Server address:

This is the address the agent uses to communicate with the server. Enter an IP address or a fully qualified domain name (FQDN).

Assign a server address

192.168.198.132

Remember server address

Optional settings:

By default, the deployment uses the hostname as the agent name. Optionally, you can use a different agent name in the field below.

Assign an agent name:

SanWindowsAgent

The agent name must be unique. It can't be changed once the agent has been enrolled.

W

EndpointsDeploy new agent

a

This is the address the agent uses to communicate with the server. Enter an IP address or a fully qualified domain name (FQDN).

Assign a server address

192.168.198.132

☒ Remember server address

Optional settings:

By default, the deployment uses the hostname as the agent name. Optionally, you can use a different agent name in the field below.

Assign an agent name:

SamWindowsAgent

The agent name must be unique. It can't be changed once the agent has been enrolled.

Select one or more existing groups:

Default

4 Run the following commands to download and install the agent:

```
Invoke-WebRequest -Uri https://packages.wazuh.com/4.x/windows/wazuh-agent-4.14.0-1.msi -OutFile $env:tmp\wazuh-agent; msexec.exe /i $env:tmp\wazuh-agent /q WAZUH_MANAGER='192.168.198.132' WAZUH_AGENT_NAME='SamWindowsAgent'
```

Requirements

- You will need administrator privileges to perform this installation.
- PowerShell 3.0 or greater is required.

Keep in mind you need to run this command in a Windows PowerShell terminal.

Select one or more existing groups:

Default

4 Run the following commands to download and install the agent:

```
Invoke-WebRequest -Uri https://packages.wazuh.com/4.x/windows/wazuh-agent-4.14.0-1.msi -OutFile $env:tmp\wazuh-agent; msexec.exe /i $env:tmp\wazuh-agent /q WAZUH_MANAGER='192.168.198.132' WAZUH_AGENT_NAME='SamWindowsAgent'
```

Requirements

- You will need administrator privileges to perform this installation.
- PowerShell 3.0 or greater is required.

Keep in mind you need to run this command in a Windows PowerShell terminal.


5 Start the agent:

```
NET START Wazuh
```

6 Go to endpoints to verify the agent connection:

Back to agent list

On windows agent:

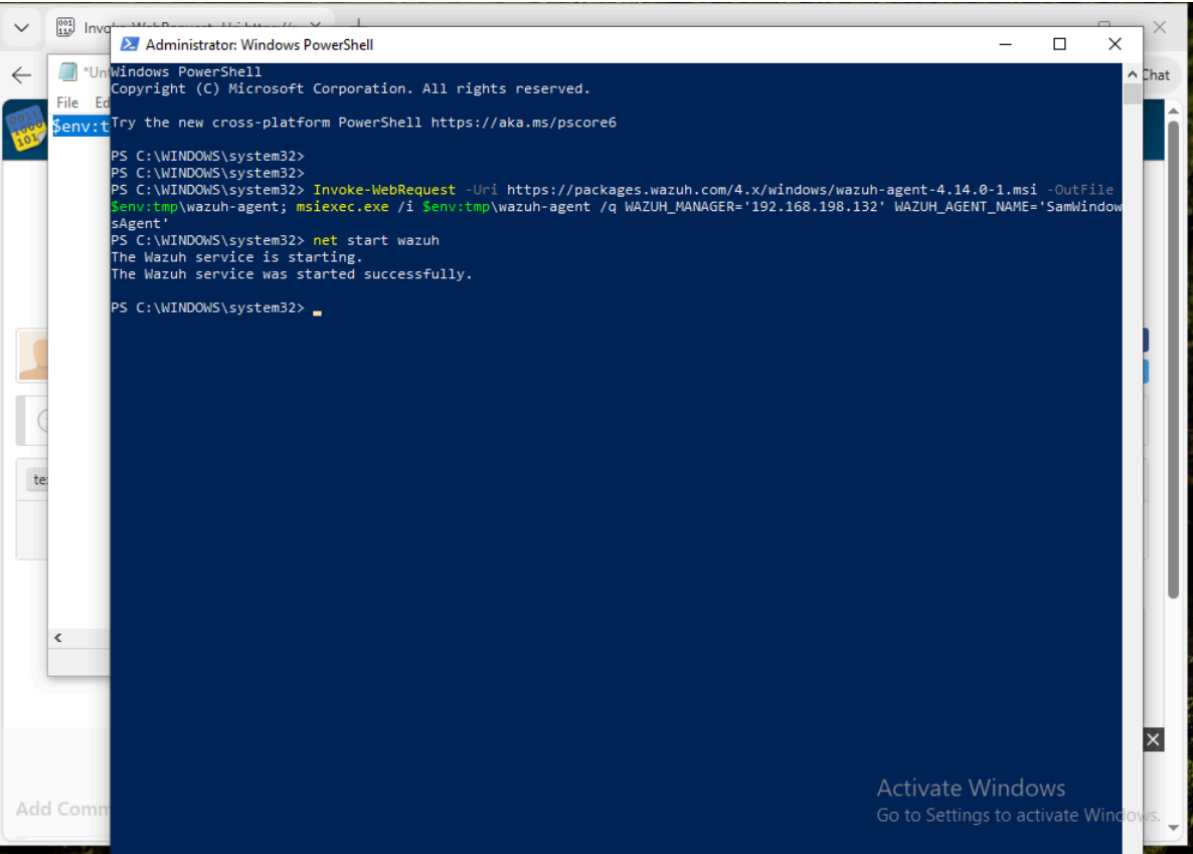

The screenshot shows a Windows PowerShell terminal window titled "Administrator: Windows PowerShell". The terminal displays the following commands and output:

```
PS C:\WINDOWS\system32>
PS C:\WINDOWS\system32>
PS C:\WINDOWS\system32> Invoke-WebRequest -Uri https://packages.wazuh.com/4.x/windows/wazuh-agent-4.14.0-1.msi -OutFile $env:tmp\wazuh-agent; msixexec.exe /i $env:tmp\wazuh-agent /q WAZUH_MANAGER='192.168.198.132' WAZUH_AGENT_NAME='SamWindowAgent'
PS C:\WINDOWS\system32> net start wazuh
The Wazuh service is starting.
The Wazuh service was started successfully.
PS C:\WINDOWS\system32>
```

An "Activate Windows" watermark is visible in the bottom right corner of the terminal window.

Note: Deploying other agents like Ubuntu, macOS, etc, is very much similar to the above steps. Just choose the correct OS in step 1.