

Table of Contents


..... 1
plot current cst 1
plot energy/slopes/kernels in 2D and marginalzed format, and regression stats 2
intercept, i.e., beta(1), of probit regression 11
rHIT/rFA as a fxn of binned energy 11
2D correlation between slope and kernel 12
stim phase 12
efficiency 12
FFT 13
plot SDT 13
plot linearity 13
plot CI 14
accuracy and SAT 14
response consistency 15
PF scatter plots 16
correlation between params and threshold 16


plot current cst

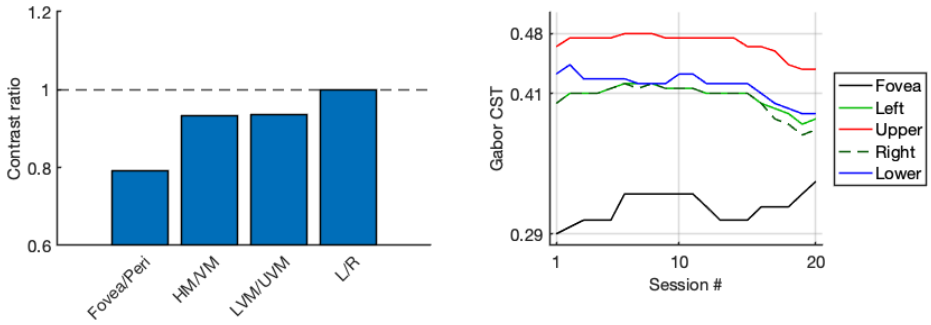



plot energy/slopes/kernels in 2D and marginalzed format, and regression stats

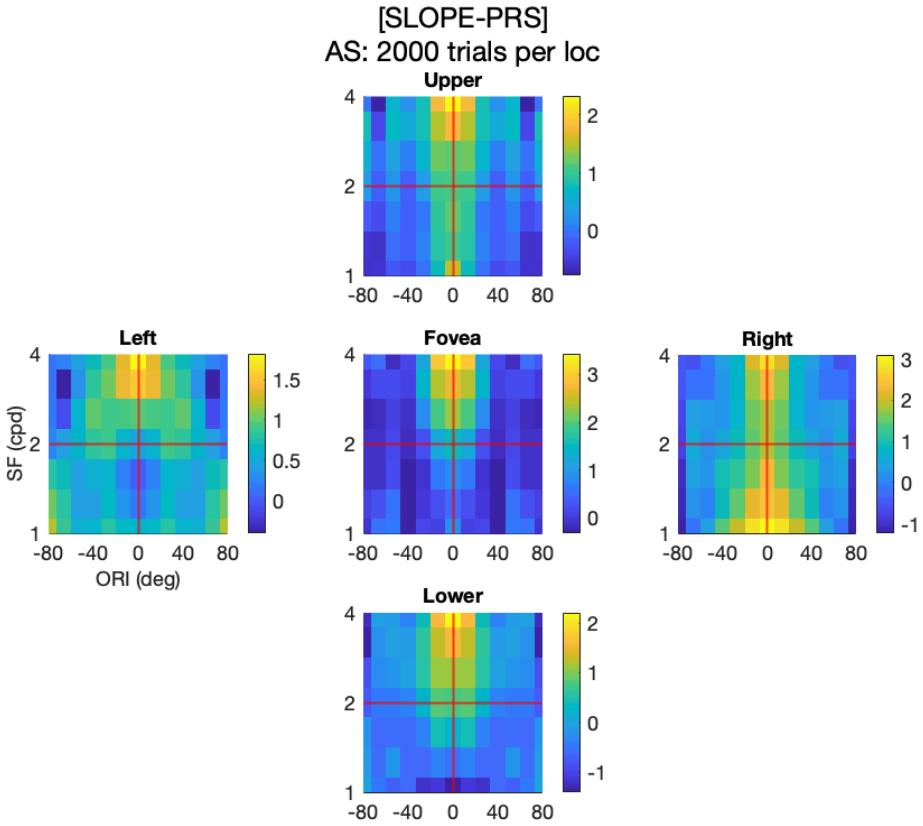


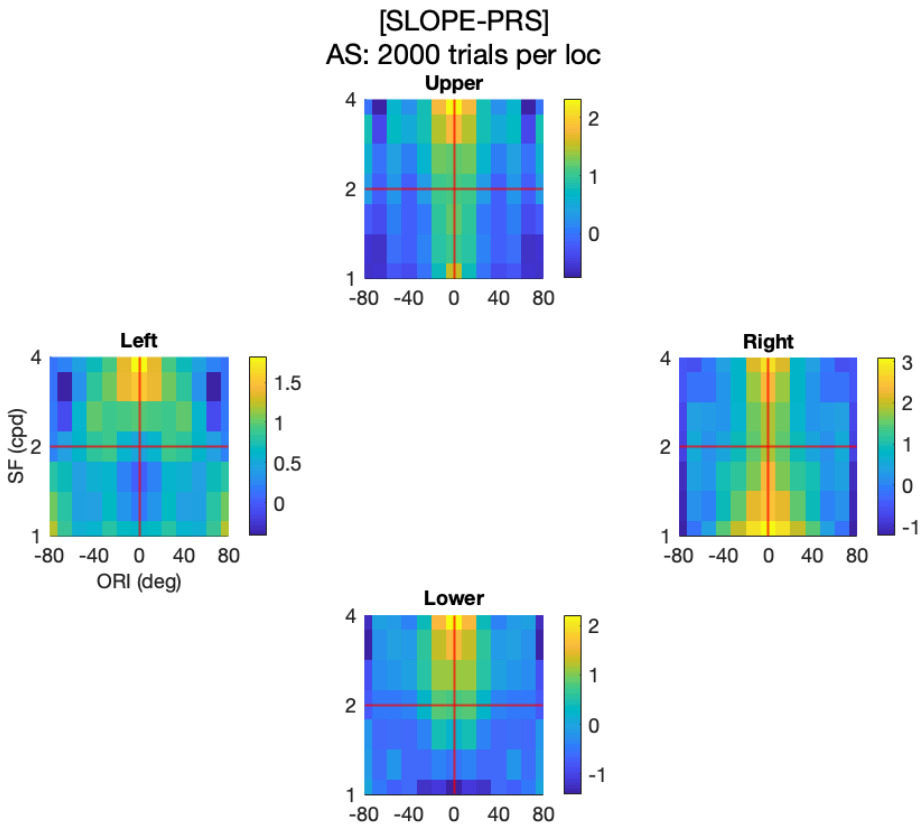

[SLOPE-PRS]
AS: 2000 trials per loc
Upper
Left
Right
Lower
SF (cpd)
ORI (deg)
-80 -40 0 40 80
1 2 4
0 0.5 1 1.5
0 1 2
-1 0 1 2 3

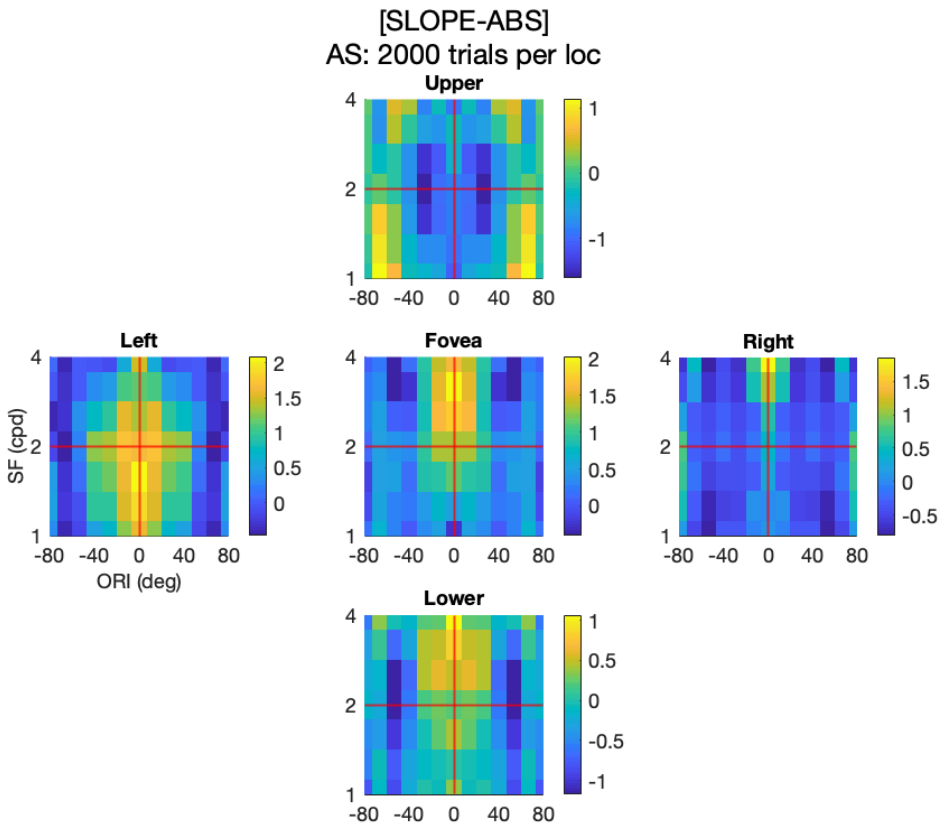

[SLOPE-ABS]
AS: 2000 trials per loc
Upper
Left
Fovea
Right
Lower
SF (cpd)
ORI (deg)

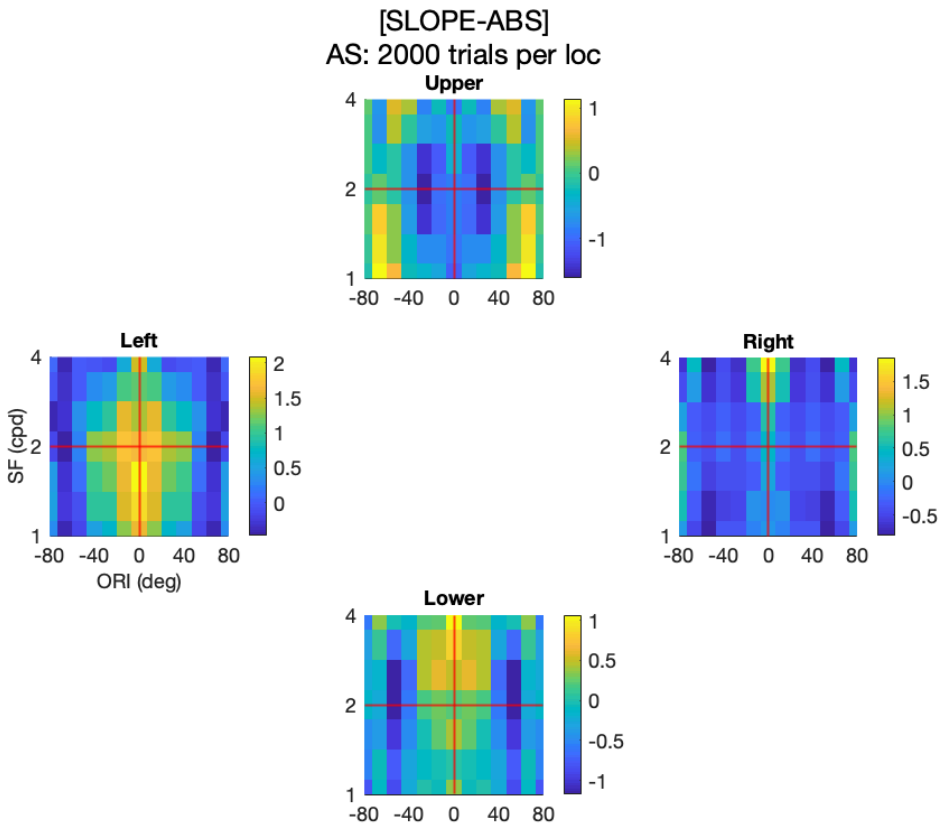

[SLOPE-ABS]
AS: 2000 trials per loc
Upper
Left
Right
Lower
SF (cpd)
ORI (deg)
-80 -40 0 40 80
1 2 4

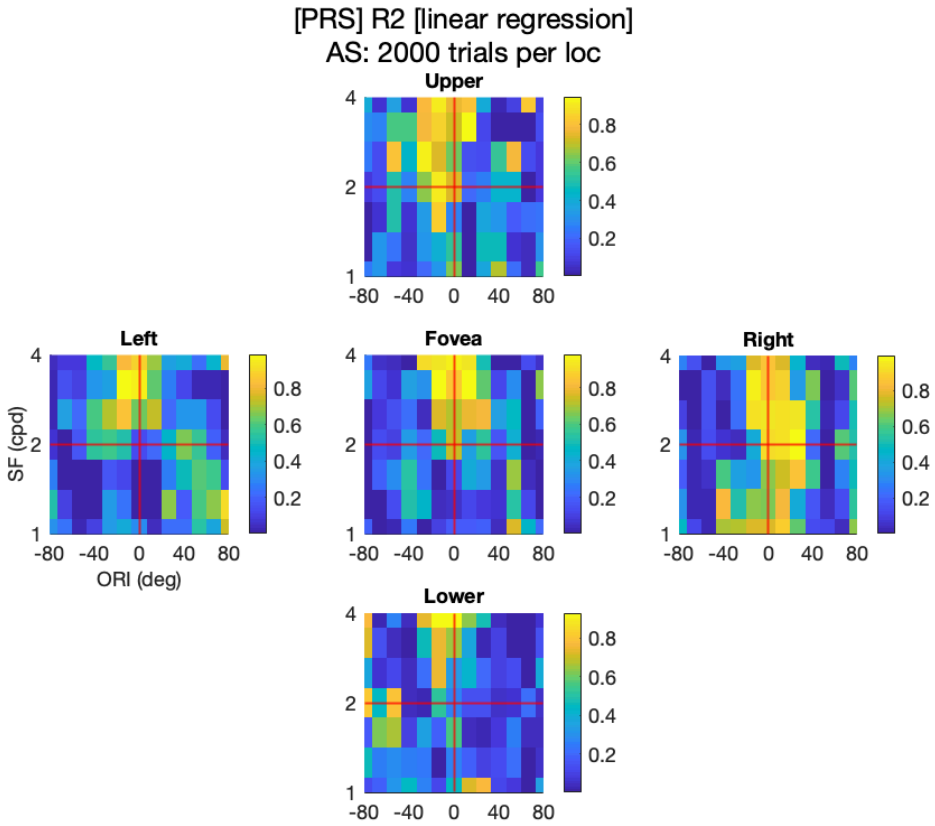

[PRS] R2 [linear regression]
AS: 2000 trials per loc
Upper
Left
Fovea
Right
Lower
SF (cpd)
ORI (deg)
4
2
1
-80 -40 0 40 80
0.8
0.6
0.4
0.2

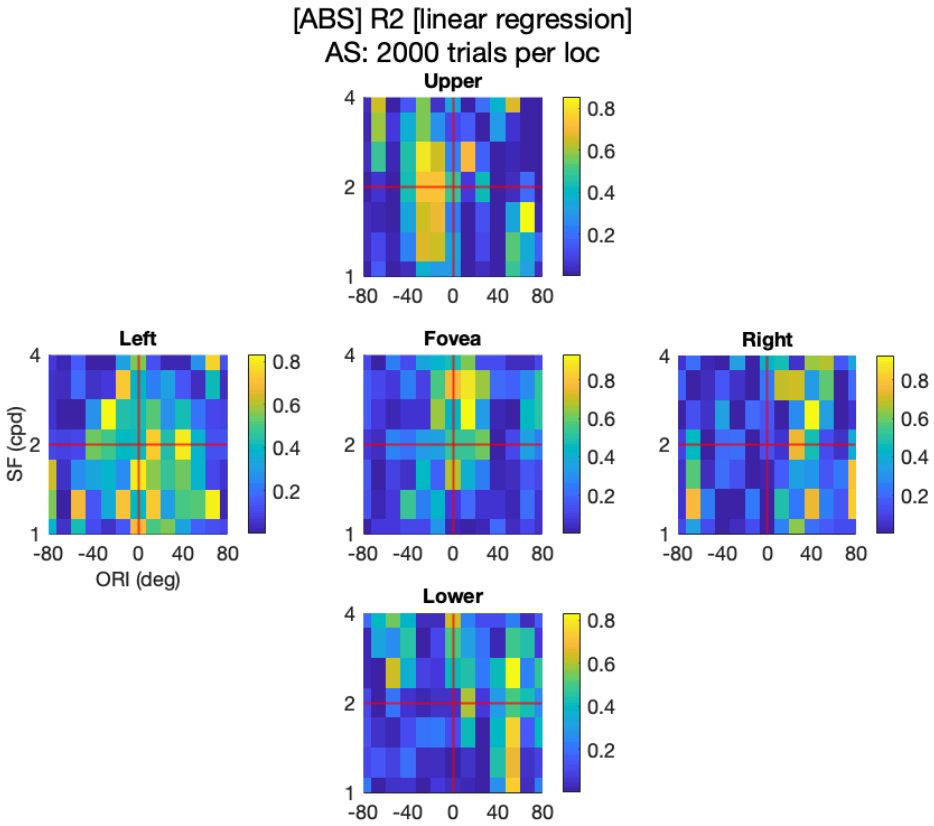

[ABS] R2 [linear regression]
AS: 2000 trials per loc
Upper
Left
Fovea
Right
Lower
SF (cpd)
ORI (deg)

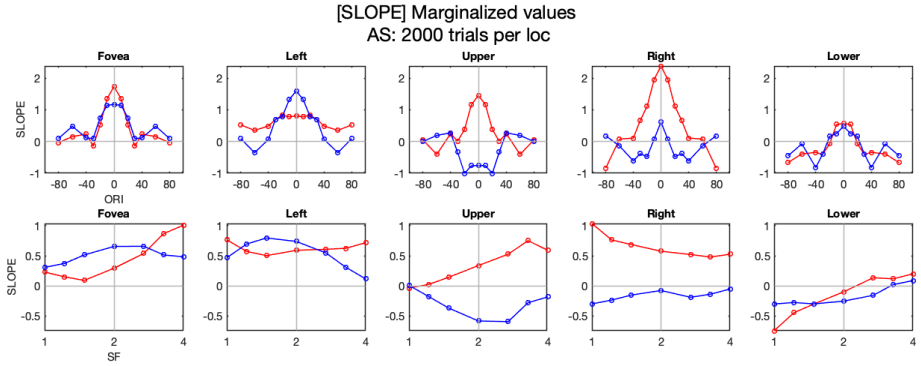

[SLOPE] Marginalized values
AS: 2000 trials per loc
Fovea
Left
Upper
Right
Lower
SLOPE
ORI
SF

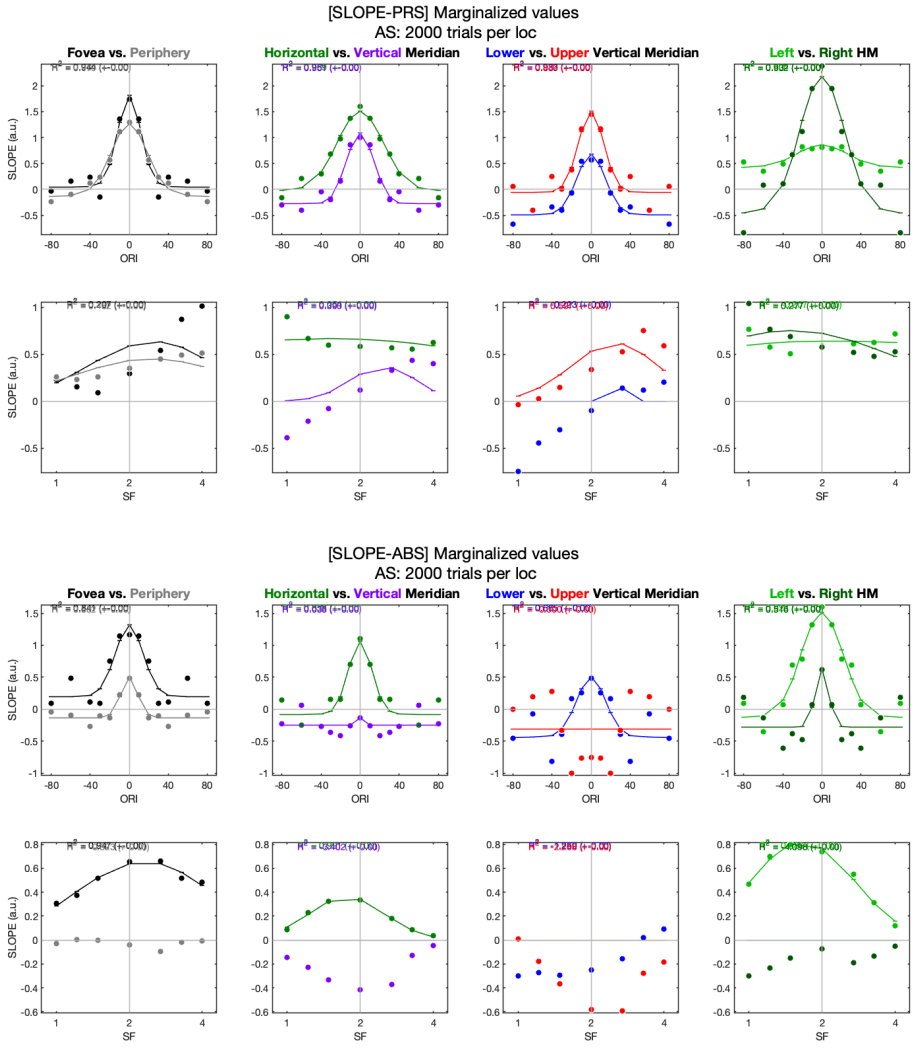

[SLOPE-PRS] Marginalized values
AS: 2000 trials per loc
Fovea vs. Periphery
Horizontal vs. Vertical Meridian
Lower vs. Upper Vertical Meridian
Left vs. Right HM
SLOPE (a.u.)
ORI
SF
[SLOPE-ABS] Marginalized values
AS: 2000 trials per loc
Fovea vs. Periphery
Horizontal vs. Vertical Meridian
Lower vs. Upper Vertical Meridian
Left vs. Right HM
SLOPE (a.u.)
ORI
SF

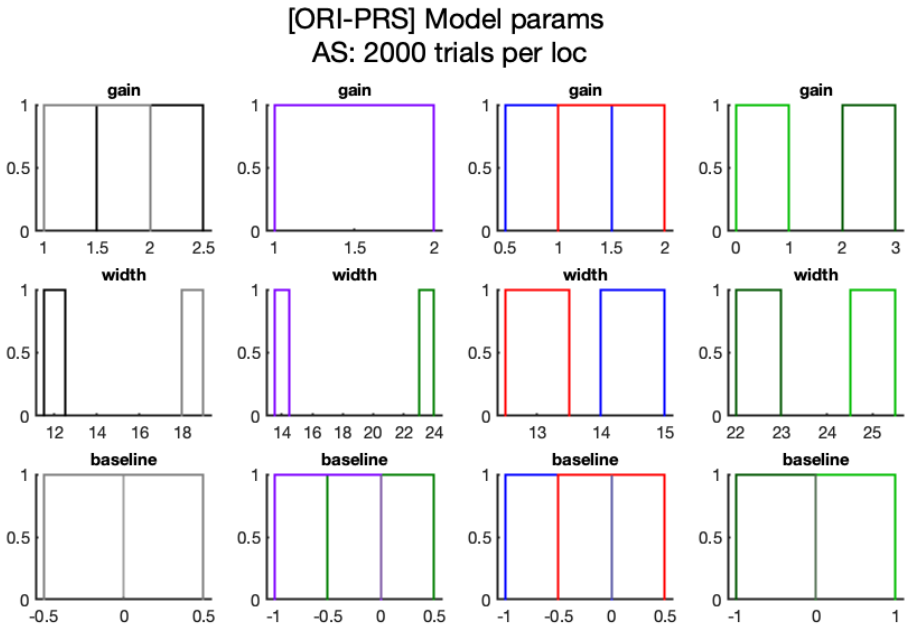
[ORI-PRS] Model params
AS: 2000 trials per loc
gain
width
baseline

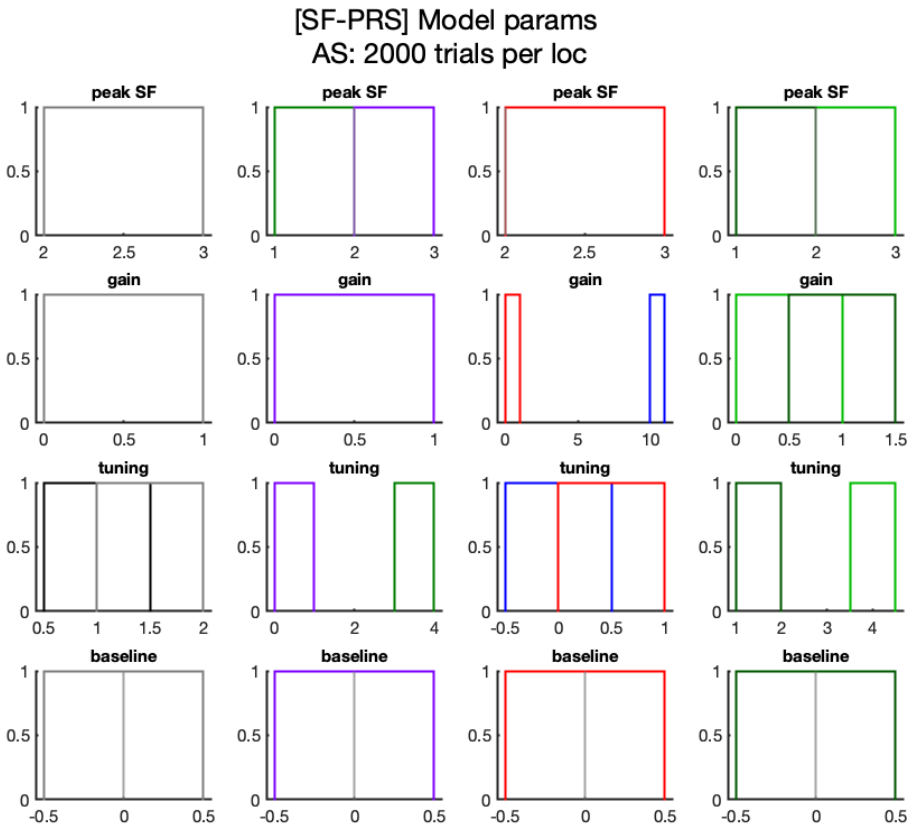
[SF-PRS] Model params
AS: 2000 trials per loc
peak SF
gain
tuning
baseline

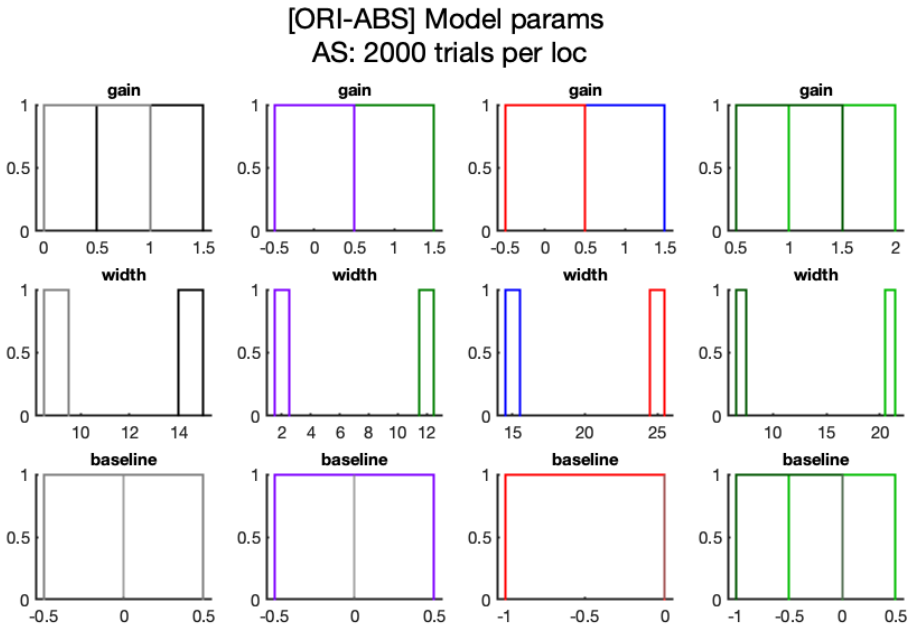
[ORI-ABS] Model params
AS: 2000 trials per loc
gain
width
baseline

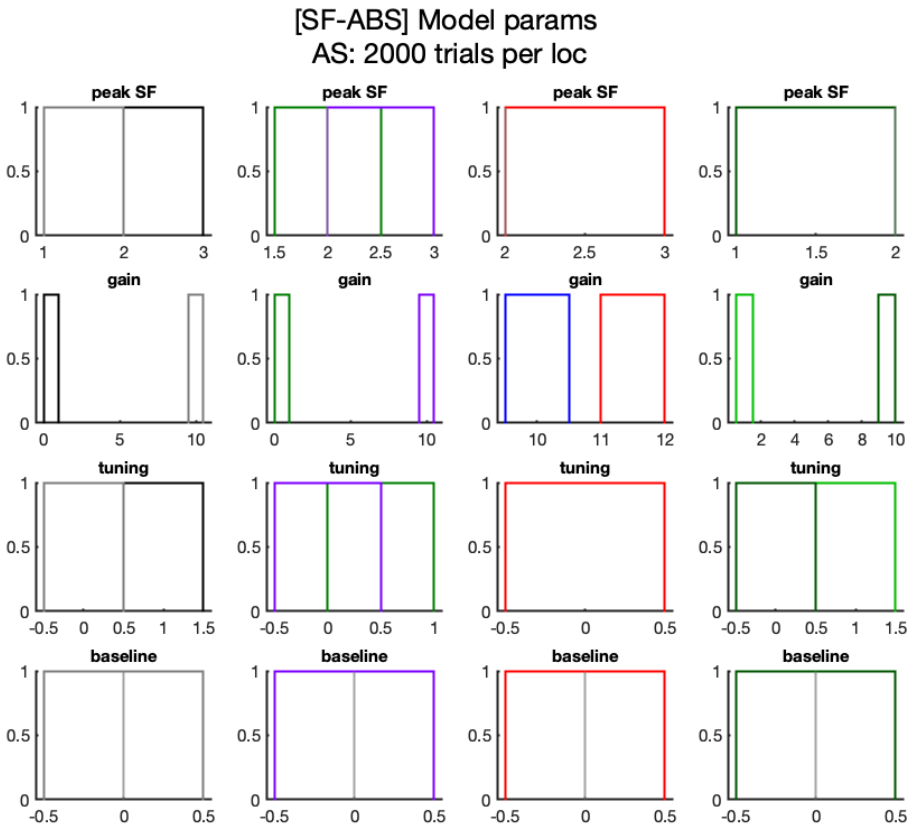

[SF-ABS] Model params
AS: 2000 trials per loc
peak SF
gain
tuning
baseline

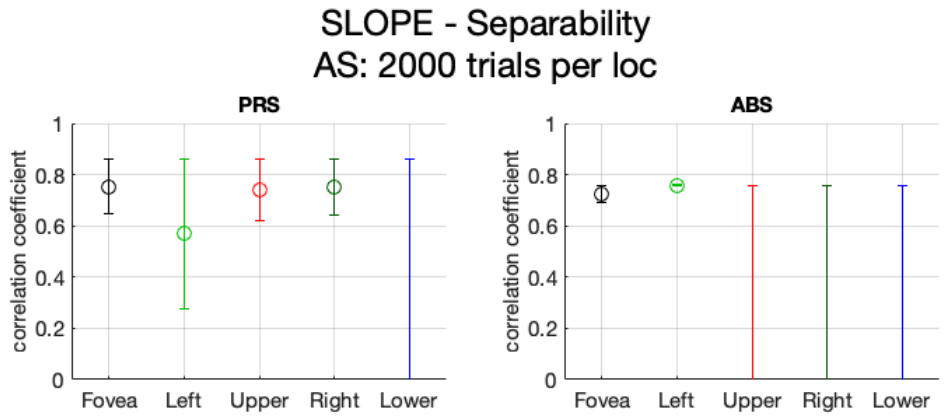


intercept, i.e., beta(1), of probit regression


for itype = 1:3 data2D = squeeze(intercept(itype, :, :, :)); n = 1; % plot both Fovea and PERI plot2D-per5Loc make_sgtitle(sprintf('[%s] intercept [probit regression]', namesType{itype}), subjName, nsubj, nAllTrials) end

rHIT/rFA as a fxn of binned energy

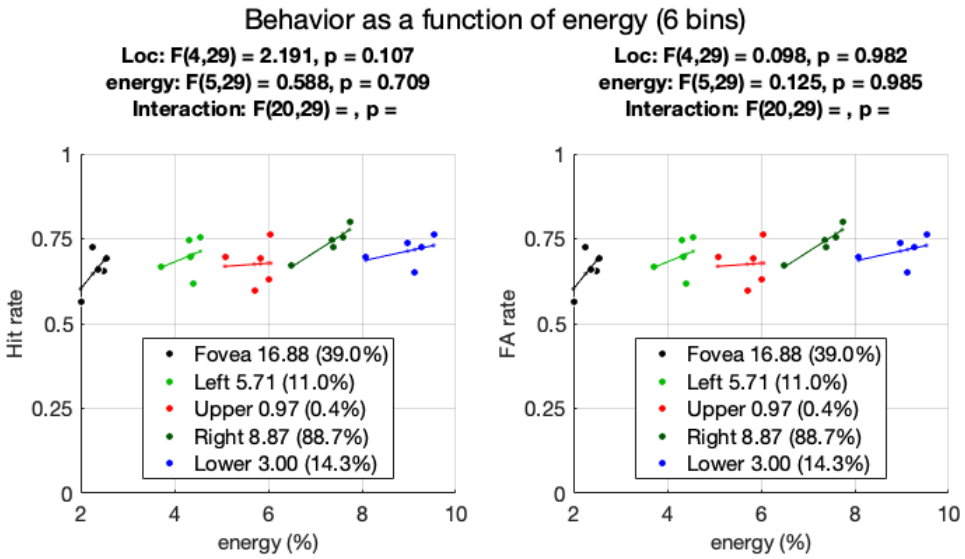


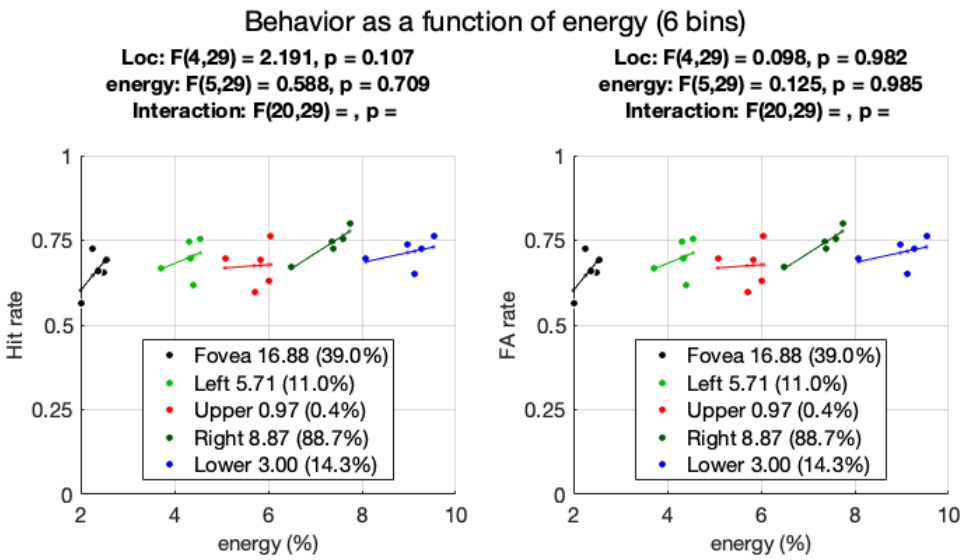

2D correlation between slope and kernel

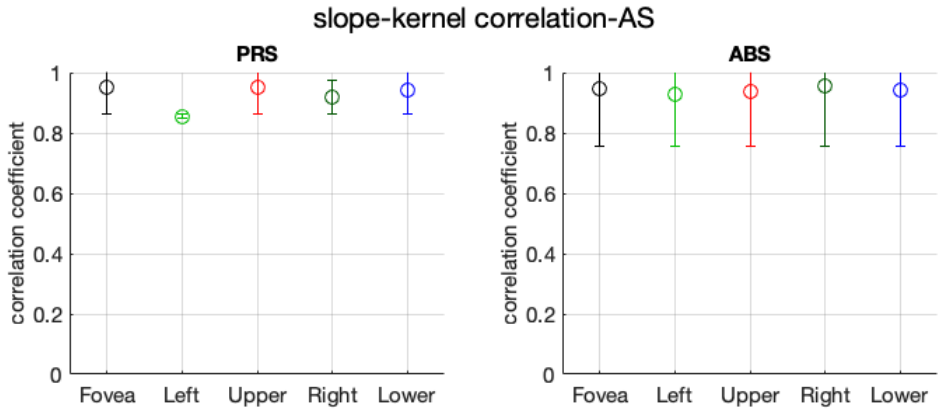


stim phase

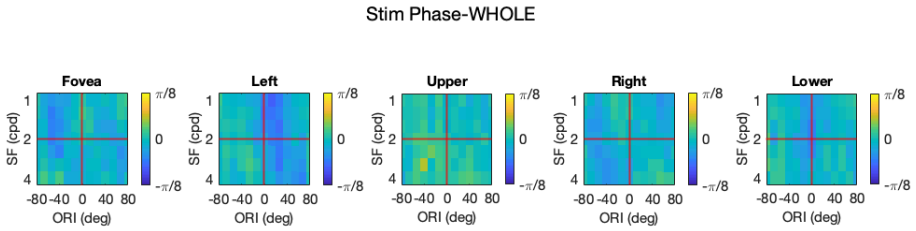


efficiency

RCplot_efficiency


FFT

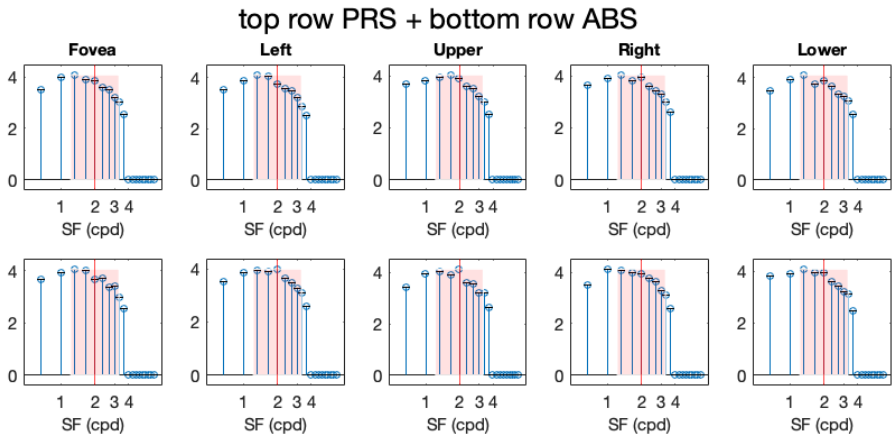


plot SDT

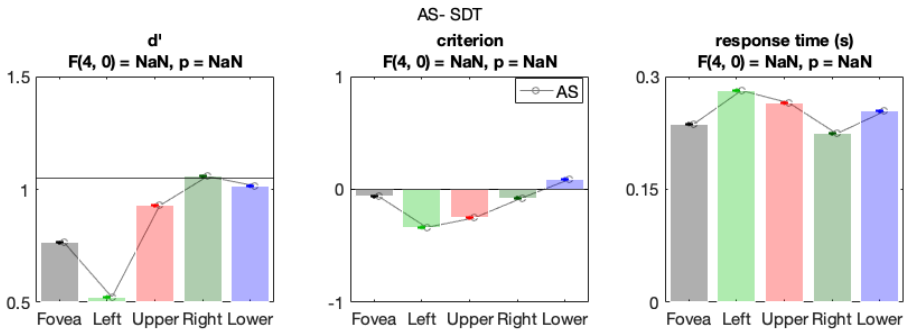


plot linearity

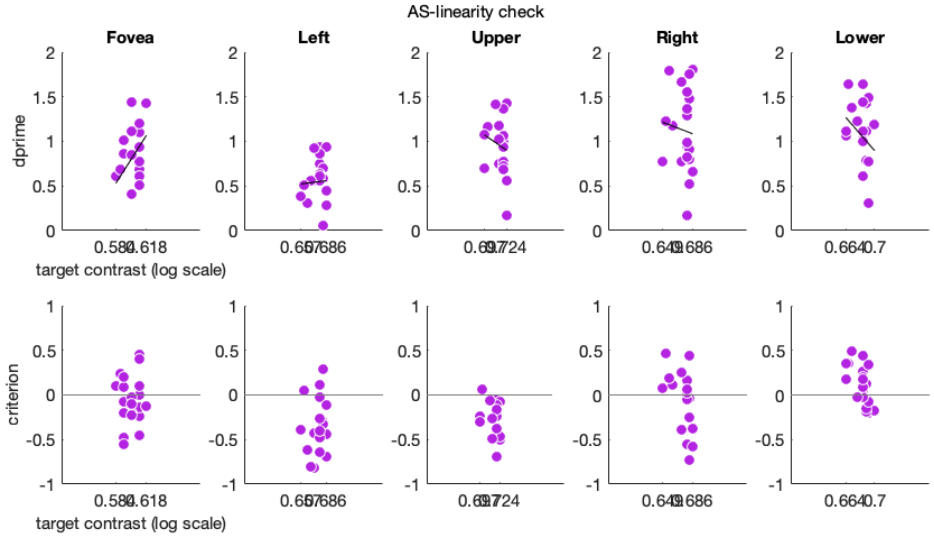


plot CI

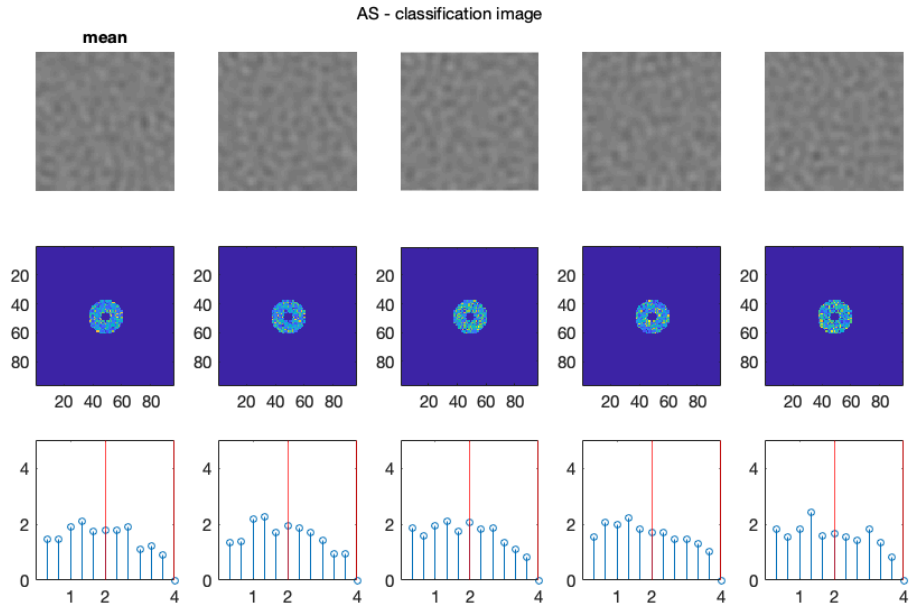


accuracy and SAT

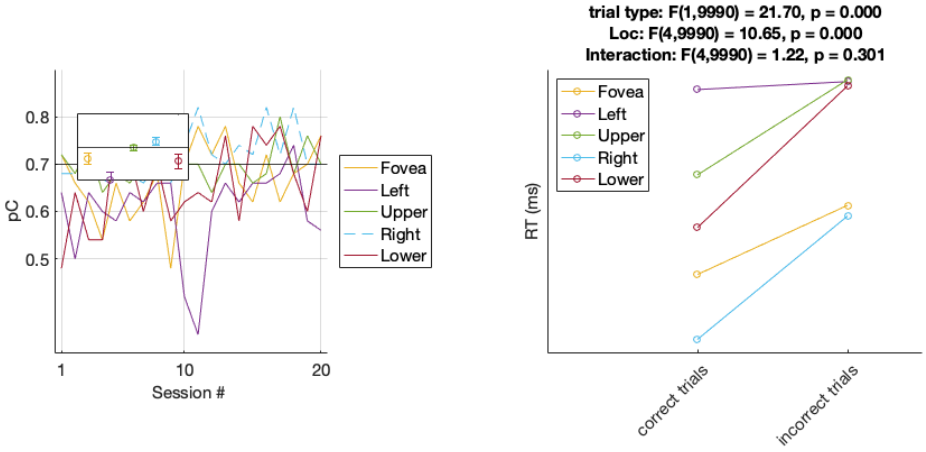

response consistency

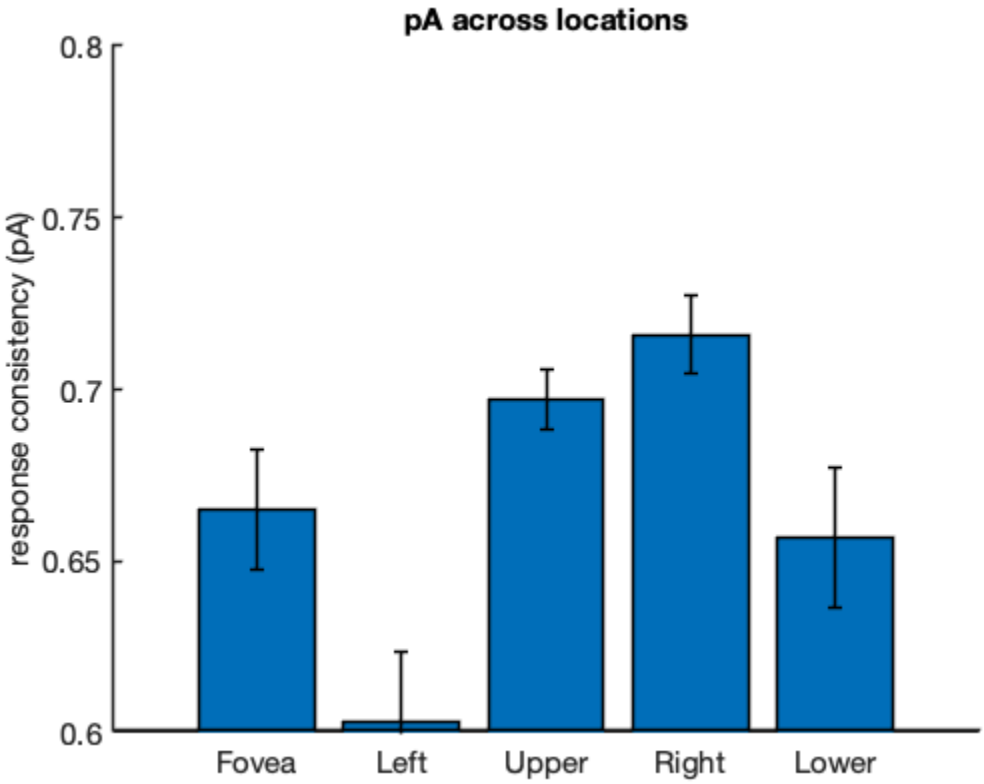

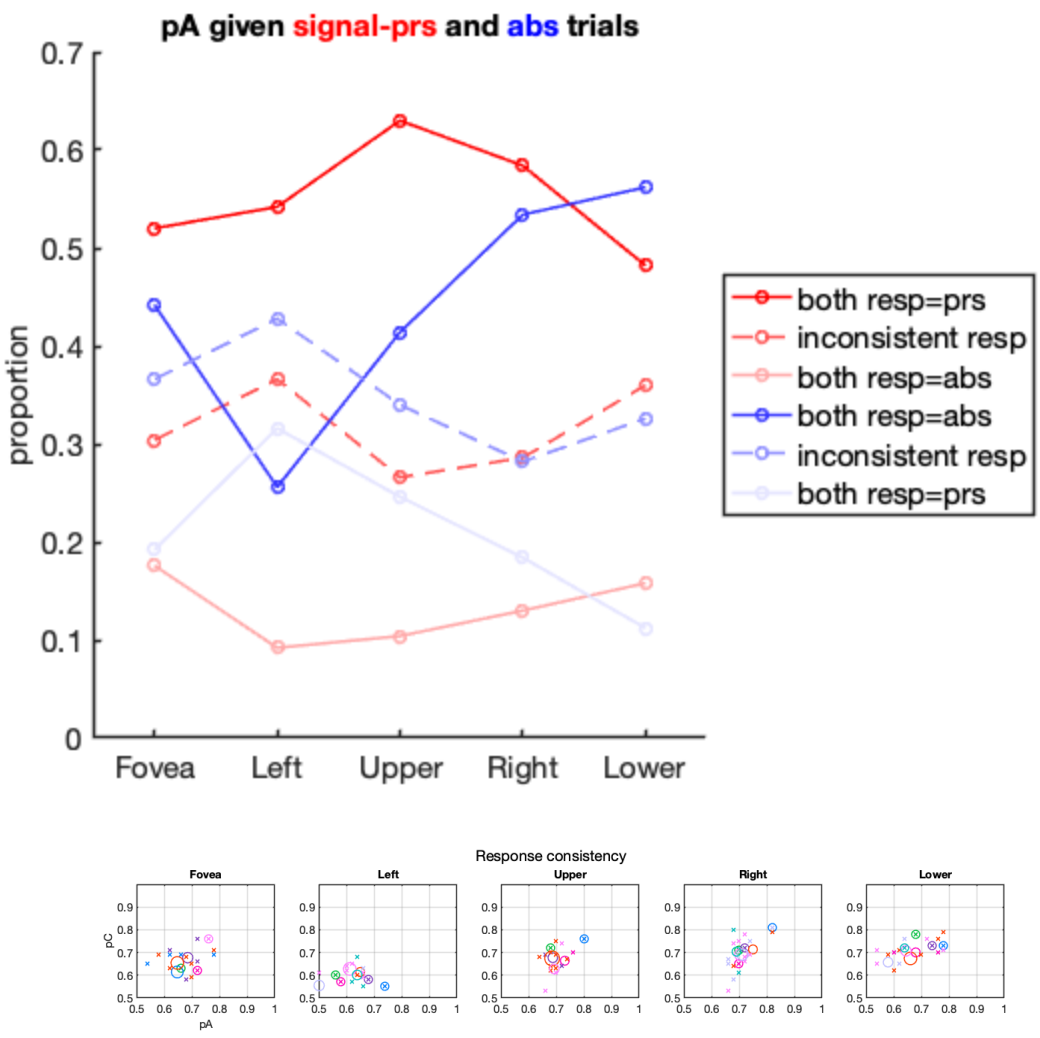

PF scatter plots

correlation between params and threshold

if nsubj > 1, RC_corr_ThreshParams; end

Published with MATLAB® R2019a