
check AF's patches used for demo

```
load AF_test/testData_full.mat load exptParams.mat patch_AF = patch; clear patch stiPar = expt.stiPar;
scr = expt.scr;
```

```
nAllTrials = size(trialsMat, 1); cueLocation = trialsMat(:,5); tgtType = nan(nAllTrials,1); for ii = 1:nAll-
Trials if cueLocation(ii) == 1 cueLocation(ii) == 3, tgtType(ii,:) = trialsMat(ii,3); elseif cueLocation(ii)
== 2 cueLocation(ii) == 4, tgtType(ii,:) = trialsMat(ii,4); end end cst_all = trialsMat(:,9); % contrast, 2
levels cst = unique(cst_all);
```

```
patch_prs_cst1 = patch_AF(tgtType == 1 & cst_all == cst(1)); patch_prs_cst2 = patch_AF(tgtType ==
1 & cst_all == cst(2)); patch_abs_cst1 = patch_AF(tgtType == 0 & cst_all == cst(1)); patch_abs_cst2 =
patch_AF(tgtType == 0 & cst_all == cst(2));
```

```
%% for n=1:4 % plot the 2D and 1D power of 4 types of trials switch n case 1, pp = patch_prs_cst1; sgtitle_
= 'prs cst1'; case 2, pp = patch_prs_cst2; sgtitle_ = 'prs cst2'; case 3, pp = patch_abs_cst1; sgtitle_ = 'abs
cst1'; case 4, pp = patch_abs_cst2; sgtitle_ = 'abs cst2'; end ntrials = length(pp); pp_fft2_2D = nan(ntrials,
stiPar.gaborpsiz, stiPar.gaborpsiz); pp_fft2_1D = nan(ntrials, stiPar.gaborpsiz);
```

```
    margDim = 1; % 1=average vertically, 2= average horizontally
    % given the power plot of prs trials (clear spike at SF=2), margDim=1 s
```

```
    for it = 1:ntrials
        [fft2D, fft1D] = getFFT(pp{it}, margDim, 1);
        pp_fft2_2D(it, :, :) = fft2D;
        pp_fft2_1D(it, :) = fft1D;
    end
```

```
    plotFFT(pp_fft2_2D, margDim)
    sgtitle(sgtitle_, 'fontsize', 20)
    clear pp
```


```
end
```

test the patches used in my exp


```
ntrials=5000, no full plots
all done!
all done!
all done!
all done!
ntrials=5000, no full plots
all done!
all done!
all done!
all done!
ntrials=5000, no full plots
all done!
all done!
all done!
```

all done!
ntrials=5000, no full plots
all done!
all done!
all done!
all done!


AF gabor AF noise, ratio base=0.3

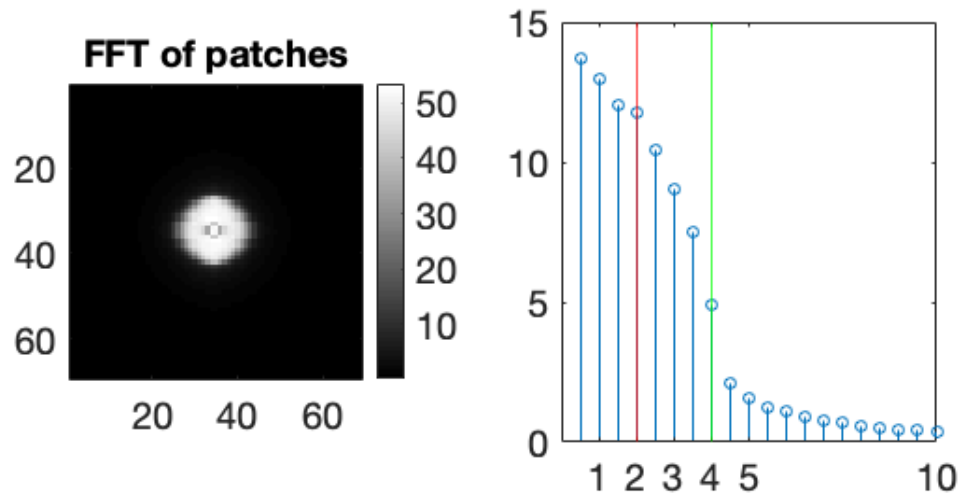


AF gabor SX noise, ratio base=0.3

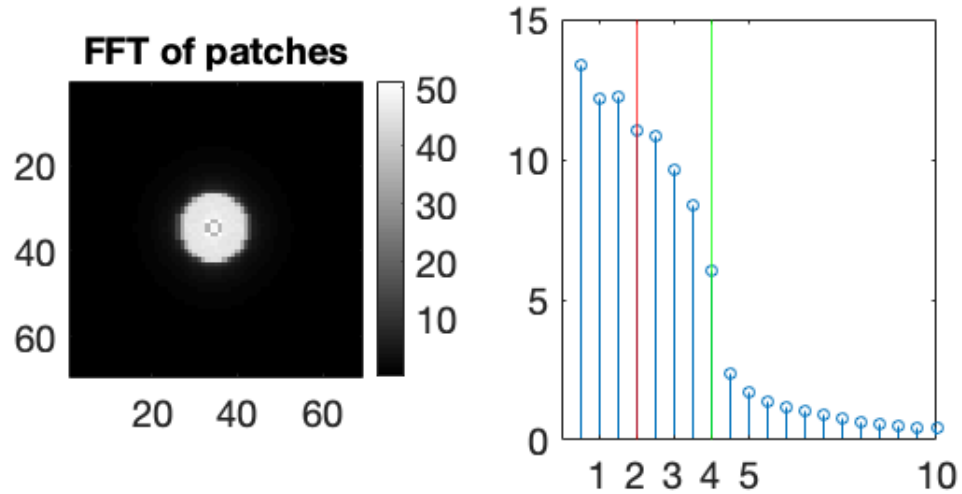


SX gabor AF noise, ratio base=0.3

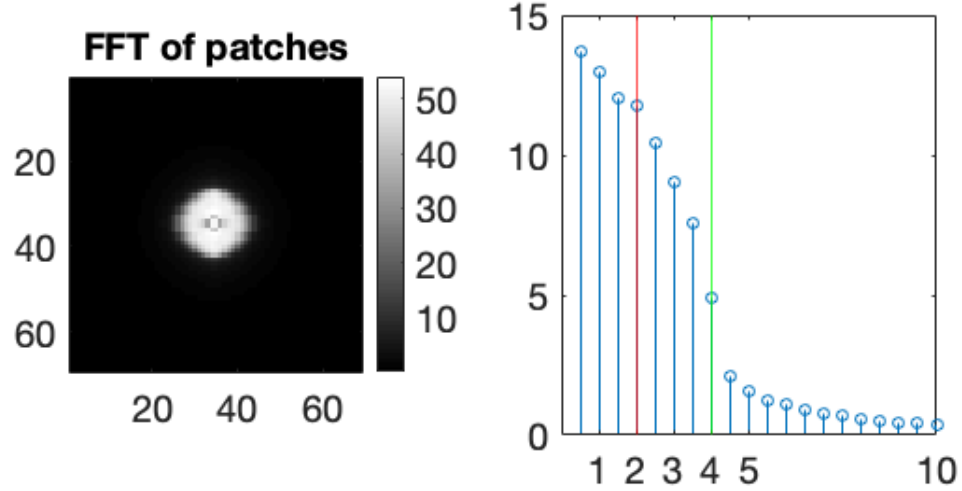


SX gabor SX noise, ratio base=0.3

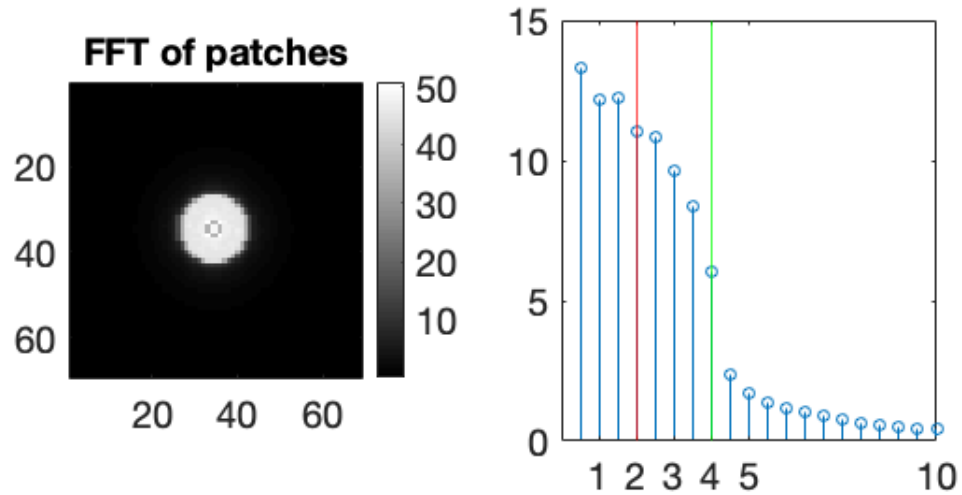


AF gabor AF noise, ratio base=0.4

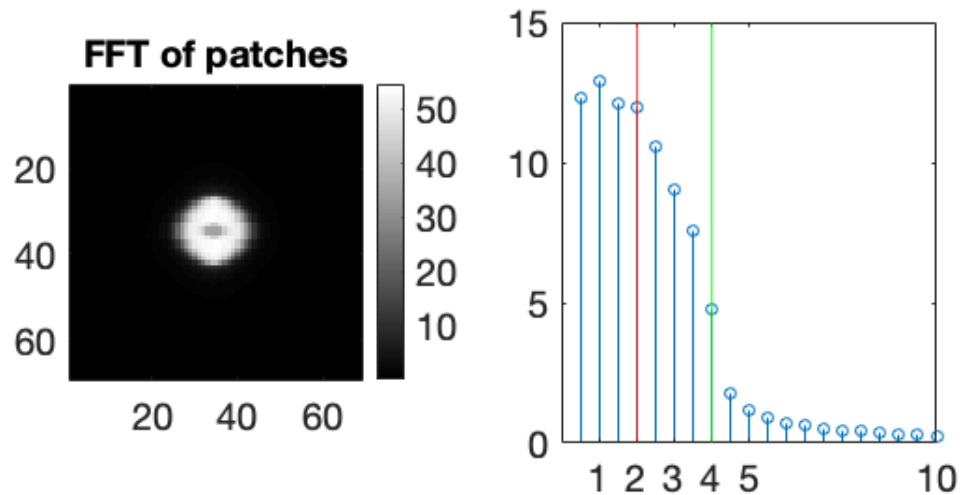


AF gabor SX noise, ratio base=0.4

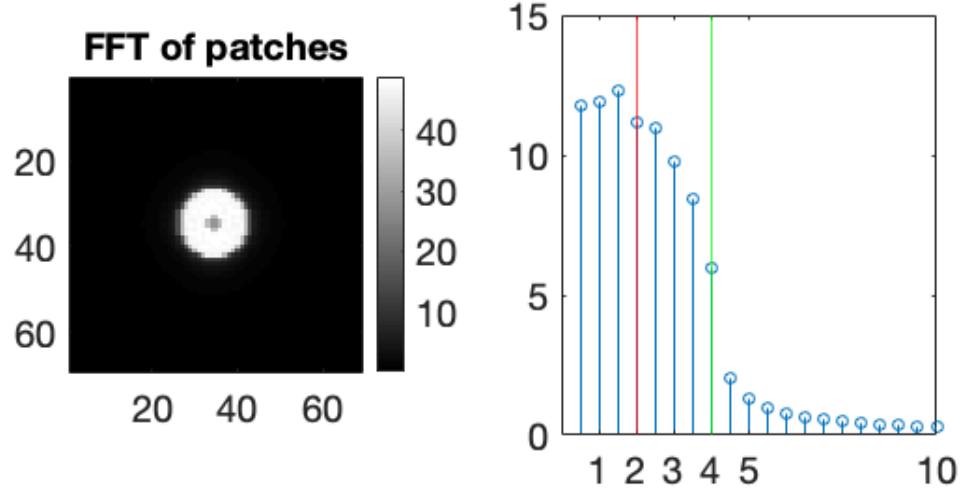


SX gabor AF noise, ratio base=0.4

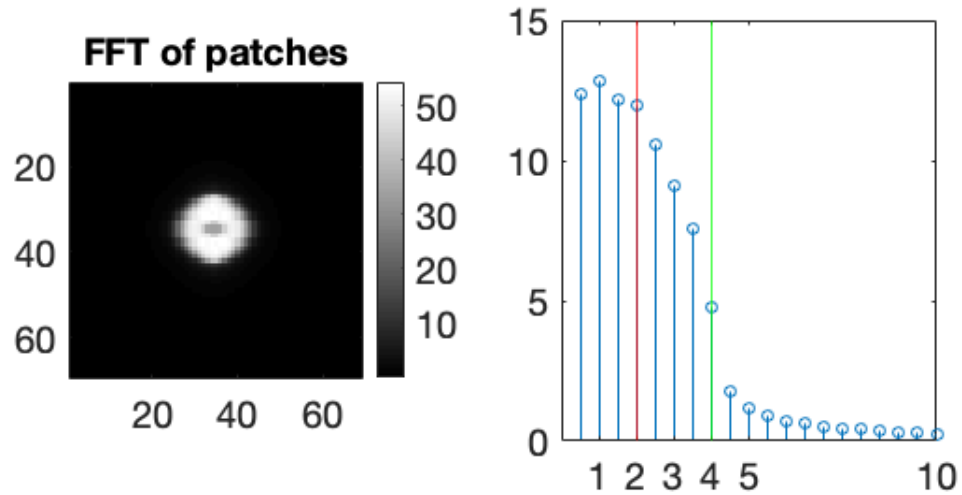


SX gabor SX noise, ratio base=0.4

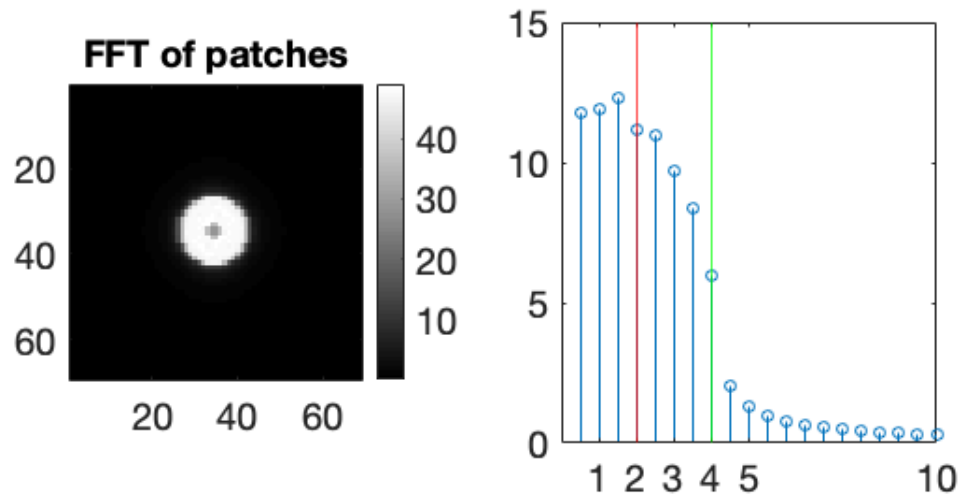


AF gabor AF noise, ratio base=0.5

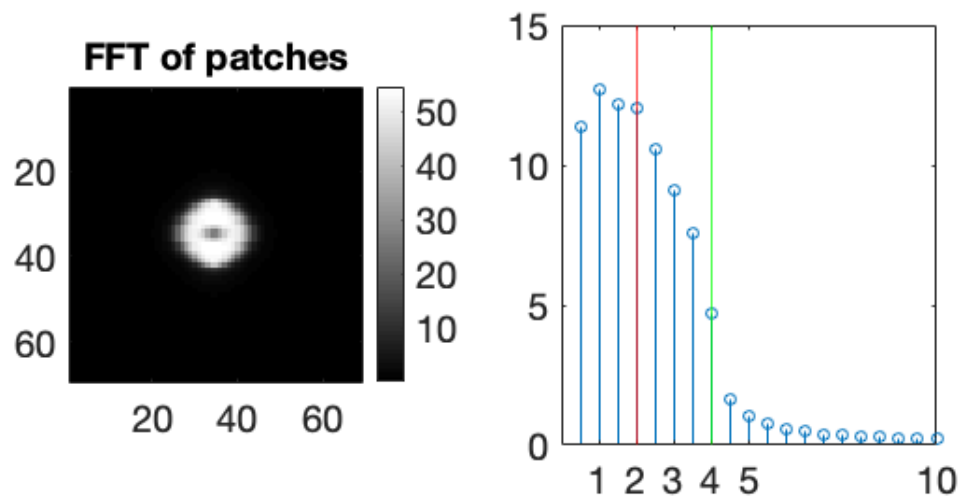


AF gabor SX noise, ratio base=0.5

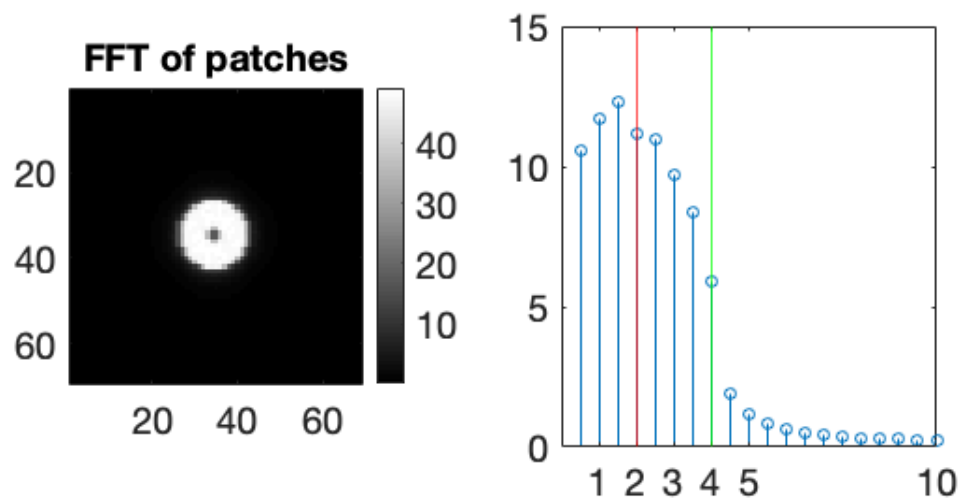


SX gabor AF noise, ratio base=0.5

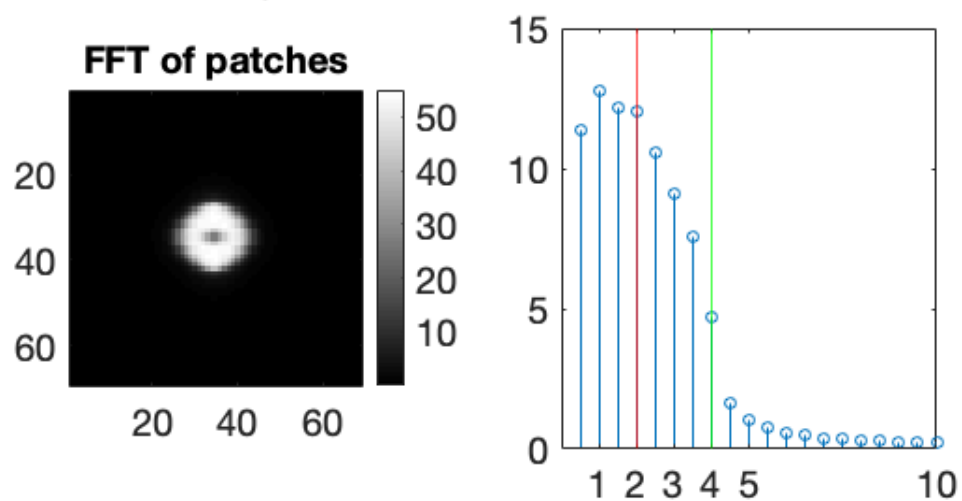


SX gabor SX noise, ratio base=0.5


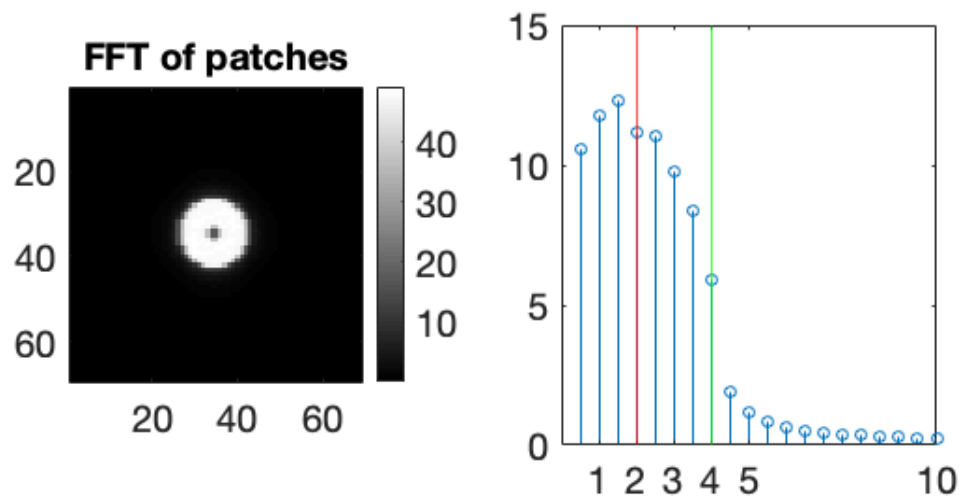


AF gabor AF noise, ratio base=0.6

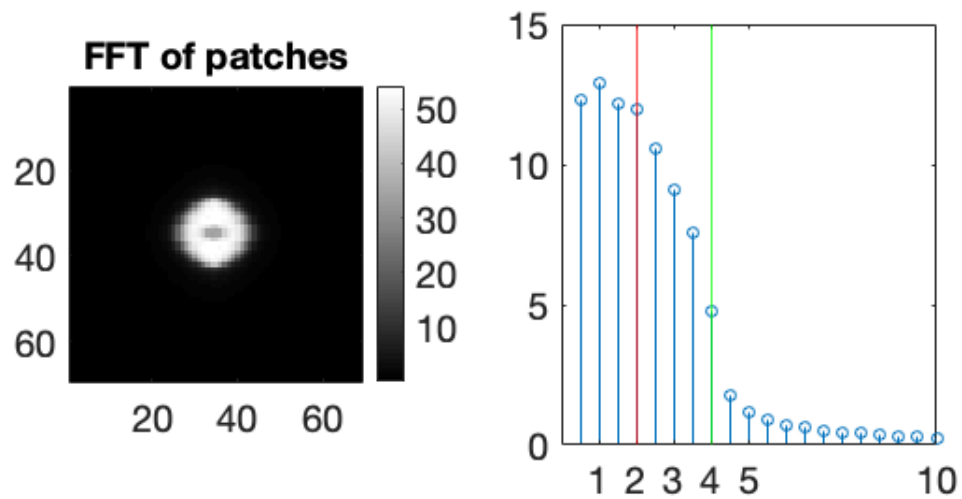

AF gabor SX noise, ratio base=0.6

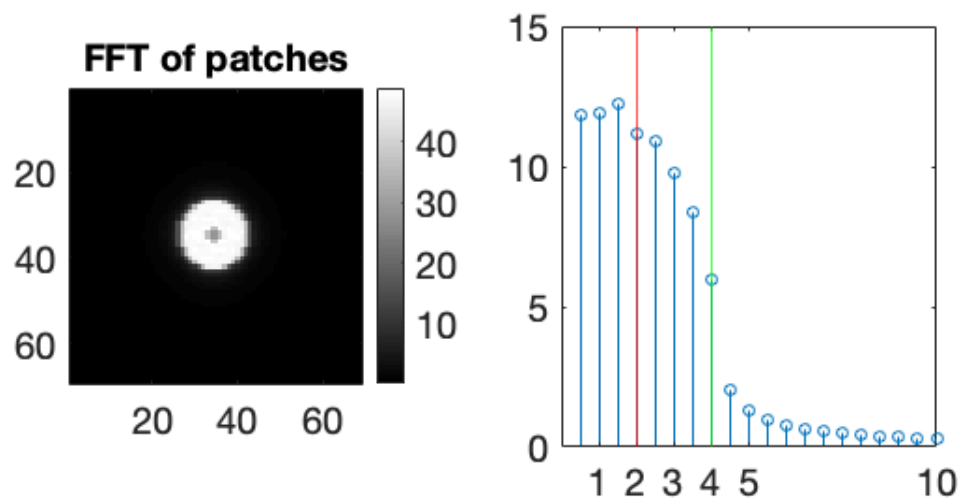

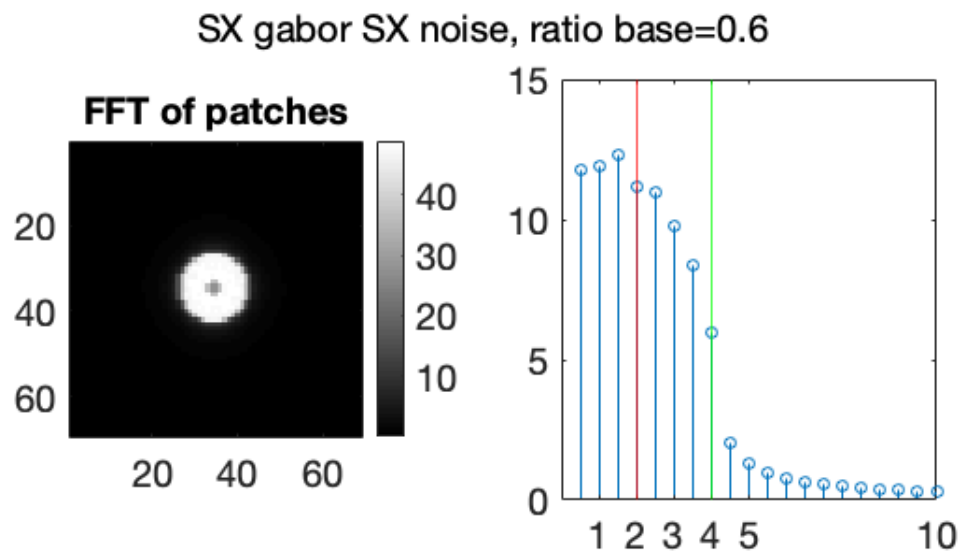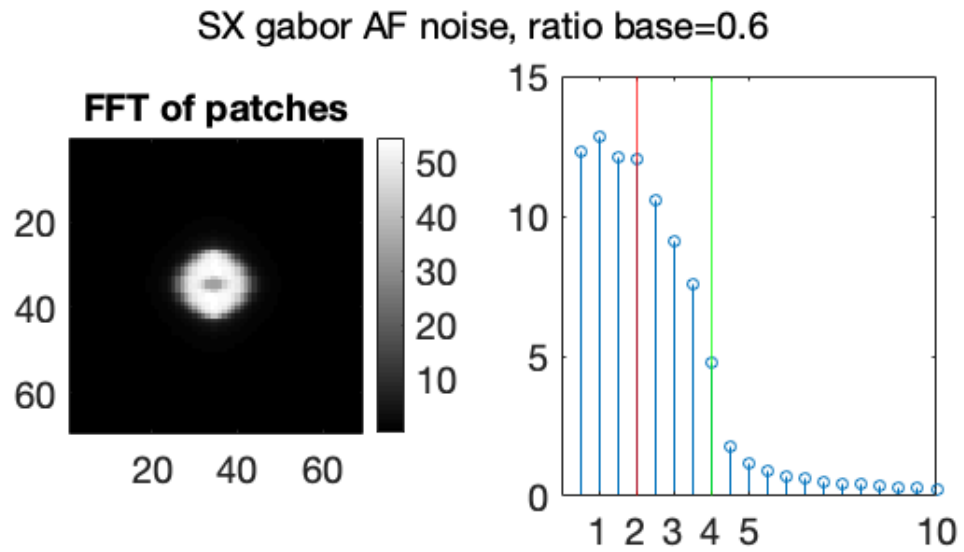

Published with MATLAB® R2019a