


Same information, same keys — the only fork is the regression target

Protocol schematic; no results shown. Tuning is not equalised; the optional F3 forcing axis is not drawn.

ONE SHARED RUN

skips the anchor

Same information set nothing dated after the issue time (regime F0)
Same anchor used by three of the four

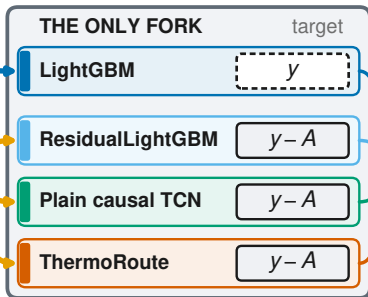

Prediction

$\hat{y} = A + r$
LightGBM: $\hat{y}$ direct

One key registry

Every model scored on the same station $\times$ date $\times$ lead keys.
Declining to predict is a failure.

RMSE within station

Paired station contrast

Median across stations

The anchor A schematic — not data

$$A = c + \phi^h (y - c)$$



■ LightGBM predicts $\hat{y}$ directly (raw target + site identity); scored on the same keys.

■ ThermoRoute bounds $|r| < 1^\circ\text{C}$ about the anchor only — not a bound on error.