Data Ingestion Pipeline.

Config. yaml (data-ingestion)
⟨Actual values of config parameters ⟩.

Configuration values are loaded into dataclass using configuration manager.py.

Stage01_ data_ingestion.py Component.

Config-entity.py
Data Ingestion Config dataclass to hold the parameters.

dataclass used as input parameters.

download()

unzip & clean ()

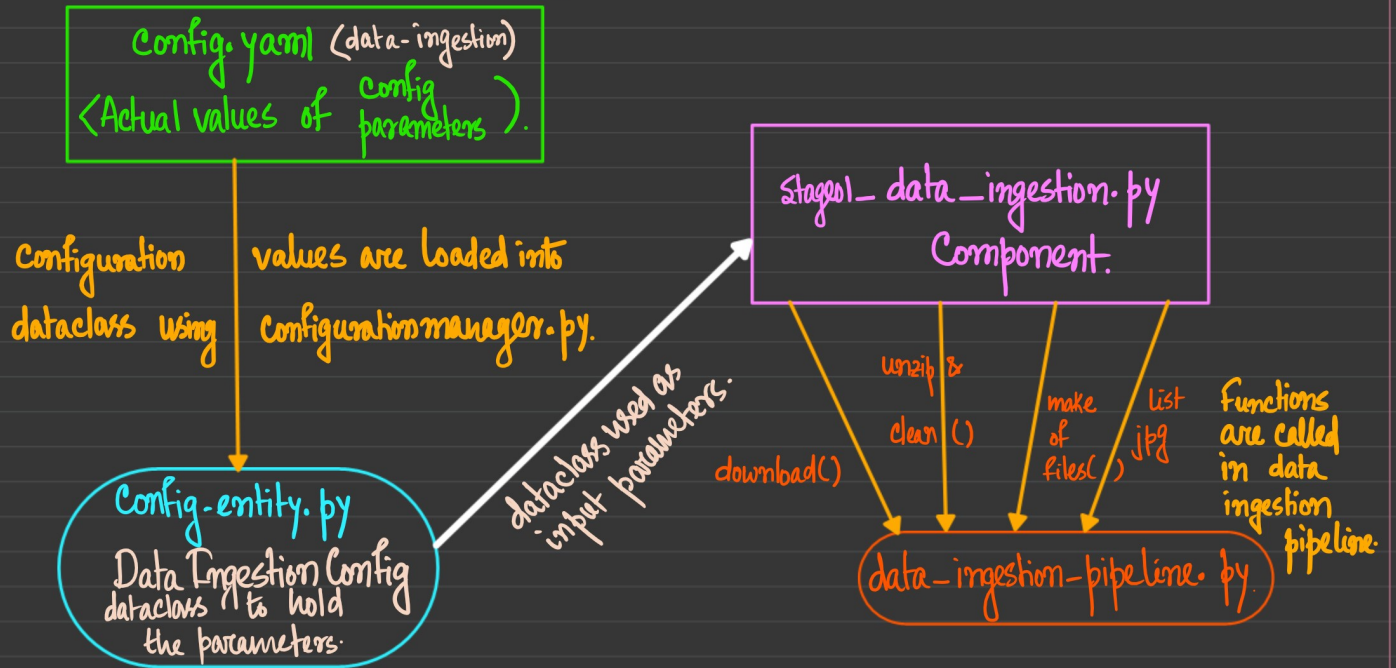make of files()

List jpg

data-ingestion-pipeline.py

Functions are called in data ingestion pipeline.

Prepare Base Model

Training Model

Model Evaluation