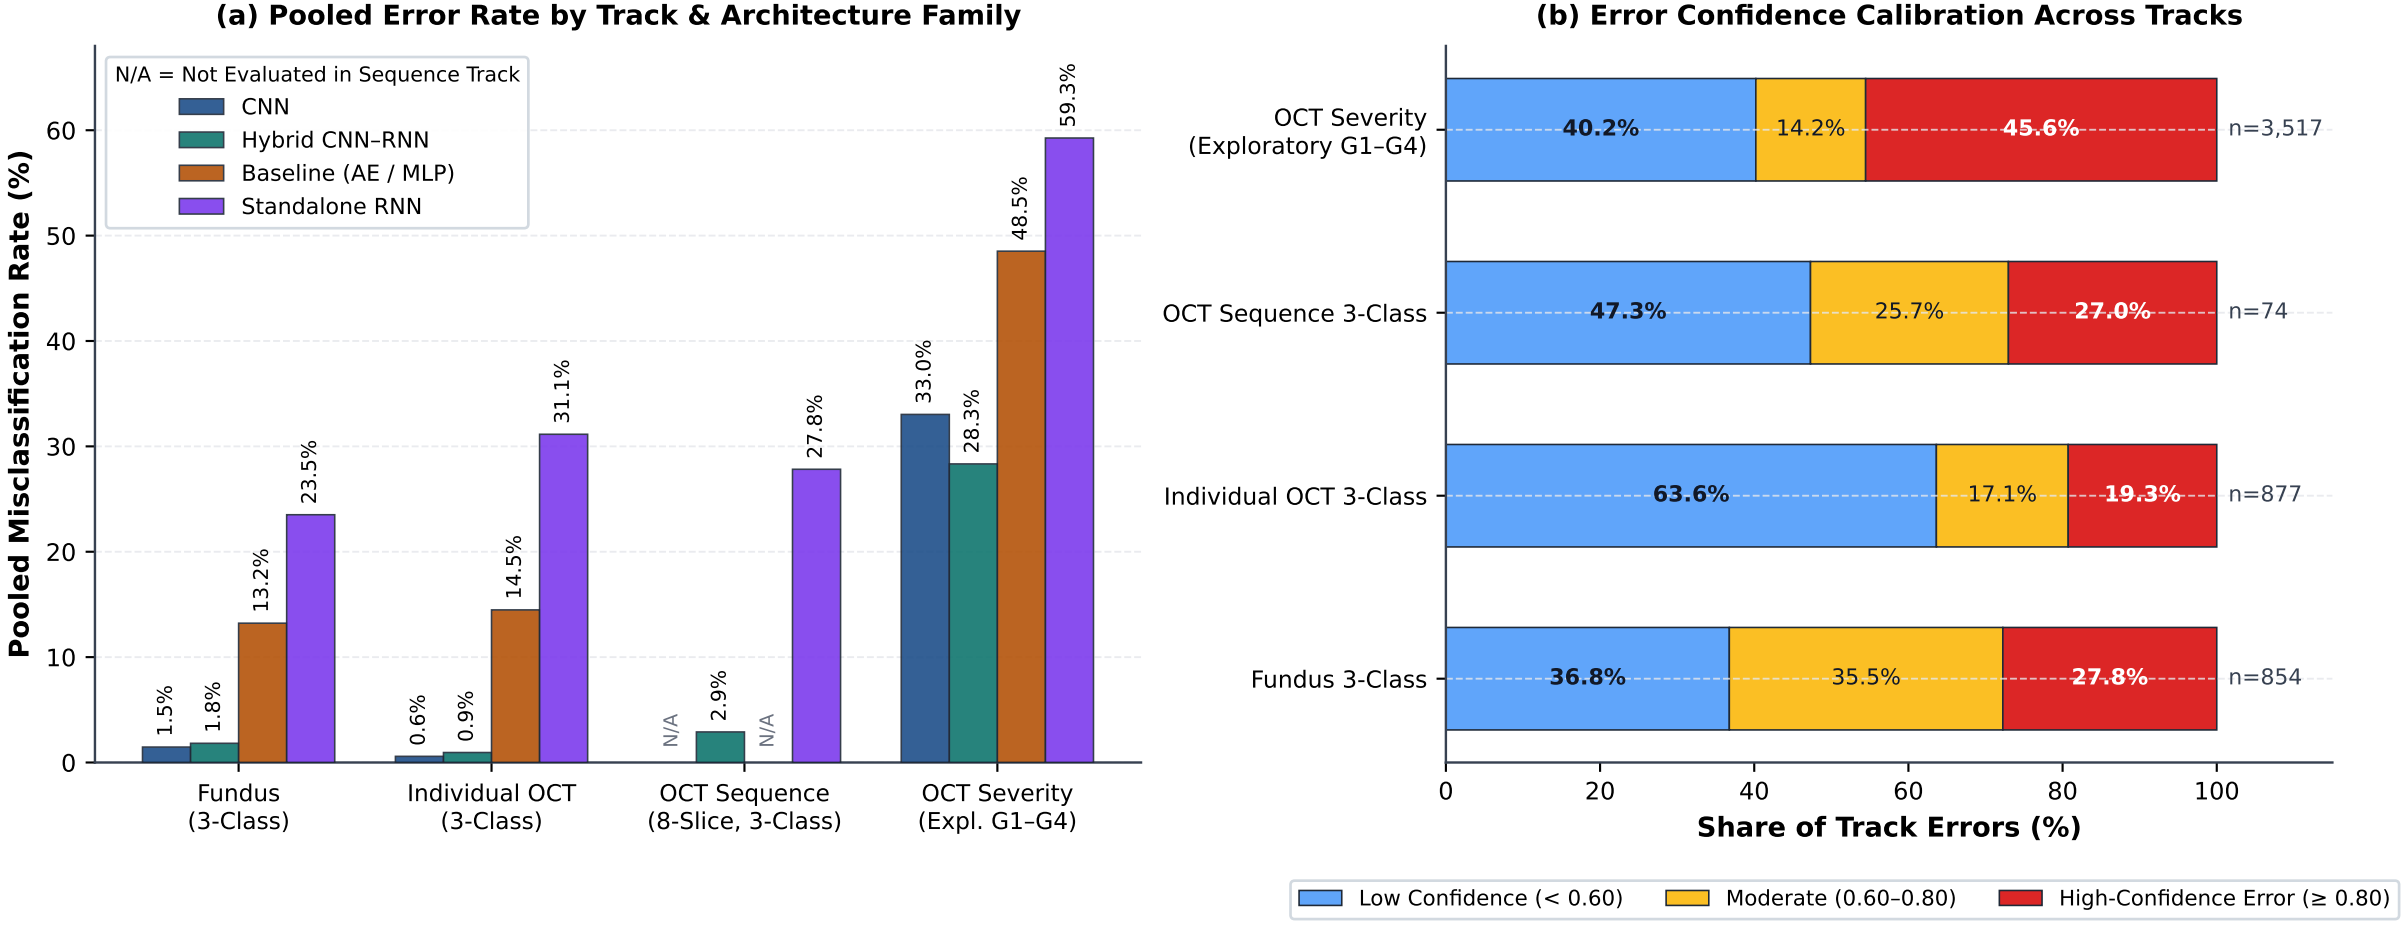
(a) Pooled Error Rate by Track & Architecture Family
N/A = Not Evaluated in Sequence Track
CNN
Hybrid CNN–RNN
Baseline (AE / MLP)
Standalone RNN
Pooled Misclassification Rate (%)
0
10
20
30
40
50
60
1.5%
1.8%
13.2%
23.5%
0.6%
0.9%
14.5%
31.1%
N/A
2.9%
N/A
27.8%
33.0%
28.3%
48.5%
59.3%
Fundus (3-Class)
Individual OCT (3-Class)
OCT Sequence (8-Slice, 3-Class)
OCT Severity (Expl. G1–G4)
(b) Error Confidence Calibration Across Tracks
OCT Severity (Exploratory G1–G4)
40.2%
14.2%
45.6%
n=3,517
OCT Sequence 3-Class
47.3%
25.7%
27.0%
n=74
Individual OCT 3-Class
63.6%
17.1%
19.3%
n=877
Fundus 3-Class
36.8%
35.5%
27.8%
n=854
0
20
40
60
80
100
Share of Track Errors (%)
Low Confidence (< 0.60)
Moderate (0.60–0.80)
High-Confidence Error (≥ 0.80)