Python Assignment 1

Answer Sheet

Student Name:	Shakhawat Hossain Shuvo

Problem 1: Answer

```
# Write your code here


s = input()

balance_list = []
cnt_L = 0
cnt_R = 0
st = 0
for i in range(len(s)):
    if 'L' == s[i]:
        cnt_L += 1
    elif 'R' == s[i]:
        cnt_R += 1
    if cnt_L == cnt_R:
        balance_list.append(s[st:i+1])
        cnt_L = 0
        cnt_R = 0
        st = i+1
print(len(balance_list))
for item in balance_list:
    print(item)
```

Problem 1: Screenshot of Accepted Code (If needed)

```
# Write your code here
```

#	When	Who	Problem	Lang	Verdict	Time	Memory
370442414	Apr/09/2026 21:21 UTC+6	Shakhawat_Hossain_Shuvo	S - Max Split	Python 3	Accepted	78 ms	0 KB

Problem 2: Answer

```
# Write your code here
```

```python
from collections import Counter

n = int(input())
arr = list(map(int, input().split()))

cnt = Counter(arr)
remove = 0
for x,c in cnt.items():
    if c < x:
        remove += c
    elif c > x:
        remove += c - x

print(remove)
```

Problem 2: Screenshot of Accepted Code (If needed)

```python
# Write your code here
```

Task: - Language: - Status: - User: Reset Search

Submission Time	Task	User	Language	Score	Code Size	Status	Exec Time	Memory	
2026-04-09 22:16:09	C - Good Sequence	ShuvoCoder	Python (CPython 3.13.7)	300	244 Byte	AC	37 ms	24348 KiB	Detail

Problem 3: Answer

```python
# Write your code here
```

Problem 3: Screenshot of Accepted Code (If needed)

```python
# Write your code here
```

(৬)

Write the difference between list and Dictionary of ~~pyt~~ python.

List :

* List সবসময় order অনুযায়ী element সংগ্রহ করে।
* List লিখা হয় ইতিয় বন্ধনীর ভিতরে "[ ]"
* insertion অনুযায়ী ক্রম বজায় রাখে।
* একই উপাদান একাধিক বার থাকতে পারে।
* index দ্বারা মান গুলো অ্যাক্সেস করা যায়।
* this ~~(F_list[0])~~ F_list[0] → 1

Dictionary :

* Dictionary সবসময় key এবং value জোড়ে হিসাবে থাকে।
* Dictionary লিখা হয় ব্রেস বন্ধনীর ভিতরে "{ }"
* key এর insertation অনুযায়ী ক্রম বজায় থাকে।
* key ডুপ্লিকেট হতে পারে না ইউনিক হতে হয়
* key দ্বারা মান গুলো অ্যাক্সেস করা যায়।

F_dict['a'] → 1

* write about *args and **kargs of python with Proper examples.

*args :

*args ব্যবহার করা হয় যখন কোন ফাংশনে অনেকগুলো পজিশনাল আর্গুমেন্ট পাঠাতে চাই। এই ফাংশনের ভিতরে সেগুলো Tuple হিসাবে জমা রাখে।

```
def jog_tol(*arg):
    total = sum(args)
    return total
print(jog_tol(10, 20))
```

আউটপুট = 30

** kargs :

** kargs ব্যবহার করা হয় যখন কোন ফাংশনে অনেকগুলো key এবং value পাঠাতে চাই। এই ফাংশনের ভিতরে এগুলো Dictionary হিসেবে জমা হয়।

```
def user(**kargs):
    for key, value in kargs.items():
        print(f"{key} : {value}")

user(Name = "Shuvo", Age = 20, city = "Dhaka")
```

আউটপুট :

Name : Shuvo
Age : 20
City : Dhaka

Problem 4: Answer

```
# Write your code here



n = int(input())
arr = list(map(int,input().split()))
```

```
cnt = 0
br = True
while True:
    if not br:
        break
    for i in range(n):
        if arr[i] % 2 != 0:
            br = False
            break

        else:
            arr[i] = arr[i] / 2
    if br:
        cnt += 1

print(cnt)
```

Problem 4: Screenshot of Accepted Code (If needed)

```
# Write your code here
```

My Submissions

#	When	Who	Problem	Lang	Verdict	Time	Memory
370454929	Apr/09/2026 23:07 UTC+6	Shakhawat_Hossain_Shuvo	P - Minimize Number	Python 3	Accepted	62 ms	0 KB

Problem 5: Answer

```
# Write your code here


import pyautogui
n = int(input())
#n = 5
for i in range(1,n + 1):
    pyautogui.write('*'*i)
    pyautogui.press('enter')
```

Problem 5: Screenshot of Accepted Code (If needed)
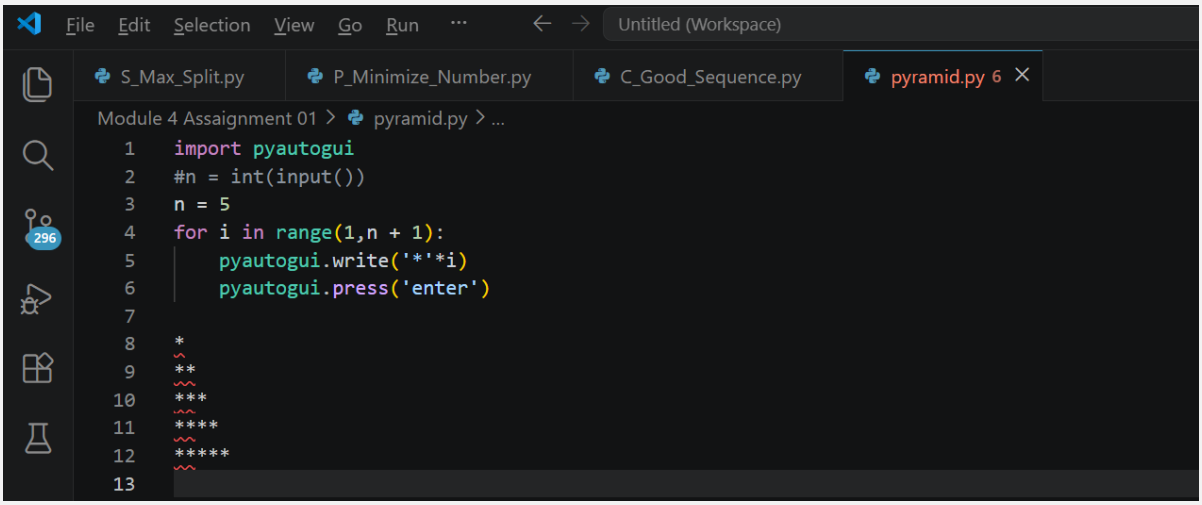
```
# Write your code here
```