

PRACTICAL 1

Name: Shweta Hangal

PRN: 202501050004

1.1.1 Calculate Momentum

Write a program that accepts the mass of an object (in kilograms) and its velocity (in meters per second), then calculates and displays the momentum of the object. The momentum is calculated using the formula: $P = m * v$

where:

m is the mass of the object (in kilograms).

v is the velocity of the object (in meters per second).

Input Format:

- A single floating-point number representing the mass of the object in kilograms.
- A single floating-point number representing the velocity of the object in meters per second.

Output Format:

- The output will display calculated momentum with appropriate units (kgm/s) (rounded up to 2 decimal places).


Code:

```
m = float(input())
```

```
v = float(input())
```

```
p = m * v
```

```
print(f"{p:.2f}kgm/s")
```

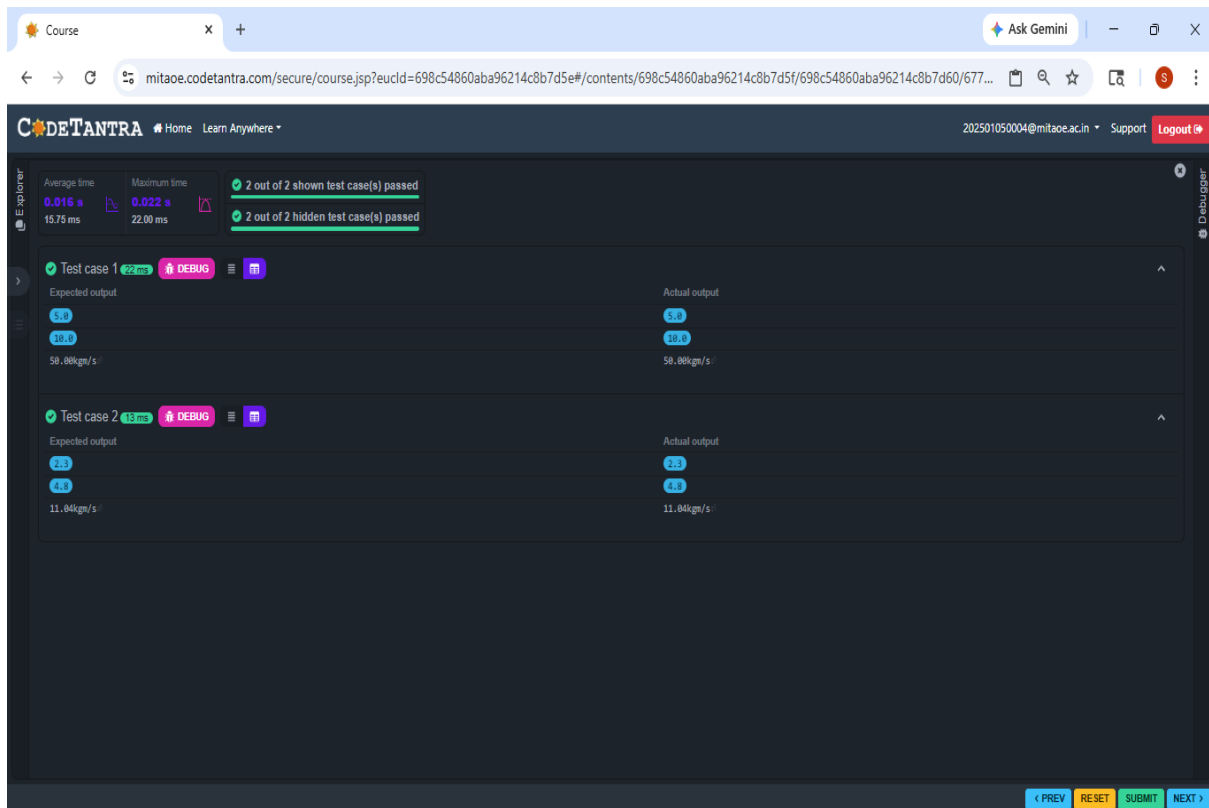

1.1.2 Condition Calculation based on the Number of Digits

Write a Python program that accepts an integer as input. Depending on the number of digits in n .

Constraints:

$$1 \leq n \leq 999$$

Input Format:

- The input consists of a single integer n .

Output Format:

- If n is a single-digit number, print its square.
- If n is a two-digit number, print its square root (rounded to two decimal places).
- If n is a three-digit number, print its cube root (rounded to two decimal places).
- Else print "Invalid".

Code:

```
import math

n = int(input())

if 1 <= n <= 9:

    print(n*n)

elif 10 <= n <= 99:


    print(f"{math.sqrt(n):.2f}")

elif 100 <= n <= 999:

    print(f"{math.cbrt(n):.2f}")

else:

    print("Invalid")
```

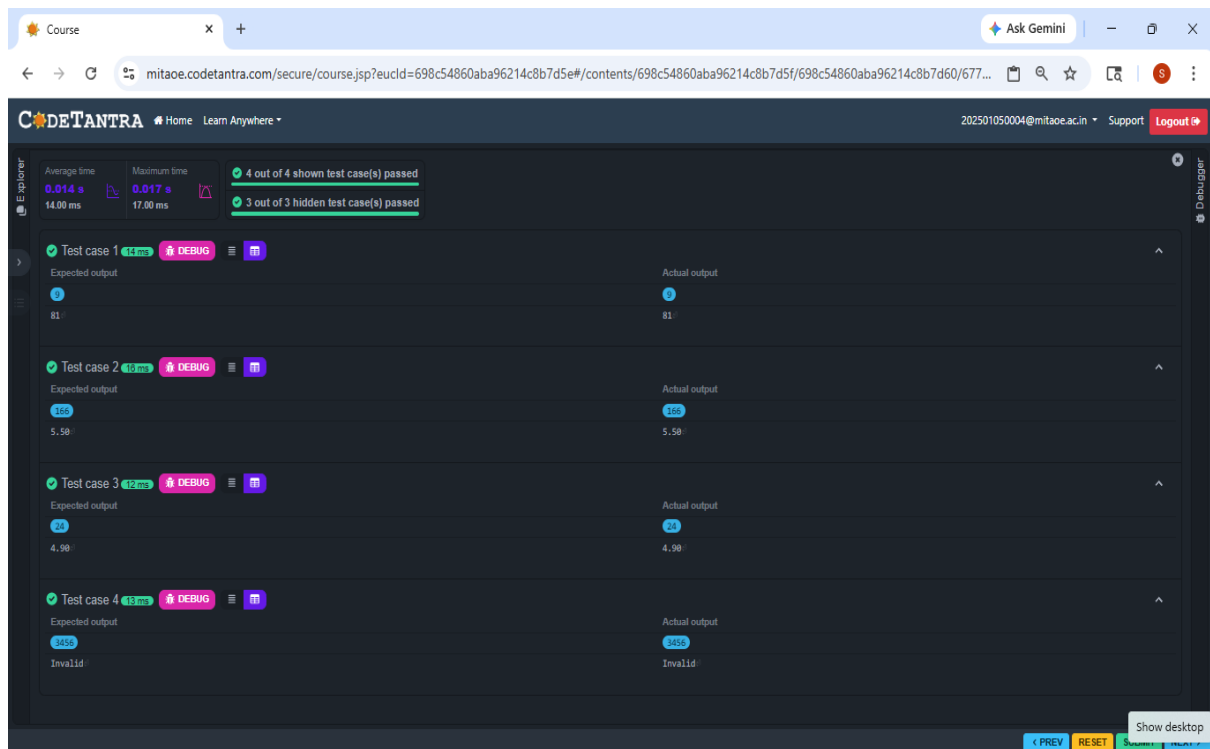

1.1.3 Days between Two Dates

Write a Python program to calculate number of days between two dates.

Input Format:

- The first line contains the first date in the format YYYY-MM-DD.
- The second line contains the second date in the format YYYY-MM-DD.

Output Format:

- An integer representing the number of days between the given dates.

Note:

- The first date should always be considered earlier than the second date.

Code:

```
from datetime import date
```

```
from datetime import datetime
```

```
date1 = input().strip()
```


```
date2 = input().strip()
```

```
d1 = datetime.strptime(date1, "%Y-%m-%d")
```

```
d2 = datetime.strptime(date2, "%Y-%m-%d")
```

```
difference = d2 - d1
```

```
print(difference.days)
```

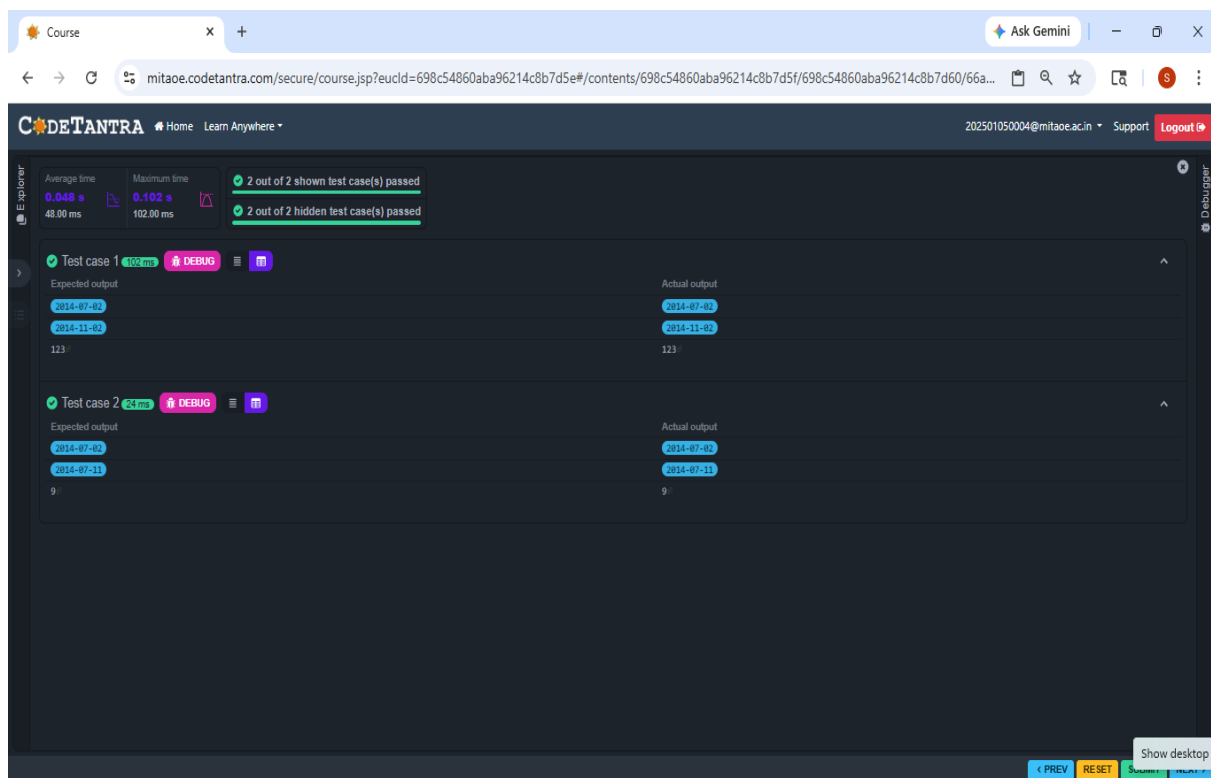

1.1.4 Reverse a number

Write a Python program to reverse the digits of the number and print the reversed number.

Input Format:


- The input is a single integer.

Output Format:

- The output prints a single integer, which is the reversed number.

Code:

```
n= int(input())  
reversed_num = int(str(n)[::-1])  
print(reversed_num)
```

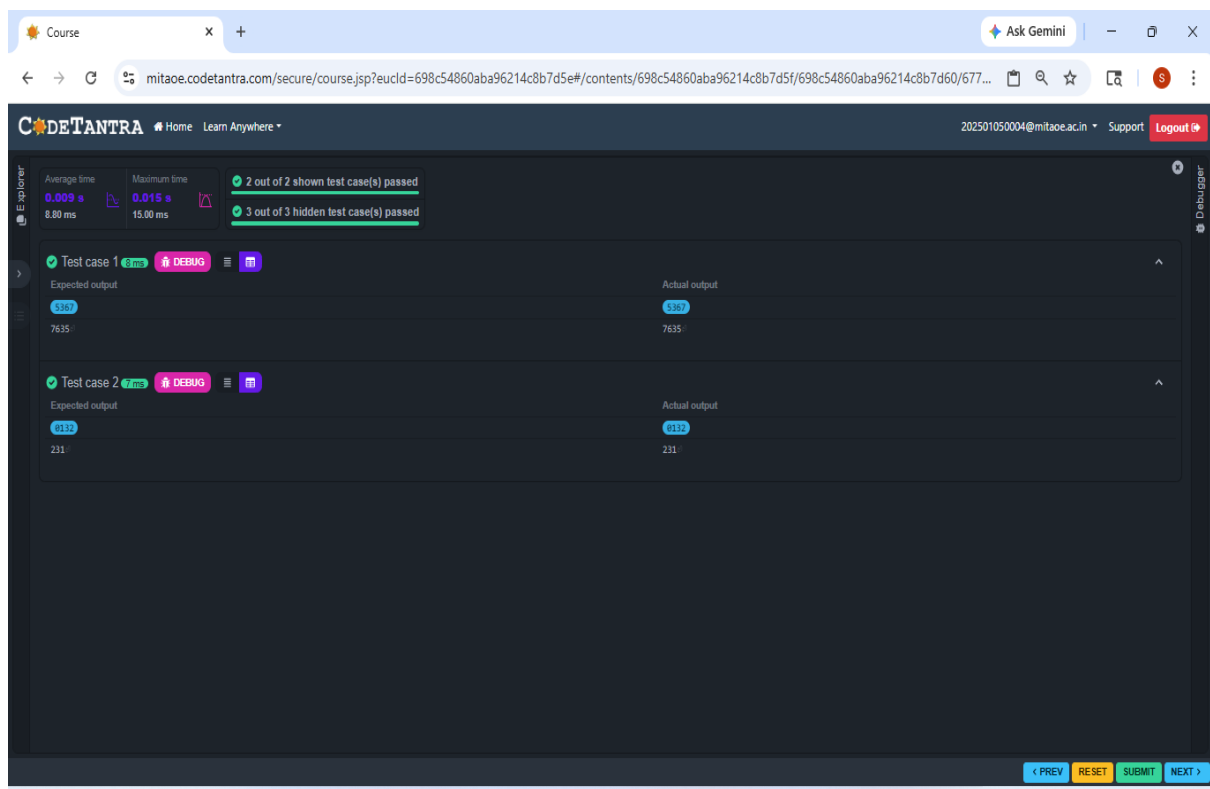

1.1.5 Multiplication Table

Write a Python program that takes an integer as input and prints the multiplication table for that integer from 1 to 10.

Input Format:

- The first line of input contains an integer that represents the number for which the multiplication table is to be printed.

Output Format:

- Print the multiplication table for the given number in the format:

<number> x <multiplier> = <result>

Note:

- The character "x" is used in the output to represent multiplication.
- Refer to the visible test-cases for more clarity.

Code:


```
n = int(input())
```

```
for i in range(1, 11):
```

```
    print(f"{n} x {i} = {n*i}")
```

The screenshot displays a web-based code editor interface for a programming challenge. At the top, there's a navigation bar with 'Course', 'Home', and 'Learn Anywhere' links. A status bar indicates '2 out of 2 shown test case(s) passed' and '2 out of 2 hidden test case(s) passed'. The main area shows the 'Expected output' and 'Actual output' for 'Test case 1'. The output is a 10x1 grid of multiplication results for n=8, ranging from 8 x 1 to 8 x 10. The 'Actual output' column shows the same results, indicating a successful test case. At the bottom, there are buttons for 'PREV', 'RESET', 'SUBMIT', and 'NEXT'.

Expected output	Actual output
8 x 1 = 8	8 x 1 = 8
8 x 2 = 16	8 x 2 = 16
8 x 3 = 24	8 x 3 = 24
8 x 4 = 32	8 x 4 = 32
8 x 5 = 40	8 x 5 = 40
8 x 6 = 48	8 x 6 = 48
8 x 7 = 56	8 x 7 = 56
8 x 8 = 64	8 x 8 = 64
8 x 9 = 72	8 x 9 = 72
8 x 10 = 80	8 x 10 = 80

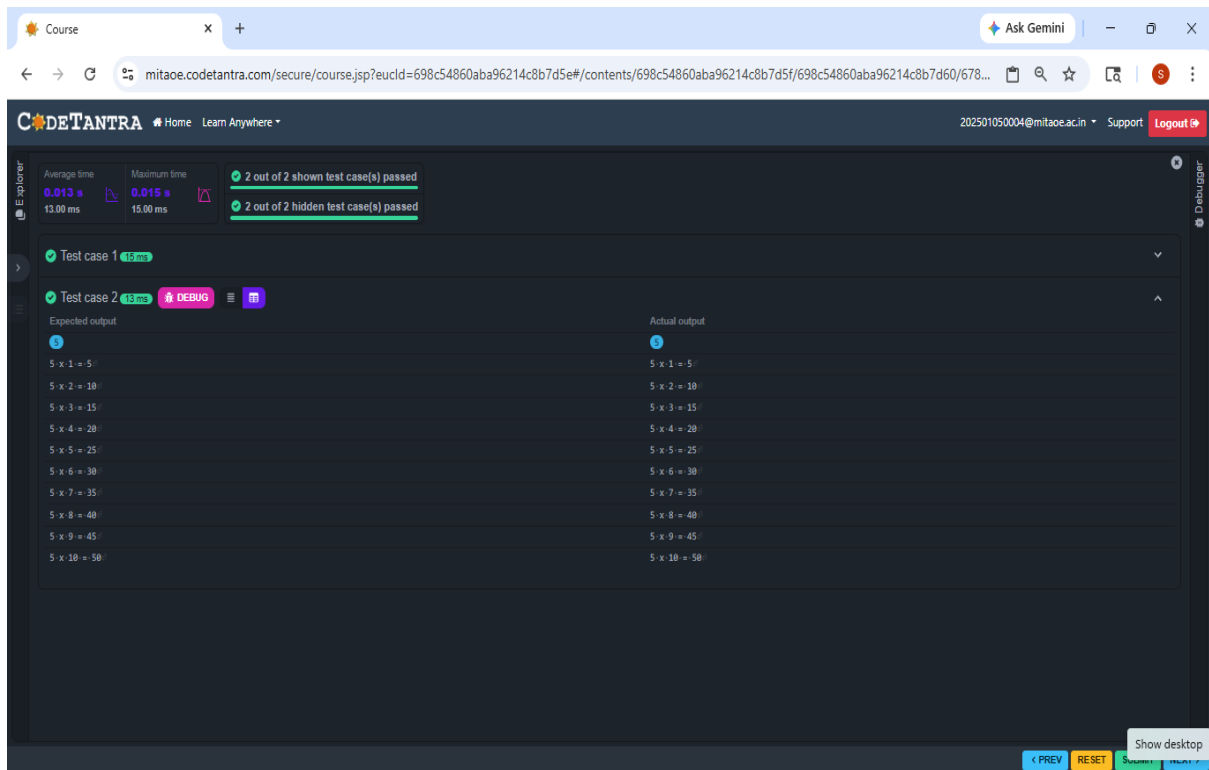

1.2.1 Pass or Fail

Write a Python program that accepts the number of courses and the marks of a student in those courses.

The grade is determined based on the aggregate percentage:

- If the aggregate percentage is greater than 75, the grade is Distinction.
- If the aggregate percentage is greater than or equal to 60 but less than 75, the grade is First Division.
- If the aggregate percentage is greater than or equal to 50 but less than 60, the grade is Second Division.
- If the aggregate percentage is greater than or equal to 40 but less than 50, the grade is Third Division.

Input Format:

- The first input will be an integer n , the number of courses.
- The second input will be n integers representing the marks of the student in each of the n courses, separated by a space.

Output Format:

If the student passes all courses:

- Print the aggregate percentage (formatted to two decimal places).
- Print the grade based on the aggregate percentage.

If the student fails any course (marks < 40 in any course), print:

- "Fail".

Note:

- **Aggregate Percentage:** Average performance across all courses, calculated by summing all marks and dividing by the number of courses.

Code:

```
n = int(input())
marks = list(map(int, input().split()))
failed = False
for m in marks:
    if m < 40:
        failed = True
        break
if failed:
    print("Fail")
else:
    total = sum(marks)
    agg = total / n
    print("Aggregate Percentage: {:.2f}".format(agg))
    if agg > 75:
        print("Grade: Distinction")
    elif agg >= 60:
        print("Grade: First Division")
    elif agg >= 50:
        print("Grade: Second Division")
    elif agg >= 40:
        print("Grade: Third Division")
```

Course

mitaoe.codetanttra.com/secure/course.jsp?euclid=698c54860aba96214c8b7d5e#/contents/698c54860aba96214c8b7d5f/698c54860aba96214c8b7d61/677...

CODETANTRA Home Learn Anywhere

202501050004@mitaoe.ac.in Support Logout

Average time: 0.023 s, Maximum time: 0.036 s

5 out of 5 shown test case(s) passed
5 out of 5 hidden test case(s) passed

Test Case	Expected output	Actual output	Aggregate Percentage	Grade
Test case 1	55 65 78 89	55 65 78 89	71.75	First Division
Test case 2	56 78 97 86 93	56 78 97 86 93	82.00	Distinction
Test case 3	99 85 43 97 34	99 85 43 97 34	Fail	Fail
Test case 4				

PREV RESET SUBMIT NEXT

Course

mitaoe.codetanttra.com/secure/course.jsp?euclid=698c54860aba96214c8b7d5e#/contents/698c54860aba96214c8b7d5f/698c54860aba96214c8b7d61/677...

CODETANTRA Home Learn Anywhere

202501050004@mitaoe.ac.in Support Logout

Average time: 0.023 s, Maximum time: 0.036 s

5 out of 5 shown test case(s) passed
5 out of 5 hidden test case(s) passed

Test Case	Expected output	Actual output	Aggregate Percentage	Grade
Test case 1	55 65 78 89	55 65 78 89	71.75	First Division
Test case 2	56 78 97 86 93	56 78 97 86 93	82.00	Distinction
Test case 3	99 85 43 97 34	99 85 43 97 34	Fail	Fail
Test case 4	55 54 53	55 54 53	54.00	Second Division
Test case 5	40 45 42 48 43	40 45 42 48 43	43.20	Third Division

PREV RESET SUBMIT NEXT

1.2.2 Fibonacci Series

Write a Python program that uses recursion to print the first n terms of the Fibonacci series.

Input Format:

- A single integer n representing the number of terms to generate.


Output Format:

- A single line containing the first n terms of the Fibonacci sequence, separated by spaces.

Code:

```
def fibonacci(n,a=0,b=1):
    if n == 1:
        return a
    else:
        return fibonacci(n-1,b,a+b)

n = int(input())
for i in range(1, n + 1):
    print(fibonacci(i), end=" ")
```

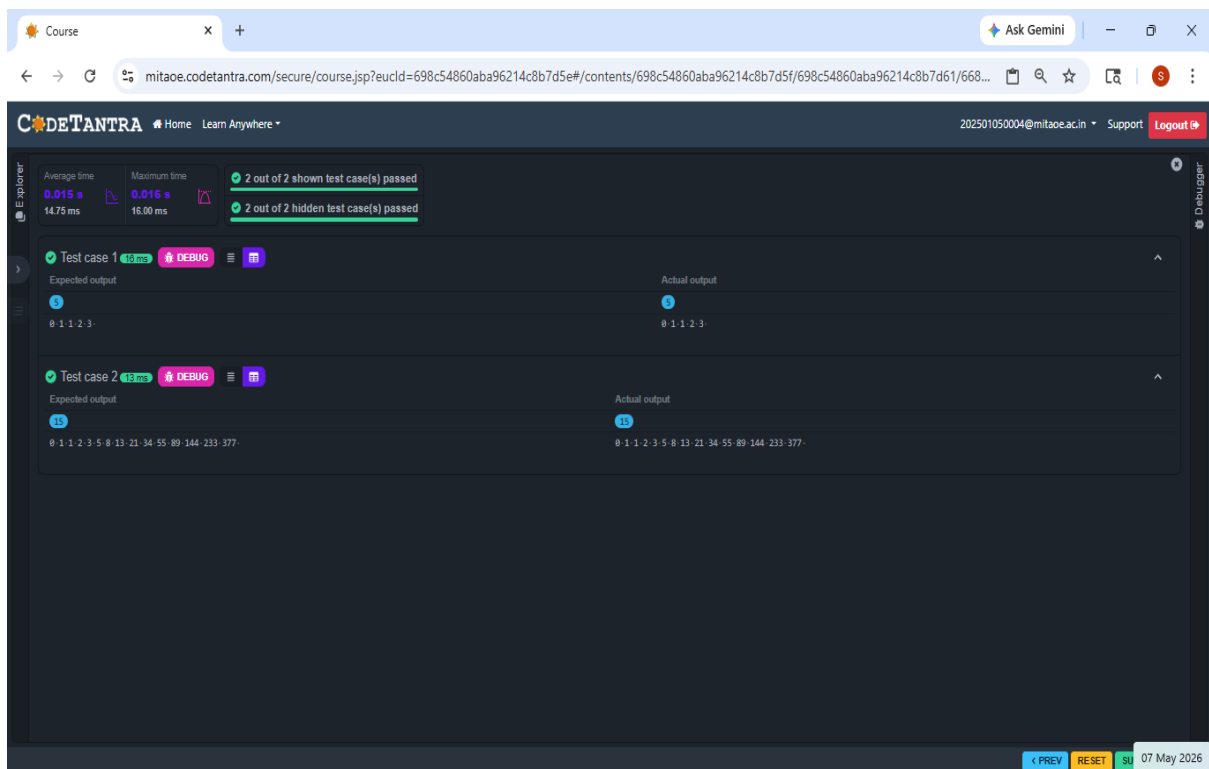

1.2.3 Pattern-1

Write a Python program to print a pattern of asterisks in the form of a right-angled triangle.

Input Format:

- The input is an integer, representing the number of rows in the pattern.


Output Format

- The output should display the pattern of asterisks (*), with each row containing an increasing number of asterisks.

Note: Refer to the displayed test cases for the sample pattern.

Code:

```
n = int(input())
for i in range(1,n+1):
    print('* ' * i)
```

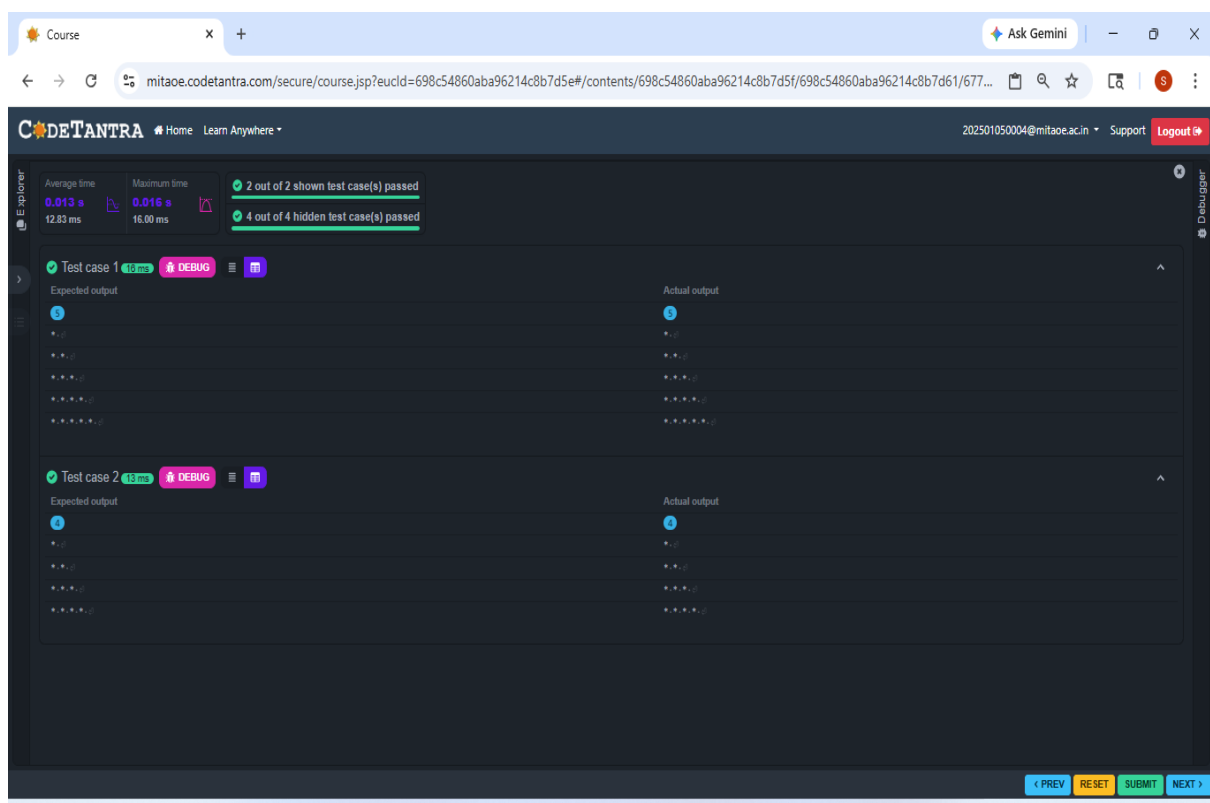

1.2.4 Pattern-2

Write a Python program to print a right-angled triangle pattern of numbers.

Input Format:

- The input is an integer, representing the number of rows in the pattern.

Output Format:

- The output should display the pattern of numbers separated by space, with each row containing increasing numbers starting from 1 up to the row number.

Note:

- Refer to the displayed test cases for the sample pattern.

Code:

```
n = int(input())  
  
for i in range(1,n+1):  
    for j in range(1,i+1):  
        print(j,end=" ")  
    print()
```

The screenshot displays the CodeTANTRA web application interface. At the top, there's a navigation bar with 'Course', 'Home', and 'Learn Anywhere' links. The main content area shows test results for two test cases. Test case 1 is marked as 'Passed' with a green checkmark and shows '2 out of 2 shown test case(s) passed' and '2 out of 2 hidden test case(s) passed'. The 'Expected output' and 'Actual output' columns both show the following pattern for n=5:

```
1  
1 2  
1 2 3  
1 2 3 4  
1 2 3 4 5
```

Test case 2 is also marked as 'Passed' and shows '2 out of 2 shown test case(s) passed' and '2 out of 2 hidden test case(s) passed'. The 'Expected output' and 'Actual output' columns both show the following pattern for n=8:

```
1  
1 2  
1 2 3  
1 2 3 4  
1 2 3 4 5  
1 2 3 4 5 6  
1 2 3 4 5 6 7  
1 2 3 4 5 6 7 8
```

The interface includes a 'Debugger' sidebar on the right and a 'Submit' button at the bottom right.

