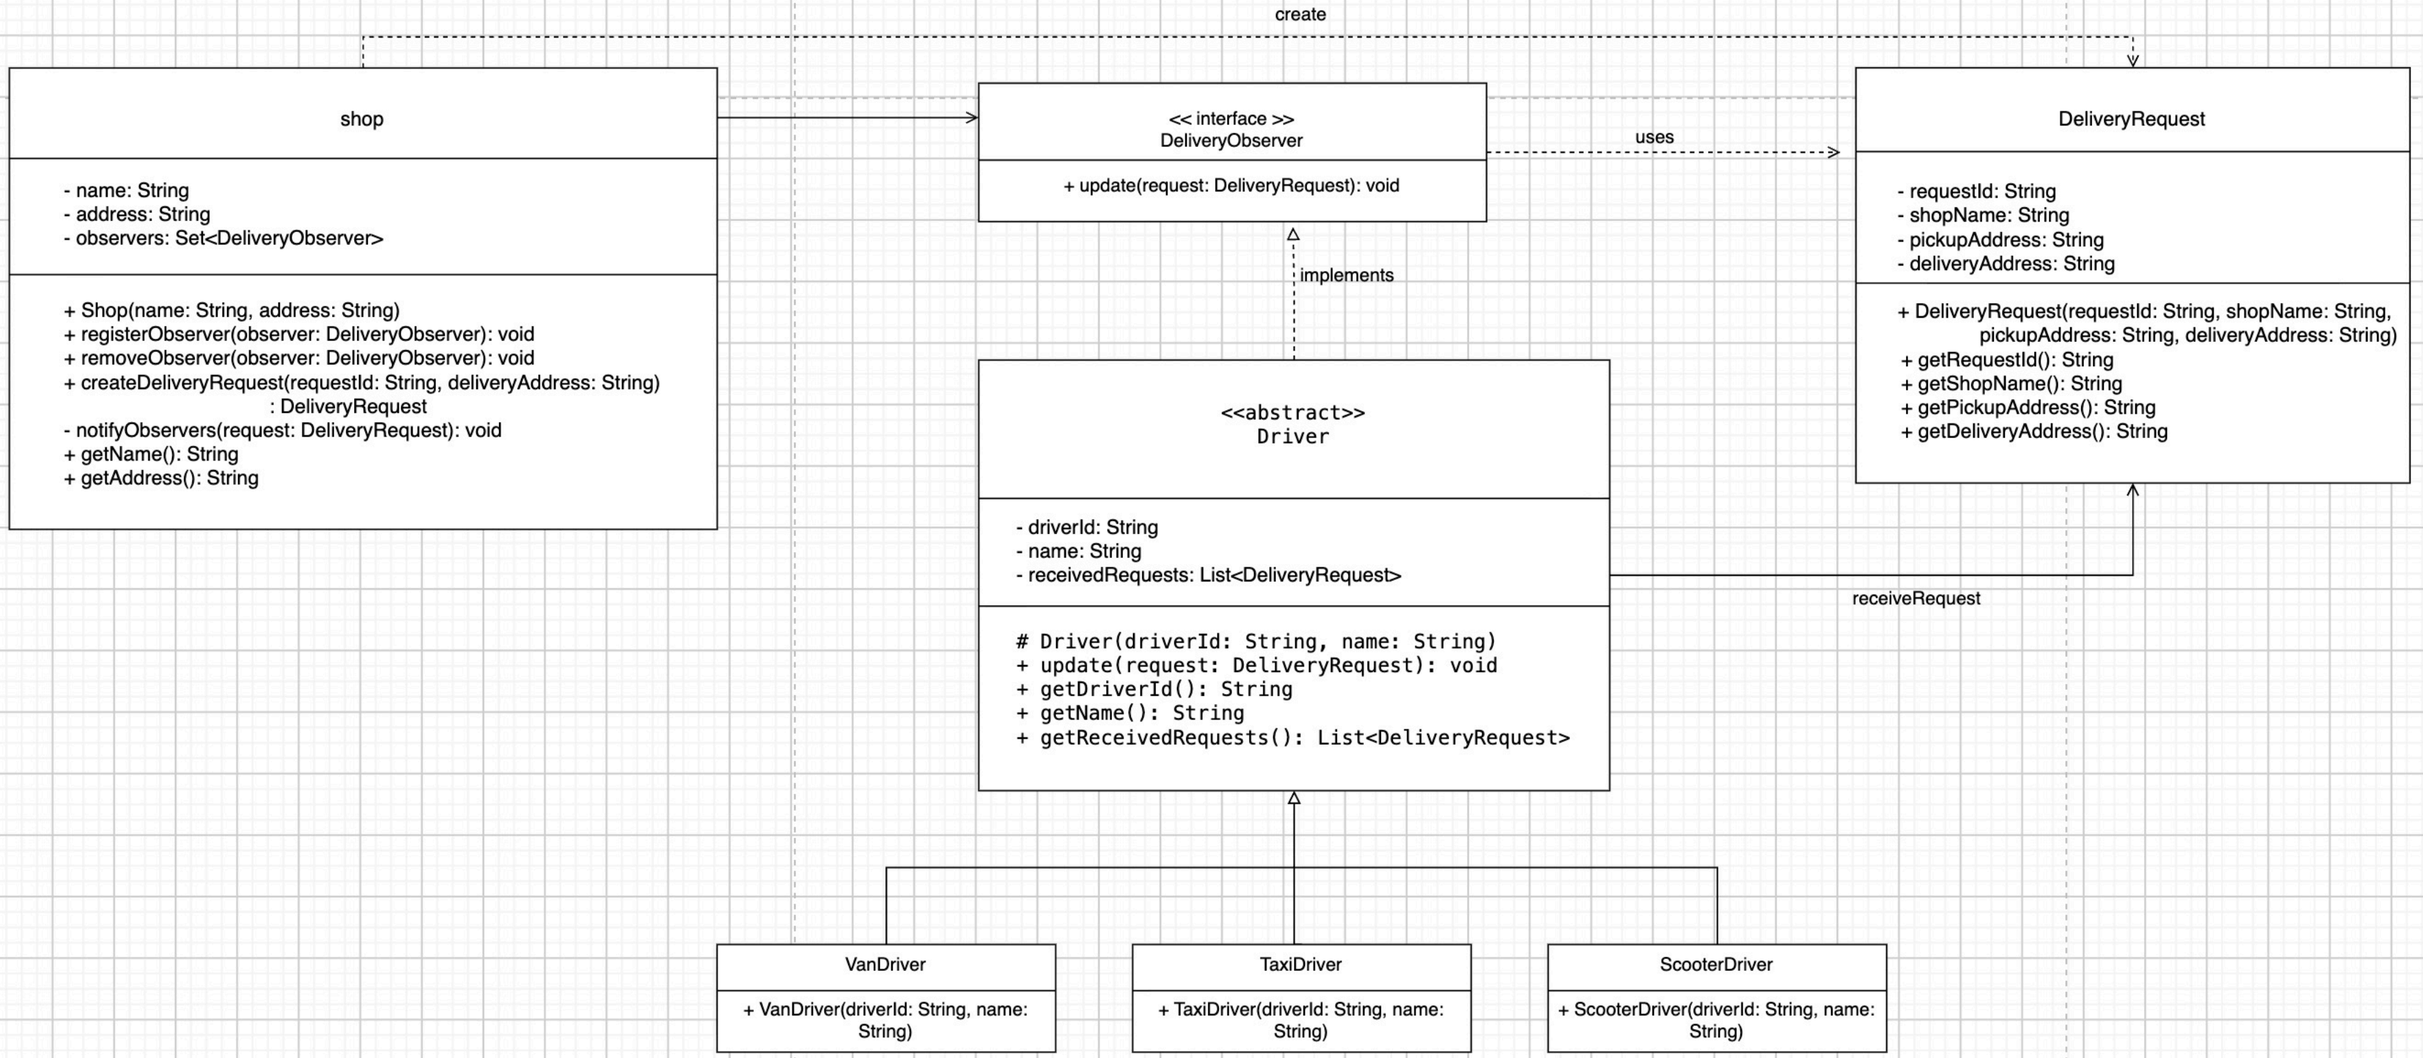

create
shop
- name: String
- address: String
- observers: Set<DeliveryObserver>
+ Shop(name: String, address: String)
+ registerObserver(observer: DeliveryObserver): void
+ removeObserver(observer: DeliveryObserver): void
+ createDeliveryRequest(requestId: String, deliveryAddress: String)
: DeliveryRequest
- notifyObservers(request: DeliveryRequest): void
+ getName(): String
+ getAddress(): String
<< interface >>
DeliveryObserver
+ update(request: DeliveryRequest): void
uses
DeliveryRequest
- requestId: String
- shopName: String
- pickupAddress: String
- deliveryAddress: String
+ DeliveryRequest(requestId: String, shopName: String,
pickupAddress: String, deliveryAddress: String)
+ getRequestId(): String
+ getShopName(): String
+ getPickupAddress(): String
+ getDeliveryAddress(): String
implements
<<abstract>>
Driver
- driverId: String
- name: String
- receivedRequests: List<DeliveryRequest>
# Driver(driverId: String, name: String)
+ update(request: DeliveryRequest): void
+ getDriverId(): String
+ getName(): String
+ getReceivedRequests(): List<DeliveryRequest>
receiveRequest
VanDriver
+ VanDriver(driverId: String, name:
String)
TaxiDriver
+ TaxiDriver(driverId: String, name:
String)
ScooterDriver
+ ScooterDriver(driverId: String, name:
String)