

Practical 10 Use Postman to test a sample API

Code:

```
C:\Users\Shyam Patel>mkdir ost_prac10
```

```
C:\Users\Shyam Patel>cd ost_prac10
```

```
C:\Users\Shyam Patel\ost_prac10>mkdir  
simple-api
```

```
C:\Users\Shyam Patel\ost_prac10>cd  
simple-api
```

```
C:\Users\Shyam Patel\ost_prac10\simple-  
api>npm init -y
```

```
C:\Users\Shyam Patel\ost_prac10\simple-  
api>package.json:
```

```
{  
  
  "name": "simple-api",  
  
  "version": "1.0.0",  
  
  "main": "index.js",  
  
  "scripts": {  
  
    "test": "echo \"Error: no test specified\"  
&& exit 1"  
  
  },  
  
  "keywords": [],  
  
  "author": "",  
  
  "license": "ISC",  
  
  "description": ""  
  
}
```

```
C:\Users\Shyam Patel\ost_prac10\simple  
api>npm install express
```

```
added 65 packages, and audited 66  
packages in 2s
```

```
22 packages are looking for funding
```

run `npm fund` for details

found 0 vulnerabilities

C:\Users\Shyam Patel\ost_prac10\simple-api>touch server.js

'touch' is not recognized as an internal or external command,


operable program or batch file.

C:\Users\Shyam Patel\ost_prac10\simple-api>notepad server.js

C:\Users\Shyam Patel\ost_prac10\simple-api>node server.js

Server running on http://localhost:3000

Get all:

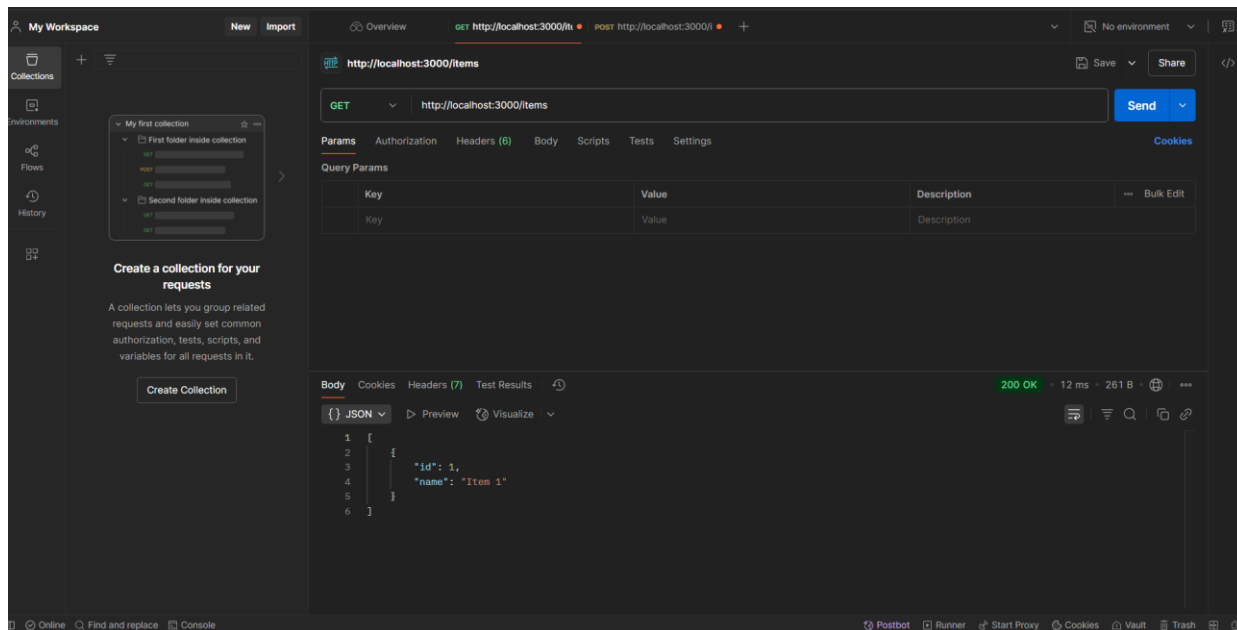


The screenshot shows the Postman interface with a GET request to `http://localhost:3000/items`. The response is a 200 OK status with a JSON body. The JSON body is an array of objects, with the first object having `"id": 1` and `"name": "Item 1"`.

```

1 {
2   {
3     "id": 1,
4     "name": "Item 1"
5   }
6 }

```

Post :

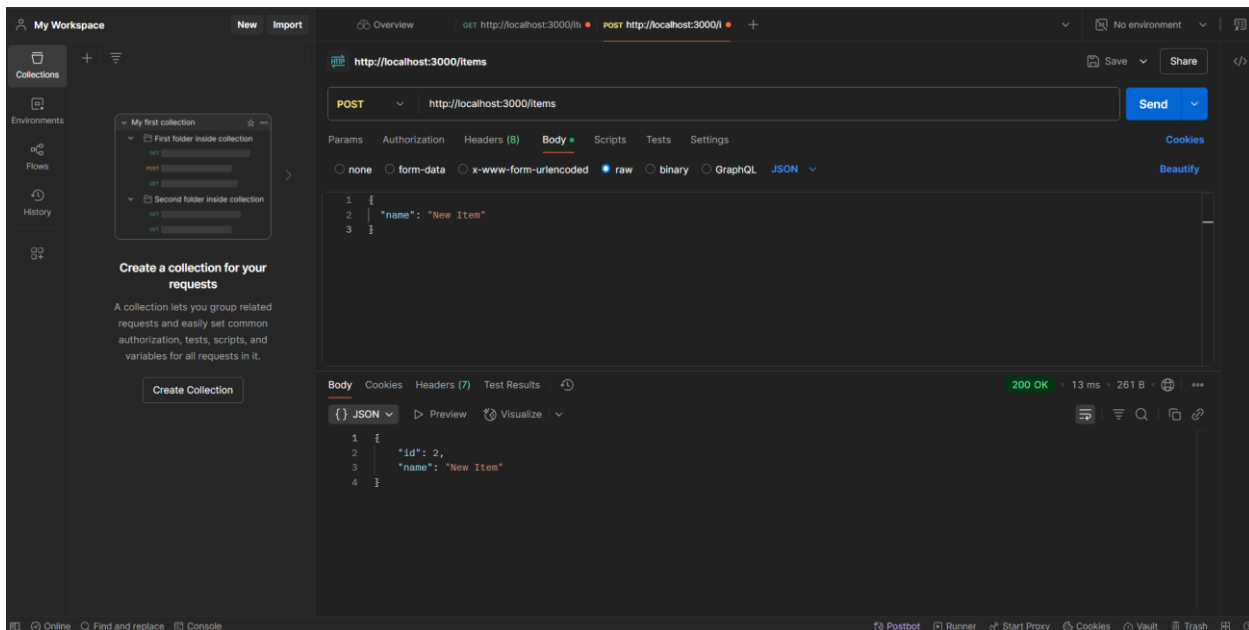

The screenshot shows the Postman interface with a POST request to `http://localhost:3000/items`. The request body is a JSON object with `"id": 2` and `"name": "New Item"`. The response is a 200 OK status with a JSON body. The JSON body is an array of objects, with the first object having `"id": 2` and `"name": "New Item"`.

```

1 {
2   {
3     "id": 2,
4     "name": "New Item"
5   }
6 }

```