


1. Look into RIB data at 00:00:00 to find prefixes originated by a scrubber AS.



2. Collect BGP update data collected by RIS collectors for every 5 minutes with the scrubber as an origin.



3. Compare prefixes from step 2 with prefixes on step 1.




5. Store it.



6. Accumulate all the new prefixes originated by the scrubber on that day.



7. Check originating ASes of those prefixes (exact/less) with RIB data the next day at 00:00:00.

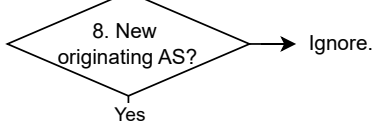

9. Suspected scrubbing.



10. Look ROA records to of the prefix.