Task **Hide VLC's bottom toolbar in window mode.**

how evidence is constructed

a Fixed-window step rewards

Each call scores only the latest step in a short window.



The window mixes a redundant wait with the scored step, and it has no later context. Opening Preferences looks Useful; View ▸ Minimal Interface later shows it was overrated.

b Milestone rewards

The task is decomposed into one planned subgoal sequence.



Predefined milestones (one planned path)

Tools → Preferences → Save

mismatch


A valid alternative

View menu → Minimal Interface

The View-menu path never visits Preferences.
Both are standard VLC methods. A singular planned path cannot cover the other.

c Adaptive-group process rewards (ours)

Evidence is built from the path that was actually taken, not from a fixed window or a planned milestone list.

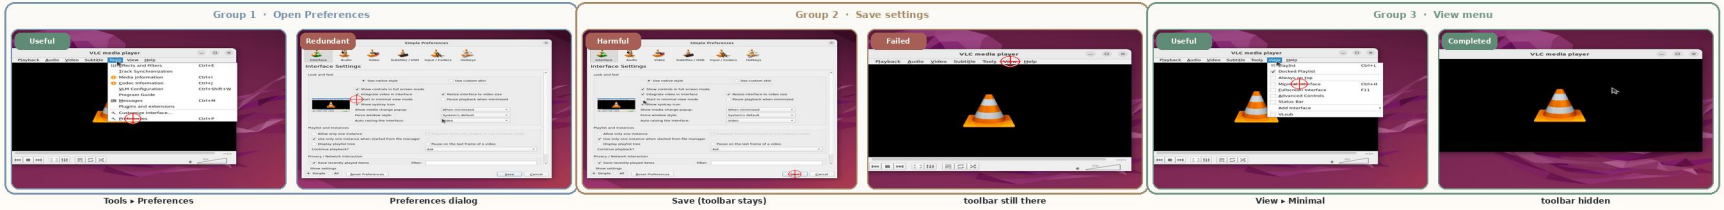

Group = evidence scope

Consecutive steps that share a subgoal. Opening Preferences is judged with the other Preference steps, not with a fixed-length slice.

Follows the executed path

This run hid the toolbar from the View menu, so that is Group 3 — not a planned Preferences-only path.

Later groups see earlier ones

When scoring the View-menu steps, the unused Preferences attempt is still in evidence, so those earlier steps are down-weighted.

Groups are recovered from the executed trajectory, so the evidence scope adapts to the path rather than to a window size or a predefined checkpoint list.