



In Pursuit of Knowledge

HAMDARD UNIVERSITY BANGLADESH

Hamdard Nagar, Gazaria, Munshigonj-1510

LAB REPORT ()

Course Code: CSE 313

Course Title: Database Management
System


Topic: How to install Oracle 10g and uninstall.

Submitted by:	Submitted to:
Name : Mohammad Siam Ahmed Rana ID : 315212019 Batch : 21 st Department of CSE Hamdard University Bangladesh	Md. Shahidul Islam Lecturer Department of CSE Hamdard University Bangladesh

<u>Submission Date:</u>	<u>Submitted Date:</u>

Administrator Creation

Step-1: Search Command prompt and click “Run as administration”

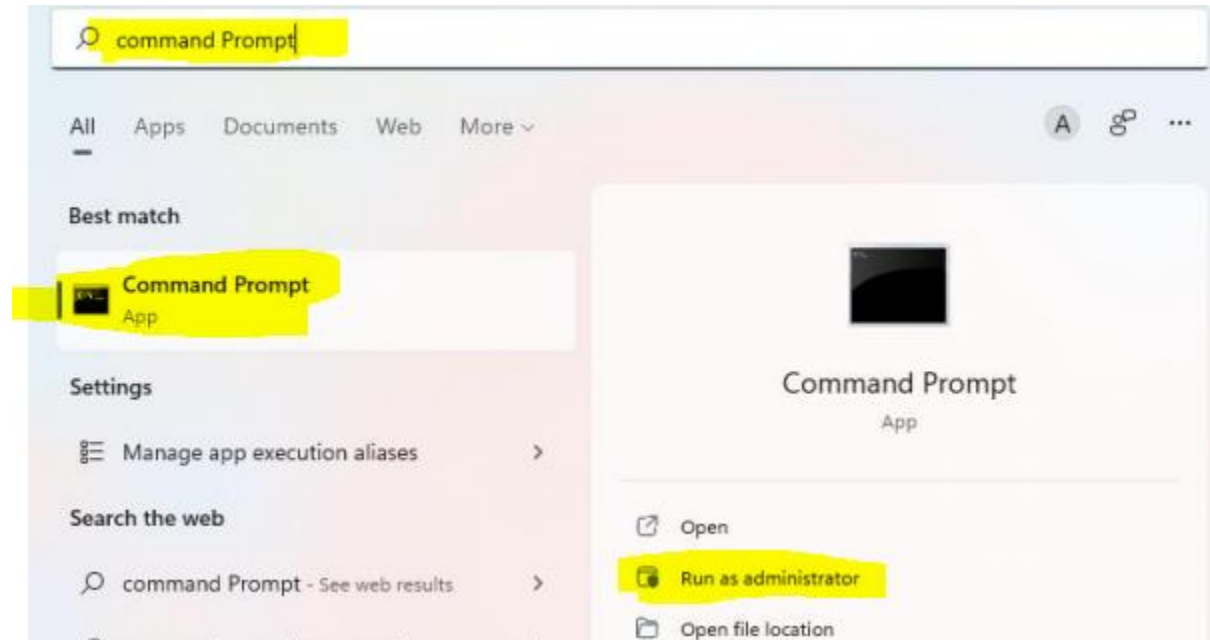

Step-2: Create “Administrator”

```
Administrator: Command Prompt
Microsoft Windows [Version 10.0.19045.3570]
(c) Microsoft Corporation. All rights reserved.

C:\Windows\system32>cd..


C:\Windows>cd..

C:\>net user administrator /active:yes
The command completed successfully.


C:\>
```

Virtual Memory Create


Step-03: Open “Administrator” and go to “This PC” properties then click “Advanced system settings”

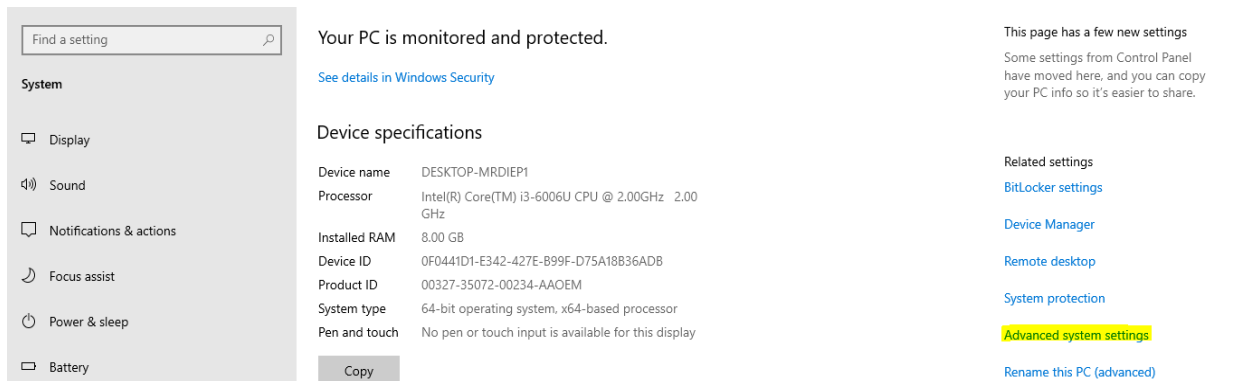


Step-04: Click “Settings”

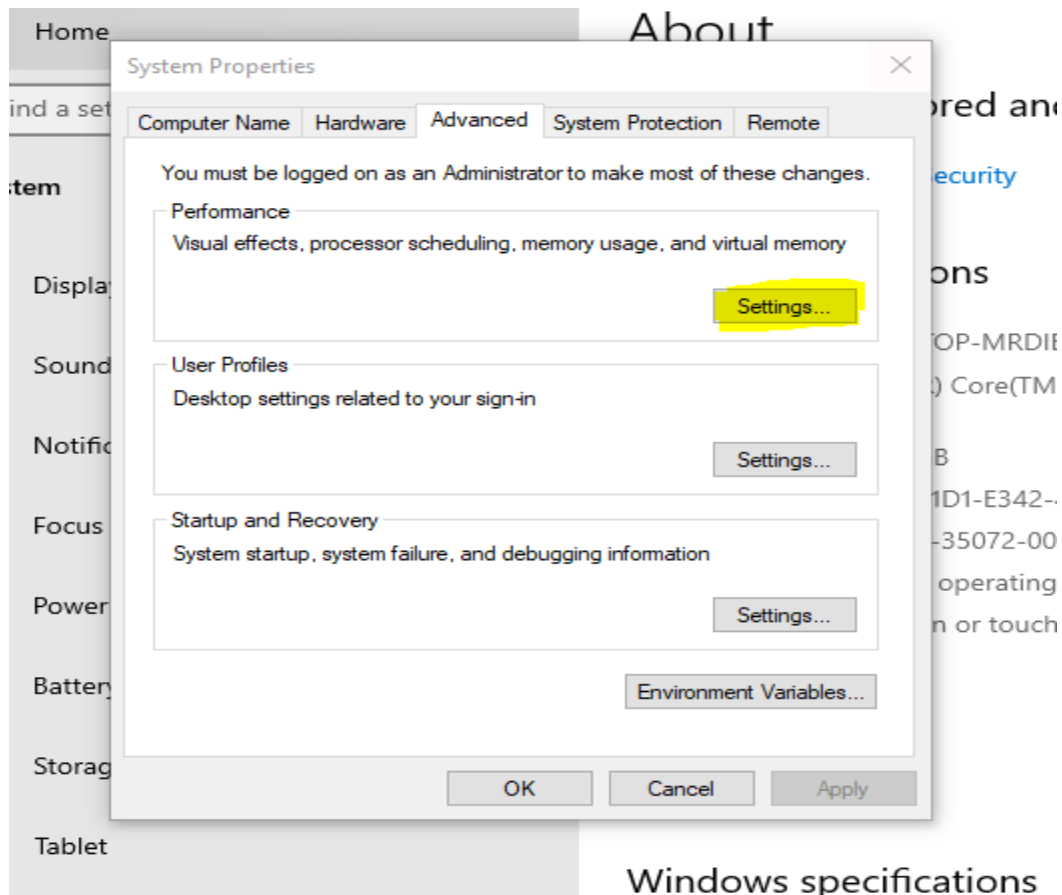


Step-05: Click “Advanced”

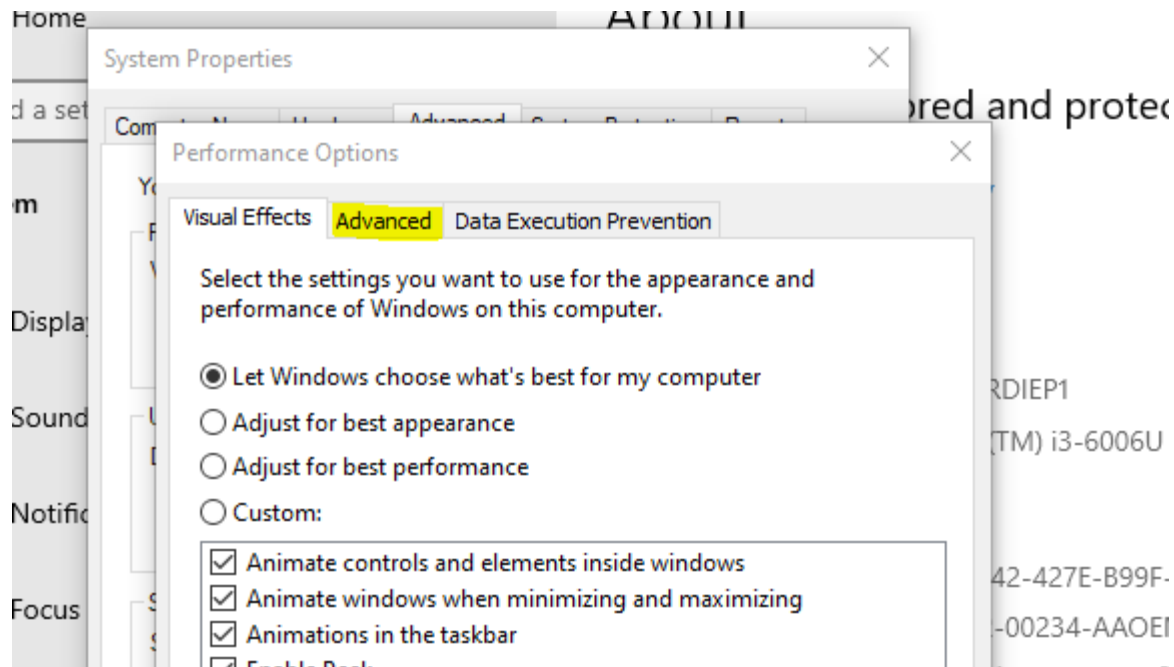


Step-06: Click “Change”

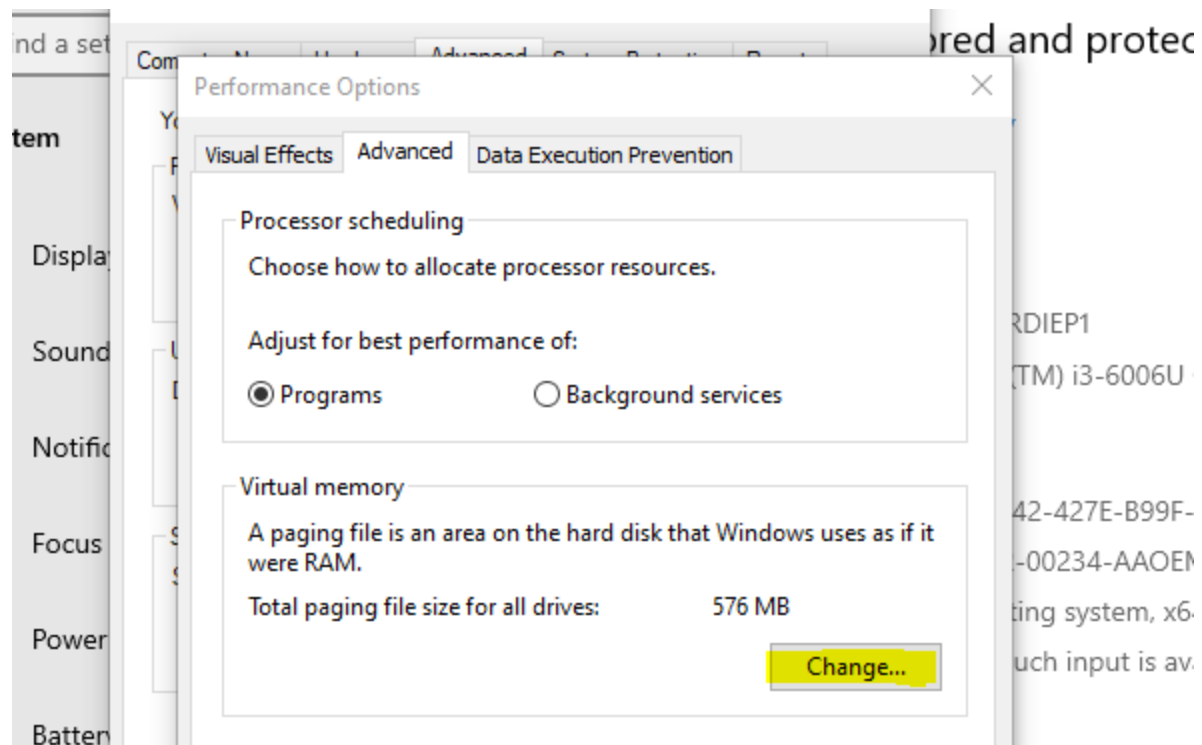


Step-7: Disable “Automatically manage paging file size for all drives”

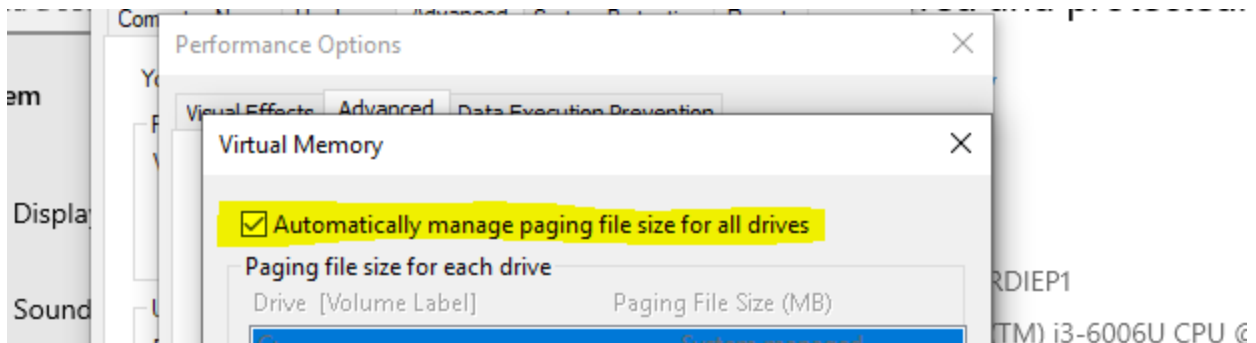

Step-08: Select “Custom size” then fixed initial and maximum size. Click “Set” and then Click “OK”

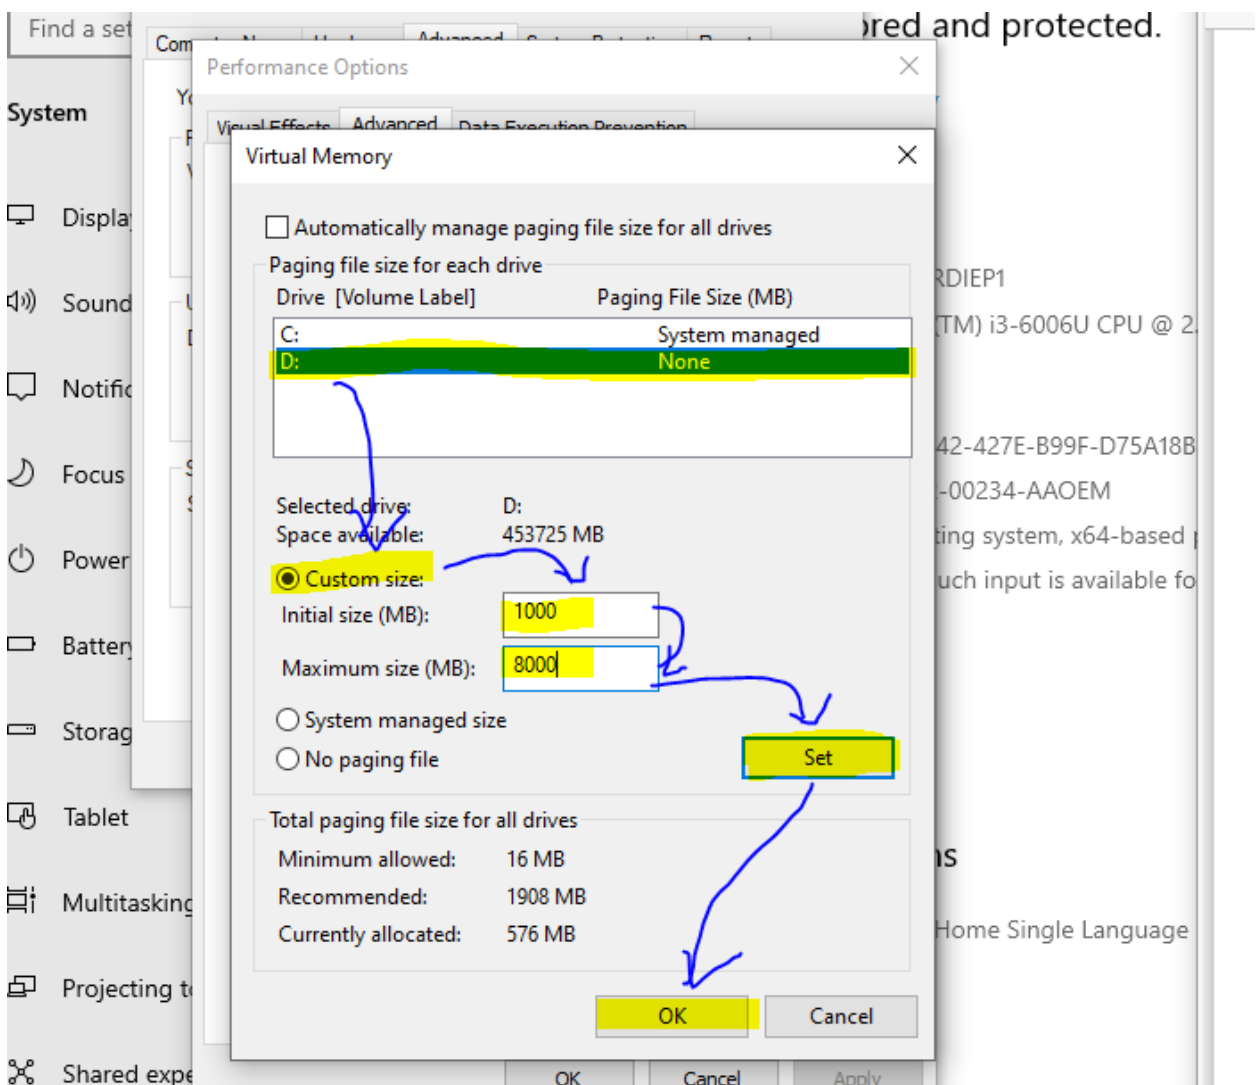


Step-09: Click “Apply” and click “Ok”

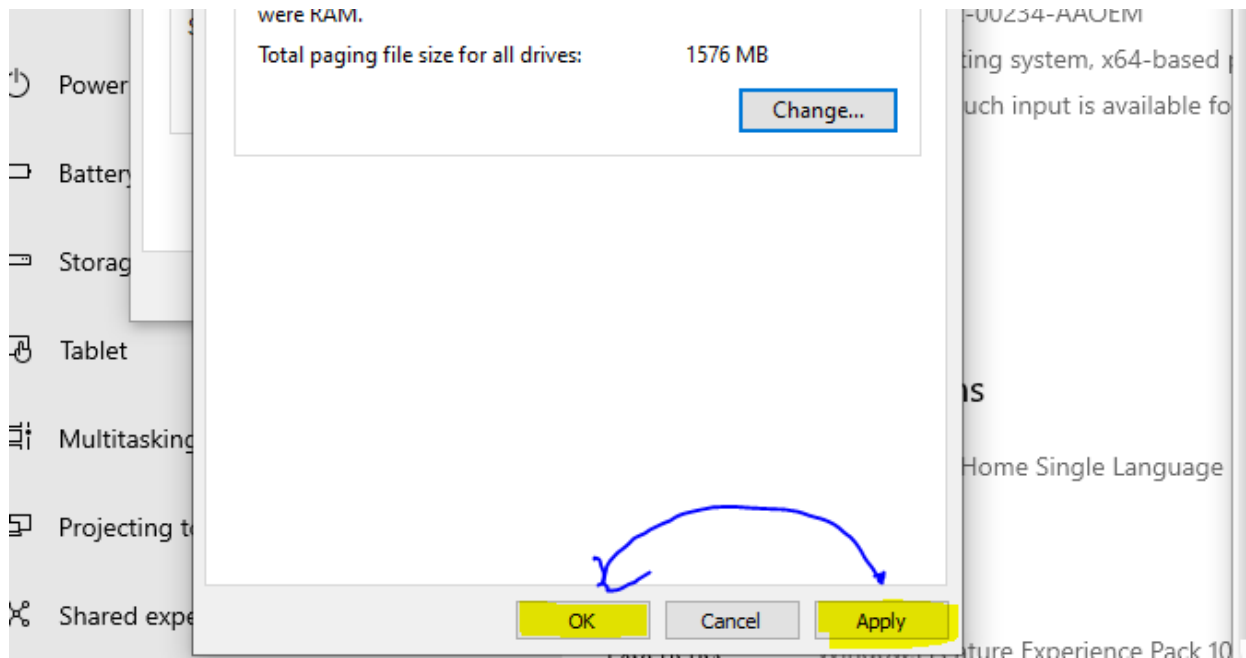


RUN COMPITIBILITY MODE


Step-10: Go to Oracle where you store it and select “setup” and go to properties.

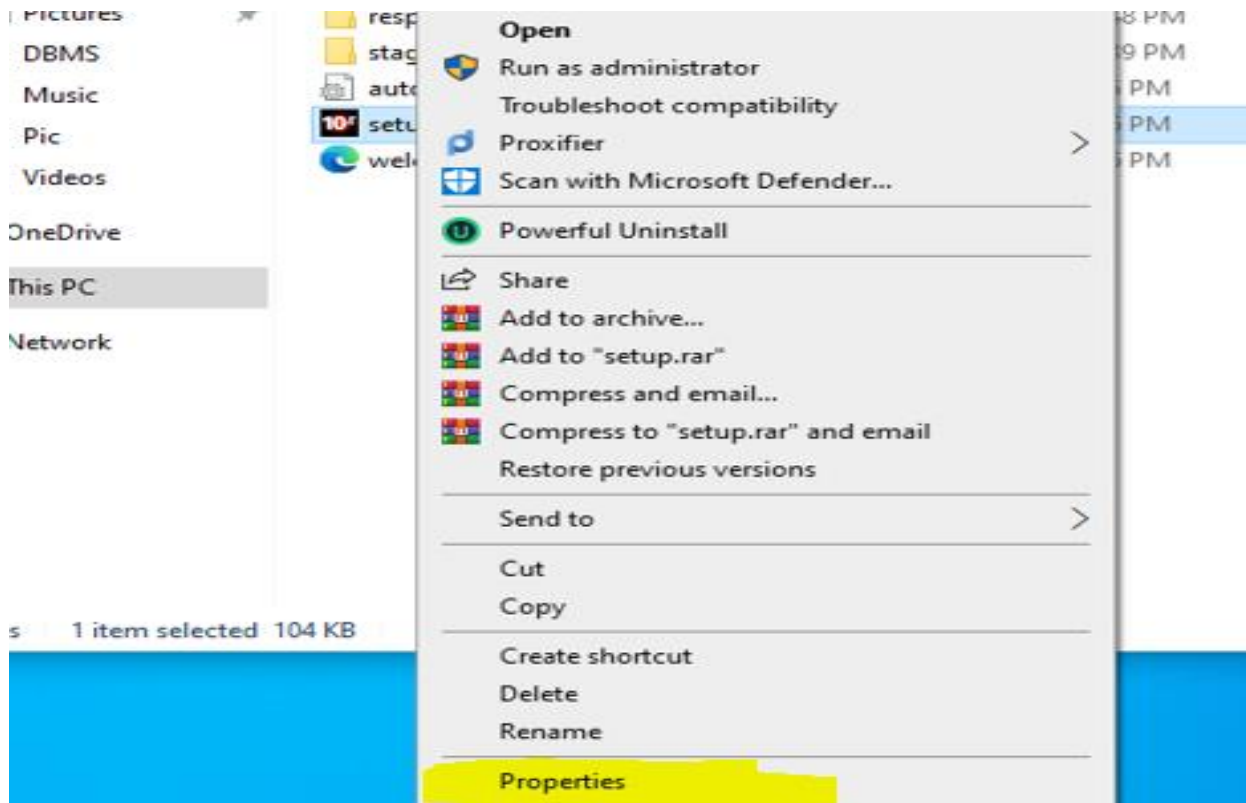

Step-11: Select “Compatibility” then enable “Run this program in compatibility mode” then click “Apply” and click “Ok”.

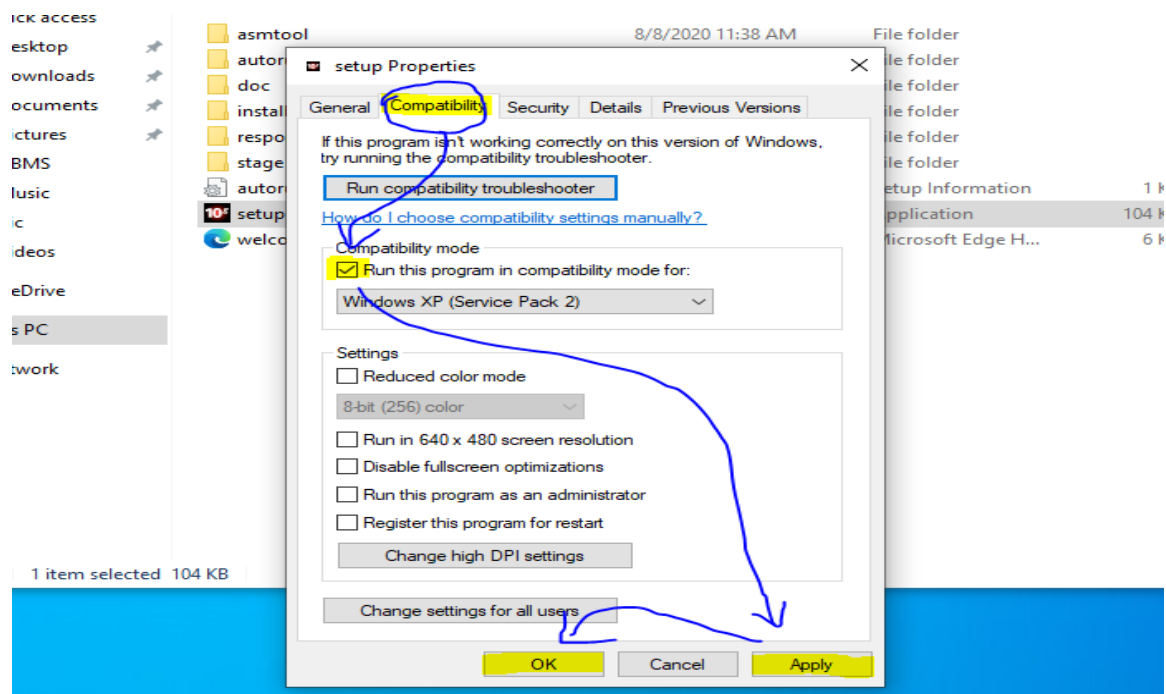

Step-12: Right Click on “setup.exe” .Click “Run as administrator”.

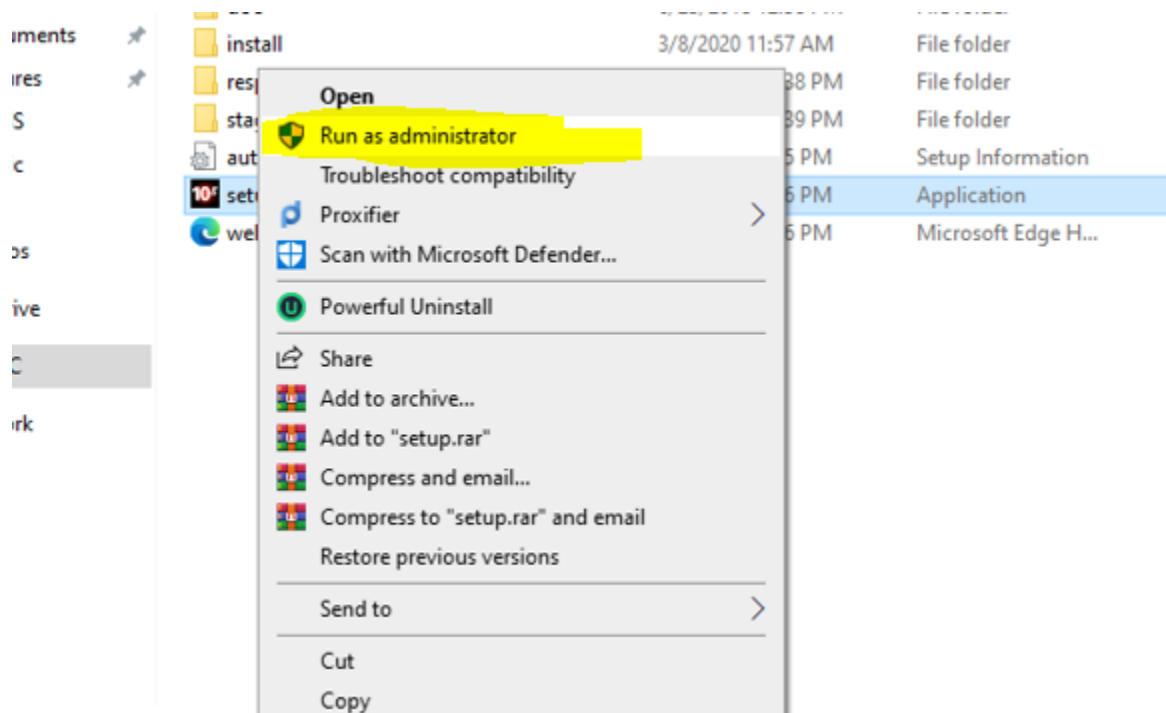

Step-13: Click “Advanced Installation” and Click “Next”.


The screenshot shows the 'Oracle Database 10g Installation - Installation Method' window. The title bar includes the Oracle logo and window controls. The main heading is 'Select Installation Method'. There are two radio buttons: 'Basic Installation' (unselected) and 'Advanced Installation' (selected). Below 'Basic Installation' is a description: 'Perform full Oracle Database 10g installation with standard configuration options requiring minimal input. This option uses file system for storage, and a single password for all database accounts.' Below this are fields for 'Oracle Home Location' (D:\oracle\product10.2.0\db_1) with a 'Browse...' button, 'Installation Type' (Enterprise Edition (1.3GB)), and a checked checkbox for 'Create Starter Database (additional 720MB)'. Below the checkbox are fields for 'Global Database Name' (orcl), 'Database Password', and 'Confirm Password'. A note states: 'This password is used for the SYS, SYSTEM, SYSMAN, and DBSNMP accounts.' The 'Advanced Installation' section is highlighted with a yellow background and contains the text: 'Allows advanced selections such as different passwords for the SYS, SYSTEM, SYSMAN, and DBSNMP accounts, database character set, product languages, automated backups, custom installation, and alternative storage options such as Automatic Storage Management.' At the bottom are buttons for 'Help', 'Back', 'Next' (highlighted in yellow), 'Install', and 'Cancel'. The Oracle logo is visible at the bottom left.

Step-14: Click “Next”


Step-15: Select destination and click “Next”

The screenshot shows the 'Oracle Universal Installer: Specify Home Details' window. The title bar includes the Oracle logo and window controls. The main heading is 'Specify Home Details'. Under the 'Destination' section, there is a description: 'Enter or select a name for the installation and the full path where you want to install the product.' Below this are fields for 'Name' (OraDb10g_home1) and 'Path' (D:\oracle\product10.2.0\db_1) with a 'Browse...' button. At the bottom are buttons for 'Help', 'Installed Products...', 'Back', 'Next' (highlighted in yellow), 'Install', and 'Cancel'. The Oracle logo is visible at the bottom left.

Step-16: Enable “User Verified” and click “Next”.

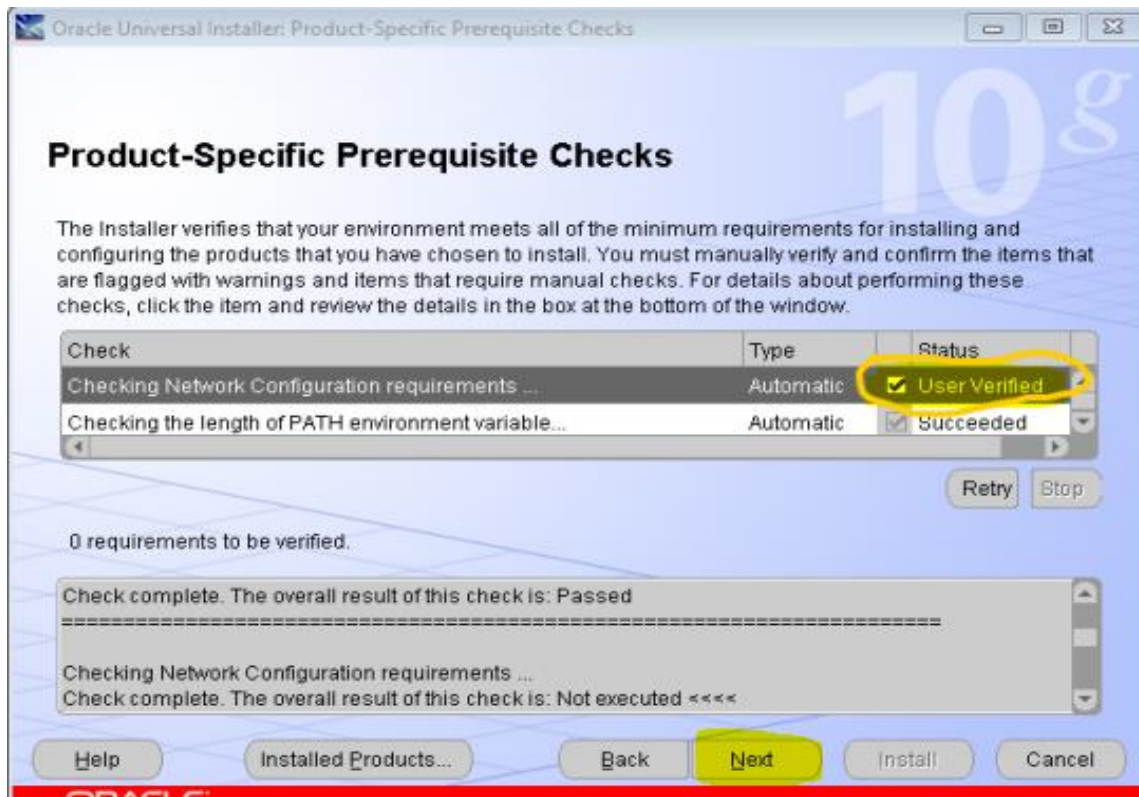


Step-17: Select “Installation Software Only” and click “Next”.

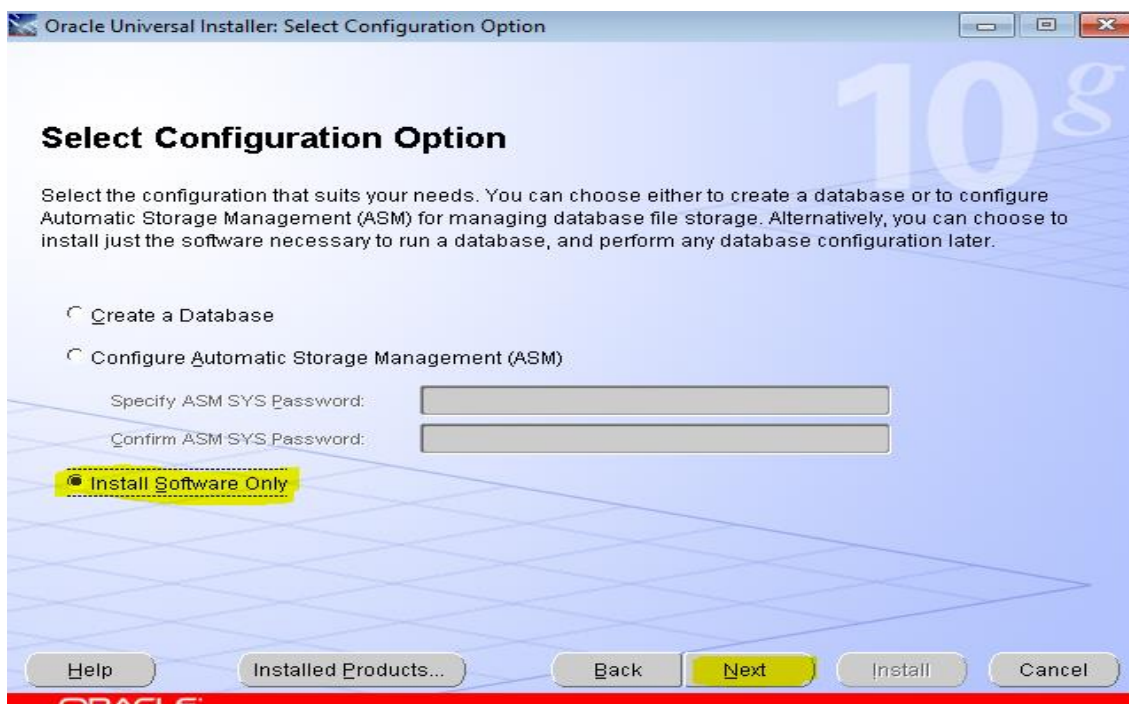


Step-18: Click “Allow access”.

Step-19: Click “Install”

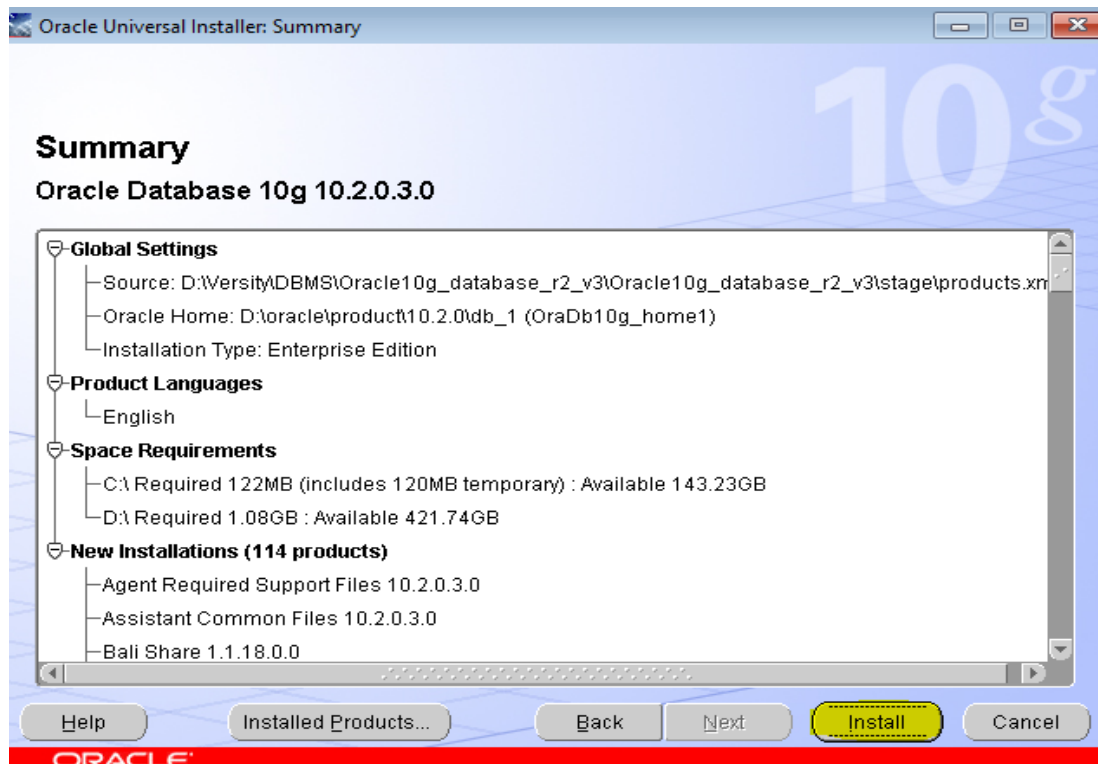


Step-20: After Installation Click “Exit > Yes”.

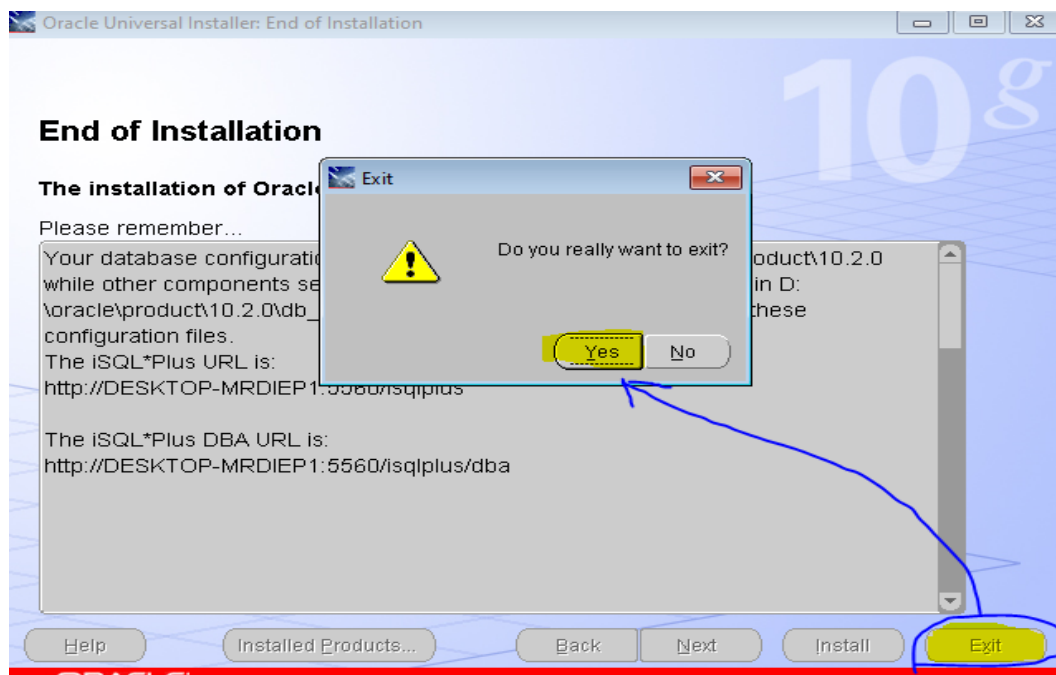


DATABASE CREATE

Step-21: Go to “Oracle – OraDb10g_home1” from windows start button and there Select “Database Configuration Assistant” then go to “Run as administrator” and click it.

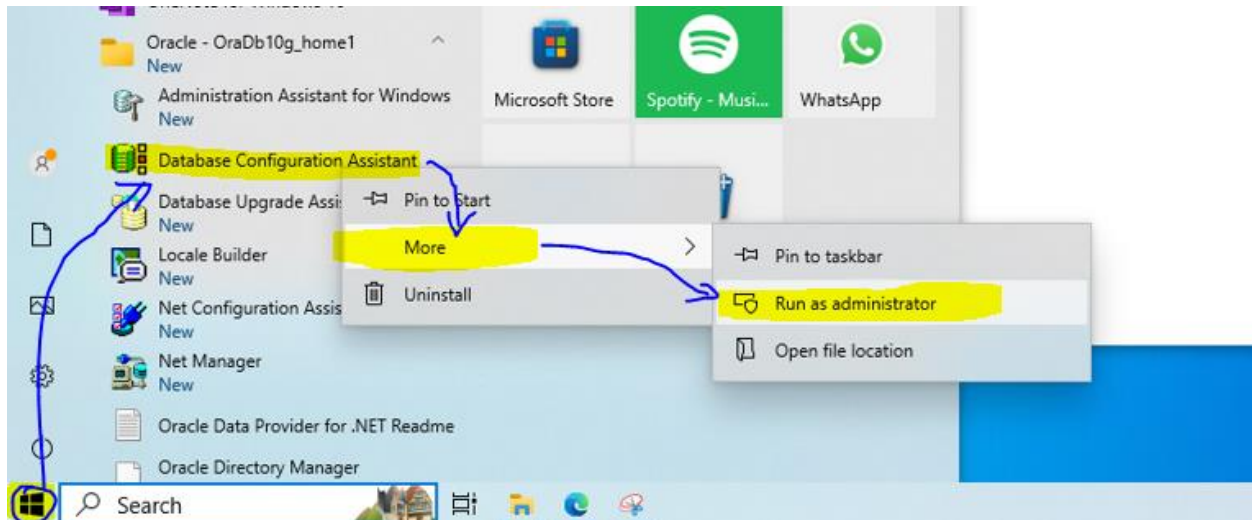

Step-22: Click “Next”

Step-23: Select “Create a Database” and click “Next”.

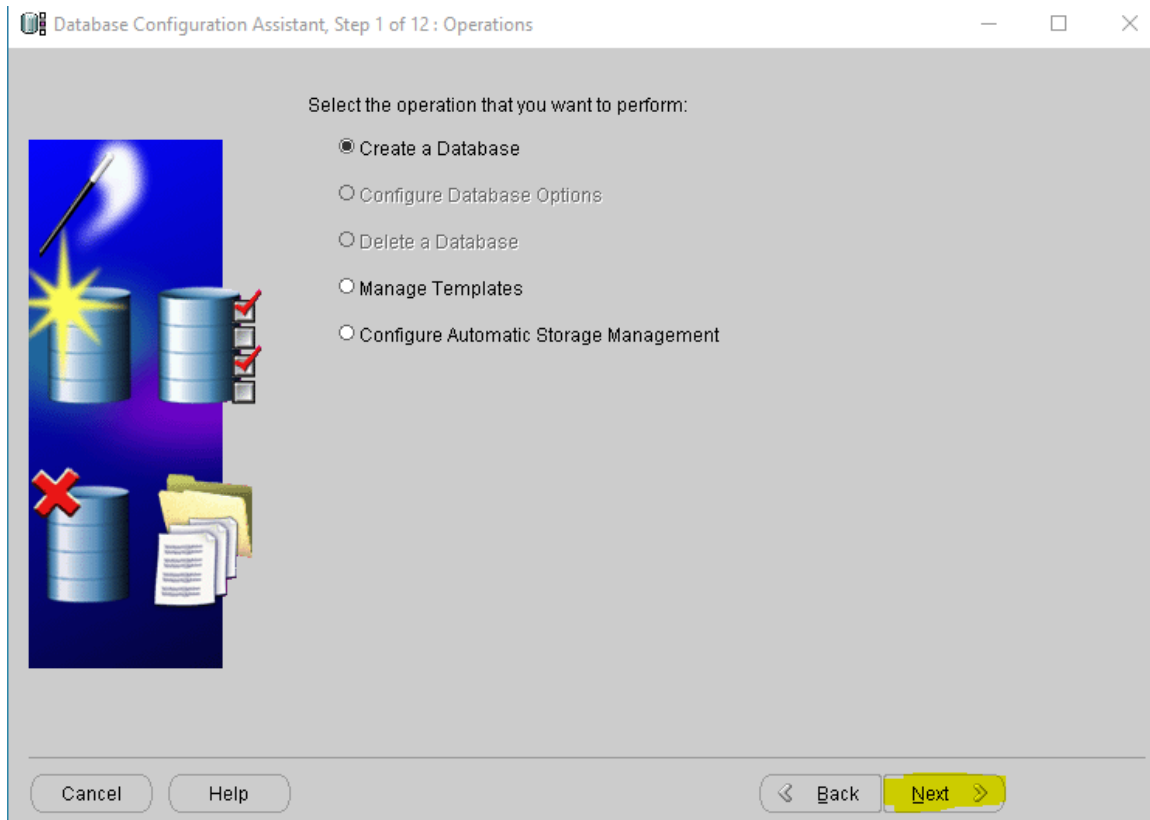

Step-24: Click "Next".

Step-25: Set global database name then click "Next".

Database Configuration Assistant, Step 3 of 12 : Database Identification

An Oracle database is uniquely identified by a Global Database Name, typically of the form "name.domain".

Global Database Name:

A database is referenced by at least one Oracle instance which is uniquely identified from any other instance on this computer by an Oracle System Identifier (SID).

SID:

Cancel Help Back Next

Step-26: Click "Next".

Step-27: Enter password and click "Next".

Database Configuration Assistant, Step 5 of 12 : Database Credentials

For security reasons, you must specify passwords for the following user accounts in the new database.

☒ Use the Same Password for All Accounts

Password: Confirm Password:

☐ Use Different Passwords

User Name	Password	Confirm Password
SYS		
SYSTEM		
DBSNMP		
SYSMAN		


Cancel Help Back Next

Step-28: Click “Next”.

Step-29: Click “Next”.

Step-30: Click “Next”.


Step-31: Select “Sample Schemas” and click “Next”.

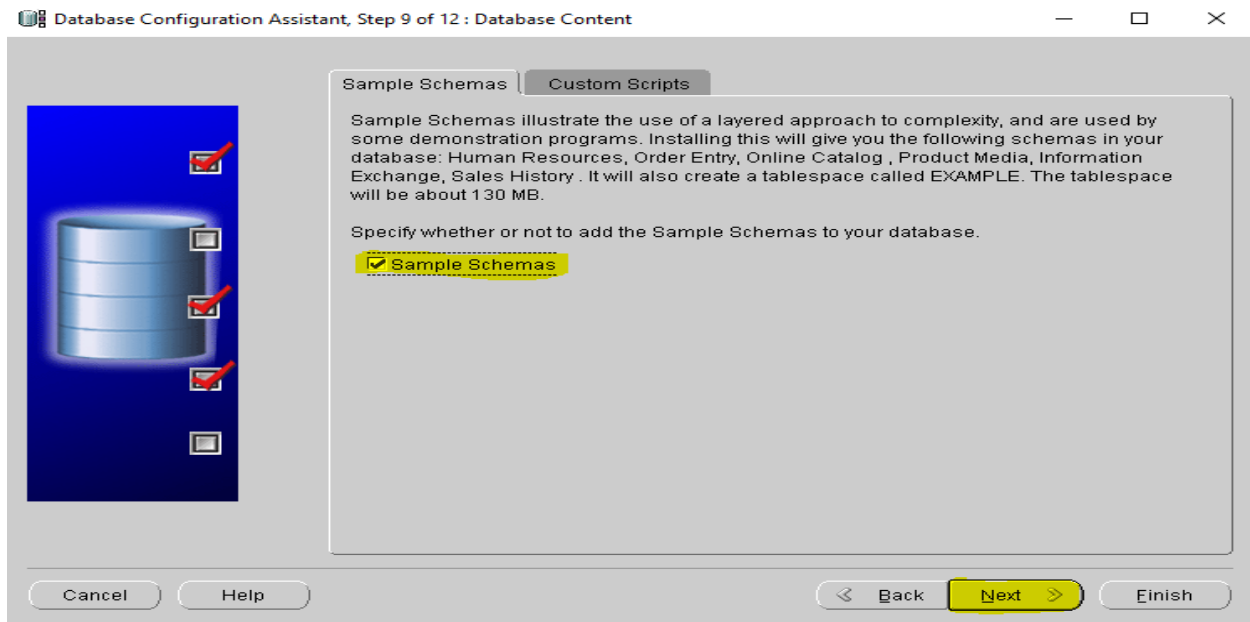


Step-32: Click “Next”.

Step-33: Click “Next”.

Step-34: Select “Create Database” and click “Finish”

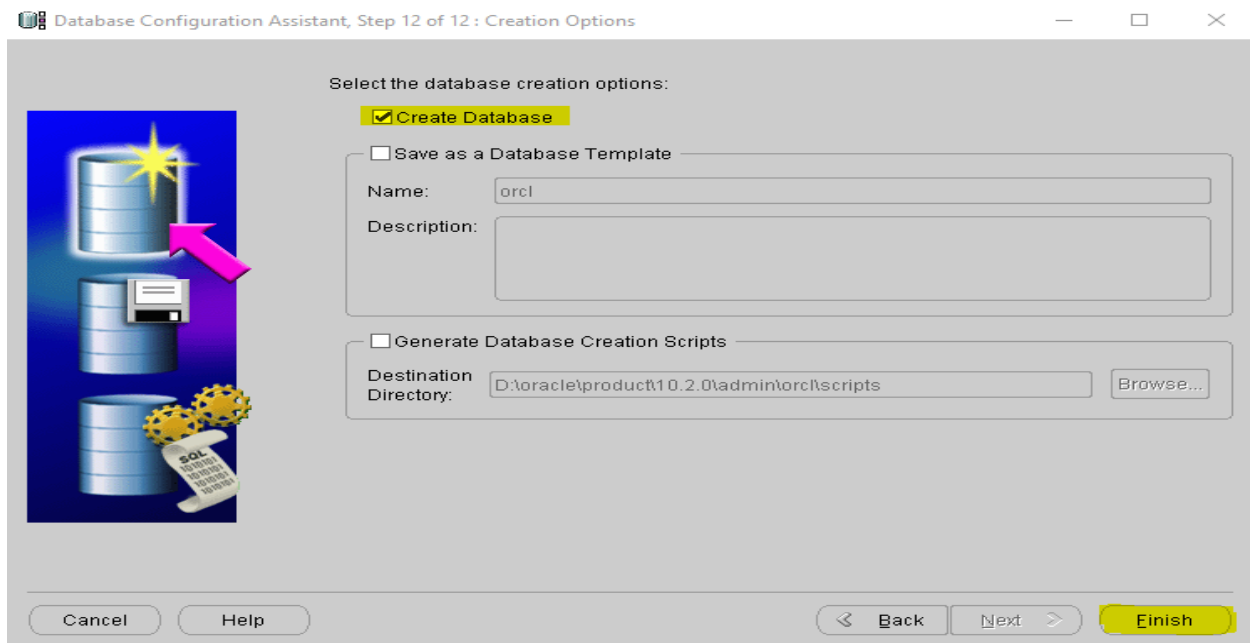


Step-35: Click “OK”.

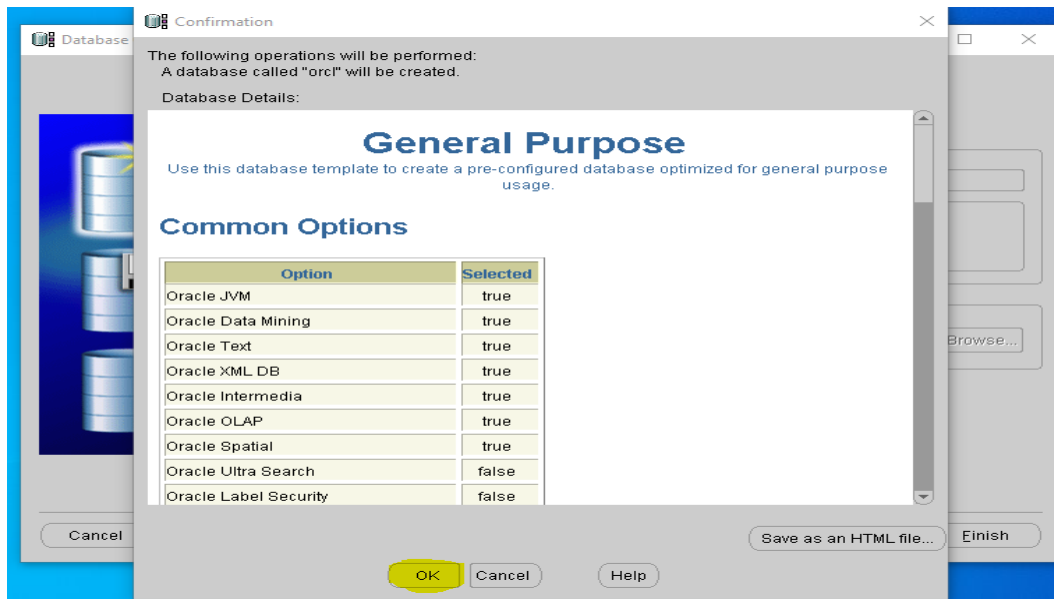


Step-36: Database Creating....

Step-37: Click “Allow access”.


Step-38: Go to “Password Management”.

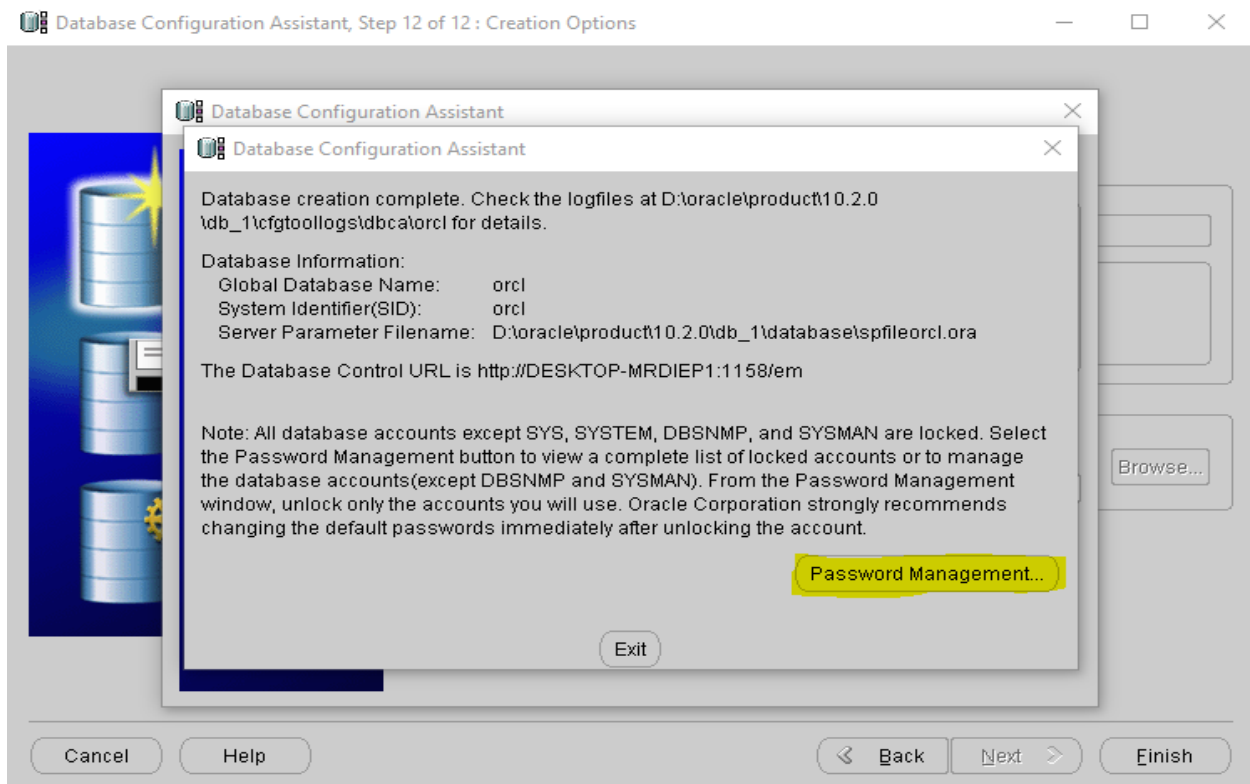

Step-39: Unlock “SH” and “HR” and Set password and click “OK”.

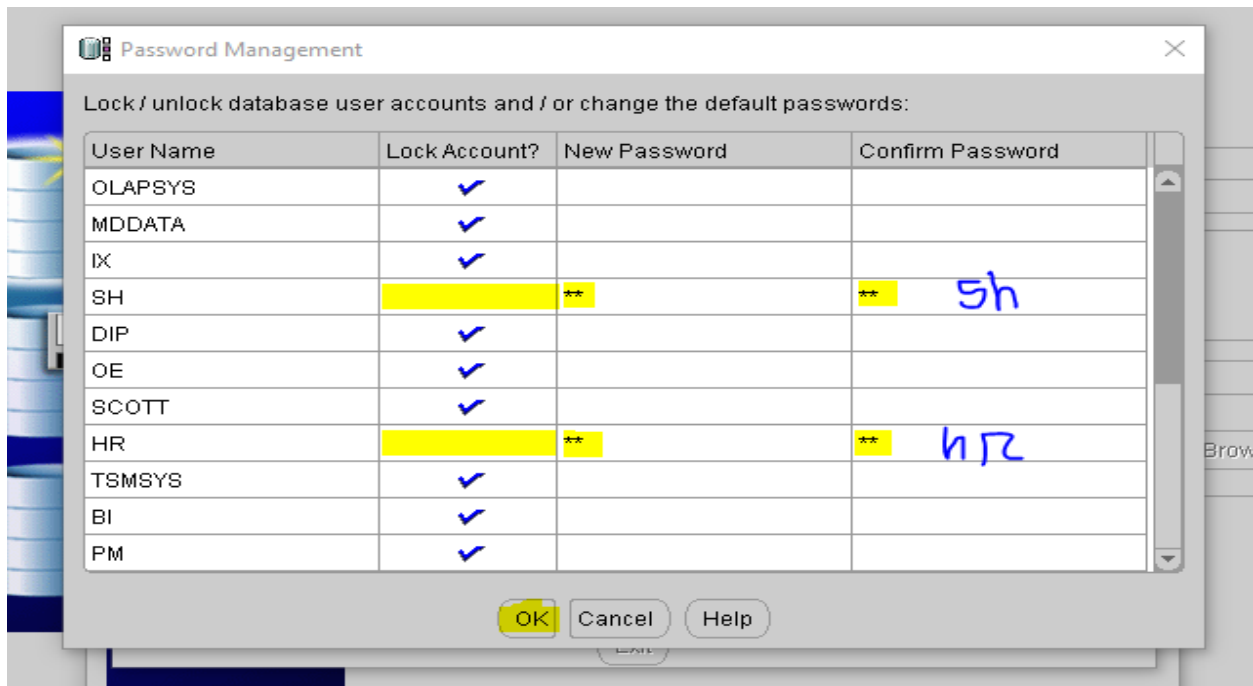


Step-40: Click “Exit”.

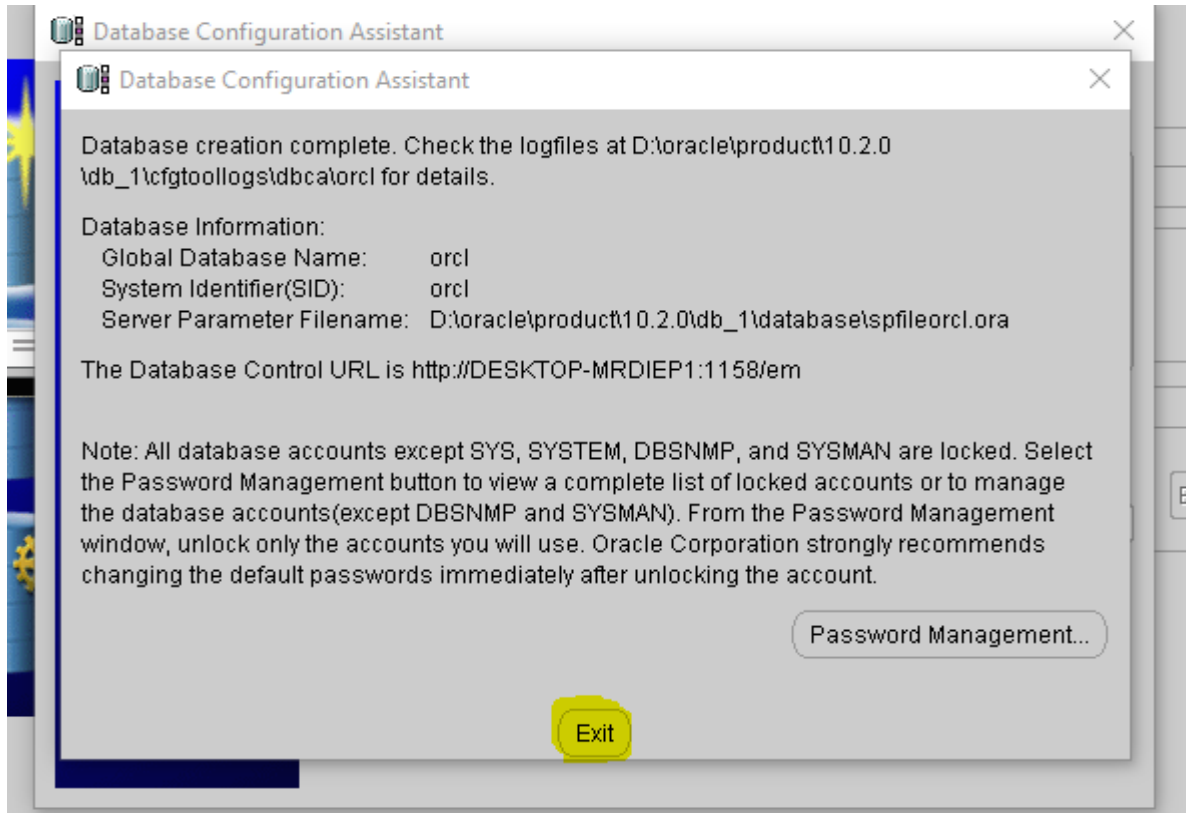


LISTENER CREATE

Step-41: Go to Windows start button and select “Net Configuration Assistant” then go to “Run as administrator” and click it.

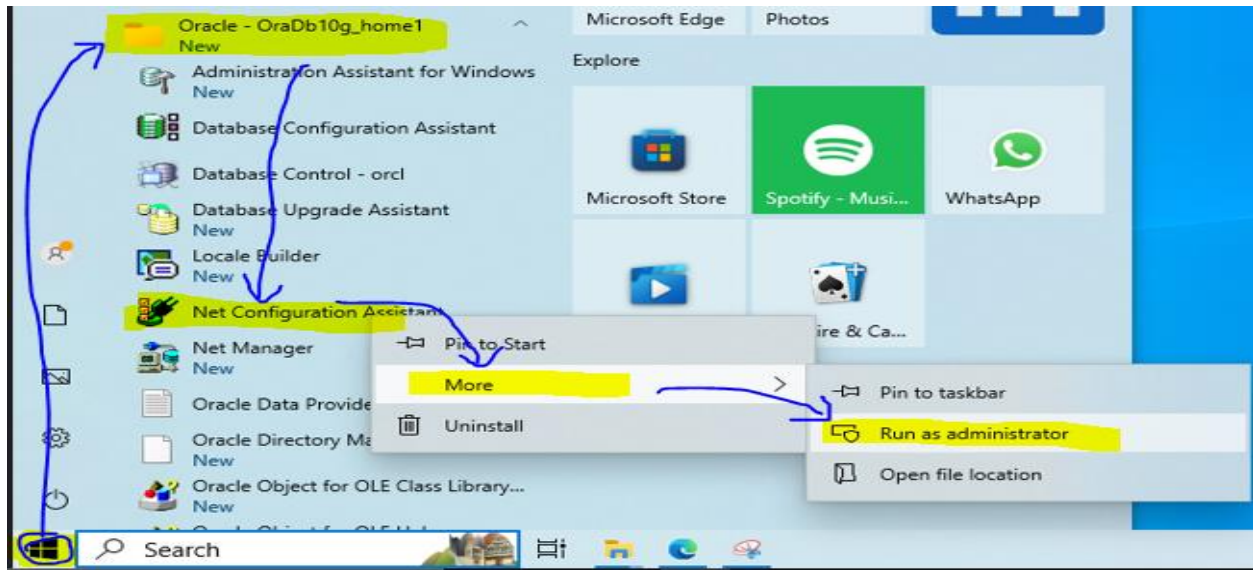

Step-42: Select “Listener configuration” and Click “Next”.

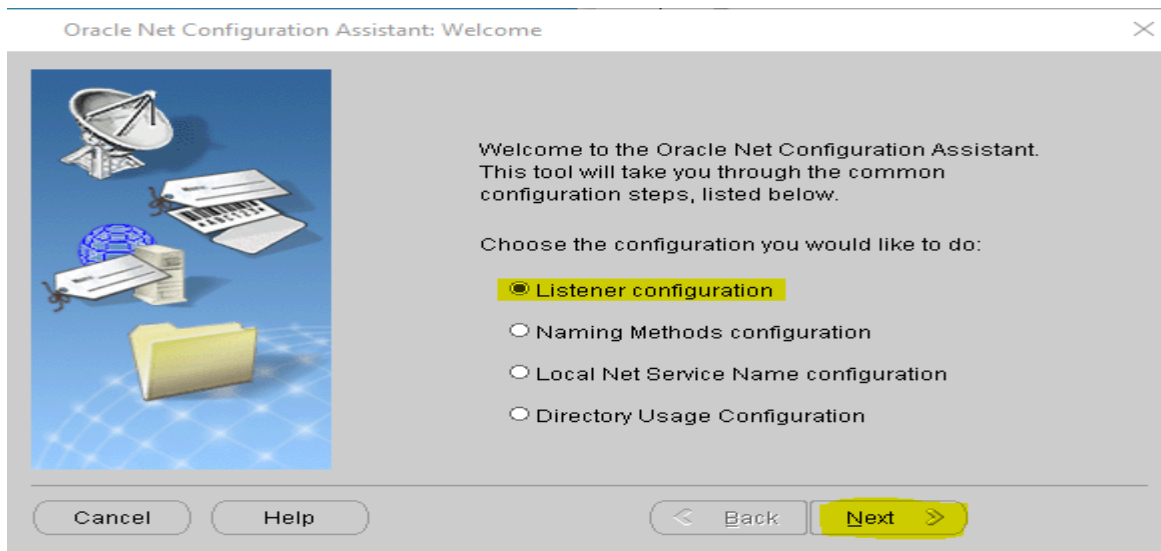

Step-43: Click “Next”.


Step-44: Click “Next”.

Step-45: Click “Next”.

Step-46: Click “Next”.

Step-47: Select “No” . Click “Next”.

Step-48: Click “Finish”.

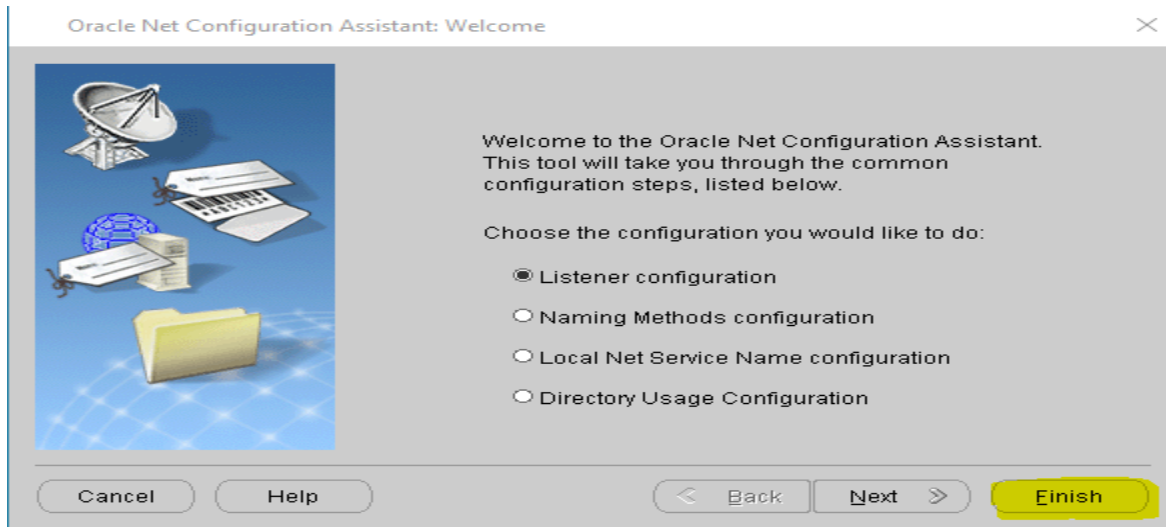

Database Login

Step-49: Go to the Command prompt and type –

C:\Users\Administrator>cd.. [than Click 'Enter']

C:\Users>cd.. [than Click 'Enter']

C:\>F: [The name of the folder in which the software is installed. Then click 'Enter']

F:\>cd F:\oracle\product\10.2.0\db_1\bin [Click 'Enter']

F:\oracle\product\10.2.0\db_1\bin>set oracle_sid=orcl [Write set oracle_sid=orcl. Orcl=Database name]

F:\oracle\product\10.2.0\db_1\bin>sqlplus sys/sys123 as sysdba [write- sqlplus sys/sys123 as sysdba]

.....

SQL> conn hr/hr [Connect database user...hr/hr=User name/user password.]

```
Administrator: Command Prompt - sqlplus sys/sys123 as sysdba
Microsoft Windows [Version 10.0.19045.3570]
(c) Microsoft Corporation. All rights reserved.


C:\Users\Administrator>cd..
C:\Users>cd..
C:\>D:
D:\>cd D:\oracle\product\10.2.0\db_1\bin
D:\oracle\product\10.2.0\db_1\bin>set oracle_sid=orcl
D:\oracle\product\10.2.0\db_1\bin>sqlplus sys/sys123 as sysdba
SQL*Plus: Release 10.2.0.3.0 - Production on Thu Nov 2 00:21:48 2023
Copyright (c) 1982, 2006, Oracle. All Rights Reserved.

Connected to:
Oracle Database 10g Enterprise Edition Release 10.2.0.3.0 - Production
With the Partitioning, OLAP and Data Mining options

SQL> conn hr/hr
Connected.
SQL> conn sh/sh
Connected.
SQL>
```


Uninstall

Step-50: Go to Windows start button and select “Database Configuration Assistant” then go to “Run as administrator” and click it.

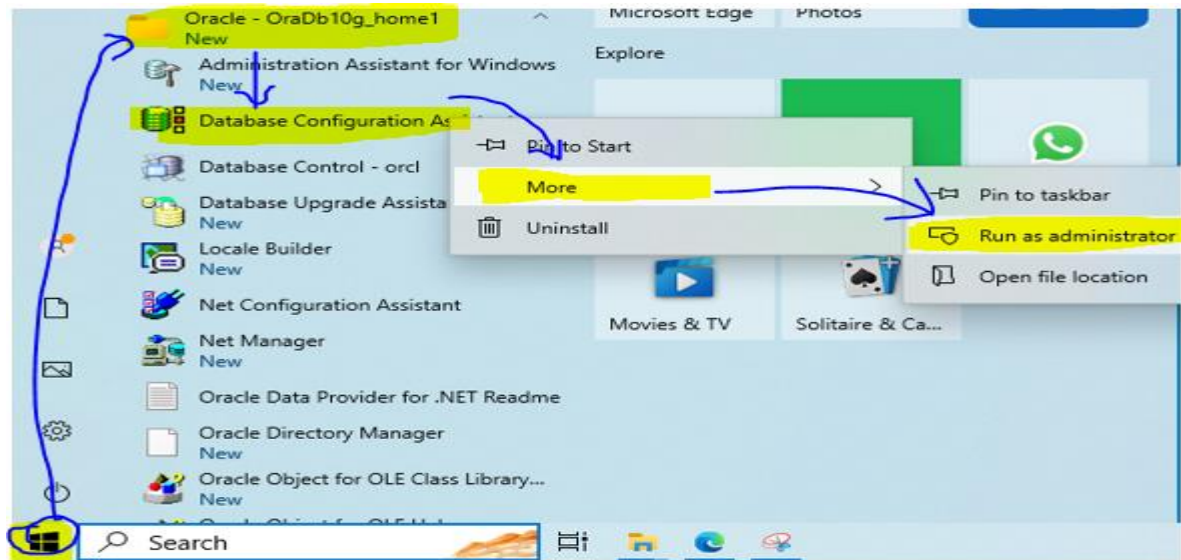


Step-51: Click “Next”.

Step-52: Select “Delete a Database” and click “Next”.

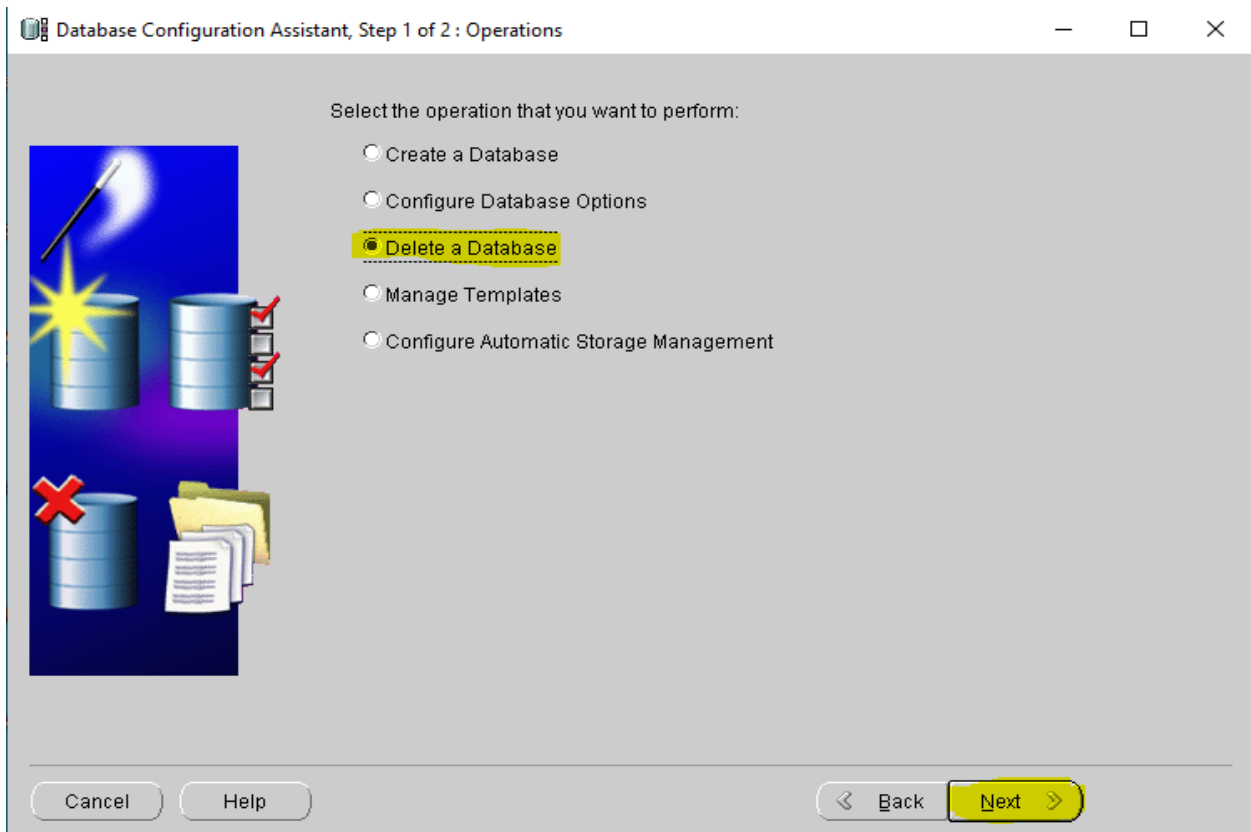


Step-53: Click “Finish > Yes”.

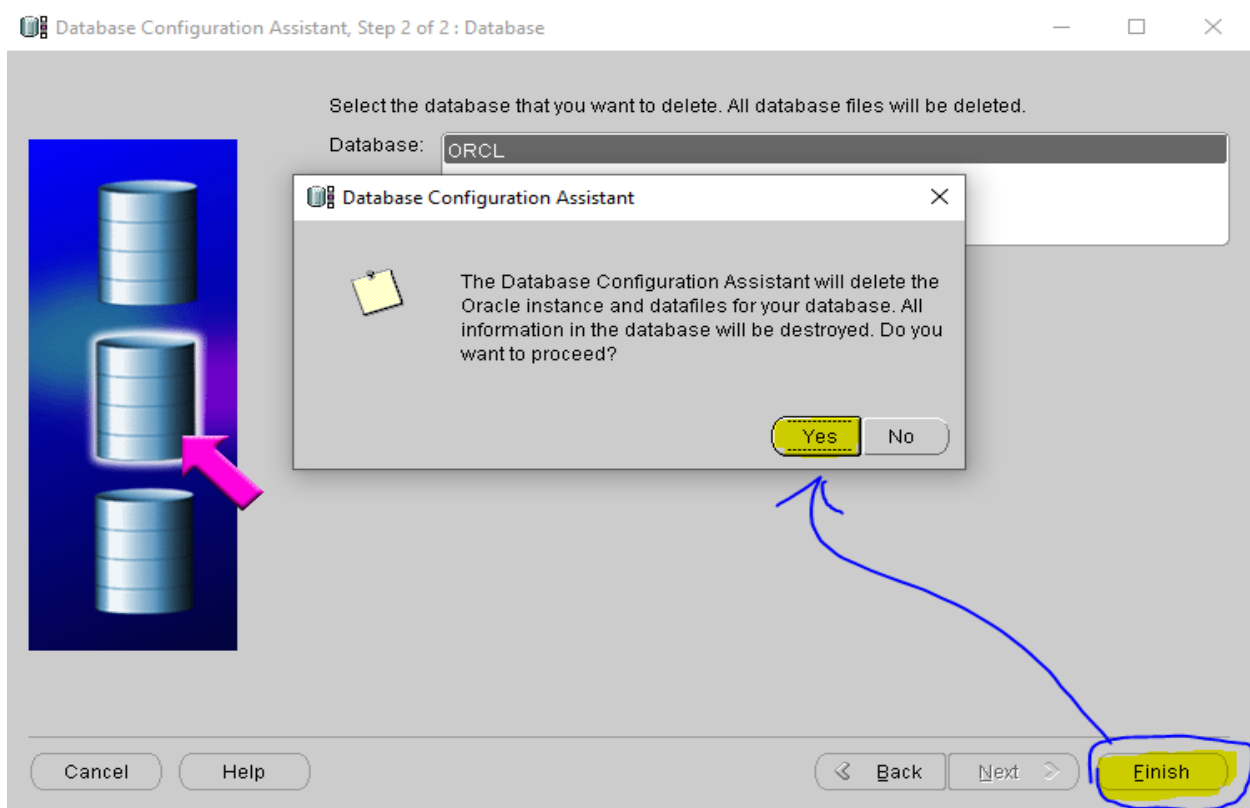


Step-54: Database deletion in progress...


Step-55: Click “No”.

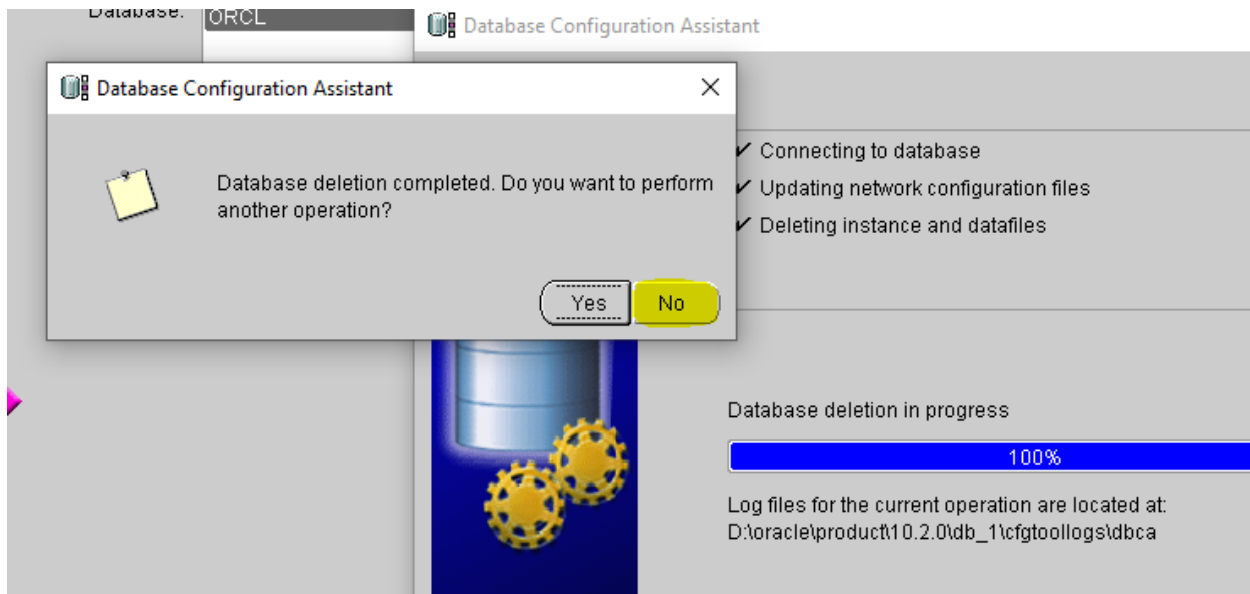


Step-56: Open Windows start button and go to Oracle - OraDb10g_home1 Click “Universal Installer”

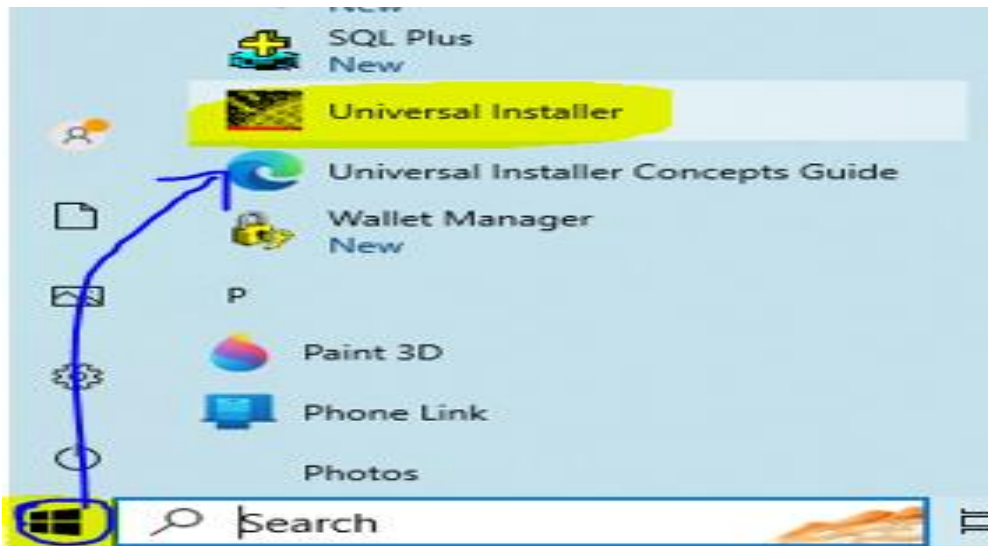


Step-57: Click “Deinstall Products” and click “Next”.

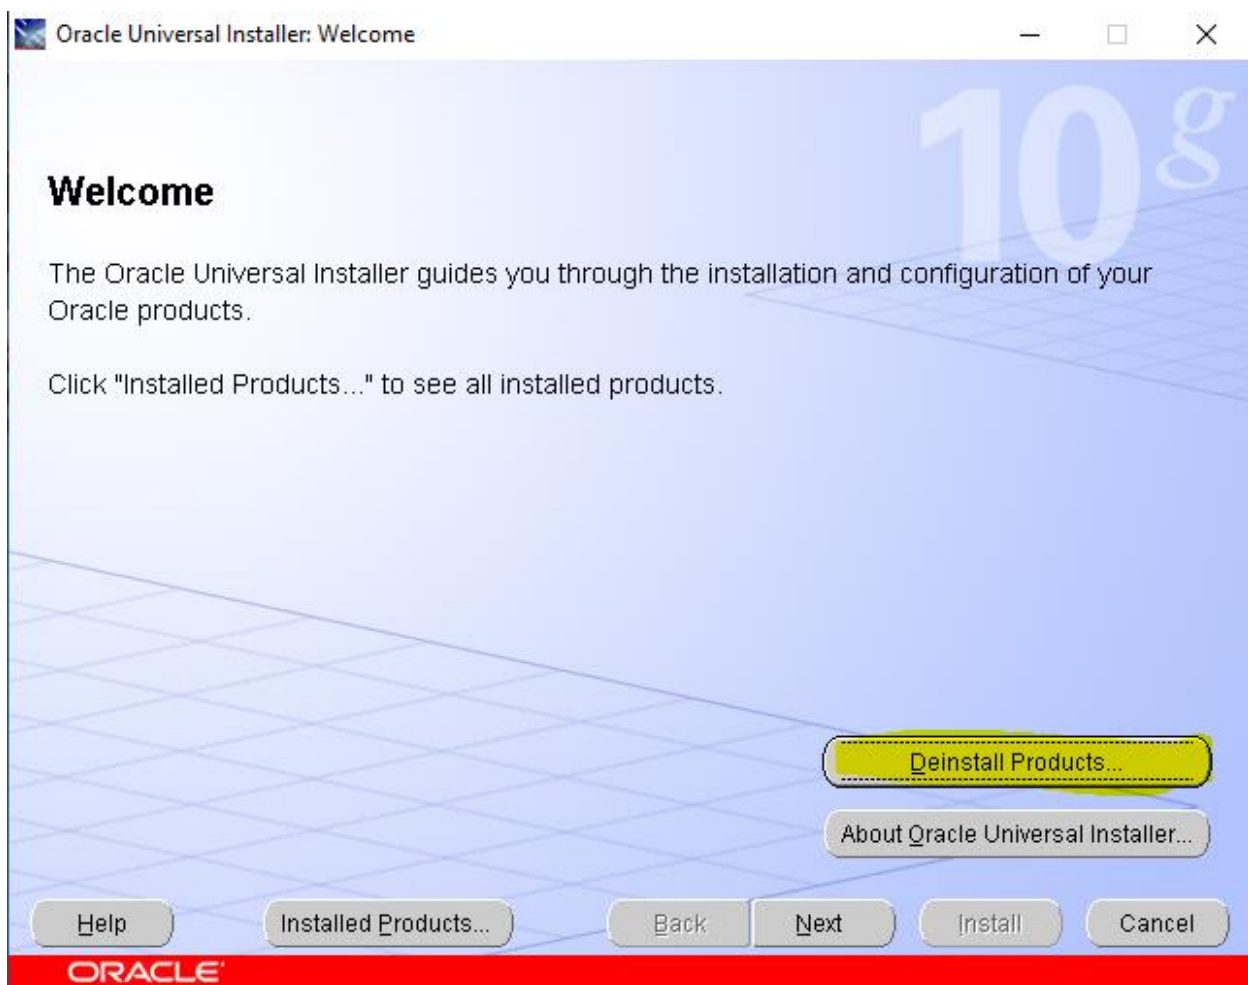

Step-58: Select "OraDb10g_home1" and Click "Remove".

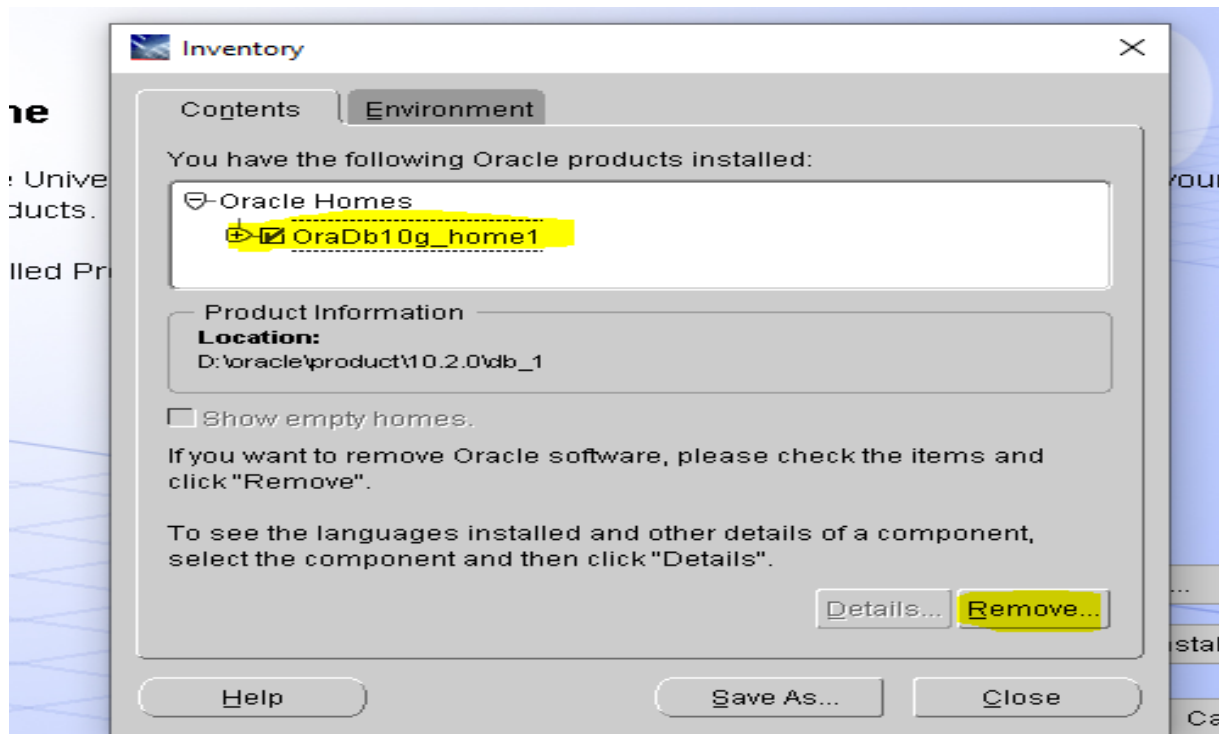


Step-59: Click "Yes".

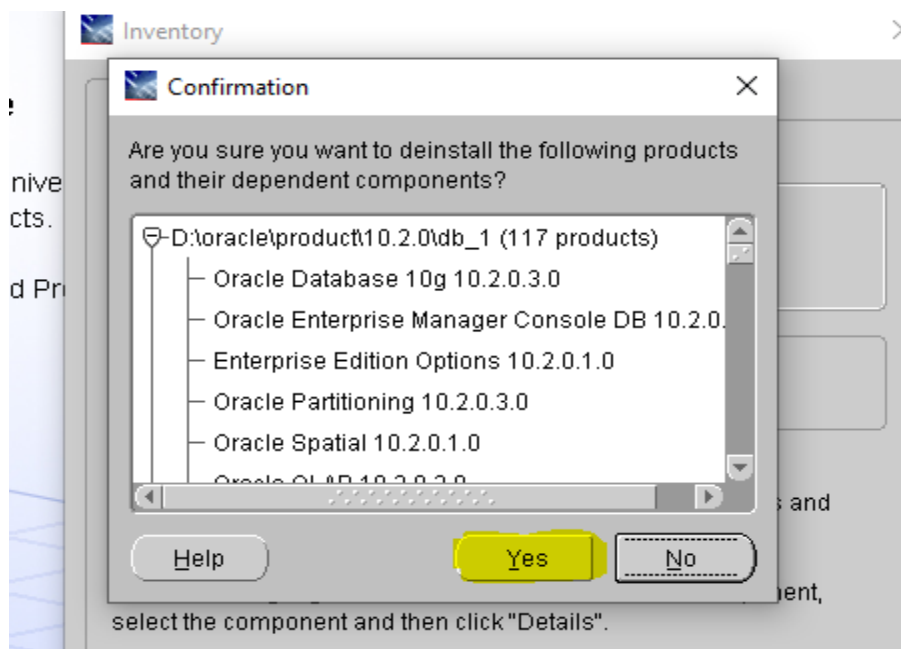


Step-60: Deinstall in progress.....

Step-61: Click "Close".

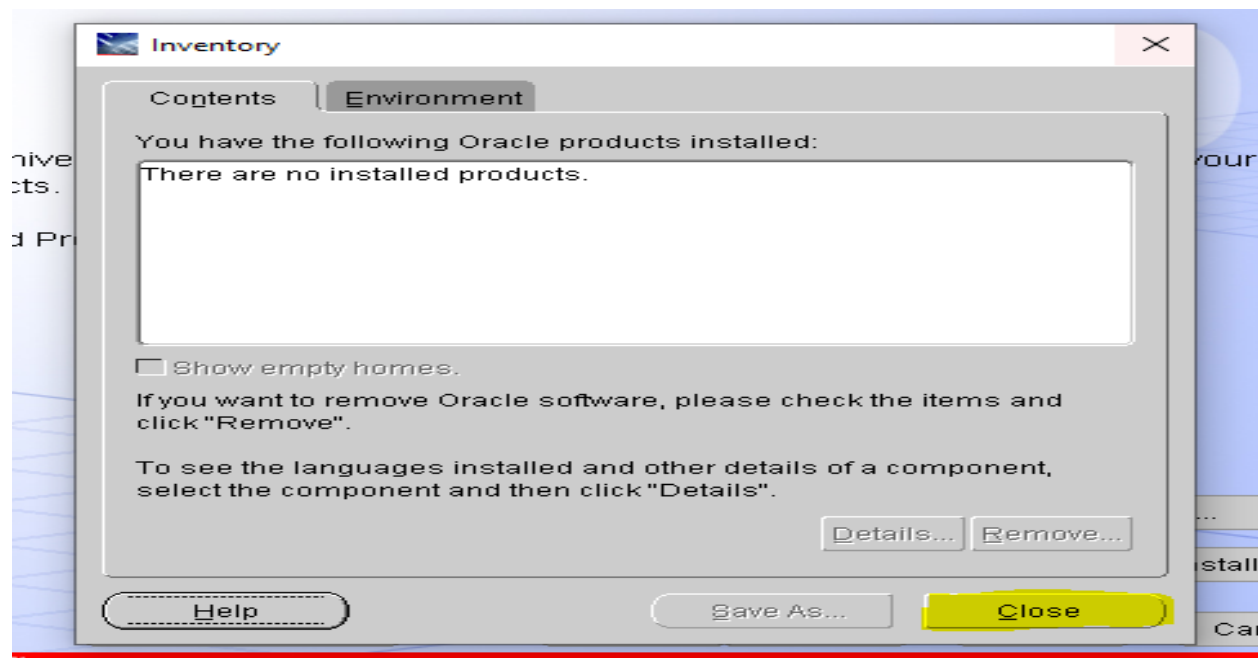

Step-62: Click "Next".

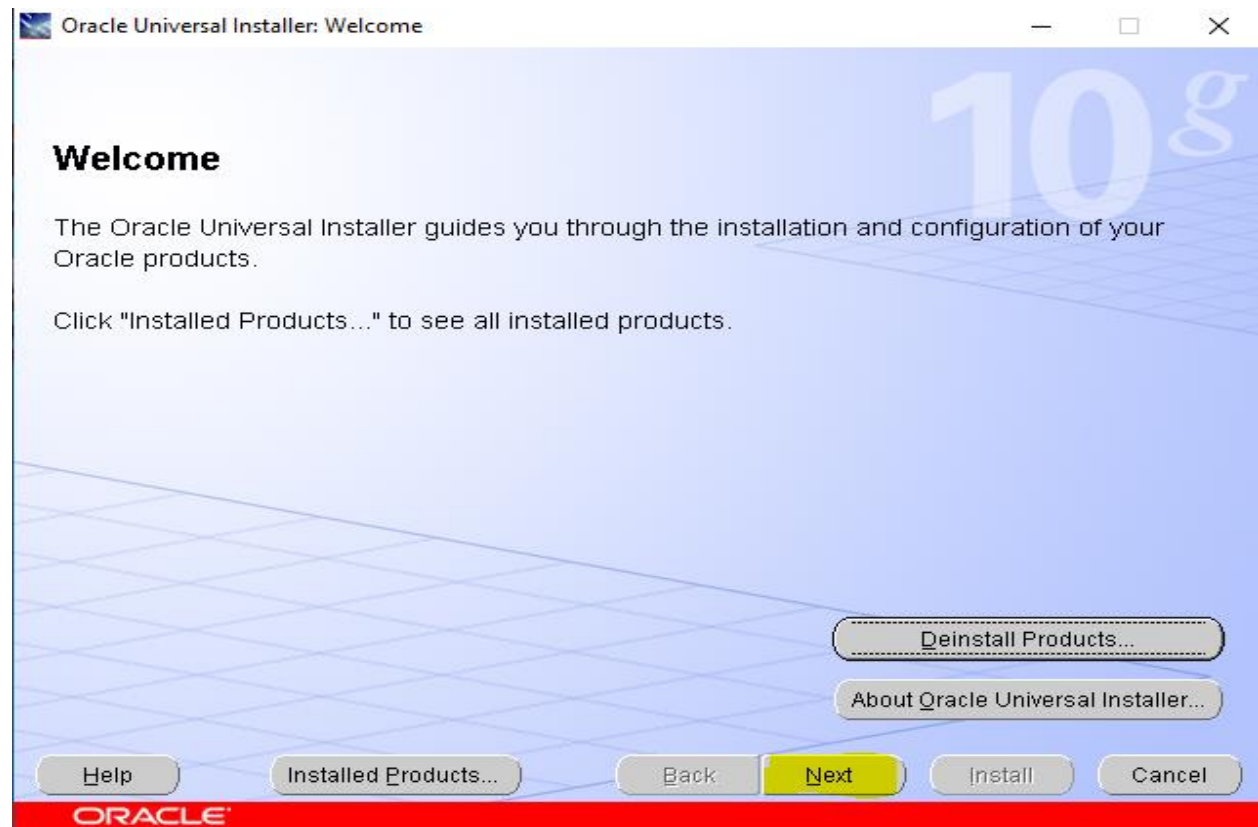

The screenshot shows the 'Specify Source Location' window of the Oracle Universal Installer. The window title is 'Oracle Universal Installer: Specify Source Location'. The main heading is 'Specify Source Location'. Below it, the section is titled 'Source'. The text says 'Enter the full path of the file representing the source of the installation.' The 'Path:' field contains 'D:\University\DBMS\Oracle11g\bin\stage\proc'. There are 'Back', 'Next', 'Install', and 'Cancel' buttons at the bottom. An 'Exit' dialog box is overlaid on top, asking 'Do you really want to exit?' with 'Yes' and 'No' buttons. A blue arrow points from the 'Cancel' button in the main window to the 'Yes' button in the 'Exit' dialog box.

A screenshot of a Windows File Explorer window showing a folder named 'oracle' selected. A right-click context menu is open over the folder. A blue arrow points from the 'oracle' folder icon to the 'Delete' option in the menu. The 'Delete' option is highlighted with a yellow background. The menu options are: Open, Open in new window, Pin to Quick access, Scan with Microsoft Defender..., Give access to, Restore previous versions, Include in library, Pin to Start, Add to archive..., Add to "oracle.rar", Compress and email..., Compress to "oracle.rar" and email, Send to, Cut, Copy, Create shortcut, Delete, Rename, and Properties.