Frontier and Localhost: A Survey of How Production AI Learns Outside the Weights

Mikhail L. Arbuzov
Independent Researcher
mike.arbuzov54@gmail.com

Lee Mosbacker
Independent Researcher
lee.mosbacker@gmail.com

Sisong Bei
Independent Researcher
qurining@gmail.com

Ziwei Dong
Independent Researcher
ziwei.dong@alumni.emory.edu

Dmitri Kalaev
Independent Researcher
kalaevdr@gmail.com

Alexey A. Shvets
Palo Alto Networks
ashvets@paloaltonetworks.com

Abstract

Production systems built on large language models increasingly adapt outside the model weights: after a failure, teams change instructions, skills, memories, tools, orchestration graphs, evaluation suites, and governance rules faster than any weight update. Two earlier results explain why this is the right place to adapt: reliability over long outputs hinges on a sparse set of key decisions, and inside a bounded deployment those decisions fail in a small, recurring catalogue of modes that a targeted budget of fixes can cover. This article surveys 256 production and research systems from January 2023 to October 2026 and reads the scaffold layer as one adaptation surface governed by one loop: a recurring failure is traced to a scaffold coordinate, a candidate edit is proposed, a gate accepts or rejects it on measured loss, and a second decision sets how far the edit may travel. We state the five conditions under which this loop is an optimizer rather than patchwork, classify systems by which loops they close and whether each gate is algorithmic or human, and add a further axis: the class of feedback signal the gate receives. Exact signals (code, mathematics), observable outcomes (completed tasks), judged signals (writing, design), and delayed signals (research) fix what the gate can be, which design-space cells are reachable, and which failure dominates. No surveyed system combines automated local adaptation with governed cross-organizational promotion, versioned lineage, access control, and rollback. We map the failure surface this gap leaves open and state the open problems for closing it.

1 Introduction

The standard mental model of a system built on a large language model (LLM) is the model. Pre-training fixes the weights, fine-tuning nudges them, and deployment wraps a thin layer of prompts and tools around the result. Production in 2025 and 2026 has stopped behaving this way. Frontier weights change on a cycle of months; the systems built on them change daily, in instruction files checked into repositories, in memories that persist across sessions, in skills loaded on demand, in registered tools, in evaluation suites that block a merge, in agent topologies, and in pull-request gates on shared rule repositories. A growing share of the adaptation that makes a deployed system reliable now happens outside the weights, in a fast-changing local scaffold wrapped

around a slow-changing frontier model.

Read one at a time, these artifacts look like unrelated engineering. A skill file is a procedure the model did not have. A repository rule is a local parameter for one project's conventions. A retrieval connector is memory access specific to one patch of work. A tool registry provisions a capability the base model cannot reach. A pull-request review against a shared rule repository is a promotion gate, and an evaluation suite that blocks a merge is a validation check before promotion. Read together, they are one adaptation surface, the non-model part of what has been called a compound AI system [1], and the question this survey asks is what optimization discipline that surface needs. The answer we find is that the field has built an external adaptation layer for LLMs but not the optimizer that should govern it. Most deployments maintain the layer as patchwork: a failure happens, someone adds a rule, the pile grows, nobody knows which addition helped, and fixes leak into contexts that never validated them.

This article makes five contributions.

1. It states the loop that turns patchwork into optimization in plain language, then as a gated update rule, with the five conditions under which the rule is a mechanism rather than a metaphor (Section 3).
2. It introduces a classification of the feedback signal available to that loop, from an exact check to a delayed and sparse reward, and shows that the class fixes what the gate can be, which design-space cells are reachable, and which failure dominates (Section 4).
3. It surveys 256 production and research systems from January 2023 to October 2026, scores each on six substrates with a published rubric and a released score table, and reports where maturity is uneven (Sections 5 and 6).
4. It places every system that closes both loops in a design space indexed by gate type and reads the empty cells structurally (Section 7), and it reads the convergence of five research families on the same loop as evidence that the architecture is real rather than one group's local optimum (Section 8).
5. It names, as a four-property audit criterion, the architecture no surveyed system instantiates, namely governed cross-tenant scaffold optimization with versioned lineage, access control, and rollback, and it maps the failure surface that the gap leaves open (Sections 9 and 10).

The survey runs no experiments. Its evidence is the published behavior of the systems it scores, the released score table, and an audit of every absolute claim against the October-2026 literature (Supplementary Material).

2 Why adaptation lives outside the weights

2.1 Breadth in the weights, depth in the scaffold

Frontier training optimizes for breadth. The weights are tuned to generalize across millions of unseen deployments, and the training objective smooths over exactly the things one deployment cares about: local naming conventions, contradictory tenant preferences, rare workflow-specific failures. Reinforcement learning from human feedback reduces output diversity and homogenizes preferred style across users [2, 3], and instruction-tuning data rewards patterns that generalize across the annotator pool rather than patterns specific to any one deployment. The frontier model is therefore trained in a way that systematically disfavors encoding one tenant's idiosyncrasies as preferred behavior. Tiwari et al. [4] reach the same place from the optimization side: in-context adaptation is cheap and rapid but capacity-bounded, in-weights adaptation is expressive but induces

forgetting and loss of plasticity [5], so a two-timescale system needs a cheap outer layer that absorbs what context can carry.

Production reliability, by contrast, is achieved in depth. Inside one deployment, reliability is determined by what global training had to smooth away. Encoding every deployment in the weights is ruled out three times over. Per-tenant fine-tuning multiplies the training, evaluation, and serving lifecycle by the number of deployments. Weights ship quarterly at best, while the deployment wants daily updates. And overfitting the weights to one tenant degrades the adjacent tenants whose preferences contradict. Per-tenant adapters [6], distilled models, and learned routing each absorb some residual in principle. In the surveyed corpus they appear rarely, and the scaffold is where adaptation lands; the reason the systems themselves give is that it is the one substrate that is cheap, inspectable, reversible, tenant-scoped, and updatable on a daily cadence at once.

2.2 Why the scaffold is the right architecture, not a workaround: three papers

The case that learning belongs outside the weights does not rest on cost alone. It is the conclusion of three papers, of which this is the third. The first, *Beyond Exponential Decay* [7], asks why long LLM outputs do not fail at the rate a uniform per-token error model predicts, and finds that reliability hinges on a sparse set of key decisions, under a tenth of tokens by the available long-context measurement, rather than on uniform per-token accuracy. The second, *The Architecture of Errors* [8], asks what those key-decision failures look like inside a bounded deployment and finds that they cluster into a finite catalogue of recurring modes whose size grows only slowly with the number of observed failures, so a small, targeted budget of interventions covers the residual. Together they say where a deployment's errors are and that they are few enough to fix one at a time.

This article asks where the fixes live. The answer the corpus gives is: in persistent artifacts outside the weights, which is where a small catalogue of recurring, tenant-specific modes can be addressed cheaply, inspected, and reversed. Once the loop that edits those artifacts is gated and scoped, the arrangement is not a patch on an inadequate model. It is the architecture the error structure of the first two papers calls for: a frontier model that generalizes, a local scaffold that specializes, and reliability that comes from governing the specialization.

2.3 Three stages of scaffold maintenance

Three stages of scaffold maintenance recur across the corpus (Table 1). They differ in how candidate updates are produced, whether credit assignment is explicit, and whether promotion is bounded by evidence. In the surveyed corpus, production deployments sit at Stage 1 or 2; the loop of Section 3 is Stage 3.

A patchwork loop becomes Stage 3 once the five conditions of Section 3 hold. The survey of Sections 5 to 7 asks which deployed systems meet which of them.

2.4 Relation to existing surveys

Table 2 places this survey against the surveys that cover neighboring ground. Existing surveys of self-evolving agents, agent memory, context engineering, skills, and harness design catalogue mechanisms by what they edit and when. None classifies systems by whether a feedback loop is closed, by whether the gate is algorithmic or human, or by the class of signal the gate receives; two carry a governance axis, and none a cross-organization promotion dimension. This survey classifies on those four axes and audits a named gap against them. The prompt-optimization lineage

Table 1: Three stages of scaffold maintenance.

Stage	Update mechanism	Credit assignment	Promotion discipline	Dominant failure
1. Patchwork	Intuition-driven local edits	Implicit, ad hoc	None	Bloat
2. Random artifact search	Many variants tried under an evaluation	Weak; the evaluation is the only signal	Evaluation-gated merge, no failure-to-coordinate tracing	Overfitting to the in-distribution patch
3. Artifact-layer descent	Residual traced to a coordinate, then one edit	Explicit per failure mode	Bounded by evidence radius; reversible	(the discipline this article describes)

Table 2: Related surveys and the axes they classify by ("partial": discussed but not a classification axis).

Survey	Scope	Organizing axes	Loop closure	Gate type	Signal class	Governance
Gao et al. [9]	self-evolving agents	what, when, how, where to evolve	partial	partial	no	no
Fang et al. [10]	self-evolving agents	inputs, agent system, environment, optimizers	partial	no	no	no
Zhou et al. [11]	self-evolving coding agents (108 methods)	evolution target, timing, code signals	partial	partial	partial	partial (reversibility)
Ding et al. [12]	persistent-state agents (435 works)	authority, scope, mutability, provenance, recoverability	no	partial	no	yes (provenance, rollback)
Lin et al. [13]	memory security (~90 works)	lifecycle phases × security objectives	no	partial	no	yes (principal scoping, rollbackability)
Guo et al. [14]	agent system and harness design	six runtime responsibilities	partial	partial	partial	partial
Xia et al. [15]	skill-mediated agents (8 systems)	four responsibility layers, ten patterns	partial	no	no	partial
Ding et al. [16]	skill evaluation and evolution	four evolution paradigms × six benchmark classes	partial	partial	partial	partial
Mei et al. [17]	context engineering (1,411 papers)	components × system implementations	no	no	no	no
This survey	256 scaffold-adaptive systems	loop closure, gate type, signal class, governance	yes	yes	yes	yes (four-property audit)

that a reader will expect here, OPRO, EvoPrompt, Promptbreeder, DSPy, and TextGrad [18–22], optimizes a prompt or program once against a development set and sits in the contrast corpus, and the evolving-playbook line of agentic context engineering [23] sits at the single-loop boundary. The closest precedents for optimization over the scaffold itself are agent symbolic learning, which treats prompts, tools, and pipeline as symbolic parameters updated from textual feedback [24]; STOP, in which a scaffolding program recursively improves its own improvement code [25]; and a coding agent that edits its own harness to raise its benchmark score [26]. Each runs one deployment's loop under a benchmark score, and Section 3 states what that loop becomes once persistence, scope, and promotion are added. Appendix H traces each neighboring line and states what this survey inherits from it.

3 The loop: artifact-layer descent

3.1 The loop in plain language

The disciplined version of scaffold maintenance is one loop, run again and again over the life of a deployment. It does not react to single failures. As the deployment runs, it logs what went wrong: failed outputs, user corrections, rejected answers, evaluation regressions, tool-call errors. Reflecting over that record, it clusters the failures into recurring modes and takes up the ones that matter most, where a mode earns attention in proportion to how often it recurs and how badly it fails. For such a mode it locates the single scaffold coordinate responsible, which may be a stale memory entry, an under-specified instruction, a missing tool argument, a brittle retrieval rule, or a misrouted agent edge, and it synthesizes one candidate edit to that coordinate. It measures whether the edit lowers the deployment's failure rate on its own recurring tasks, which we call the patch loss, and a gate accepts or rejects the edit on that measurement. An accepted edit stays in the scaffold; one that a later check shows made things worse is pruned or rolled back. Then comes the step most systems skip. The loop decides how far the edit should travel, promoting it to other deployments only as far as the evidence reaches. That limit is the edit's evidence radius. Fig. 1 draws the loop.

3.2 Two loops, two knobs

An engineer notices that a coding agent keeps misnaming a class in one repository. The fix is a one-line rule in that repository's instruction file. The edit is small and its scope is one project. The same engineer could promote the rule to a team-wide template, to the company's core instructions, or to a cross-tenant skill registry. The edit did not change; the scope did. And the gate that should let it through gets stricter at each step, because the loss it is tested against is now an average over more deployments, and a fix that helps one repository can hurt another.

Loop 1 is the local fix: a recurring failure produces a candidate edit, the edit is tested, and an accepted edit changes one deployment's scaffold. Loop 2 is the separate decision of whether that fix should be shared. The two loops turn different knobs. Loop 1 sets how much one accepted edit changes the local scaffold, the analogue of a step size. Loop 2 sets how many deployments the edit applies to, which does not change the step but changes the target: which average failure rate the scaffold is being tuned to reduce. The scopes nest, USER within PROJECT within STACK within TENANT within CORE, and each level has its own loss, the average failure rate over the deployments it contains (Fig. 2). "Cross-tenant promotion" means reaching the TENANT or CORE level. This is why governance is not administrative overhead. It is the regularization that keeps a small fix from being aimed at the wrong target.

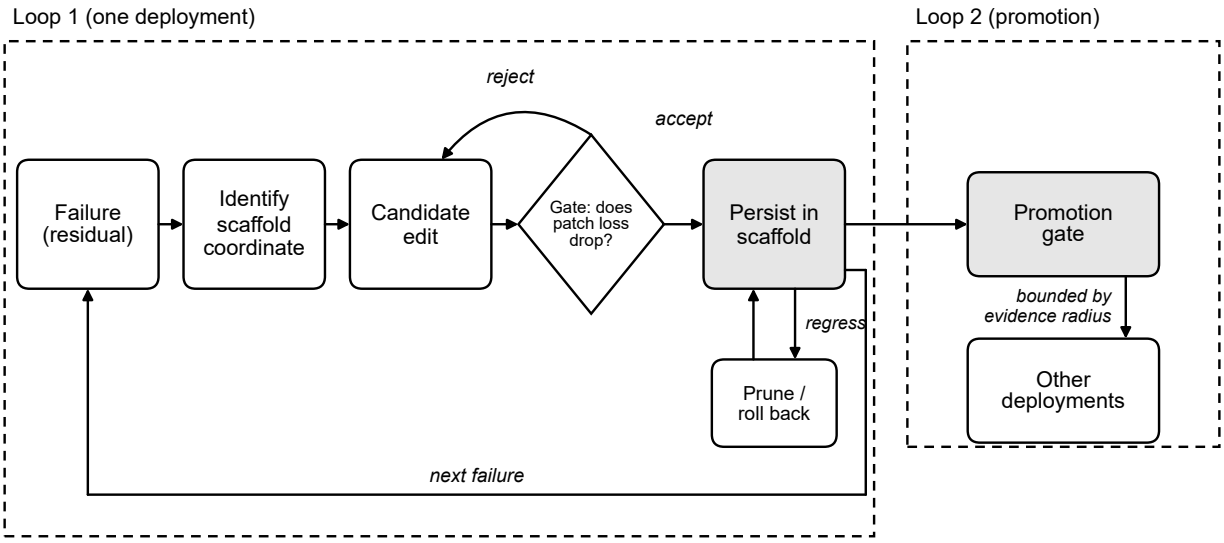


Figure 1: Artifact-layer descent. Loop 1 turns a failure into a gated, persisted edit on one deployment's scaffold; Loop 2 promotes a validated edit to other deployments, only as far as its evidence radius supports.

3.3 When the loop is an optimizer

The loop is an optimization process, rather than a description of good practice, when five conditions hold:

1. a measurable patch loss, such as a failure rate, a correction rate, or an evaluation score;
2. captured residuals, so that failures are logged rather than lost;
3. credit assignment, so that a failure can be traced, at least sometimes, to the scaffold coordinate that caused it;
4. a synthesized candidate edit to that coordinate; and
5. a gate that checks whether the edit lowers the loss before the edit is kept or promoted.

Write the patch loss of deployment D as

$$L_D(\theta_s) = \mathbb{E}_{x\sim D}[\ell(\pi(\theta_M, \theta_s, x))]\,,$$

where θ_M are the frontier weights, fixed during deployment, θ_s is the scaffold, a structured object over the six substrate coordinates of Section 5, and ℓ is an operational loss. A failure yields no analytic gradient. It yields a candidate edit z_t, proposed by reflection over the accumulated failure history in order of how often and how badly each mode fails. The gate accepts the edit when its noisy estimate of the change in loss clears a margin,

$$G_t(z_t) = 1 \iff \widehat{\Delta}_{z_t} L_D(\theta_s^t) + \lambda\,\Omega(z_t) \le -\tau_t,$$

where $\Omega \ge 0$ penalizes the complexity of the edit and the breadth of its promotion and $\tau_t \ge 0$ is the required margin. An accepted edit is applied; a rejected one leaves the scaffold unchanged. Production systems implement this inequality without writing it: an evaluation blocks a merge on

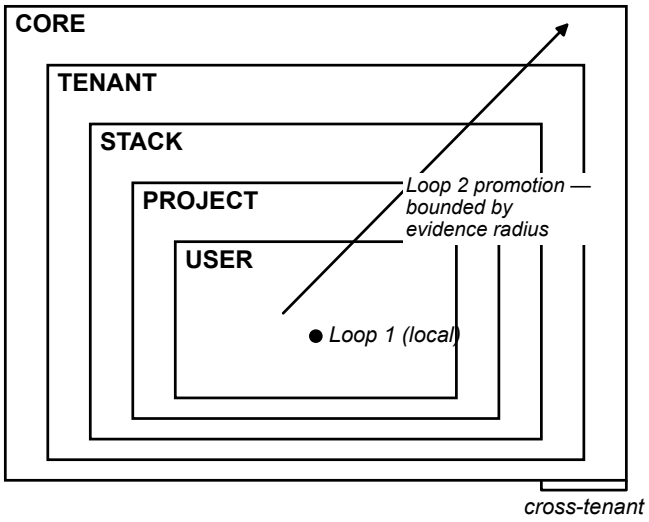


Figure 2: Patch scope hierarchy. Each level's loss averages the deployments it contains. Loop 1 descends a USER or PROJECT loss; Loop 2 promotes upward; cross-tenant promotion means reaching TENANT or CORE.

regression, a reviewer rejects a vague rule, a governance system holds a local artifact back until evidence accumulates.

Each loop has a gate, and we name three kinds. A gate is **Auto** when the decision is an algorithmic criterion: an evaluation score, a verifier, a reinforcement-learning threshold, or a language-model judge [27] with a quantified agreement rate. It is **Human** when the decision is reviewer judgment. It is **None** when the loop is absent. These labels index the design space of Section 7.

3.4 Assumptions

The descent reading holds when (i) the frontier weights stay frozen while the scaffold adapts; (ii) each edit is a persistent, inspectable artifact rather than a transient prompt; (iii) the deployment exposes a loss that can be measured; (iv) the proposal process can, at least sometimes, trace a failure to the responsible coordinate; (v) the gate is a noisy estimator of whether an edit helps, not an oracle; and (vi) promotion widens an artifact's scope under a gate rather than averaging comparable updates the way weight-space federated learning does. Under these assumptions Appendix A states a one-step descent inequality and an informal convergence proposition to a gate-stable scaffold. Where a condition fails, the same picture should be read as an analogy, and the survey marks which systems meet which conditions. Condition (iii) says the loss must be measurable. It does not say what measures it, and that turns out to be the question that sorts the corpus.

4 Where the signal comes from: four classes of feedback

Four scaffolds all run the loop of Section 3. A coding agent changes one line in its repository rule file; the test suite runs and reports pass or fail within seconds. A scheduling assistant changes how it phrases a booking request; the appointment either appears on the calendar or it does not, and the system learns which an hour later. A marketing assistant changes the tone rule in its instructions;

nobody can say whether the next draft is better, only whether a reviewer prefers it. A research assistant changes how it chooses which direction to pursue; whether the choice was good becomes visible months later, after many other edits have landed. All four produce a candidate edit z_t. They differ in what the gate G_t can know about it.

That difference is the subject of this section. The gate of Section 3 accepts an edit when its estimate $\widehat{\Delta}_{z_t} L_D$ of the loss change clears a margin. Condition (1) of the loop says a patch loss must be measurable; it does not say how. We distinguish four classes of feedback signal by what produces the estimate, and the class turns out to fix three things at once: what the gate can be, which cells of the two-loop design space of Section 7 a deployment can reach, and which entry of the failure surface of Section 10 dominates. Table 3 summarizes; the paragraphs that follow give one example per class from the corpus.

Table 3: The four feedback-signal classes and what each fixes.

Class	Signal	Gate G_t becomes	Conditions (1)–(5) of Sec. 3 satisfied	Reachable cells (Sec. 7)	Dominant failure (Sec. 10)	Corpus examples
C1 exact	deterministic pass/fail or exact score, immediate	surrogate verifier; exact eval cascade; $\tau_t \approx 0$	(1)(2)(4)(5) directly; (3) credit assignment open	[Auto × Auto], [Auto × Human], [None × Auto]; only class where auto-gated Loop 2 needs no receiving-side human	test overfitting; scaffold bloat	DGM, AlphaEvolve kernels, SkillOpt on math
C2 observable outcome	success/failure event after one episode; noisy, confounded	RL threshold; held-out task suite; batching or agreement filter; $\tau_t > 0$	(1) noisy; (2) only if logged; (3) hardest; (4)(5)	[Auto × Auto] in simulators; [Auto × Human] in production	patch overfitting; poisoned memory; tool-output injection	Devin, Sierra, SAGE, SkillRL, PACE, Voyager
C3 judged	judge, rubric, rating, reference comparison; no ground truth	calibrated LLM-judge or reviewer; the rubric is itself a coordinate (reflexive gate)	(1) by proxy; (2) via complaints; (3) via rubric decomposition; (4); (5) proxy	[Auto × Human] naturally; [Auto × Auto] only with calibration; [Human × Human] for high stakes (registries and curation only)	Goodhart / eval fragility; rubric accretion	SkillForge, CASCADE, skills-repository review
C4 delayed, sparse	outcome at a long horizon, once per many edits	proposal pruning (semantic merge, archive selection) plus proxy milestones; no per-edit gate	(1) only at horizon; (2) rarely as a failure event; (3) temporal, open; (4); (5) replaced by novelty or taste	[Auto × Auto] through archive selection; otherwise [None × Auto] or human on both loops	drift; indistinguishable from random search	NanoResearch, CORAL, AlphaEvolve archive

C1, exact. A deterministic checker returns pass or fail, or an exact score, immediately and repeatably. Unit tests, compilers, type checkers, exact-match answer keys, proof checkers, and schema validators are all of this kind. DGM accepts a self-modification only after it passes in a

sandbox on coding benchmarks [28]; AlphaEvolve scores candidate programs with a cascade of exact evaluators [29]; SkillOpt gates a skill edit on a held-out exact-match split of a math benchmark [30]. In the formalism the estimator bias ε_t is close to zero, the margin τ_t can be set near zero, and accepting on a single evaluation ($n = 1$, Section 7) is defensible because repeating the check would return the same answer. Two of the five conditions still need work even here. A failing test localizes the output, not the scaffold coordinate that caused it, so credit assignment remains open; and a checker that is also the training target can be gamed. The dominant failures are test overfitting and scaffold bloat, because cheap acceptances accumulate.

C2, observable outcome. The environment or the user emits an outcome after an episode: the appointment is booked, the ticket is closed, the pull request is merged, the tool call returns without error, the retrieved document contains the answer. The signal is real, but it arrives one episode late, it is noisy, and it is confounded, because a user can accept a wrong answer and reject a right one. Devin's merged pull requests [31], SAGE's task success on AppWorld [32], SkillRL's success-rate threshold [33], and PACE's failure signals from a deployed small model [34] are gates of this class. The gate becomes a reinforcement-learning threshold or a held-out task suite; τ_t must be strictly positive, and the noise is absorbed by batching episodes or by requiring agreement across samples (Appendix B) rather than by the per-edit check alone. The bottleneck is credit assignment in its hardest form: the outcome says *that* the episode failed, not *why*, so tracing it to one coordinate is an inference the loop must make on its own. This is the class most production deployments live in. It is also the class in which the signal arrives through the same channel an attacker controls, which is why poisoned memory and tool-output injection (Section 10) dominate here.

C3, judged. There is no fact of the matter. An essay, a marketing page, a blog post, a design, a pitch deck, or a code review for style can be scored only by a judge: a human rater, a language-model judge, a rubric, or a comparison against references. SkillForge accepts a skill diff when its judge agrees with human engineers more than nine times in ten [35]; CASCADE consolidates memory under a human-and-agent gate [36]; Anthropic's skills repository promotes a skill when a reviewer approves the pull request. Three things change. The estimator bias ε_t is now the judge's bias, which is bounded only by calibration against people, so assumption (A2) of Appendix A has to be bought rather than assumed. Residuals are captured only when someone objects, so condition (2) depends on complaint channels rather than on instrumentation. And the rubric that defines the loss is itself a scaffold coordinate. When the pitch-review worked case of Appendix A edits the rubric from "evaluate market size" to "require a numeric estimate and a source", the edit changes the gate that will judge the next edit. We call this the *reflexive gate*. Its dominant failure is Goodhart's law in the form the eval-fragility entry of Section 10 describes, and in the form measured for reward models, where optimizing a proxy past a point lowers the true score [37]: once the judge is the target, the scaffold learns the judge. The judge's criteria are not stable even when the judge is a person; evaluators' criteria drift as they grade more outputs [38].

C4, delayed and sparse. The outcome exists but arrives after weeks or months, once per many edits, in a world that has moved on. Research programs, product strategy, and open-ended discovery are of this kind, and automated research pipelines such as the AI Scientist, which generates ideas, runs experiments, and writes the paper, are its clearest instance [39]. NanoResearch merges candidate skills by semantic compatibility rather than by a measured loss change [40]; CORAL promotes findings into shared memory on a heartbeat rather than on an evaluation [41]; AlphaEvolve's MAP-Elites archive keeps candidates for their diversity, not their score [29]. There is no per-edit estimate to gate on, so G_t degenerates to proposal pruning plus proxy milestones, and the descent argument applies only to the composition of pruning and whatever gate exists at the horizon

(Appendix B). Temporal credit assignment across many edits is open. The dominant failure is drift. The scaffold ages faster than the signal that would correct it, and an optimizer in this class cannot be told from random search by its outcomes alone, which is the indistinguishability Ong et al. [42] report for harness optimizers.

The same four classes on the weight side. Reinforcement learning from verifiable rewards trains model weights on C1 signals: a math answer matches or it does not. The effort to push that recipe into writing and other open-ended tasks has had to build C3 gates, and the constructions are worth naming because they are the only gates a C3 scaffold loop can borrow. Rubrics as Rewards scores a response against an instance-specific checklist generated before training and judged by a fixed model [43]; Writing-Zero trains a pairwise generative judge on writing principles and then holds it fixed while the policy learns [44]; reference-anchored judging improves agreement with human labels where no verifier exists [45]; an essay scorer trained against a fixed rubric of binary items reaches the agreement of a single human rater [46]. A second group lets the gate move with the policy. RLPR scores a response by the policy's own probability of a fixed reference, so the scorer co-evolves by construction [47]; Rubric-ARM alternates updates of a rubric generator and a judge before freezing them for policy training [48]; EvoRubrics, SCORE, and RubricEM update rubrics adversarially or from a rubric buffer within training [49–51]. Of fourteen such papers we checked, thirteen are methods and one is a survey; of the methods, eight hold the rubric or judge fixed during policy optimization and five co-evolve it, five report agreement with human judgment, and none of the co-evolving ones does (Appendix G). These are weight-space methods and this survey does not score them. The point is narrower: whether the rubric is fixed or co-evolved with the policy is exactly the reflexive-gate question, and a co-evolved rubric is a gate under descent whose calibration nobody has yet measured. On the scaffold side, three systems report judge calibration, SkillForge's agreement with engineers, SkillChain's judge-human kappa, and SkillCoach's trajectory-filter consistency against human gold [35, 52, 53], and none of them calibrates a judge that is itself being edited.

What the class does to the design space. Read the matrix of Section 7 by class and its empty cells stop being accidents. Every system in the [Auto × Auto] cell whose gate is a per-edit estimator runs on a C1 signal or on a simulated C2 environment where the outcome is cheap to observe; the [Auto × Auto] systems that work in C4 domains gate by pruning, not by an estimate (Claim IV-1). The production-viable cell [Auto × Human] is populated only by C2 and C3 systems, where the human on Loop 2 substitutes for the exact signal that Loop 1 lacks (Claim IV-2). And the weight-side rubric work supplies gate constructions that no scaffold-side system has yet calibrated under the reflexive condition (Claim IV-3). The claims audit in the Supplementary Material checks all three against the rescored corpus; the first two hold without exception and the third is sharpened by the three scaffold-side calibration figures named above.

The class also settles a question Section 9 leaves open: whether the missing cross-tenant architecture *should* be filled. The answer is by class rather than by domain. In C1 an automatically gated cross-tenant promotion of a test-validated code skill is low-risk, and the held-out receiving-side evaluation that Section 6 finds absent is cheap to add. In C2 the corner should be filled only with that receiving-side evaluation, because the sending side's outcome signal does not transfer. In C3 a human gate on Loop 2 is a design feature, not a defect, and governance means lineage and rollback around a human decision. In C4 property (a) of Section 9 cannot be met, so what remains of governance is lineage and rollback without an automatic gate. Safety-critical domains, which Section 9 names as the case for human gates, are C3 or C4 domains with high stakes; the class, not the domain, is what carries the argument.

5 Substrates, corpus, and scoring

5.1 Six substrates

A deployment's scaffold is composed of six substrates. They are the coordinates of θ_s, and each can be edited independently of the others. The three kinds of memory on S3 follow the cognitive-architecture taxonomy of Sumers et al. [54].

Table 4: The six scaffold substrates and the mark a system must reach to score 5.

Substrate	What persists	Score-5 mark
S1 Instructions	Project, team, or organization rules attached to a workspace	Versioned, two-loop, auto-gated promotion
S2 Skills	Procedural artifacts (code or text) loaded on demand	Skill bank self-modifies on failure, test-gated, versioned, promoted
S3 Memory	Cross-session experience (episodic, semantic, procedural)	Provenance, versioning, and correction pathways
S4 Tools	Vetted action surface and context schemas	Domain-curated bundle is the product; evaluation-gated tool versions
S5 Orchestration	Multi-role graph and routing	Population or policy updates from an outer-loop signal
S6 Governance	Versioning, promotion, audit, rollback	Dev-to-staging-to-production with evaluation thresholds, audit log, and rollback

The 0 to 5 rubric is the same on every substrate: 0, ephemeral; 1, persistent and local; 2, persistent with tool attachment but no feedback; 3, multi-scope or feedback-driven but without automated promotion; 4, automated feedback updates the scaffold, so one loop is closed; 5, the substrate's own top mark in Table 4. On the substrates that hold adaptable content (S1, S2, S5) the top mark requires both loops; on the substrates that hold governance machinery (S3 provenance and correction, S4 evaluation-gated tool versions, S6 evaluation-gated promotion with audit and rollback) it requires the machinery a second loop would need, which is why a registry or a prompts-as-code platform can score 5 on S6 while having no inner loop at all. Systems that adapt several substrates at once receive an additional integrated row. Other partitions are possible, for instance separating evaluation suites from governance; the argument of Section 3 is invariant to the partition so long as the coordinates stay independently editable.

5.2 How the corpus was assembled

The corpus was built in two passes with one rubric. The first pass (January 2023 to May 2026) searched arXiv, vendor documentation, and public repositories for systems described as self-improving, scaffolded, or agentic, and kept those that wrap a foundation model with at least one persistent artifact updated from deployment signal. The second pass (June to October 2026) ran query families for self-evolving skills and skill lifecycle, harness and context optimization, agent memory governance, prompt-as-code and evaluation-gated promotion, federated or multi-tenant skill sharing, and multi-agent topology evolution, and it followed the citations of the systems the first pass had identified as closest to the gap of Section 9. Every system admitted in either pass was scored from its own method section or documentation, never from a secondary summary. The first pass scored 130 systems; the second added 126, for 256 unique systems and 269 substrate-level rows. The cutoff is October 2026.

Two filters structure the corpus (Fig. 3). The patch-local discriminator admits a system to the core corpus when it scores at least 3 on at least one substrate, that is, when some artifact persists across scope or is updated from feedback; systems that carry the labels but fail it are kept as a contrast corpus so the boundary is auditable rather than rhetorical. A stricter composite two-loop audit then asks whether Loop 1 modifies a persisted artifact from session signal and Loop 2 has an explicit cross-context promotion mechanism with versioning or lineage; only systems passing both enter the design space of Section 7. Of the 256 systems, 204 pass the discriminator and 52 form the contrast corpus; 14 research systems and 3 industry exemplars pass the composite audit, and 7 systems added in 2026 promote across contexts without versioning or lineage and enter only under the relaxations below. Industry systems evaluated from vendor documentation rather than from a paper are flagged as such wherever they appear.

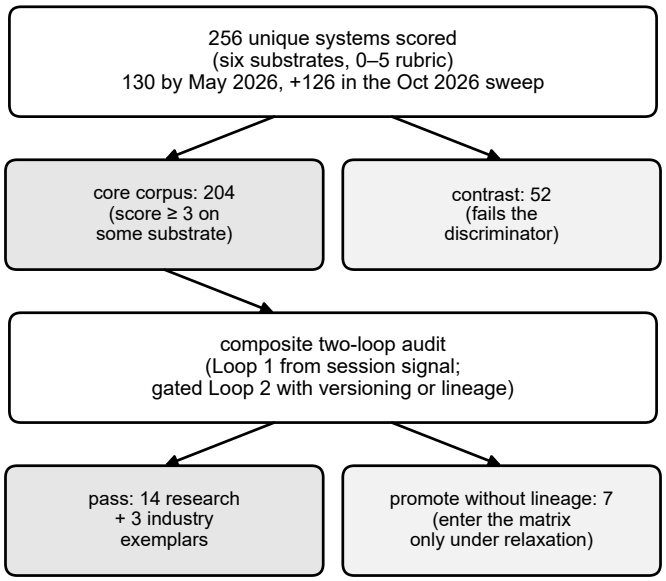


Figure 3: Corpus flow. Every system is scored on the six substrates; the discriminator splits core from contrast; the composite two-loop audit selects the systems placed in the design space of Section 7.

Two kinds of system are excluded. Those whose only update mechanism is weight-level fine-tuning or reinforcement learning are model-side and belong to the self-evolution literature this survey positions against; those with no public evidence of deployment or release are not scored at all.

5.3 Evidence and scoring discipline

Each system carries one or more evidence tiers: T1 peer-reviewed publication; T2 arXiv preprint; T3 production claim with metrics; T4 open-source artifact; T5 industry blog or interview. T1 and T4 carry the most weight in cluster-level statements; T3 is admissible when the claim is concrete (a named benchmark or integration target); T5 only when corroborated by a higher tier. Production claims are never pooled with peer-reviewed evidence when a cluster-level statistic is computed. Scoring is single-rater. One author scored every system, half-scores were used only when one criterion was clearly met and another partially, and ambiguous cases were rounded down. The complete score table, with a one-line justification per row, is released as Appendix I so that every classification can be re-derived. The counts reported in Section 6 move under two natural relaxations of the composite

criterion, counting any of versioning, lineage, or rollback as Loop-2 governance, or admitting updates that persist only optimizer state as Loop 1; the qualitative findings survive both (Appendix C).

6 Findings: substrate maturity and four clusters

6.1 Maturity is uneven, and the 2026 additions did not change the ceiling

Table 5 aggregates the corpus by substrate. The column n counts scored rows on that substrate, *Mean* is the average score, and *Score-5 systems* are those that reach the substrate's top mark in Table 4.

Table 5: Substrate maturity across the 256-system corpus (all scored rows; May 2026 corpus plus October 2026 sweep). The integrated row counts systems scored across several substrates as one composite row. No system added in 2026 scores 5 on any substrate.

Substrate	n	Mean	Score-5 systems	Survey finding
S1 Instructions	15	3.07	(none)	Rules persist across IDEs and agents; none closes both loops; ceiling 4
S2 Skills	50	3.34	SAGE, COSPLAY	Most active research substrate; Loop 1 routinely automated; production repositories human-merged
S3 Memory	50	3.06	Cuadros et al.	Lineage now shipped in products; enforced correction still absent
S4 Tools	20	3.65	MCP, Harvey, Hippocratic AI	Most mature production substrate; registries govern admission, not evaluation
S5 Orchestration	37	3.08	(none)	Topologies evolve under evaluation; one structurally gated instance; no two-loop system
S6 Governance	45	3.02	Braintrust, Vellum, LangSmith Hub, AGENTS.md/AAIF	Mature prompts-as-code; 2026 registries add lineage and rollback; no inner loop
Integrated	52	3.81	NanoResearch, AutoAgent, SkillRL	High-water mark; research systems without enterprise governance

The rows behind the table read as follows. On S1, rules persist across IDEs and agents (Claude Code, Cursor, AGENTS.md [55], Windsurf, Continue.dev) and adoption is measured at a fifth to a quarter of coding-agent projects [56, 57], yet context files raise inference cost by about a fifth without raising task success in a controlled study [58]. On S2, the two systems at the top mark, SAGE and COSPLAY, close both loops inside one research environment [32, 59]; 31 of the 2026 additions are skill systems, almost all closing Loop 1 under an automatic gate, and eleven treat retirement as a gated operation [60–62]; the public skill repositories, by contrast, are human-merged with one deprecation in 254 edits [63]. On S3, lineage has arrived in production memory, in Letta's git-backed Context Repositories [64], Mem0's per-memory history [65], and Zep's bitemporal facts [66], while five production backends still return revoked facts [67]; the 2026 research splits into write-gating and provenance on one side [68–70] and verifier-gated failure loops on the other [71–73], and no system carries both. On S4, MCP registries split into catalogs (the official registry: namespaces and version records, no scanning, no private servers) and control planes with scanning, access control, and quarantine [74–76]; none has evaluation-gated promotion. On S5, automated workflow search predates the corpus's topology evolution, in optimizable agent graphs [77] and in tree search over code-represented workflows [78]; topologies now evolve under evaluation [79–81], TOCOMAS alone

retains a topology change only when it satisfies a structural invariant [82], and Evo2Team promotes routing skills across teams with target-side confirmation [83]. On S6, the 2026 registries bring lineage and rollback [84–86], and every one of them has Loop 1 = None.

Three things stand out. First, the six substrates recur: every integrated system in the corpus has a recognizable instance of each, under different names, and a score of 5 on S4 or S6 marks governance maturity rather than a closed inner loop, which is why MCP and the prompts-as-code platforms score 5 there and still sit outside the two-loop cells of Section 7. Second, no system matures all six at once. Research systems learn fast and lack enterprise governance; production systems govern well and learn slowly; open standards solve artifact portability but not adaptation. Third, and this was the result we were not looking for, the 2026 sweep added 126 systems, 92 of its 102 core systems close Loop 1 under an automatic gate, and not one of them reaches the top mark on any substrate. The local loop has become routine. The governed second loop has not moved. The maturity gradient is not a quirk of the corpus; it tracks which constraints each kind of system was built to satisfy.

6.2 Five absences, read by signal class

Five absences fall out of the discriminator, and each sits in a particular feedback-signal class (Section 4).

- **Failure-triggered memory is rare in production** (C2). Deployed memory systems record preferences and successful facts, not residuals; the one field report of anti-recurrence stores written from dead-ends is a single self-reported deployment [87].
- **Cross-customer promotion is nearly absent** (all classes). ShareMem, EvolveNet, XRepoSkill, and RASO promote across users, clients, or repositories inside one operator [88–91]; no system promotes across customers or organizations with evidence.
- **Versioned memory has arrived; enforced correction has not** (C2, C3). Git-backed and bitemporal memory ship in products, and five backends still return revoked facts [67].
- **Scaffold-level curriculum is unspecified in nearly every system** (C2). Which sessions inform the next edit is left to the order they arrive in; Task-CoEvolve's variance-weighted task sampling and AutoSaddler's mini-batch failure signals are the exceptions [92, 93].
- **Receiving-side evaluation at promotion is rare** (C1, C2). It now exists in ShareMem (evaluation tasks belong to a different user), XRepoSkill (verification in at least two repositories), Evo2Team (target-side confirmation, which still misses four of twenty-two transfers on new graphs), and VACE (candidate evaluated with the receiving model held fixed) [94]; EvolveNet has none, and the federated optimization framework that proposes a receiving-client gate has not implemented it [95]. This is the missing piece that would catch a scaffold over-fitting one deployment before it propagates to another.

6.3 Four clusters

Four archetypal clusters recur across the core corpus (Table 6). They differ in where on the patchwork-to-descent gradient each sits and in which loop is automated.

Research full-auto systems show that the architecture works under fully algorithmic gates. NanoResearch co-evolves skills, memory, and policy with a semantic-merge orchestrator [40]; AutoAgent runs an execution cycle and an evolution cycle over elastic memory [97]; SkillOpt runs held-out gating, a rejected-edit buffer, and a bounded textual learning rate on a markdown skill (Section 8); AlphaEvolve, and FunSearch before it [98], pairs an evaluator with an evolutionary archive and reports production gains at Google [29]; DGM modifies its own code under sandboxed tests [28];

Table 6: Four clusters of the core corpus.

Cluster	Representative systems	Loop 1 / Loop 2	What the cluster shows
Research full-auto	NanoResearch, SkillOpt, SkillRL, AlphaEvolve, DGM, ADAS, Voyager; in 2026 EvolveNet, Evo2Team, XRepoSkill	Auto / Auto	Both loops can run under algorithmic gates and benchmark gains compound; enterprise governance is uniformly absent
Production hybrid	SkillForge, CASCADE, Sierra Agent OS 2.0, Cognition Devin; in 2026 Spotify's recommendation loop [96], SkillChain [52]	Auto / Human	An algorithmic Loop-1 gate with a reviewer on Loop 2 is the production-viable cell; the 2026 entries add online A/B gating and reported judge agreement
Governance-first	Braintrust, Vellum, LangSmith Hub; in 2026 EDDOps, Agentic Configuration Management, Governed Capability Evolution	None / Auto or Human	Evaluation-gated promotion, lineage, and rollback exist; candidate generation is manual and no inner loop fires from session signal
Open standards and registries	AGENTS.md, MCP, Anthropic Agent Skills, Cursor Rules; in 2026 the MCP control planes	Mixed, or Human / Human	Cross-vendor convergence on artifact format and tool attachment; registries govern admission and access but do not evaluate

ADAS searches over agent designs expressed as code [99], and Voyager, the 2023 precursor, grows a skill library in a game environment [100]. The 2026 entries move the cluster's frontier from a single deployment to a federation of them. Every member still lacks access control and audited promotion.

Production hybrid systems pair an algorithmic Loop-1 gate with a reviewer on Loop 2. SkillForge routes judge-passed skill diffs to support engineers, with the judge agreeing with people more than nine times in ten [35]; Sierra routes agent-generated insights through human-authored expert answers [101] and Devin's merged pull requests are its promotion step [31]; Spotify optimizes prompts and planning automatically and launches only behind an online A/B test [96]; SkillChain applies judge-monotone edits and then a human reflection gate, with judge-human agreement reported as a kappa between 0.72 and 0.91 [52]. The human on Loop 2 is doing the work that the missing exact signal cannot.

Governance-first systems automate Loop 2 alone. The prompts-as-code platforms [102–104] and the 2026 registries [84–86] have immutable versions, evaluation thresholds, and rollback; they lack a Loop 1 because candidates are authored by engineers rather than triggered by session feedback. This is MLOps for scaffolds, distinct from MLOps for weights.

Open standards and registries converge across vendors on format and attachment. Claude Agent Skills, Cursor Rules, GitHub Copilot instructions, Windsurf, Continue.dev, Zed, and Replit all keep a git-tracked markdown artifact attached to a workspace with an MCP-style tool layer [57, 105]. Convergence across vendors is independent evidence, complementary to the research-side convergence of Section 8, that the architecture is real rather than any one vendor's local optimum. Two measured facts temper the optimism. Context files raise cost without raising success in a controlled study [58], and the runtime state of autonomous loops sits outside version control in the repositories that run them [106].

7 The two-loop design space

Systems that pass the composite audit sit in a 3×3 matrix indexed by the gate type on each loop (Fig. 4); Appendix E lists the named membership of every cell.

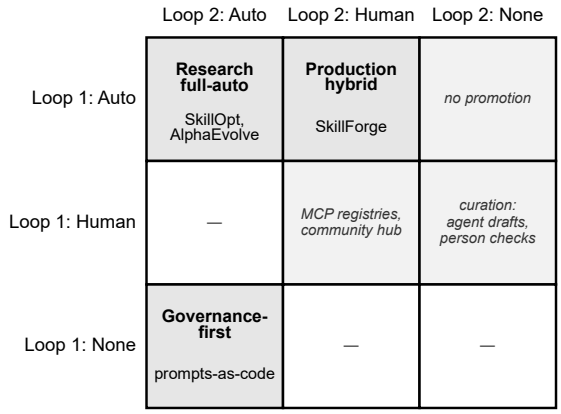


Figure 4: The two-loop design space. Two cells hold every system that passes the composite audit; a third holds the governance-first platforms, which have the gated second loop but no inner loop; the human-authored cells are occupied only by registries and curation workflows that have no session-signal loop. No populated system adds governed cross-tenant promotion.

Two cells hold every system that passes the composite audit. [Auto × Auto] holds the research full-auto systems, twelve from the May corpus with machine-evaluated criteria on both loops. [Auto × Human] is the production-viable cell: Loop 1 fires at machine speed under an algorithmic criterion and Loop 2 waits for a person; SkillForge and CASCADE sit here with the three industry exemplars. Those twelve plus two are the fourteen research systems of Section 5. A third cell, [None × Auto], holds the governance-first platforms, which have evaluation-gated promotion and no failure-triggered candidate generation; they pass the Loop-2 half of the audit only and enter the matrix as contrast entries. The 2026 sweep did not add a cell. Its seven cross-context promoters land in [Auto × Auto] without versioning or lineage, and so enter the strict audit only under relaxation; its one production loop lands in [Auto × Human].

The other cells are not all empty. Those that are occupied hold only systems that fail the composite audit, and the lopsided pattern of occupancy is itself a finding. [Human × Auto] remains empty: nobody authors candidates by hand and promotes them automatically, because manual authorship offers automated promotion little leverage. [Human × Human] is occupied by MCP registries and a community hub [74–76, 107], where a person registers an artifact and a person approves its use; the field study of five public skill repositories finds the same shape in practice, with every substantive edit human-merged and one deprecation in 254 edits [63]. [Human × None] is the curation cell. An agent drafts, a person fact-checks, and the result is frozen [108]. These are single-loop by construction, and read by signal class the occupancy is what Section 4 predicts: automatic gates on both loops appear only where the signal is exact or cheaply observable, and the human cells fill where it is not.

Two cross-cutting findings sharpen the picture. *Evidence is now batched before acceptance.* In the May corpus nearly every automatic gate fired on a single evaluation, absorbing estimator noise

through the per-edit margin alone. By mid-2026 statistical acceptance is common: a paired per-item test that commits an edit only when its wins are reliable [109], a merge accepted only when the held-out items it fixes outnumber those it breaks [89], three heterogeneous critics that must all pass [110], and mini-batch failure signals with validation-based selection [93]. The agreement form of batching, where k independent proposals must converge, shrinks the false-accept rate as p^k rather than shrinking variance as $1/k$, and the two should not be conflated (Appendix B). *Multi-layer hierarchies remain rare.* AlphaEvolve is still the only system that combines a cascade evaluator with a diversity archive; the 2026 systems that keep archives use them for lineage, not for staged evaluation.

8 Convergent research families

The loop of Section 3 is not a prescription the field has yet to adopt. Five research families, starting from different substrates and under different names, have arrived independently at parts of it, and we read that convergence as evidence that the loop is a shared attractor rather than one group's local optimum. Convergence on a design is not evidence that the design is optimal; what it shows is that the same constraints keep producing the same shape.

The clearest single instance is SkillOpt [30]. It treats one markdown skill document as the trainable external state of a frozen agent and edits it with explicit optimizer controls: rollout and reflection batches, add/delete/replace edits, a bounded textual learning rate with cosine decay, a held-out selection gate that accepts only a strictly better score, a rejected-edit buffer kept as negative feedback, and an epoch-wise slow update. Across six benchmarks, seven target models, and three harnesses it is best or tied on every cell its authors evaluate, and it reports transfer across models, harnesses, and benchmarks that reads as an empirical measurement of evidence radius rather than as a governance mechanism. Its own follow-up, SkillOpt-Lite [111], removes the buffer, the slow update, and the schedule, keeps the held-out gate and a consensus filter across rollouts, and matches or beats it. The gate and a consensus form of credit assignment are load-bearing; the rest are stabilizers.

Five research families instantiate complementary parts of the loop (Table 7). The *reflective-evolution* family proposes edits by reflecting over trajectories [112] and supplies the two-timescale motivation [4]. *Reflective context learning* [113] is the most direct independent formalization: it observes that credit assignment, overfitting, forgetting, and high-variance signals persist whether the learned object lies in parameter space or context space, and its generalization penalty is the complexity term Ω of Section 3. The *harness-optimization* family targets orchestration rather than skills (Meta-Harness [114]; AHE [115]; MOSS [116]; CANTANTE [117]; HARNESSEVO [118]) and names credit assignment as the bottleneck; by October 2026 it is the largest family in the corpus, with roughly two hundred papers citing its founding entries and a dozen scored here, among them HarnessForge and Growing Harness [81, 119]. The *lifecycle* family shows that hygiene is a precondition for descent. LLM-authored skills add nothing over no skill until retirement and a bounded active set are in place [120]; MOCHA shows that the complexity penalty Ω is a constraint frontier rather than a scalar once platform limits bind [121]; SkillsVote attributes each outcome to skill, exploration, or environment before admitting an update [122]; and eleven 2026 systems make retirement a gated operation [60–62, 123]. The *transfer* family instruments Loop 2: measuring evidence radius one task at a time [124], pooling evidence across parallel agents [125], promoting through shared memory on a heartbeat [41], consolidating across a deployment's own episodes [34], and, in 2026, federating skill patches across clients with an auditable decision log [126] or across deployments with a held-out

merge gate and round rollback [89].

Table 7: Five research families converging on artifact-layer descent, with the part of the loop each instantiates.

Family	Representative systems	What it instantiates	What it leaves open
Reflective evolution	GEPA; Tiwari et al.	proposal by reflection over trajectory evidence; two-timescale motivation	persistent artifact; bounded step; held-out gate
Reflective context	RCL	the learned object in context space; generalization penalty as Ω	cross-deployment Loop 2
Harness optimization	Meta-Harness; AHE; MOSS; CANTANTE; HARNESSEVO; HarnessForge; Growing Harness	credit assignment over orchestration; source-level edits; slot attribution	governed Loop 2; access control; rollback
Lifecycle and multi-objective	Ratchet; MOCHA; SkillsVote; Library Drift; SkillSmith; ASSAY	hygiene as precondition; constraint frontier as the shape of Ω; gated retirement	gradient-analogue closure; retirement of a promoted artifact's descendants
Transfer and federation	ICT; Combee; CORAL; PACE; FederatedSkill; EvolveNet; Evo2Team; XRepoSkill	empirical evidence radius; cross-client aggregation; receiving-side confirmation	cross-organization gate, lineage, rollback

Read against the loop and against the four properties of Section 9, four claims are well supported.

1. The scaffold-versus-weights decomposition is independently confirmed. GEPA, Meta-Harness, MOSS, RCL, PACE, and the 2026 harness papers all begin from the observation that weights and the external artifact layer are distinct adaptation surfaces with different cost, reversibility, and scope; a system that updates both keeps them as separate levers [127].
2. Credit assignment is the central engineering bottleneck. AHE, CANTANTE, Meta-Harness, HARNESSEVO, SkillsVote, and the harness-optimizer evaluation of Ong et al. [42] all identify attributing a system-level failure to one scaffold coordinate as what separates descent from trial-and-error, and it remains unsolved in the general multi-substrate case.
3. Lifecycle hygiene is a precondition for descent, not an alternative to it. A dirty artifact pool starves the gate of signal; the 2026 retirement mechanisms are the field's answer, and the one negative result cuts deeper. Once a contaminated skill has descendants, rolling it back recovers little, so gating must happen before commit [110].
4. No surveyed system combines automated local adaptation with governed cross-organization promotion. FederatedSkill narrows the gap on cross-client promotion and lineage, EvolveNet on the merge gate and rollback, and neither meets all four properties of Section 9.

9 The missing architecture: governed cross-tenant scaffold optimization

Four properties define an architecture that no surveyed system instantiates:

- (a) **auto-gated Loop 1**: the commit criterion is an algorithmic threshold;
- (b) **cross-organization promotion**: Loop 2 routes artifacts between organizations (we use

cross-tenant and *cross-organizational* interchangeably);

- (c) **versioned lineage with access control**: promoted artifacts carry versions, audit trails, and role-based access policies;
- (d) **rollback**: a bad promotion can be reverted without redeploy.

The closest approaches partition the requirements, and the October-2026 sweep sharpened the partition without closing it. FederatedSkill has (a), the strongest partial (b) in the corpus (privacy-preserving aggregation of skill patches across heterogeneous clients that sit under one operator), and partial (c) through an auditable per-modification decision log [126]. EvolveNet has (a), a held-out merge gate at the aggregator, and (d) in the form of a rollback to the previous shared harness after a failed round, with no lineage, no access control, and clients that are benchmark partitions rather than organizations [89]. SkillForge has (a) and (b) within one enterprise with partial (c) [35]. The governance-first registries have (c) without access control and (d) with evidence [84–86]; the MCP control planes have access control without evaluation-gated promotion [74]. Rollback, which was almost absent in the May corpus, now appears inside single deployments, as edit-level reversal [61, 128] and as an admission test that rejects edits which cannot be undone [129], and inside one federated round. No system rolls back a promotion that has crossed an organization boundary, because none makes such a promotion. Appendix E gives the per-system enumeration.

In machine-learning terms, what is missing is a cross-tenant aggregator with an automated evaluation gate at the scaffold layer. It would carry five parts: per-tenant artifact pools, each tagged with provenance; an aggregation step across tenants that respects tenant isolation; a held-out evaluation at the receiving tenant that blocks a promotion whenever it does not lower that tenant's patch loss; versioned lineage with access control; and a rollback envelope on every promoted artifact. The federated-learning analogy [130–132] is useful only in the limit where artifacts are mergeable update representations; federated prompt tuning, in which participants learn a shared prompt rather than shared weights [133], is the weight-side precedent closest to that limit. In surveyed practice Loop 2 is selection and merge, and the nearest systems aggregate program edits with a language model, not by averaging.

Whether the architecture *should* be built is a question the feedback-signal class answers (Section 4). Where the signal is exact, an automatically gated cross-tenant promotion of a test-validated skill is low-risk and the receiving-side evaluation is cheap. Where the signal is an observable outcome, the corner should be filled only with that receiving-side evaluation, because the sending side's outcome does not transfer; Evo2Team's four failed transfers out of twenty-two after target-side confirmation show that even a receiving-side check is necessary rather than sufficient [83]. Where the signal is judged, a human gate on Loop 2 is a design feature, and governance means lineage and rollback around a human decision. Where the signal is delayed, property (a) cannot be met and what remains is lineage and rollback without an automatic gate. Naming the four properties converts a vague gap into an audit criterion that any future system can be measured against. Naming the signal class says, for a given deployment, which of the four it should expect to meet.

10 The failure surface

Patchwork scaffold maintenance introduces failure modes that weight-only systems do not have; they are the scaffold-layer entries in the technical-debt ledger that machine-learning systems have carried for a decade [134]. Each is also a missing piece of the optimizer, and each dominates in a particular feedback-signal class (Table 8). This section surveys the documented attacks and degradations; it proposes no new threat model.

Table 8: The failure surface of patchwork scaffold maintenance, the measured evidence, the architectural response, and the feedback-signal class in which each failure dominates.

Failure	What has been measured	Architectural response	Dominant class
Scaffold bloat	Instruction-following accuracy falls and latency grows sharply as instruction count scales [135]; LLM-authored skills add nothing over no skill until lifecycle hygiene is applied [120]	Complexity penalty Ω in the gate; pruning and expiry as first-class gated operations	C1, C3
Poisoned memory	High attack success against standard retrieval-augmented generation [136]; backdoors planted in long-term memory or knowledge bases [137]; memory control-flow attacks across major agent frameworks [138]	Provenance on every entry; write gating; a rollback envelope [139, 140]	C2
Injection via tools and MCP	A tool's output or a connected server can smuggle instructions into context [141, 142]; one approved MCP configuration could later be modified without re-approval (CVE-2025-54136) [143]	Narrow tool permissions; a privilege hierarchy over instructions [144]; tool bindings pass the same promotion gate as any other coordinate	C2
Evaluation fragility	Optimizing a proxy reward past a point lowers the true score [37]; access asymmetries alone produce large relative gains that reflect exposure to the test [145]; harness optimizers cannot be told from trial-and-error by downstream score alone [42]	Held-out evaluations scoped within evidence radius, weighted toward recurring modes, re-read as the target drifts, and checked against an update's attribution	C3 (primary), C1
Coordination failures	Fourteen failure modes in multi-agent systems, dominated by role confusion and context loss [146]	Orchestration topology treated as a scaffold coordinate under the same gate and rollback discipline	C2
Patch overfitting	A scaffold tuned to one deployment over-fits it by construction (Appendix A)	Evidence-radius discipline at promotion; receiving-side held-out evaluation	C2
Plasticity loss	Context rot (long-context degradation [147]), instruction conflict, memory pollution, tool-version drift	Expiry and rollback as explicit loop operations rather than retrospective hygiene	C4

Two rows deserve a sentence beyond the table. Bloat is a signal-quality problem as well as a latency problem. Ratchet reports LLM-authored skills at no gain over a no-skill baseline against a double-digit gain for human-curated ones, and attributes the gap to lifecycle management, which in the vocabulary of Section 3 means that residual capture and mode discovery cannot work on a messy artifact pool [120]. Evaluation fragility compounds because the evaluation suite is itself a patch-local artifact rather than a fixed instrument. It is optimized against: once a metric becomes the target it is gamed. It is read non-independently, because the gate scores path-dependent agent trajectories whose readings do not compose like ordinary test-set statistics. It goes stale, because the suite adapts on the same cadence as the scaffold it gates. And because failures concentrate in a finite catalogue of recurring modes, a suite that samples tasks at random under-weights exactly the families that drive the failure rate. The response in the table follows from those four properties: held-out, scoped, mode-weighted, re-read, and checked against attribution rather than only against score.

The failure surface is real, quantified by 2024 to 2026 work, and largely unmitigated in production; a survey of persistent-state agents coded from 435 works reaches the same verdict, finding the literature concentrated on accumulating and retrieving state rather than on governing, recovering, or relinquishing it [12]. Every row names a piece of the optimizer that current systems do not yet have.

11 Open problems and conclusion

Five open problems follow from the survey, one per feedback-signal class and one for the architecture.

1. **Exact signals: credit assignment from a failing check to a scaffold coordinate.** A test tells the loop that an output failed, not which instruction, skill, or tool binding caused it. Slot attribution [118], intervention-based attribution [80], and contrastive multi-agent attribution [117] each solve one substrate's case; a general method is the bottleneck named by every harness-optimization paper.
2. **Observable outcomes: receiving-side evaluation before promotion.** Four systems now evaluate at the receiving side and one of them still misses nearly a fifth of its transfers; the gate that a federated scaffold optimizer needs is a held-out test at the receiving tenant, proposed but not yet built [95].
3. **Judged signals: calibrating a gate that is itself being edited.** Of thirteen weight-side rubric-reward methods, five co-evolve the rubric with the policy, and none of those five reports agreement with human judgment; on the scaffold side three systems report judge calibration and none calibrates a judge under edit. The nearest measurement is on the human side, where evaluators' criteria drift as they grade [38]; the reflexive gate of Section 4 has no measured instance on the scaffold side.
4. **Delayed signals: telling descent from search.** Where the outcome arrives after many edits, an optimizer's gains cannot be distinguished from trial-and-error by outcome alone [42]; evaluating harness optimizers against their attribution claims rather than their scores is the open method.
5. **The governed cross-tenant corner.** Properties (a) through (d) of Section 9, with the receiving-side gate of problem 2 as the piece that would make cross-organization promotion safe in the two classes where it should be automatic.

The field has built an external adaptation layer for language models but not the optimizer that should govern it. The reason the layer belongs where it is was established by the two papers this

article completes: reliability over long outputs hinges on a sparse set of key decisions, and inside a bounded deployment those decisions fail in a small, recurring catalogue of modes that a targeted budget of fixes can cover. The place to spend that budget is a persistent, inspectable, reversible artifact outside the weights. Once the loop that edits it is gated and scoped, the arrangement is not a patch on an inadequate model but the architecture that the error structure calls for.

The survey shows how far practice has come toward that loop, and the distance is uneven. The local loop closes automatically in most research systems and in a growing number of production ones; evidence is batched before acceptance; retirement and expiry have become first-class; lineage has reached production memory. What has not moved is the second loop. No surveyed system promotes a validated edit across an organization boundary under an automatic gate with lineage, access control, and rollback, and the signal-class analysis says this is not one gap but four, each with its own reachable answer. The frontier model generalizes. The local scaffold specializes. Reliability comes from governing that specialization, and the instruments that judge each edit are themselves part of the moving scaffold, so the same evidence-radius and lifecycle discipline the optimizer needs must extend to the gates that judge it.

Acknowledgments

The authors used an AI assistant (Claude, Anthropic) to help search the literature, check citations, and edit prose; all claims, scores, and classifications were reviewed and approved by the authors.

References

[1] M. Zaharia, O. Khattab, L. Chen, J. Q. Davis, H. Miller, C. Potts, J. Zou, M. Carbin, J. Frankle, N. Rao, and A. Ghodsi, "The shift from models to compound AI systems," Berkeley Artificial Intelligence Research (BAIR) Blog, https://bair.berkeley.edu/blog/2024/02/18/compound-ai-systems/, 2024.

[2] R. Kirk, I. Mediratta, C. Nalmpantis *et al.*, "Understanding the effects of RLHF on LLM generalisation and diversity," in *ICLR 2024*, 2024.

[3] V. Padmakumar and H. He, "Does writing with language models reduce content diversity?" *arXiv preprint*, 2023.

[4] R. Tiwari, K. Sareen, L. A. Agrawal, J. E. Gonzalez, M. Zaharia, K. Keutzer, I. S. Dhillon, R. Agarwal, and D. Khatri, "Learning, fast and slow: Towards LLMs that adapt continually," *arXiv preprint*, 2026.

[5] S. Dohare *et al.*, "Loss of plasticity in deep continual learning," *Nature*, vol. 632, no. 8026, pp. 768–774, 2024.

[6] E. J. Hu, Y. Shen, P. Wallis, Z. Allen-Zhu, Y. Li, S. Wang, L. Wang, and W. Chen, "LoRA: Low-rank adaptation of large language models," *arXiv preprint arXiv:2106.09685*, 2021.

[7] M. L. Arbuzov, S. Bei, Z. Dong, D. Kalaev, and A. A. Shvets, "Beyond exponential decay: Rethinking error accumulation in large language models," *arXiv preprint*, 2025.

[8] M. L. Arbuzov, L. Mosbacker, S. Bei, Z. Dong, D. Kalaev, and A. Shvets, "The architecture of errors: From universal impossibility to patch-local LLM reliability," *arXiv preprint arXiv:2605.30628*, 2026.

[9] H.-a. Gao, J. Geng, W. Hua, M. Hu, X. Juan *et al.*, "A survey of self-evolving agents: What, when, how, and where to evolve on the path to artificial super intelligence," *Transactions on Machine Learning Research*, 2026, arXiv:2507.21046v4, 16 Jan 2026.

[10] J. Fang, Y. Peng, X. Zhang, Y. Wang, X. Yi, G. Zhang, Y. Xu, B. Wu, S. Liu, Z. Li, Z. Ren, N. Aletras, X. Wang, H. Zhou, and Z. Meng, "A comprehensive survey of self-evolving AI agents: A new paradigm bridging foundation models and lifelong agentic systems," *arXiv preprint arXiv:2508.07407*, Aug. 2025.

[11] H. Zhou, H. Hu, T. Luo, Y. Shang, C. Fang, Z. Chen, L. Xiao, and Q. Zhang, "Self-evolving coding agents," *arXiv preprint arXiv:2608.03392*, Aug. 2026.

[12] T. Ding, A. Nannapaneni, B. Liu, and L. Zhang, "Always-on agents: A survey of persistent memory, state, and governance in LLM agents," *arXiv preprint arXiv:2606.30306*, 2026.

[13] Z. Lin, X. Hao, R. Fu, S. Cui, K. Chen, C. Li, Z. Li, and F. Xiong, "A survey on long-term memory security in LLM agents: Attacks, defenses, and governance across the memory lifecycle," in *Proceedings of EMNLP 2026*, 2026, arXiv:2604.16548v3, 22 Sep 2026.

[14] J. Guo, Z. Hao, C. Wang, C. Fan, T. Luo, H. Li, Y. Gao, H. Mei, J. Peng, R. Xu, M. Dong, H. Wu, M. Zheng, K. Han, S. Wang, C. Xu, and Y. Wang, "From question answering to task completion: A survey on agent system and harness design," *arXiv preprint arXiv:2606.20683*, Jun. 2026.

[15] B. Xia, L. Zhu, Z. Xing, Q. Lu, D. Sejdinovic, and X. Xu, "Harnessing agent skills: Architectural patterns and a reference architecture for skill-mediated LLM agents," *arXiv preprint arXiv:2606.20631*, May 2026.

[16] K. Ding, Y. Zhou, C. Jin, F. Tong, M. Zhou, and D. N. Metaxas, "Agent skill evaluation and evolution: Frameworks and benchmarks," *arXiv preprint arXiv:2606.11435*, Jun. 2026.

[17] L. Mei, J. Yao, Y. Ge, Y. Wang, B. Bi, Y. Cai, J. Liu, M. Li, Z.-Z. Li, D. Zhang, C. Zhou, J. Mao, T. Xia, J. Guo, and S. Liu, "A survey of context engineering for large language models," *arXiv preprint arXiv:2507.13334*, Jul. 2025.

[18] C. Yang, X. Wang, Y. Lu, H. Liu, Q. V. Le, D. Zhou, and X. Chen, "Large language models as optimizers," in *International Conference on Learning Representations (ICLR)*, 2024, arXiv:2309.03409.

[19] Q. Guo, R. Wang, J. Guo, B. Li, K. Song, X. Tan, G. Liu, J. Bian, and Y. Yang, "EvoPrompt: Connecting LLMs with evolutionary algorithms yields powerful prompt optimizers," in *International Conference on Learning Representations (ICLR)*, 2024, arXiv:2309.08532.

[20] C. Fernando, D. Banarse, H. Michalewski, S. Osindero, and T. Rocktäschel, "Promptbreeder: Self-referential self-improvement via prompt evolution," *arXiv preprint arXiv:2309.16797*, 2023.

[21] O. Khattab, A. Singhvi, P. Maheshwari, Z. Zhang, K. Santhanam, S. Vardhamanan, S. Haq, A. Sharma, T. T. Joshi, H. Moazam, H. Miller, M. Zaharia, and C. Potts, "DSPy: Compiling declarative language model calls into self-improving pipelines," *arXiv preprint arXiv:2310.03714*, 2023.

[22] M. Yuksekgonul, F. Bianchi, J. Boen, S. Liu, Z. Huang, C. Guestrin, and J. Zou, "TextGrad: Automatic "differentiation" via text," *arXiv preprint*, 2024.

[23] Q. Zhang, C. Hu, S. Upasani *et al.*, "Agentic context engineering: Evolving contexts for self-improving language models," arXiv preprint arXiv:2510.04618, 2025.

[24] W. Zhou, Y. Ou, S. Ding, L. Li, J. Wu, T. Wang, J. Chen, S. Wang, X. Xu, N. Zhang, H. Chen, and Y. E. Jiang, "Symbolic learning enables self-evolving agents," *arXiv preprint arXiv:2406.18532*, 2024.

[25] E. Zelikman, E. Lorch, L. Mackey, and A. T. Kalai, "Self-taught optimizer (STOP): Recursively self-improving code generation," in *First Conference on Language Modeling (COLM 2024)*, 2024, arXiv:2310.02304.

[26] M. Robeyns, M. Szummer, and L. Aitchison, "A self-improving coding agent," *arXiv preprint arXiv:2504.15228*, 2025.

[27] L. Zheng, W.-L. Chiang, Y. Sheng, S. Zhuang, Z. Wu, Y. Zhuang, Z. Lin, Z. Li, D. Li, E. P. Xing, H. Zhang, J. E. Gonzalez, and I. Stoica, "Judging LLM-as-a-judge with MT-Bench and Chatbot Arena," in *Advances in Neural Information Processing Systems (NeurIPS 2023), Datasets and Benchmarks Track*, 2023, arXiv:2306.05685.

[28] J. Zhang *et al.*, "Darwin Gödel machine: Open-ended evolution of self-improving agents," *arXiv preprint*, 2025.

[29] A. Novikov *et al.*, "AlphaEvolve: A coding agent for scientific and algorithmic discovery," arXiv preprint arXiv:2506.13131, 2025.

[30] Y. Yang, Z. Gong, W. Huang, Q. Yang, Z. Zhou, Z. Huang, Y. Li, X. Gao, Q. Dai, B. Liu, K. Qiu, Y. Yang, D. Chen, X. Yang, and C. Luo, "SkillOpt: Executive strategy for self-evolving agent skills," arXiv preprint arXiv:2605.23904, 2026. [Online]. Available: https://microsoft.github.io/SkillOpt

[31] Cognition, "Devin's 2025 performance review: Learnings from 18 months of agents at work," https://cognition.com/blog/devin-annual-performance-review-2025, 2025.

[32] J. Wang *et al.*, "Reinforcement learning for self-improving agent with skill library," *arXiv preprint*, 2025.

[33] P. Xia *et al.*, "SkillRL: Evolving agents via recursive skill-augmented reinforcement learning," *arXiv preprint*, 2026.

[34] C. Ling, P. Chen, A. Guan, J. Qu, S. A. Akbar, M. Gopinathan, and E. Cornejo, "PACE: Two-timescale self-evolution for small language model agents," *arXiv preprint*, 2026.

[35] X. Liu *et al.*, "SkillForge: Forging domain-specific, self-evolving agent skills in cloud technical support," *arXiv preprint*, 2026, accepted at ACM SIGIR 2026 Industry Track.

[36] X. Huang *et al.*, "CASCADE: Cumulative agentic skill creation through autonomous development and evolution," *arXiv preprint*, 2025.

[37] L. Gao, J. Schulman, and J. Hilton, "Scaling laws for reward model overoptimization," *arXiv preprint arXiv:2210.10760*, 2022.

[38] S. Shankar, J. Zamfirescu-Pereira, B. Hartmann, A. G. Parameswaran, and I. Arawjo, "Who validates the validators? aligning LLM-assisted evaluation of LLM outputs with human preferences," *arXiv preprint arXiv:2404.12272*, 2024.

[39] C. Lu, C. Lu, R. T. Lange, J. Foerster, J. Clune, and D. Ha, "The AI scientist: Towards fully automated open-ended scientific discovery," *arXiv preprint arXiv:2408.06292*, 2024.

[40] J. Xu *et al.*, "NanoResearch: Co-evolving skills, memory, and policy for personalized research automation," *arXiv preprint*, 2026.

[41] A. Qu, H. Zheng, Z. Zhou, Y. Yan, Y. Tang, S. Y. Ong, F. Hong, K. Zhou, C. Jiang, M. Kong, J. Zhu, X. Jiang, S. Li, C. Wu, B. K. H. Low, J. Zhao, and P. P. Liang, "CORAL: Towards autonomous multi-agent evolution for open-ended discovery," *arXiv preprint*, 2026.

[42] K. T.-i. Ong, M. Kang, D. Choi, J. Cho, S. Kim, S. Lim, G. Jang, M. Oh, B. Jeong, S. Kim, T. Kwon, and J. Yeo, "Towards direct evaluation of harness optimizers via priority ranking," *arXiv preprint*, 2026.

[43] A. Gunjal, A. Wang, E. Lau, V. Nath, Y. He, B. Liu, and S. Hendryx, "Rubrics as rewards: Reinforcement learning beyond verifiable domains," *arXiv preprint arXiv:2507.17746*, 2025.

[44] R. Jia, Y. Yang, Y. Gai, K. Luo, S. Huang, J. Lin, X. Jiang, and G. Jiang, "Writing-zero: Bridge the gap between non-verifiable tasks and verifiable rewards," *arXiv preprint arXiv:2506.00103*, 2025.

[45] K. Shi, Y. Liu, P. Wang, A. R. Fabbri, S. Joty, and A. Cohan, "References improve LLM alignment in non-verifiable domains," *arXiv preprint arXiv:2602.16802*, Feb. 2026.

[46] X. Jin, J. Zhang, T. Cao, and B. Yang, "Beyond score prediction: LLM-based essay scoring and feedback generation via reinforcement learning with rubric rewards," *arXiv preprint arXiv:2607.19219*, Jul. 2026.

[47] T. Yu, B. Ji, S. Wang, S. Yao, Z. Wang, G. Cui, L. Yuan, N. Ding, Y. Yao, Z. Liu, M. Sun, and T.-S. Chua, "RLPR: Extrapolating RLVR to general domains without verifiers," *arXiv preprint arXiv:2506.18254*, Jun. 2025.

[48] R. Xu, T. Liu, Z. Dong, T. Yu, I. Hong, C. Yang, L. Zhang, T. Zhao, and H. Wang, "Alternating reinforcement learning for rubric-based reward modeling in non-verifiable LLM post-training," *arXiv preprint arXiv:2602.01511*, 2026.

[49] H. Ding, B. Huang, Y. Fang, W. Liao, Z. Li, J. Zhang, Z. Wu, J. Zhao, and Y. Wang, "EvoRubrics: Dynamic rubrics as rewards via adversarial co-evolution for LLM reinforcement learning," *arXiv preprint arXiv:2606.23038*, Jun. 2026.

[50] H. Zhu, C. Cai, Y. Song, X. Chen, S. Han, and Y. Guo, "Self-evolving deep research via joint generation and evaluation," *arXiv preprint arXiv:2606.04507*, Jun. 2026.

[51] G. Li, B. Dalvi Mishra, Z. Wang, J. Yan, Y. Chen, C.-L. Li, L. T. Le, R. Han, G. Lee, H. Tong, C.-Y. Lee, and T. Pfister, "RubricEM: Meta-RL with rubric-guided policy decomposition beyond verifiable rewards," *arXiv preprint arXiv:2605.10899*, May 2026.

[52] Y. Hu, M. Xu, H. Guo, Y. Song, X. Zhu, and B. Zheng, "Skillchain: Closing the loop on skill evolution for image-based e-commerce ai assistants," *arXiv preprint arXiv:2606.12984*, 2026.

[53] J. Zhu, K. Mao, Y. Guo, D. He, S. Xu, S. Gu, and Y. Yue, "Skillcoach: Self-evolving rubrics for evaluating and enhancing agentic skill-use," *arXiv preprint arXiv:2607.01874*, 2026.

[54] T. R. Sumers, S. Yao, K. Narasimhan, and T. L. Griffiths, "Cognitive architectures for language agents (CoALA)," *Transactions on Machine Learning Research (TMLR)*, 2023.

[55] AGENTS.md, "AGENTS.md: A cross-vendor open standard for agent instructions," 2025. [Online]. Available: https://agents.md

[56] R. Robbes, T. Matricon, T. Degueule, A. Hora, and S. Zacchiroli, "Agentic much? adoption of coding agents on github," *arXiv preprint arXiv:2601.18341*, 2026.

[57] M. Galster, S. Mohsenimofidi, J. L. Lulla, M. A. Abubakar, C. Treude, and S. Baltes, "Harness engineering for agentic ai coding tools: An exploratory study," *arXiv preprint arXiv:2602.14690*, 2026.

[58] T. Gloaguen, N. Mündler-Sasahara, M. N. Müller, V. Raychev, and M. Vechev, "Evaluating agents.md: Are repository-level context files helpful for coding agents?" *arXiv preprint arXiv:2602.11988*, 2026.

[59] X. Wu *et al.*, "Co-evolving LLM decision and skill bank agents for long-horizon tasks," *arXiv preprint*, 2026.

[60] X. Zhang, Y. Cui, G. Wang, Z. Li, W. Qiu, B. Zhu, and P. He, "Library drift: Diagnosing and fixing a silent failure mode in self-evolving llm skill libraries," *arXiv preprint arXiv:2605.19576*, 2026.

[61] Y. Wei, Z. Huang, S. Lu, J. Qian, Q. Wang, C. Wu, and L. He, "Skillsmith: Co-evolving skills and tools for self-improving agent systems," *arXiv preprint arXiv:2606.01314*, 2026.

[62] H. Pu, X. Song, and L. Zhao, "Skillops: Managing llm agent skill libraries as self-maintaining software ecosystems," *arXiv preprint arXiv:2605.13716*, 2026.

[63] C. Shen and E. Hruschka, "Who maintains agent skills? A longitudinal study of human-governed, AI-assisted skill maintenance," *arXiv preprint arXiv:2609.05677*, 2026.

[64] Letta, "MemFS; memory & dreaming; introducing context repositories: Git-based memory for coding agents," https://docs.letta.com/letta-code/memfs, https://docs.letta.com/letta-agent/memory, https://www.letta.com/blog/context-repositories/, 2026.

[65] Mem0, "Mem0 platform: Memory history, feedback, and changelog," https://docs.mem0.ai/api-reference/memory/history-memory, https://docs.mem0.ai/api-reference/memory/feedback, https://docs.mem0.ai/changelog, 2026.

[66] Zep, "Zep documentation: Facts; february 2026 deprecation wave; changelog," https://help.getzep.com/facts, https://help.getzep.com/february-2026-deprecation-wave, https://help.getzep.com/changelog/2026/9/24, 2026.

[67] Y. T. Shen, K. Toyoda, and A. Leung, "Revoked but still authoritative: An empirical study of revocation enforcement in agent-memory systems," *arXiv preprint arXiv:2609.08258*, Sep. 2026.

[68] Z. Wang, "TOKI: A bitemporal operator algebra for contradiction resolution in LLM-agent persistent memory," *arXiv preprint arXiv:2606.06240*, Jun. 2026.

[69] J. Xu, Y. Xiao, W. Shao, H. Liu, and X. Li, "Memory provenance laundering in LLM agents: A non-amplification firewall for persistent memory," *arXiv preprint arXiv:2607.29167*, Jul. 2026.

[70] Y. Margalit, N. Cohen-Inger, E. Avram, R. Taig, and O. Margalit, "Governed shared memory for multi-agent LLM systems," *arXiv preprint arXiv:2606.24535*, Jun. 2026.

[71] Z. Yu, Y. Wu, Z. Yin, K. Chen, Z. Zhao, M. Wang, S. Yan, and L. Yang, "Recursive experiential–working memory evolution for long-horizon agent harnesses," *arXiv preprint arXiv:2608.24876*, Aug. 2026.

[72] H. Wang, G. Dong, H. Liang, Z. Zhang, J. Luo, C. Liu, C. Xue, and H. Tang, "MemGuard: Persisting verifier signals for LLM-agent memory governance," *arXiv preprint arXiv:2608.21867*, Aug. 2026.

[73] X. Sun, Q. Wang, H. Li, and L. Chen, "Verifiable memory: Learning unified memory management with local and global verifiers for large language model agents," *arXiv preprint arXiv:2608.03137*, Aug. 2026.

[74] agentic-community, "Mcp gateway & registry," https://github.com/agentic-community/mcp-gateway-registry, 2026.

[75] Microsoft, "Inventory and discover mcp servers in your api center," https://learn.microsoft.com/en-us/azure/api-center/register-discover-mcp-server, 2026.

[76] TrueFoundry, "Mcp gateway authentication and security," https://www.truefoundry.com/docs/ai-gateway/mcp-gateway-auth-security, 2026.

[77] M. Zhuge, W. Wang, L. Kirsch, F. Faccio, D. Khizbullin, and J. Schmidhuber, "Language agents as optimizable graphs," in *Forty-first International Conference on Machine Learning (ICML 2024)*, 2024, arXiv:2402.16823.

[78] J. Zhang, J. Xiang, Z. Yu, F. Teng, X. Chen, J. Chen, M. Zhuge, X. Cheng, S. Hong, J. Wang, B. Zheng, B. Liu, Y. Luo, and C. Wu, "AFlow: Automating agentic workflow generation," *arXiv preprint arXiv:2410.10762*, 2024.

[79] Y. Cheng, C. Liu, H. Yu, H. Tan, T. Wu, W. Jin, J. Ran, K. Wang, X. Li, H. Bai, G. Chesi, and N. Wong, "Optimas: Automatically optimize multi-agent system," *arXiv preprint arXiv:2608.21918*, 2026.

[80] J. Chu, J. Seo, J. Cho, J. Na, Y. Xiong, Y. Kim, and H. J. Kim, "Agentgrad: Intervention-guided prompt optimization for multi agent systems," *arXiv preprint arXiv:2609.08572*, 2026.

[81] M. Chen, C. Lv, G. Zhang, H. Chang, and S. Zhou, "Harnessforge: Joint harness and policy evolution for adaptive agent systems," *arXiv preprint arXiv:2606.01779*, 2026.

[82] S. Zhao, R. Kong, Z. Zhang, L. Shen, X. He, X. Zhang, and Q. Zhang, "Topological coherence for self-evolving multi-agent systems," *arXiv preprint arXiv:2609.37953*, 2026.

[83] R. Wang and J. Cui, "Evo2team: When do evolved skills transfer? from selection to deployment," *arXiv preprint arXiv:2609.34135*, 2026.

[84] R. Kang and V. Wang, "Registry-governed agent lifecycle: Completing EDDOps with evaluation-driven registration, promotion, and retirement on AWS AgentCore," *arXiv preprint arXiv:2607.00345*, Jul. 2026.

[85] A. Quessada-Vial, "Agentic configuration management (ACM): A reference configuration model for governed agentic systems," *arXiv preprint arXiv:2608.11166*, Aug. 2026.

[86] X. Qin, S. Luan, J. See, Z. Boukhers, C. Yang, and Z. Li, "Governed capability evolution:

Lifecycle-time compatibility checking and rollback for AI-component-based systems, with a proof-of-concept evaluation on embodied agents," *arXiv preprint arXiv:2604.08059*, Apr. 2026.

[87] M. Helwig, "Memory as infrastructure: Reliability engineering for persistent agent memory in months-long LLM-assisted development," *arXiv preprint arXiv:2609.05510*, Aug. 2026.

[88] J. Hu, H. Zhao, Q. Jia, D. Chen, T. Zhao, S. Duan, and G. Liu, "Learning from others, acting for you: Cross-user memory sharing for llm agents," *arXiv preprint arXiv:2609.32511*, 2026.

[89] J. Nie, Y. Zhang, Q. Cai, Y.-m. Cheung, X. Tian, and B. Han, "Evolvenet: Collaborative harness evolution for agent self-improvement," *arXiv preprint arXiv:2608.04968*, 2026.

[90] Y. Guo, H. Zhou, J. Zhang, Y. Zhang, Y. Liu, Q. Chen, Q. Lin, H. Dong, J. M. Zhang, and Z. Chen, "Xreposkill: Learning transferable skills for software engineering agents," *arXiv preprint arXiv:2609.36807*, 2026.

[91] J. Chu, J. S. Lee, J. Park, D. Ko, J. Na, S. Lee, T. Lee, M. Yoon, M. Joo, Y. Xiong, and H. J. Kim, "Retrieval-augmented skill optimization via cross-harness adaptation," *arXiv preprint arXiv:2609.38024*, 2026.

[92] A. Miyai, K. Aizawa, and T. Yamasaki, "Task-coevolve: Efficient harness optimization via adaptive validation task selection," *arXiv preprint arXiv:2608.20169*, 2026.

[93] S. Park, W. Kim, R. Tan, J. Zhang, W.-S. Han, P. Gao, C. Park, Y. Yao, R. Fu, E. Nallipogu, Q. Lin, S. Rajmohan, and D. Zhang, "Autosaddler: Automatic harness optimization with durable updates from agent execution traces," *arXiv preprint arXiv:2608.23041*, 2026.

[94] J. Qi, Y. He, J. Liu, Q. Huang, S. Hu, Z. Dang, G. Chen, R. Yang, W. Jiang, Y. Liu, T. Lyu, and F. Li, "Vace: Validation-gated alternating co-evolution of agent models and harnesses," *arXiv preprint arXiv:2609.37105*, 2026.

[95] Q. Yang, Z. Kou, X. Zhang, D.-D. Wu, H. Gu, J. Guo, Y. Liu, D. Jiang, and Q. Xu, "Federated agent optimization," *arXiv preprint arXiv:2610.01195*, 2026.

[96] E. Palumbo, A. Tamborrino, V. Ode, B. Lacker, A. Casas Escoda, J. Hopple, M. Better, J. Leoni, H. Galvão, H. Bouchard, M. Lalmas, J. L. Redondo García, A. Abebe, A. Clifton, A. Blomberg, H. Lindström, D. Doro, and C. Doig Cardet, "Bootstrapping conversational recommendation agents at spotify: Synthetic data generation and self-improvement loops," *arXiv preprint arXiv:2609.30297*, 2026.

[97] X. Wang *et al.*, "AutoAgent: Evolving cognition and elastic memory orchestration for adaptive agents," *arXiv preprint*, 2026.

[98] B. Romera-Paredes, M. Barekatain, A. Novikov, M. Balog, M. P. Kumar, E. Dupont, F. J. R. Ruiz, J. S. Ellenberg, P. Wang, O. Fawzi, P. Kohli, and A. Fawzi, "Mathematical discoveries from program search with large language models," *Nature*, vol. 625, pp. 468–475, 2024.

[99] S. Hu, C. Lu, and J. Clune, "Automated design of agentic systems (ADAS)," *arXiv preprint*, 2024.

[100] G. Wang *et al.*, "Voyager: An open-ended embodied agent with large language models," *arXiv preprint*, 2023.

[101] Sierra, "Agent OS 2.0: From answers to memory and action," 2025. [Online]. Available: https://sierra.ai/blog/agent-os-2-0

[102] Braintrust, "Use prompts in code," Braintrust documentation, https://www.braintrust.dev/docs/guides/prompts, 2026, accessed 2026-10-03.

[103] Vellum, "Release tags," Vellum documentation, https://docs.vellum.ai/product/deployments/release-tags, 2026, accessed 2026-10-03.

[104] LangChain, "Prompt engineering concepts," LangSmith documentation, https://docs.langchain.com/langsmith/prompt-engineering-concepts, 2026, accessed 2026-10-03.

[105] P. Barbaste, T. Darrigol, G. Vu, and T. Wiltberger, "Harness engineering: Anatomy, architecture, and evolution of coding agents – a source-code study of eleven systems," *arXiv preprint arXiv:2609.00006*, 2026.

[106] J. L. Lulla, V. Nersesyan, S. Mohsenimofidi, C. Treude, and S. Baltes, "Loop engineering: Building blocks, adoption, and impact," *arXiv preprint arXiv:2608.21884*, 2026.

[107] Z. Jiang and B. Dong, "Buildrix: An open platform for sharing and benchmarking agentic ai skills in building engineering," *arXiv preprint arXiv:2606.25139*, 2026.

[108] T. Q. Nguyen, S. Desai, R. H. Anwar, F. Shaik, V. Suryanarayanan, and V. Chowdhary, "VerificAgent: Domain-specific memory verification for scalable oversight of aligned computer-use agents," *arXiv preprint arXiv:2506.02539*, Jun. 2025.

[109] Y. Wang, L. Xia, R. Liu, Z. Zhang, H. Wu, Y. Yang, J. He, Y. Guo, and K. Lei, "Sage: A statistical acceptance gate for self-evolving agents," *arXiv preprint arXiv:2609.36043*, 2026.

[110] L. Shang, M. Xu, Y. Sun, T. Xia, L. Hu, L. Xu, and N. Zheng, "When self-evolution backfires: Pre-commit gating against skill contamination in llm agents," *arXiv preprint arXiv:2608.05810*, 2026.

[111] Y. Shen, B. Li, and X. Zhang, "SkillOpt-Lite: Better and faster agent self-evolution via one line of vibe," *arXiv preprint arXiv:2607.03451*, 2026.

[112] L. A. Agrawal, S. Tan, D. Soylu, N. Ziems, R. Khare, K. Opsahl-Ong, A. Singhvi, H. Shandilya, M. J. Ryan, M. Jiang, C. Potts, K. Sen, A. G. Dimakis, I. Stoica, D. Klein, M. Zaharia, and O. Khattab, "GEPA: Reflective prompt evolution can outperform reinforcement learning," *arXiv preprint*, 2025.

[113] N. Vassilyev, W. Berrios, R. Zhang, B. Han, D. Kiela, and S. Mehri, "Reflective context learning: Studying the optimization primitives of context space," *arXiv preprint*, 2026.

[114] Y. Lee, R. Nair, Q. Zhang, K. Lee, O. Khattab, and C. Finn, "Meta-Harness: End-to-end optimization of model harnesses," *arXiv preprint*, 2026.

[115] J. Lin, S. Liu, C. Pan, L. Lin, S. Dou, Z. Xi, X. Huang, H. Yan, Z. Han, T. Gui, and Y.-G. Jiang, "Agentic harness engineering: Observability-driven automatic evolution of coding-agent harnesses," *arXiv preprint*, 2026.

[116] Q. Cai, Y. Zhang, X. Jia, H. Zheng, W. Xue, J. Song, X. Tian, and Y. Guo, "MOSS: Self-evolution through source-level rewriting in autonomous agent systems," *arXiv preprint*, 2026.

[117] T. Zehle, "CANTANTE: Optimizing agentic systems via contrastive credit attribution," *arXiv preprint*, 2026.

[118] M. Nguyen, W. C. Tan, N. A. Hassan, A. Raman, L. H. Lim, and A. F. Razak, "Where does harness-optimization value live? Localized gains and the budget-splitting trap in self-evolving LLM agents," *arXiv preprint arXiv:2609.02889*, 2026.

[119] L. Li, J. Li, J. Zhao, K. Ye, Y. Li, C.-z. Xu, and X. Gao, "Grow the harness, not the context: From strategy-free scaffolds to reusable specialist agents," *arXiv preprint arXiv:2609.26760*, 2026.

[120] X. Zhang, Y. Cui, G. Wang, Z. Li, W. Qiu, B. Zhu, and P. He, "Ratchet: A minimal hygiene recipe for self-evolving LLM agents," *arXiv preprint*, 2026.

[121] M. M. Tanjim, J. Subramanian, X. Chen, B. Kveton, S. Mukherjee, A. Zhang, S. Kim, S. Sarkhel, and S. Choudhury, "MOCHA: Multi-objective chebyshev annealing for agent skill optimization," *arXiv preprint*, 2026.

[122] H. Liu, H. Yang, T. Jiang, B. Tang, F. Xiong, Y. Luo, and Z. Li, "SkillsVote: Lifecycle governance of agent skills from collection, recommendation to evolution," *arXiv preprint arXiv:2605.18401*, 2026.

[123] Y. Wang, Y. Zhou, Y. Liang, C. Zhang, F. Liu, J. Zhou, and H. Yao, "Not all skills help: Measuring and repairing agent knowledge," *arXiv preprint arXiv:2606.15390*, 2026.

[124] Y. Shalev, Z. Ding, and M. Jamnik, "Training language agents to learn from experience," *arXiv preprint*, 2026.

[125] H. Li, R. He, Q. Zhang, C. Ji, Q. Mang, X. Chen, L. A. Agrawal, W.-L. Liao, E. Yang, A. Cheung, J. Zou, K. Olukotun, I. Stoica, and J. E. Gonzalez, "Combee: Scaling prompt learning for self-improving language model agents," *arXiv preprint*, 2026.

[126] J. Yang, G. Yao, Y. Zhang, R. R. Kompella, G. Liu, and S. Chang, "FederatedSkill: Federated learning for agentic skill evolution," *arXiv preprint arXiv:2606.03143*, 2026.

[127] P. Hebbar, Y. Manawat, S. Verboomen, A. Ivanova, S. Palanimalai, K. Bhatia, and V. Baskaran, "Sia: Self improving ai with harness & weight updates," *arXiv preprint arXiv:2605.27276*, 2026.

[128] H. Gao, H. Chen, C. Wang, S. Guo, L. Pang, Z. Liu, H. Shen, and X. Cheng, "Skill-laudit: Ground-truth-free skill evolution via paired trajectory auditing," *arXiv preprint arXiv:2606.14239*, 2026.

[129] T. Sah, D. Sah, H. Jain, and T. Sah, "Evoundo: Recoverability-constrained self-evolution for llm agent harnesses," *arXiv preprint arXiv:2608.28363*, 2026.

[130] H. B. McMahan, E. Moore, D. Ramage, S. Hampson, and B. Agüera y Arcas, "Communication-efficient learning of deep networks from decentralized data," in *Proceedings of the 20th International Conference on Artificial Intelligence and Statistics (AISTATS)*, ser. Proceedings of Machine Learning Research, vol. 54, 2017, pp. 1273–1282.

[131] H. B. McMahan, D. Ramage, K. Talwar, and L. Zhang, "Learning differentially private recurrent language models," in *International Conference on Learning Representations (ICLR)*, 2018, arXiv:1710.06963.

[132] P. Kairouz, H. B. McMahan, B. Avent, A. Bellet, M. Bennis *et al.*, "Advances and open problems in federated learning," *arXiv preprint arXiv:1912.04977*, 2019, published in Foundations and Trends in Machine Learning, vol. 14, no. 1–2, 2021.

[133] T. Guo, S. Guo, J. Wang, and W. Xu, "PromptFL: Let federated participants cooperatively learn prompts instead of models – federated learning in age of foundation model," *arXiv preprint arXiv:2208.11625*, 2022.

[134] D. Sculley, G. Holt, D. Golovin, E. Davydov, T. Phillips, D. Ebner, V. Chaudhary, M. Young, J.-F. Crespo, and D. Dennison, "Hidden technical debt in machine learning systems," in *Advances in Neural Information Processing Systems 28 (NIPS 2015)*, 2015.

[135] D. Jaroslawicz *et al.*, "How many instructions can LLMs follow at once?" *arXiv preprint*, 2025.

[136] W. Zou *et al.*, "PoisonedRAG: Knowledge corruption attacks to retrieval-augmented generation of large language models," *arXiv preprint*, 2024, accepted at USENIX Security 2025.

[137] Z. Chen, Z. Xiang, C. Xiao, D. Song, and B. Li, "AgentPoison: Red-teaming LLM agents via poisoning memory or knowledge bases," *arXiv preprint arXiv:2407.12784*, 2024.

[138] Z. Xu *et al.*, "From storage to steering: Memory control flow attacks on LLM agents," *arXiv preprint*, 2026.

[139] Y. Su, W. Xu, C. Zuo, and E. Bertino, "ChronoMem: Version control and semantic rollback for large language model agent memory," *arXiv preprint arXiv:2607.27773*, 2026.

[140] C. Yu, Y. Wang, J. Zhang, Y. Duan, M. Zheng, Z. Wu, K. Shi, and T. Cai, "From faulty memories to corrected actions: Dependency-guided rollback repair for memory-augmented agents," *arXiv preprint arXiv:2608.10502*, 2026.

[141] K. Greshake, S. Abdelnabi, S. Mishra, C. Endres, T. Holz, and M. Fritz, "Not what you've signed up for: Compromising real-world LLM-integrated applications with indirect prompt injection," *arXiv preprint arXiv:2302.12173*, 2023.

[142] E. Debenedetti, J. Zhang, M. Balunović, L. Beurer-Kellner, M. Fischer, and F. Tramèr, "AgentDojo: A dynamic environment to evaluate prompt injection attacks and defenses for LLM agents," *arXiv preprint arXiv:2406.13352*, 2024.

[143] Check Point Research, "MCPoison: Cursor IDE's MCP vulnerability (CVE-2025-54136)," https://research.checkpoint.com/2025/cursor-vulnerability-mcpoison/, 2025.

[144] E. Wallace, K. Xiao, R. Leike, L. Weng, J. Heidecke, and A. Beutel, "The instruction hierarchy: Training LLMs to prioritize privileged instructions," *arXiv preprint arXiv:2404.13208*, 2024.

[145] S. Singh *et al.*, "The leaderboard illusion," *arXiv preprint*, 2025.

[146] M. Cemri *et al.*, "Why do multi-agent LLM systems fail?" *arXiv preprint*, 2025.

[147] N. F. Liu *et al.*, "Lost in the middle: How language models use long contexts," *Transactions of the Association for Computational Linguistics (TACL)*, 2023.

[148] A. Madaan *et al.*, "Self-refine: Iterative refinement with self-feedback," in *Advances in Neural Information Processing Systems (NeurIPS)*, 2023.

[149] S. Yao, J. Zhao, D. Yu, N. Du, I. Shafran, K. Narasimhan, and Y. Cao, "ReAct: Synergizing reasoning and acting in language models," in *International Conference on Learning Representations (ICLR)*, 2023.

[150] D. Tran and D. Kiela, "Single-agent LLMs outperform multi-agent systems on multi-hop reasoning under equal thinking token budgets," *arXiv preprint*, 2026.

[151] N. Shinn *et al.*, "Reflexion: Language agents with verbal reinforcement learning," in *Advances in Neural Information Processing Systems (NeurIPS)*, 2023.

[152] Z. Ma, S. Yang, Y. Ji, X. Wang, Y. Wang, Y. Hu, T. Huang, and X. Chu, "SkillClaw: Let skills evolve collectively with agentic evolver," *arXiv preprint arXiv:2604.08377*, 2026.

[153] J. Ni *et al.*, "Trace2Skill: Distill trajectory-local lessons into transferable agent skills," *arXiv preprint*, 2026.

[154] S. Alzubi *et al.*, "EvoSkill: Automated skill discovery for multi-agent systems," *arXiv preprint*, 2026.

[155] W. Song, J. Yue, and Z. Pang, "ABSTRAL: Automatic design of multi-agent systems through iterative refinement and topology optimization," *arXiv preprint*, 2026.

[156] Y. He *et al.*, "EvoTest: Evolutionary test-time learning for self-improving agentic systems," *arXiv preprint*, 2025.

[157] Z. Ren, Y. Chen, D. Guo, G. Rong, T. Li, R. B. Xiong, Q. Lan, W. Wang, L. Nanbo, Y. Yang, M. Zhuge, and J. Schmidhuber, "Self-improvements in modern agentic systems: A survey," *arXiv preprint arXiv:2607.13104*, 2026.

[158] P. Du, "Memory for autonomous LLM agents: Mechanisms, evaluation, and emerging frontiers," *arXiv preprint arXiv:2603.07670*, Mar. 2026.

[159] W.-C. Huang, W. Zhang, Y. Liang, Y. Bei, Y. Chen, T. Feng *et al.*, "A survey of agent memory in the second half: Towards self-evolving and long-horizon agents," *arXiv preprint arXiv:2602.06052*, 2026.

[160] J. Luo, Y. Tian, C. Cao, Z. Luo, H. Lin, K. Li, C. Kong, R. Yang, and J. Ma, "From storage to experience: A survey on the evolution of LLM agent memory mechanisms," *arXiv preprint arXiv:2605.06716*, May 2026.

[161] Q. Hua, L. Ye, D. Fu, Y. Xiao, X. Cai, Y. Wu, J. Lin, J. Wang, and P. Liu, "Context engineering 2.0: The context of context engineering," *arXiv preprint arXiv:2510.26493*, Oct. 2025.

[162] Y. Zhou, W. Shu, Y. Su, W. Du, Y. Fang, and X. Lin, "A comprehensive survey on agent skills: Taxonomy, techniques, and applications," *arXiv preprint arXiv:2605.07358*, 2026.

[163] Y. Zhou, A. I. Muresanu, Z. Han, K. Paster, S. Pitis, H. Chan, and J. Ba, "Large language models are human-level prompt engineers," *arXiv preprint arXiv:2211.01910*, 2022.

[164] R. Pryzant, D. Iter, J. Li, Y. T. Lee, C. Zhu, and M. Zeng, "Automatic prompt optimization with "gradient descent" and beam search," in *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing (EMNLP 2023)*, 2023, arXiv:2305.03495.

[165] K. Opsahl-Ong, M. J. Ryan, J. Purtell, D. Broman, C. Potts, M. Zaharia, and O. Khattab, "Optimizing instructions and demonstrations for multi-stage language model programs," in *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing (EMNLP 2024)*, 2024, arXiv:2406.11695.

[166] C.-A. Cheng, A. Nie, and A. Swaminathan, "Trace is the next AutoDiff: Generative optimization with rich feedback, execution traces, and LLMs," *arXiv preprint arXiv:2406.16218*, 2024.

[167] J. S. Park *et al.*, "Generative agents: Interactive simulacra of human behavior," in *Proceedings of the 36th Annual ACM Symposium on User Interface Software and Technology (UIST)*, 2023.

[168] A. Zhao, D. Huang, Q. Xu, M. Lin, Y.-J. Liu, and G. Huang, "ExpeL: LLM agents are experiential learners," in *Proceedings of the 38th Annual AAAI Conference on Artificial Intelligence (AAAI-24)*, 2024, arXiv:2308.10144.

[169] C. Packer, S. Wooders, K. Lin, V. Fang, S. G. Patil, I. Stoica, and J. E. Gonzalez, "MemGPT: Towards LLMs as operating systems," *arXiv preprint arXiv:2310.08560*, 2023.

[170] Z. Z. Wang, J. Mao, D. Fried, and G. Neubig, "Agent workflow memory," *arXiv preprint arXiv:2409.07429*, 2024.

[171] W. Xu, Z. Liang, K. Mei, H. Gao, J. Tan, and Y. Zhang, "A-MEM: Agentic memory for LLM agents," in *Advances in Neural Information Processing Systems (NeurIPS 2025)*, 2025, arXiv:2502.12110.

[172] M. Suzgun, M. Yuksekgonul, F. Bianchi, D. Jurafsky, and J. Zou, "Dynamic cheatsheet: Test-time learning with adaptive memory," *arXiv preprint arXiv:2504.07952*, 2025.

[173] A. Plesner, C. Northcutt, F. Guzmán, and A. Athalye, "A cheap verifier is good enough: LLM post-training is robust to erroneous rewards," *arXiv preprint arXiv:2609.33467*, Sep. 2026.

[174] H. Chen, Z. Han, Y. Yan, Q. Zhu, M. Sun, and W. Che, "From holistic evaluation to structured criteria: Rubrics across the evolving LLM landscape," *arXiv preprint arXiv:2606.08625*, 2026.

A Formal statement of artifact-layer descent

This appendix states the setup behind Section 3, a one-step descent inequality under a noisy gate, an informal convergence proposition, the optimization-analogy correspondence, and four worked cases. No new theorem is claimed; the proposition is the ordinary target of local stochastic optimization under noisy estimators, restated for a discrete, versioned parameter.

A.1 Setup

Let the frontier model have fixed parameters θ_M and let the scaffold be a structured object $\theta_s \in \Theta_s = \Theta_1 \times \cdots \times \Theta_6$ over the six substrate coordinates of Section 5; Θ_s is discrete, symbolic, and versioned. For a deployment D, $L_D(\theta_s) = \mathbb{E}_{x\sim D}[\ell(\pi(\theta_M, \theta_s, x))]$. A candidate edit $z_t \sim Q_t(z \mid H_t, \theta_s^t)$ is drawn from a proposal process conditioned on the accumulated history H_t of failures, corrections, rejected outputs, evaluation regressions, and prior accepted edits. Q_t is not uniform: for a mode m that recurs with frequency f_m and carries per-occurrence loss s_m, its expected contribution to the failure rate is $f_m s_m$, so high-frequency or high-severity modes are proposed first. The finite directional difference is $\Delta_z L_D(\theta_s) = L_D(\theta_s \oplus z) - L_D(\theta_s)$; the gate sees only a noisy estimate $\widehat{\Delta}_z L_D$. The update is

$$\theta_s^{t+1} = \theta_s^t \oplus z_t \text{ if } G_t(z_t) = 1, \quad \theta_s^{t+1} = \theta_s^t \text{ otherwise.}$$

Table 9: Optimization concepts and their scaffold analogues.

Optimization concept	Scaffold analogue
Parameter vector	Instructions, skills, memories, tools, routing graphs, evaluation gates, governance rules
Loss	Failure, user correction, evaluation regression, retrieval miss, tool error, schema violation
Gradient estimate	Credit assignment identifying the coordinate responsible for a failure
Step	Accepted scaffold edit; step size is edit magnitude under $\oplus$
Aggregated update	Several recurring failures combined before an update, by averaging or by agreement across k proposals
Update radius	Promotion scope: which loss is descended (USER, PROJECT, STACK, TENANT, CORE)
Validation loss	Held-out patch evaluation before merge
Regularization	Complexity penalty $\Omega(z)$, bloat control, cross-patch regression checks
Overfitting	Scaffold improves on this deployment and degrades elsewhere
Rollback	Reverting a harmful accepted update

A.2 Descent inequality

Assume (A1) positive descent bias on accepted edits, $\mathbb{E}[\widehat{\Delta}_{z_t} L_D \mid G_t = 1, \theta_s^t] \le -\gamma_t - \tau_t$ for some $\gamma_t > 0$, and (A2) bounded estimator bias on accepted edits, $|\mathbb{E}[\Delta_{z_t} L_D - \widehat{\Delta}_{z_t} L_D \mid G_t = 1, \theta_s^t]| \le \varepsilon_t$. With $p_t = \Pr(G_t = 1 \mid \theta_s^t)$,

$$\mathbb{E}[L_D(\theta_s^{t+1}) \mid \theta_s^t] \le L_D(\theta_s^t) - p_t(\gamma_t + \tau_t) + p_t\,\varepsilon_t.$$

Per-step expected improvement is the gate's margin minus its estimator bias, weighted by acceptance probability. In the feedback-signal classes of Section 4, ε_t is near zero for an exact check (C1), bounded by batching for an observable outcome (C2), equal to the judge's bias and bounded only by calibration for a judged signal (C3), and unavailable per edit for a delayed signal (C4).

A.3 Convergence (informal)

Add (A3) proposal coverage, that at every non-gate-stable scaffold Q_t places probability at least $q > 0$ on an admissible edit with $\mathbb{E}[\Delta_z L_D] \le -\delta$; (A4) effective compactness of the reachable orbit; and (A5) persistent acceptance with summable bias, $\sum_t p_t(\gamma_t + \tau_t) = \infty$ and $\sum_t p_t \varepsilon_t < \infty$; and let $0 \le L_D \le B$. Then $L_D(\theta_s^t)$ is a non-negative supermartingale up to summable noise, it converges almost surely, and the limit set of $\{\theta_s^t\}$ is gate-stable: no admissible edit clears the gate with negative expected directional loss in the limit. This is convergence of the loss and stability of the gate decision, not convergence to an optimum; a globally suboptimal gate-stable scaffold is consistent with the result, because Q_t may never propose the improving edit or $\widehat{\Delta}$ may be biased to reject it. In a non-stationary deployment ($D = D_t$) the same mechanism tracks a moving optimum rather than converging once, which is why recency weighting, pruning, expiry, and rollback are the scaffold-level analogues of continual-learning machinery rather than optional hygiene.

A.4 Correspondence

Table 9 pairs each optimization concept with its scaffold analogue. Credit assignment here is attribution, not backpropagation. Scaffold systems do not differentiate through instruction files; they trace an output error to an upstream coordinate, manually or with a judge or verifier. The

descent argument needs only that this attribution succeeds with non-zero probability per failure, assumption (iv) of Section 3.

A.5 Worked cases

Retrieval. Failures recur because retrieved context omits the decisive clause. Attribution traces the error to the retrieval coordinate: chunking, query rewriting, metadata filter, embedding model, reranker, or context-packing rule. The candidate edit tightens chunk boundaries or adds a metadata constraint, and the gate checks that recall and answer accuracy improve on the patch evaluation without degrading adjacent cases. Signal class C1 or C2.

Pitch review. The system repeatedly overrates decks that claim a large market without numbers. The failure cluster points at an under-specified rubric coordinate. The edit changes "evaluate market size" into "require a numeric estimate and a source; if absent, cap the score". The gate runs the revised rubric against held-out decks with human scores. The edit changed the gate that will judge the next edit: the reflexive gate of Section 4, class C3.

Tool use. Calls fail because optional parameters are under-specified. The responsible coordinate may be the tool schema, the call policy, or the clarification rule. The edit adds required fields or a pre-call uncertainty check; the gate checks that tool-call failures fall without raising refusals or latency. Class C2.

Memory. A stale customer preference is repeatedly retrieved and causes bad decisions. The responsible coordinate is a memory entry together with its provenance, priority, and expiry policy. The edit corrects, expires, or version-tags the entry; the gate checks that future behavior improves without erasing useful history. Class C2, with the correction itself observable only when a later outcome reveals it.

B Gate families and feedback-signal classes

Section 3 collapses every production gate into one per-edit test G_t on an estimate of the loss change. Surveyed systems instantiate that test in several distinct ways, and some of them are better read as proposal pruning that precedes the per-edit gate than as estimators of $\widehat{\Delta}L_D$. Table 10 lists the families, the slot each occupies, representative systems, and the feedback-signal class (Section 4) each family serves.

The first five families populate G_t directly and inherit the descent guarantee of Appendix A under its assumptions. Semantic merge and archive selection are not estimators of $\widehat{\Delta}L_D$; they constrain the proposal distribution, and the descent argument applies to the composition of pruning and gate. Multi-sample agreement is listed because it is the correct analogue of "wait for k pieces of evidence before accepting an edit", a different operation from mini-batch averaging and one that should not be conflated with it. Read down the signal-class column. The only families available to a judged (C3) deployment are the two whose estimator is a judge, and the only families available to a delayed (C4) deployment are the two that do not estimate the loss change at all. That is the structural content of Section 4.

Table 10: Gate families, their slot in the formalism, and the feedback-signal class each serves.

Gate family	What it estimates	Slot in Section 3	Signal class	Representative systems
Surrogate verifier	Pass or fail from tests, a symbolic checker, or an exact match	Per-edit gate G_t	C1	DGM (sandboxed code), SkillOpt (held-out exact match), Voyager (game-state check: C2)
Evaluation cascade	$\widehat{\Delta}L_D$ on a held-out task suite, cheap-to-expensive evaluators	Per-edit gate G_t	C1 when the suite is exact; C2 when it is a task suite	AlphaEvolve, Braintrust, Vellum, LangSmith Hub
RL threshold	Reward improvement against a deployment threshold	Per-edit gate G_t	C2	SkillRL, SAGE, EvolveR, PACE
LLM judge with calibration	Pairwise or rubric score, calibrated against human agreement	Per-edit gate G_t	C3	SkillForge (Loop 1), CASCADE (consolidation gate)
Reviewer judgment	Human credit assignment by pull-request review or expert sign-off	Per-edit gate G_t, human-instantiated	C3 (and C2 when the reviewer has outcome data)	SkillForge (Loop 2), Sierra Agent OS 2.0, Anthropic skills repository
Semantic merge	Whether a candidate duplicates or conflicts with existing artifacts	Proposal pruning before G_t	C4 (also a pre-filter in C2, C3)	NanoResearch orchestrator, FederatedSkill server agent
Archive selection	Whether a candidate fills an unfilled cell in a behavior-diversity archive	Proposal pruning before G_t	C4	AlphaEvolve (MAP-Elites), ADAS
Multi-sample agreement	Whether k independent proposals or evaluations agree; false-accept rate decays as p^k rather than variance as $1/k$	Aggregation filter on the estimate	C2, C3 noise absorption	Under-explored; SkillOpt-Lite's consensus attribute mining is the nearest instance

C Data appendix

Corpus size. The corpus was assembled in two passes. The May-2026 pass scored 130 unique systems (140 substrate-level rows in `p3_master_scores.csv`); the October-2026 pass added 126 systems (133 rows in `p3_refresh_2026-10.csv`, four of which re-audit May systems rather than adding one), for 256 unique systems and 269 substrate-level rows. A system may be scored on several substrates, so row counts exceed system counts; the maturity table of Section 6 counts rows.

Core / contrast split. 204 of the 256 systems satisfy the patch-local discriminator (score ≥ 3 on at least one substrate) and form the core corpus, 99 of them from the May pass. The remaining 52 (31 from the May pass) form the contrast corpus: commonly described as agentic or self-improving in public discourse but failing at least one discriminator. Appendix E.1 enumerates representative contrast systems from the May pass; each October contrast row carries its exclusion reason in the released CSV.

Inclusion criteria. Any system that (a) wraps a foundation model with at least one persistent artifact updated from deployment signal, or (b) is named in the public discourse as a "self-improving," "scaffolded," or "agentic" system. The contrast set (Self-Refine, ReAct, TextGrad, OPRO, engineer-authored convention files; Appendix E.1.1) is included so the discriminator has something to mark against; Appendix E.1.2 separately lists core-corpus systems that fail the composite two-loop criterion.

Exclusion criteria. Systems whose only update mechanism is weight-level fine-tuning or RLHF: these are model-side, not scaffold-side, and belong to the self-evolution literature this paper differentiates from. Systems with no public evidence of deployment (white papers without code, demos, or production claim).

Evidence tiers. Each system carries one or more of: (T1) peer-reviewed publication; (T2) arXiv preprint; (T3) production claim with metrics; (T4) open-source artifact; (T5) industry-blog or interview-level documentation. T1/T4 carry highest weight in cluster analysis; T3 is admissible where the claim is concrete (specific benchmark, named integration target); T5 is admissible only when corroborated by T1–T4 elsewhere. Tier flags are propagated to cluster claims through the per-row evidence column of the released CSV; T3 production claims are not pooled with T1/T2 evidence when computing cluster-level statistics.

Evidence-tier distribution. Of the core corpus, approximately one quarter carry T1 evidence, roughly half carry T2 evidence, and the remainder carry T3 or T4 evidence as the primary tier.

Survey window and dating. January 2023 to May 2026 for the first pass; June to October 2026 for the second, a systematic sweep in three parallel strands (skills and skill lifecycle; harness, context, and LLMOps governance; memory governance, competing surveys, and rubric rewards) rather than a targeted refresh, so the per-substrate statistics of Section 6 are computed on both passes together. The cutoff is October 2026. Preprint-only systems carry T2 evidence, recorded per row in the released CSV. A fraction of T2 work is recent enough that ablations may yet be revised; cluster-level claims are robust to dropping any single T2 system.

Scoring discipline. Each system received a substrate-by-substrate 0–5 score against the rubric of Section 5 of the main text and an integrated patch-local-adaptation score (PP) in {0,1,2,3,3.5,4,4.5,5}. Half-scores were used sparingly when one criterion was clearly met and another partially. Ambiguous cases were resolved conservatively (downward). Scoring is single-rater; Appendix I and Appendix E.1 together expose representative per-system scores and exclusion reasons so readers can

audit ambiguous classifications independently.

Composite two-loop criterion (sensitivity analysis). The strict count of fourteen research systems satisfying the composite two-loop criterion changes under two natural relaxations. Relaxation (a) counts any of versioning, lineage, or rollback as Loop-2 governance: on the May pass the count rises to approximately eighteen by re-admitting MAE, MetaGen, MetaReflection, and CLIN, and on the October pass it admits the seven systems that promote across users, clients, teams, or repositories without versioning or lineage (EvolveNet, Evo2Team, XRepoSkill, ShareMem, RASO, Spotify's recommendation loop, and Future AGI's prompt lifecycle). Relaxation (b) admits session signal that updates optimizer state without persisting an artifact distinct from optimizer state: on the May pass the count rises to approximately sixteen by re-admitting DSPy and TextGrad; it adds no October system, because the October contrast rows are benchmarks, evaluation and attack studies, registries, audits, and conceptual frameworks, plus one orchestrator whose adaptation lives in the weights, none of which persists optimizer state as its only artifact. The qualitative findings ([Auto × Auto] well populated; [Human × Auto] empty; the other human-authored cells occupied only by registries and curation workflows that fail the composite audit; the governance-first cluster in [None × Auto]; the cross-tenant governed-optimization corner empty) survive both relaxations.

D The mechanism stack and continual-learning notes

D.1 The mechanism stack

The abstract update rule of Section 3 expands into six operations that every patch-local system must perform, whether explicitly engineered or accidentally emergent.

1. **Residual capture.** Log failures, corrections, rejected outputs, user edits, eval regressions, tool-call failures. The Loop-1 signal source. Without it, z_t has no provenance.
2. **Mode discovery and credit assignment.** Cluster repeated failures into patch-specific error modes (the *Architecture of Errors* catalog [8], instantiated locally per patch) and attribute each mode to the scaffold coordinate responsible for it (Appendix A).
3. **Delta synthesis.** Convert a recurring mode into a candidate scaffold edit: an instruction rewrite, a new skill, a memory correction, a tool binding, an orchestration change, an eval case. This produces z_t.
4. **Delta validation.** Estimate whether the edit reduces L_D without collateral damage on adjacent inputs. The gate G_t is Auto-gated when the check is an algorithmic criterion, Human-gated when it is reviewer judgment.
5. **Promotion control.** Decide whether the accepted edit stays in the local fork or climbs the scope hierarchy: project, stack, organization, cross-tenant. Loop 2.
6. **Drift and bloat control.** Expire stale rules, prune conflicting memories, roll back regressed skills, detect over-fitting. Without this, accumulated edits produce the scaffold-level analog of plasticity loss.

Each operation is the locus of a separate engineering discipline. Surveyed systems implement them partially and unevenly: research full-auto systems excel at (3) and (4); production governance leaders at (5); industry hybrids at most of (1)–(5) but rarely (6). Implementation patterns are deferred to follow-on practitioner work.

D.2 Loop 1 and Loop 2 as descent steps of different radius

Loop 1 proposes and validates local descent steps on a single L_D. Loop 2 expands the update radius. It selects, merges, and promotes accepted local edits so that they apply to a larger averaging set of patch losses. USER-level acceptance descends on a single L_D. PROJECT promotion descends on a project-averaged loss. STACK promotion widens the average further. CORE or cross-tenant promotion descends on a federated average. The two-loop design space is therefore not just a taxonomy of engineering patterns: it is a taxonomy of *which loss each surveyed system is descending on*, gated by which estimator.

D.3 Overfitting in scaffold adaptation

In weight training, overfitting is usually a defect. In scaffold adaptation, local overfitting is partly the point. Frontier weights are trained to preserve cross-patch generality; they must smooth over local conventions and rare workflow-specific failures. A deployment patch needs the opposite: selective specialization to local residuals. The scaffold is therefore an intentionally overfittable layer, but one whose overfitting is scoped, inspectable, versioned, gated, and reversible. A scaffold that improves one repository, hospital workflow, or legal diligence process may degrade performance elsewhere. That is not a contradiction; it is patch adaptation. The mistake is promoting that edit beyond its evidence radius.

In non-stationary patches ($D = D_t$), the same descent mechanism tracks a moving optimum rather than converging once. This is why recency weighting, replay, pruning, expiry, and rollback are not optional hygiene; they are the scaffold-level analogs of continual-learning machinery.

E Contrast set, matrix membership, and closest approaches (May 2026 corpus)

The October 2026 additions are placed in the cells of Section 7 of the main text and listed in Appendix I; the per-system discussion below is the May 2026 audit on which the main text's counts build.

E.1 Contrast set

Appendix E.1 serves two audits. **Appendix E.1.1** lists representative members of the contrast corpus (31 systems that fail the patch-local discriminator, score < 3 on every substrate), so the discriminator has something to mark against. **Appendix E.1.2** lists core-corpus systems (score ≥ 3 on at least one substrate) that nonetheless fail the stricter composite two-loop criterion of Section 5, so the asterisked entries of the Section 7 matrix are auditable. Systems named in the text but not scored as rows in `supplementary/p3_master_scores.csv` (ReAct, MetaGen, MetaReflection, CLIN, ACE) are classified from their papers and marked with a dagger.

E.1.1 Contrast corpus: fails the patch-local discriminator

System	Year	Discriminator failure	Brief reason
Self-Refine [148]	2023	No persistent artifact	In-context iteration only

System	Year	Discriminator failure	Brief reason
ReAct [149]†	2023	No persistent artifact	Thought-act-observe loop is intra-session
TextGrad [22]	2024	No artifact distinct from optimizer state	Textual-gradient optimization; SkillOpt [30] (Section 8; Appendix F) adds the persistent `best_skill.md`, held-out validation gate, rejected-edit memory, and textual learning-rate schedule that TextGrad lacks.
OPRO, Toolformer	2023	No persistent deployment artifact	Optimization or tool use inside a single training or inference run
Aider conventions, Lovable knowledge	2024	No feedback loop	Engineer-authored convention files
AGENTS.md (as a standard)	2025	No feedback loop	Cross-vendor artifact format; adoption measured, adaptation absent (Section 6)
LangChain Skills, HuggingFace Agent Skills, CrewAI Skills	2025–2026	No feedback loop	Curated skill packs without failure-triggered update
Tran & Kiela [150]	2026	Not a system	Single-agent baselines match or beat multi-agent under matched thinking-token budgets; constrains S5 claims (see Section 6)

E.1.2 Core corpus, fails the composite two-loop criterion

System	Year	Composite-criterion failure	Brief reason
Reflexion [151]	2023	No Loop 2	Per-agent episodic memory without promotion
Generative Agents	2023	No Loop 2	Per-agent reflection + importance memory
ExpeL	2023	Loop boundary blurred	Experience bank built from training tasks
Mem0 (vanilla)	2024	No Loop 2	Per-user memory; no cross-context promotion
Zep	2024	No Loop 2	Per-agent/session knowledge graph
ChatGPT Memory	2024	No Loop 2	Per-user persistence
Claude Memory	2025	No Loop 2	Per-conversation-thread persistence
MemGPT	2023	No Loop 2	Virtual-context management per agent
DSPy	2023	No artifact distinct from optimizer state	Prompt-template optimization; SkillOpt [30] (Section 8; Appendix F) realizes the artifact-bearing form.

System	Year	Composite-criterion failure	Brief reason
MetaGen†	2026	No Loop 2; no cross-session persistence	Role pool dynamic within single inference call
MAE (Multi-Agent Evolve)	2025	No Loop 2	Co-evolution within Proposer/Solver/Judge triplet
MetaReflection†	2024	No Loop 2	Per-agent semantic memory
CLIN†	2023	No cross-instance promotion	Causal abstractions per-agent-per-environment
LangGraph, AutoGen, CrewAI	2023–2024	Framework only	Orchestration frameworks; not deployed systems
W&B Weave, Agenta, Langfuse	2024	No Loop 1	Observability / eval-as-code
Mobile-Agent-E, Cradle, OS-Copilot	2024–2025	No Loop 2	Self-evolving but per-session/per-deployment
Agent S, Agent S2	2024–2025	No Loop 2	Computer-use agentic framework
ACE [23]†	2025	No Loop 2 in surveyed form	Single-context evolving playbook
Cursor Rules (vanilla)	2024	No Loop 2	Per-project artifacts
GitHub Copilot custom instructions, Windsurf, Continue.dev, Zed AI rules	2024	No Loop 1	Engineer-authored at repo base branch
Replit `replit.md`	2025	Loop 2 absent	Self-writing scaffold but per-workspace

The entries above cover the main exclusion families (in-context-only; no feedback loop; not a system) and the main composite failures (no Loop 2; framework-only; engineer-authored without failure trigger; optimizer-state-only); finer-grained per-system breakdowns are deferred to follow-on practitioner work.

E.2 Survey detail

This appendix carries the cell-by-cell discussion of the two-loop matrix from Section 7, the closest-approaches enumeration that supports Section 9, and the deployment-dependence argument. It supplies the verification material for Sections 7–9.

E.2.1 Two-loop matrix: cell-by-cell discussion

The named membership of the Section 7 matrix (Figure 3):

	Loop-2 Auto-gated	**Loop-2 Human-gated**	**Loop-2 None**
Loop-1 Auto-gated	NanoResearch, SkillOpt, SkillRL, AlphaEvolve, ADAS, DGM, Voyager, SAGE, EvolveR, CoEvoSkills, AutoAgent, AutoManual	SkillForge, CASCADE, Sierra Agent OS 2.0†, Cognition Devin†	MAE*, MetaGen*, MetaReflection*, CLIN*, DSPy*, TextGrad*
Loop-1 Human-gated	**[empty by engineering logic]**	**[empty in the May-2026 pass]**	*(none)*
Loop-1 None	ExpeL (weak), Braintrust*, LangSmith Hub*, Vellum*	Anthropic skills repository*	Self-Refine*, ReAct*, Mem0*

Asterisks fail at least one composite-two-loop criterion; included for contrast. † Industry exemplar evaluated using vendor documentation as primary evidence. DSPy and TextGrad sit in [Auto × None] because their Loop 1 is automated but persists only optimizer state (Appendix C, relaxation (b)). The matrix is restricted to the 22 systems of the strict composite audit plus SkillOpt; Appendix I also assigns Loop-1 / Loop-2 entries to systems outside that audit (COSPLAY, Cuadros et al., PACE, CORAL, GEPA, Meta-Harness, MOSS, and RCL from the May pass, and every October-2026 row), but those entries are read from the papers and were not re-audited under the composite criterion, so they are neither placed in the matrix nor counted in Section 5.

[Auto × Auto] is most populated (twelve systems). Every member has a machine-evaluated decision criterion on both loops. Velocity is the cluster's defining property; the lack of cross-organizational governance is its uniform weakness.

[Auto × Human] is the production-viable cell: Loop 1 fires at machine speed under an algorithmic criterion, Loop 2 requires human approval before propagation. The pattern reconciles automation velocity with reviewer accountability. SkillForge's LLM-judge + reviewer pipeline is the architectural exemplar. CASCADE, Sierra Agent OS 2.0, and Devin instantiate variants; the industry exemplars (Agent OS 2.0, Devin) are marked with † because vendor documentation rather than peer-reviewed metrics is the primary evidence.

[None × Auto-gated] holds the governance-first prompts-as-code systems (Braintrust, LangSmith Hub, Vellum). They have a real Loop 2 (eval-gated CI blocks promotion on regression), but no Loop 1 in the patch-local sense, because the candidate artifacts are authored by engineers at their desks rather than triggered by session feedback. The asterisks mark this: governance without inner-loop adaptation. The cell is informative because it shows what survives when only the outer loop is automated.

[Human × Auto] is empty by engineering logic: if humans author candidates manually, automated promotion offers little leverage. A speculative occupant would be "expert curation +

auto-distribution" (expert-authored skills automatically gated through a held-out eval before shipping); no published example exists.

[Human × Human] is empty in the May-2026 pass; the October-2026 pass places MCP registries and a community hub here (Section 7 of the main text). A candidate occupant would be a reviewer-authored-and-reviewer-promoted artifact pipeline targeting solo and small-team workflows where automation cost exceeds review latency. No public example was found in the survey window.

[Human × None] was judged structurally improbable in the May-2026 pass, on the argument that a system requiring human authorship on Loop 1 but with no Loop 2 collapses to "engineer-edits-a-config" and is not patch-local in the sense of Section 3; the October-2026 pass found its occupants in the curation workflows of Section 7 of the main text.

DGM dual-mode note. DGM operates in both [Auto × Auto] (primary archive-based evolution) and [Auto × Human] (sandboxed code-modification review) modes depending on deployment configuration; we list it once in the dominant cell.

E.2.2 Closest approaches to governed cross-tenant scaffold optimization

The four properties of governed cross-tenant scaffold optimization are (a) auto-gated Loop 1, (b) multi-tenant cross-org promotion, (c) versioned lineage with RBAC, (d) rollback. Closest approaches partition the requirements:

- **AlphaEvolve** has (a) and partial (b) within a single organization; no cross-org promotion mechanism.
- **NanoResearch** has (a) at the research level; no enterprise governance layer described.
- **SkillOpt** has (a) fully and partial (c) via the exported `best_skill.md` artifact plus protected slow-update field; reports positive cross-model, cross-harness, and cross-benchmark transfer as empirical evidence-radius measurement; does not implement (b) cross-organizational promotion or (d) explicit rollback. The Appendix F walkthrough maps every SkillOpt design decision to its Section 3 counterpart.
- **CORAL** [41] has partial (a) via heartbeat-gated promotion and is the only system in the corpus that implements asynchronous multi-agent Loop 2 within one organization through shared persistent memory; no (b) cross-organizational scope, no formal (c) RBAC, no (d) rollback.
- **PACE** [34] has (a) at the small-model production timescale and a fast/slow two-timescale Loop 1 + Loop 2 that consolidates across one deployment's own episodes rather than across deployments; no (b), no formal (c) or (d). PACE is the closest demonstration that the two-loop architecture is implementable under small-frozen-model constraints.
- **Meta-Harness** [114] has (a) over the harness substrate (S5) with a filesystem-of-candidates credit-assignment record that functions as the accumulated history H_t of Section 3; no Loop-2 cross-organizational promotion, no RBAC, no rollback.
- **SkillForge** has (a) and (b) within one enterprise, partial (c) via VFS commits; (d) is undocumented in the public report.
- **Sierra Agent OS 2.0** has (b) and partial (a); the GitHub-style Workspaces provide some lineage but not RBAC-with-rollback in the strict sense.
- **FederatedSkill** [126] has (a) and the strongest partial (b) in the corpus: heterogeneous clients (backbone-plus-harness profiles under one federation operator) exchange semantic skill diffs, and a server-side evolution agent applies, adapts, or rejects each patch per client; partial (c) via an auditable decision log recording source patch, reward, and justification per modified

path; no RBAC, no (d).

- **SkillClaw** [152] has partial (a) via a nightly validation step and partial (b) across users of one shared, synchronized skill repository; no (c) or (d) reported.
- **ChronoMem** [139] has (d) and the versioning half of (c) for the memory substrate alone (whole-memory snapshots, version histories, natural-language rollback inside Google's Agent Development Kit); no Loop 1, no (b), no RBAC.
- **Vellum / Braintrust / LangSmith Hub** have (c) and (d) explicitly but no (a) or (b) in the strict sense; these are governance-first systems by construction.

No surveyed system combines (b), (c), and (d) under any gate type. The cross-organizational governance triad is itself unfilled, independently of whether Loop 1 is auto-gated.

E.2.3 Deployment-dependence of the missing architecture

Whether the corner *should* be filled is deployment-dependent. In safety-critical domains (medical decision support, legal advice, financial advice), reviewer-judgment gates may be a design feature rather than a defect, and the human latency is the point. The narrower survey claim is what matters: no public system currently combines automated local scaffold evolution with governed cross-organization promotion, versioned lineage with RBAC, and rollback. Naming the corner converts a vague gap into a specific four-property audit criterion that any future system can be measured against. The shortest demonstrable path appears to build on AlphaEvolve's cascade evaluator and MAP-Elites archive, extending federation from within-DeepMind multi-target to cross-customer multi-tenant. The architectural surface, not the timeline, is what this paper claims.

F The convergent research families, system by system

This section carries the May–September 2026 walkthroughs; the October 2026 additions to each family are described in Section 8 of the main text and scored in Appendix I.

This appendix expands Section 8 along two axes. Appendix F.1 indexes the landscape; Appendices F.2–F.3 walk SkillOpt mechanism-by-mechanism; Appendices F.4–F.8 walk each convergent research family, stating its Section 3 mapping explicitly and naming what it leaves open; Appendix F.9 synthesizes four claims supported by the families as a whole; Appendices F.10–F.11 carry the Section 9-property audit of SkillOpt and its published cost-per-point figure.

F.1 The convergent landscape

SkillOpt [30] is the cleanest current instance of artifact-layer descent in our survey, but it sits alongside at least eighteen independent research threads in 2025–2026 that converge on the same disciplined gradient-like update mechanism for the scaffold layer. The convergence is striking because it happens *from different starting points*: GEPA and Tiwari et al. start from prompt-optimization and continual-learning respectively; RCL starts from cognitive-agent learning; Meta-Harness, AHE, MOSS, CANTANTE, and Ong et al. start from harness engineering; MOCHA and Ratchet start from skill-deployment constraints; ICT, Combee, CORAL, and PACE start from cross-task / multi-agent / production-deployment angles. Each system instantiates a different subset of Section 3's five conditions, and each exposes a different gap.

The landscape table of Section 8 indexes the families by Section 3 mechanism and by what each leaves open; the subsections below walk each family in detail. By substrate (Section 5), GEPA and RCL operate on the prompt and context layer (S1–S2); the harness family on orchestration (S5), with MOSS extending to source code (S2+S5); MOCHA and Ratchet on skills under deployment constraints (S2); the transfer family on integrated memory-plus-orchestration stacks (S3+S5); and SkillOpt on an S2-led integrated stack.

Read against Section 9, no member of any family combines (a) auto-gated Loop 1 with (b) cross-organizational Loop 2, (c) versioned lineage with RBAC, and (d) rollback. The Section 3 picture is realized in fragments across the families; the Section 9 gap is confirmed by every member.

F.2 SkillOpt: full correspondence

The table below extends the Section 8 compact correspondence with the Section 3 role of each component and an algorithm-level pointer into SkillOpt's published procedure (their Algorithm 1).

Section 3 quantity	SkillOpt instantiation	Section 3 role explained	Algorithm pointer
θ_s (scaffold)	`best_skill.md` — a 379–1,995-token markdown document	the trainable external state of the frozen target model; persistent and exported as the deployment artifact	s_{best} (Algorithm 1, lines 1, 22, 37)
L_D (patch loss)	benchmark-native hard score / exact-match on a held-out test split	scalar quality signal that the optimizer is implicitly minimizing	EVALUATE(M, h, s, D) (lines 2, 17, 37)
Q_t (proposal)	optimizer-model reflection over failure and success minibatches; failures and successes analyzed separately, then merged with priority on failure fixes	proposal distribution conditioned on accumulated rollout evidence and current scaffold	optimizer calls O for failure analysis, success analysis, and merge (lines 9–11)
z_t (edit)	structured add/delete/replace patch on the skill (or rewrite-from-suggestions in rewrite mode)	the candidate update applied via $\oplus$ to the current scaffold	rank/clip to η_t edits, apply to obtain $\tilde{s}$ (lines 12–13)
η_t (textual learning rate)	bounded per-step edit budget; constant / linear / cosine / autonomous schedules; default cosine with floor $\eta_t = 2$	edit-magnitude controller; the Section 3 *learning rate* in textual form	rank/clip step (line 12); schedule applied per epoch
G_t (gate)	held-out selection-split accept gate, strictly greater than current selection score	the per-edit gate G_t — accepts only when $\widehat{\Delta}_{z_t} L_D$ improves the selection score	comparison at line 20; cache lookup at lines 14–18

Section 3 quantity	SkillOpt instantiation	Section 3 role explained	Algorithm pointer
rejected-edit buffer	epoch-local store of failed proposals and the score drop they caused	converts rejected steps into negative feedback for later proposals within the same epoch; zero deployment cost	$\mathcal{B}$ updated at line 26; reset at line 5
slow/meta update	epoch-end longitudinal guidance written to a markup-fenced protected slow-update field, still passed through D_{sel}	second-order consolidation across adjacent epochs; the Section 3 "step-level edits cannot overwrite the protected slow-update field" decomposition	lines 28–31; gate applied to injected guidance
optimizer-side meta skill	m_{meta} — a prompt-side summary of which edits helped, which failed, and which failures persisted	training-time guidance for Q_t; never shipped with the deployed artifact	lines 33–34 (training-side only)

The mapping is one-to-one at the level of Algorithm 1: every Section 3 quantity has a named, code-level counterpart, and every SkillOpt control surface maps onto a Section 3 quantity. SkillOpt is therefore the cleanest published instance we are aware of in which the Section 3 picture is *mechanism* rather than *metaphor*: all five Section 3 conditions are instantiated.

F.3 What SkillOpt does that prior textual-optimization systems do not

SkillOpt's own experiment design compares it against six baselines under an identical protocol (same target model, same held-out test split, same scorer). The differentiation below frames each baseline in Section 3 vocabulary and identifies the Section 3 mechanism the baseline lacks. The through-line is the paper's thesis: *the scaffold/evolution layer needs a disciplined gradient-like update mechanism*, and the live distinction across baselines is which Section 3 conditions each one fails.

- **TextGrad** [22]**.** Backpropagates textual feedback through `tg.Variable` objects in a compound system. In Section 3 terms: z_t-style edits exist, but θ_s does not — TextGrad has no artifact distinct from optimizer state. There is no η_t schedule, no held-out G_t, and no rejected-edit buffer. SkillOpt's measured advantage over TextGrad on direct chat ranges from +5.9 to +34.0 points across benchmarks at GPT-5.5 scale and is uniformly positive at all seven target-model scales. This matches our Appendix E.1 classification of TextGrad as failing the patch-local discriminator on persistence; SkillOpt closes precisely that gap.
- **GEPA** [112]**.** Reflective prompt evolution with Pareto-style multi-candidate selection. Closer than TextGrad in that it carries multiple candidates and a selection step. In Section 3 terms: Q_t is real, but the optimization target is a prompt rather than a persistent skill artifact, G_t is not the strictly-greater held-out gate of Section 3, and there is no η_t bound — accepted edits can wholesale rewrite. SkillOpt matches or outperforms GEPA in every reported cell of its main results table [30]; we do not restate the per-cell deltas here.
- **Trace2Skill** [153]**.** Distils trajectory-local lessons into reusable skill artifacts. In Section 3

terms: θ_s exists, but there is no iterative G_t — Trace2Skill mines skills offline rather than running a held-out validation loop that accepts or rejects each candidate. Our Section 3 mechanism stack therefore loses *delta validation* (operation 4) and the *rejected-edit buffer*. SkillOpt's measured gap over Trace2Skill is +5.0 to +19.0 points across benchmarks at GPT-5.5 direct chat.

- **EvoSkill** [154]**.** Skill-folder evolution under failure analysis, deployed harness-side. The strongest baseline on the Codex and Claude Code harness rows. In Section 3 terms: θ_s is a folder rather than a single artifact, and credit assignment via failure analysis is genuine, but there is no η_t bound on per-step folder edits and no rejected-edit buffer. SkillOpt beats EvoSkill by +14.0 inside Codex and +3.2 inside Claude Code on the GPT-5.5 five-benchmark average.
- **Human skill** (expert-written, 145–516 tokens per benchmark). In Section 3 terms: θ_s exists, but Loop 1 does not — the artifact is static at deployment. Provides the no-Loop-1 ceiling.
- **One-shot LLM skill** (generated zero-shot from a benchmark description by GPT-5.5, never updated). In Section 3 terms: θ_s exists; Loop 1 does not; Q_t fires exactly once with no rollout evidence. The "untrained scaffold" baseline.

ABSTRAL [155] and EvoTest [156], referenced in SkillOpt's related work but not measured in their table, operate at the multi-agent design / test-time configuration layer rather than the persistent skill layer; they are out of scope for the artifact-layer-descent comparison.

Synthesizing across all six measured baselines: the live difference is whether the loop has (i) a persistent edit-target distinct from optimizer state (θ_s), (ii) a held-out validation gate on each accept (G_t with $\widehat{\Delta}$ estimator and accept threshold τ_t), (iii) negative-feedback retention (rejected-edit buffer feeding Q_t), and (iv) a bounded learning rate with a schedule (η_t + cosine/linear/constant/autonomous). SkillOpt is the first published system in our survey that instantiates all four simultaneously, and it does so as a single offline training loop whose deployed artifact remains a 379–1,995-token markdown file requiring no inference-time optimizer calls.

A follow-up, SkillOpt-Lite [111], asks which of these controls are necessary. It reformulates skill optimization as zeroth-order optimization, keeps three principles (file-system-based trajectory exploration, consensus attribute mining that extracts attributes common across heterogeneous rollouts and discards single-sample eccentricities, and an independent held-out validation gate that is strictly disjoint from the training failures), and removes minibatch reflection pooling, the rejected-edit buffer, the slow/meta update, and the textual learning-rate schedule. It reports faster convergence and higher scores than full SkillOpt (LiveMath +8.8 points at GPT-5.5 and +25.4 at GPT-5.4-nano). Read against the four conditions above, this is evidence that (ii) the gate and a consensus form of credit assignment are load-bearing, while (iii) negative-feedback retention and (iv) the bounded learning rate are stabilizers whose value is benchmark-dependent; the finding does not touch the Section 9 governance properties.

F.4 GEPA, Tiwari, and the reflective-evolution family

The immediate predecessor to SkillOpt's optimizer framing is **GEPA** [112]. It shows that natural-language reflection over execution trajectories can provide a richer adaptation signal than sparse scalar rewards for prompt evolution in compound AI systems. GEPA samples trajectories containing reasoning steps, tool calls, and tool outputs; reflects on them to diagnose failures and propose prompt updates; and maintains a Pareto frontier of candidate prompts rather than greedily mutating

only the current best. Across six tasks, GEPA outperforms GRPO by 6% on average and by up to 20% while using up to 35× fewer rollouts, and also outperforms MIPROv2 in the reported aggregate comparison. In Section 3 vocabulary, GEPA strongly instantiates the proposal side, Q_t, through trajectory-conditioned reflection, and uses Pareto-based candidate selection as a proposal/pruning mechanism. What it does not instantiate is the full SkillOpt-style artifact lifecycle: a bounded edit budget on a reusable skill document, a strictly-greater held-out gate on each accepted skill update, a rejected-edit buffer used as negative feedback, and an exported deployment artifact with governance hooks.

[4] supply the broader theoretical framing from the optimization side, arguing explicitly that restricting learning to *either* in-context (prompt optimization) *or* in-weights (RL / fine-tuning) is unnecessary and costly. In-context adaptation is cheap and rapid but capacity-bounded; in-weights adaptation is expressive but induces catastrophic forgetting and loss of plasticity [5]. The scaffold layer of Section 2 is precisely the substrate that absorbs what in-context adaptation can carry cheaply, leaving the weights free to generalize. Tiwari et al. supply the two-timescale motivation from the optimization side; Section 2 supplies the matching motivation from the production-reliability side. The two framings are independent and mutually reinforcing.

F.5 Reflective Context Learning: a parallel formalization

The most direct independent convergence on the Section 3 formalization comes from **Reflective Context Learning** [RCL; [113]]. Their opening observation is that "the fundamental problems of learning, including credit assignment, overfitting, forgetting, local optima, and high-variance learning signals, persist whether the learned object lies in parameter space or context space," and that current methods are "fragmented and ad hoc" precisely because they address these challenges one at a time rather than as a unified optimization problem over the context. The parallel to Section 3's argument — that scaffold maintenance needs the discipline of weight-space optimization applied to an external artifact layer — is exact and arrived at independently.

RCL maps onto Section 3 as follows. The *learned context* is θ_s. The *reflection signal* is a form of credit assignment identifying which context coordinate caused a failure (Appendix D.1, operation 2). The *generalization penalty* that RCL introduces to prevent narrow sample-specific rules is structurally the complexity penalty $\Omega(z)$ of the gate condition. Where RCL and Section 3 differ is in Loop-2 scope: RCL is framed around single-agent cross-task generalization, while Section 3's Loop 2 is cross-deployment, cross-tenant, and cross-organizational promotion. The convergence is nonetheless significant: two research threads starting from different motivations (production reliability in Section 3, cognitive agent learning in RCL) arrive at the same formal observation that the classical learning problems do not disappear when the learned object moves outside the weights.

F.6 The harness-optimization cluster

A second convergent family focuses on the *harness* — the code and configuration layer that wraps a frozen model — rather than on skill documents specifically. This family independently identifies credit assignment as the central unsolved problem of scaffold evolution, and its engineering solutions directly instantiate Appendix D.1's operation 2 (mode discovery and credit assignment) and operation 4 (delta validation).

Meta-Harness [114] is the cleanest representative. Its opening claim — that "the performance of large language model systems depends not only on model weights, but also on their harness: the code that determines what information to store, retrieve, and present to the model" — is

Section 1's scaffold-versus-weights decomposition restated for the harness substrate specifically. Meta-Harness then identifies that existing text optimizers "compress feedback too aggressively," losing the fine-grained signal needed for credit assignment. Its solution is an outer-loop proposer with access to source code, scores, and execution traces of all prior candidates through a filesystem, so that the edit history itself becomes the credit-assignment signal. In Section 3 terms, the filesystem of prior candidates is a concrete form of the accumulated history H_t that conditions the proposal distribution Q_t, and the outer loop is a Loop-1 closure over the harness substrate (Section 5, S5) rather than the skill substrate (S2).

Agentic Harness Engineering [AHE; [115]] attacks the same problem from the observability side. The core diagnosis is that harness engineering "faces a heterogeneous action space across editable components, voluminous trajectories that bury actionable signal, and edits whose effect is hard to attribute." These three failure modes map precisely onto Section 3's mechanism stack: a heterogeneous action space is the coordinate-identification problem (Appendix D.1 op 2); voluminous trajectories that bury signal is the residual-capture problem (op 1); and effects that are hard to attribute is the credit-assignment half of op 2 (Appendix A). AHE's response — three matched observability pillars giving every editable harness component a file-level representation — is an engineering instantiation of the coordinate decomposition that Section 3 assumes. The implicit claim is that artifact-layer descent requires not just the optimization loop but also the instrumentation that makes scaffold coordinates individually observable and attributable.

MOSS [116] extends the harness argument by observing that all prior self-evolving agent systems "confine evolution to text-mutable artifacts — skill files, prompt configurations, memory schemas, workflow graphs — and leave the agent harness untouched." Since routing, hook ordering, state invariants, and dispatch live in code rather than in any text artifact, an entire class of structural failure is, in MOSS's phrase, "physically unreachable from the text layer." MOSS therefore extends Loop-1 evolution to source-level code rewriting. In Section 5 terms, MOSS evolves S2 (Skills) and S5 (Orchestration) simultaneously, rather than treating the orchestration substrate as a fixed wrapper around an evolvable skill layer. This matters for Section 9: a governed cross-tenant scaffold optimizer that covers only text-mutable artifacts leaves the code substrate ungoverned, and MOSS's diagnosis suggests the gap is not merely inconvenient but structurally incomplete.

CANTANTE [117] attacks credit assignment directly in the multi-agent setting. Its observation is that "scores are available only at the system level, whereas the parameters governing agent behavior are local," making optimization of multi-agent scaffolds "fundamentally a credit-assignment problem." CANTANTE's solution is contrastive: it decomposes system-level rewards into per-agent update signals by contrasting rollouts of multiple jointly acting configurations. In Section 3 vocabulary, CANTANTE provides a concrete mechanism for the credit-assignment step (Appendix D.1 op 2; Appendix A) in the case where the scaffold is distributed across agents rather than concentrated in a single artifact. The gap it closes is the same one Section 3 identifies in Appendix A — that attribution (output error assigned to an upstream scaffold coordinate) must succeed with non-zero probability per failure — but instantiated for the multi-agent topology substrate (S5).

Harness optimizer evaluation [42] provides independent empirical evidence for a failure mode this paper flags in Section 10: that evaluating scaffold optimizers "solely by observing target agents' performance gains" misses intermediate erroneous edits that hinder performance. Their finding — that it is "unclear whether harness optimization is driven by optimizers' informed update actions or simply trial-and-error" — is a direct empirical instantiation of the distinction between Stage 2 (random artifact search) and Stage 3 (artifact-layer descent) from Section 2's table. The credit-assignment problem is not merely theoretical: production harness optimizers that cannot

distinguish informed updates from lucky trial-and-error are operating in Stage 2 even when they report benchmark improvements.

HARNESSEVO [118] turns the same diagnosis into a measurement. It splits the harness into four separately evolvable slots (role, task strategy, tool and format rules, reflection and control) and attributes value by leave-one-in and leave-one-out evolution. On ALFWorld with a 7B target model nearly all of the gain lives in the reflection/control slot (leave-one-in +0.119; the other slots individually null), and dividing a fixed 64-rollout budget evenly across the four slots leaves each below the optimizer's effective search floor, so every slot freezes at its seed; concentrating the budget on the high-value slot recovers the gain (0.642 to 0.761). On WebShop the effect is absent. In Section 3 vocabulary this is direct evidence that credit assignment over scaffold coordinates must precede budget allocation, and that the coordinate decomposition of Section 5 is not merely descriptive: which coordinate carries value is task-dependent and must be measured, not assumed.

F.7 Multi-objective and lifecycle constraints

Two papers expose constraints on the Section 3 picture that single-loss descent does not capture, both relevant to the Section 9 missing-architecture discussion.

MOCHA [121] observes that agent skills are "multi-field artifacts subject to hard platform constraints: description fields are truncated for routing, instruction bodies are compacted via progressive disclosure, and co-resident skills compete for limited context windows." Skill optimization is therefore not a single-loss descent problem but an inherently multi-objective one: a skill must simultaneously maximize task performance and satisfy platform limits, and optimizing for task performance alone produces skills that pass benchmarks but violate deployment constraints. MOCHA introduces *Chebyshev annealing* to navigate the constraint frontier. In Section 3 terms, the complexity penalty $\Omega(z)$ in the gate condition is precisely the mechanism MOCHA is operationalizing, but Section 3's scalar Ω is a simplification: in production, the constraint surface is a Pareto frontier, not a single penalty term. MOCHA's empirical contribution is to show that ignoring this frontier — treating skill optimization as unconstrained single-loss descent — produces skills that degrade on real deployment infrastructure even when benchmark scores improve.

Ratchet [120] makes an argument that is, in some respects, orthogonal to the gradient-analog framing and for that reason worth engaging directly. Ratchet's opening finding — that LLM-authored skills deliver +0.0 pp over no-skill baselines while human-curated ones deliver +16.2 pp — suggests that the bottleneck in self-evolving skill libraries is not the optimization algorithm (the mechanism for proposing and accepting edits) but *lifecycle management*: whether skills are written, retrieved, curated, and retired correctly. Ratchet introduces four hygiene mechanisms — outcome-driven retirement, a bounded active-cap, meta-skill authoring, and pattern canonicalization — and shows that these lift the +0.0 pp floor substantially before any gradient-analog optimizer is applied.

This finding is not a refutation of the Section 3 picture but a clarification of the precondition for it. Artifact-layer descent, as formalized in Section 3, presupposes that the scaffold is maintained well enough for the gate G_t to have a meaningful signal: if skill retrieval is so noisy that the wrong skill is injected into every rollout, the proposal process Q_t receives corrupted evidence and the descent guarantee degrades to random search. Ratchet's hygiene mechanisms are, in Section 3 vocabulary, prerequisites for operation 1 (residual capture) and operation 2 (mode discovery) to function: outcome-driven retirement prevents stale artifacts from polluting the residual signal; the bounded active-cap prevents scaffold bloat from making retrieval unreliable (the Section 10 failure

mode); pattern canonicalization collapses duplicate and near-duplicate skills so the proposal process conditions on a clean, deduplicated artifact set rather than competing variants of the same pattern. The practical implication is that the deployment path to Stage-3 artifact-layer descent runs through Stage-1 hygiene as a *prerequisite*, not as an alternative. A system with strong hygiene and no optimizer sits at Stage 1 with a clean scaffold; a system with a strong optimizer and poor hygiene sits at Stage 2 with a noisy loss signal. Stage 3 requires both.

SkillsVote [122] carries the lifecycle argument to the scale of an open ecosystem. It profiles a million-scale open-source skill corpus for environment requirements, quality, and verifiability, synthesizes tasks for the verifiable subset, exposes skills through agentic library search before execution, and after execution decomposes each trajectory into skill-linked subtasks whose outcomes are attributed to skill guidance, agent exploration, environment, or result signals; only successful, reusable discoveries pass into evidence-gated updates. Two Section 3 points follow. First, attribution is performed at the admission gate rather than inside the optimizer, which is credit assignment (Appendix D.1 op 2) used as a filter on residual capture (op 1). Second, the redundancy and environment-sensitivity SkillsVote measures in open skill ecosystems are the same bloat and drift that Section 10 names, arising this time from many authors rather than one loop.

F.8 Cross-task transfer and evidence radius

Several papers independently measure what Section 3 calls the *evidence radius* of a scaffold artifact — how far an edit validated in one context continues to improve performance when redeployed elsewhere — without using that vocabulary.

Training Language Agents to Learn from Experience [ICT; [124]] introduces the In-context Training framework specifically to evaluate *cross-task self-improvement*: whether experience distilled from one set of tasks transfers to unseen tasks. Their finding that "current reflection-based methods can only self-correct within a single task instance" is a measurement of evidence radius at its lower bound — a radius of exactly one task — and their ICT framework is a systematic attempt to expand that radius through supervised distillation of reflections into reusable lessons. In Section 3 terms, ICT is an attempt to instrument Loop 2 empirically: to measure whether a locally-validated edit (one that passed the gate on one task's L_D) continues to improve performance when the promotion radius is expanded to cover a distribution of unseen tasks.

Combee [125] approaches the same measurement from the scaling direction. ACE [23] established that context-as-living-artifact (a system prompt that accumulates, refines, and organizes strategies through agentic interaction) could improve over static prompts on single-agent tasks. Combee extends this to high-parallelism settings, arguing that "existing methods primarily focus on single-agent or low-parallelism settings," which "fundamentally limits their ability to efficiently learn from a large set of collected agentic traces." The parallel scaling Combee addresses is a form of Loop-2 scope expansion: when many agents run simultaneously, the trace pool available for the next proposal step is drawn from a wider deployment distribution, and the promoted artifact is being tested against a larger averaging set of patch losses. This is not cross-organizational Loop-2 promotion, but it is a step toward it, and Combee's empirical results measure how much of the evidence-radius benefit can be captured by intra-organization parallelism before the cross-organizational barrier is reached.

CORAL [41] addresses the Loop-2 problem from the multi-agent open-ended discovery angle. CORAL replaces rigid control with long-running agents that explore, reflect, and collaborate through shared persistent memory, asynchronous multi-agent execution, and heartbeat-based interventions. The shared persistent memory is the cross-agent promoted artifact: a finding validated in one

agent's exploration that is written to the shared store becomes available to all agents, and the heartbeat mechanism provides a form of auto-gated Loop-2 promotion. CORAL does not implement the versioned lineage, RBAC, or rollback that Section 9 requires, but it provides the only fully asynchronous multi-agent Loop-2 promotion mechanism in the current survey corpus, and its open-ended discovery framing makes the evidence-radius question concrete.

PACE [34] closes this family with a production-oriented two-timescale design for small language model agents. The fast timescale adapts prompts, parsers, validators, and control logic from failure signals within a deployment; the slow timescale consolidates across episodes. The two-timescale structure maps cleanly onto the Loop-1 / Loop-2 distinction of Section 3: Loop 1 fires at the fast timescale, updating a single deployment's scaffold; Loop 2 fires at the slow timescale, consolidating across the deployment's own episodes rather than across deployments. PACE's contribution is to show that the two-loop architecture is implementable under the resource constraints of small, frozen production models — not only under frontier-model assumptions — and that the slow/fast consolidation structure persists even when the optimizer model and the target model are the same frozen small model.

SkillClaw [152] and **FederatedSkill** [126] are the two systems in the corpus whose Loop 2 crosses users rather than tasks or agents. SkillClaw treats cross-user, over-time interaction as the primary improvement signal: trajectories from many users are aggregated, an autonomous evolver identifies recurring behavioral patterns and translates them into skill-set updates, and the updated skills live in a shared repository synchronized across users; its evaluation protocol runs a day-night cycle in which simulated concurrent users generate trajectories by day and the system reflects, proposes bundles, validates, and deploys by night. FederatedSkill starts from the observation that isolated single-user task streams lack the diversity to build comprehensive skills, while raw trajectory sharing compromises privacy and a uniform global library ignores client heterogeneity. Its unit of communication is the semantic skill diff (a structured patch over a local library, shipped with the task reward that produced it); a server-side evolution agent aggregates patches into a per-client capability matrix (covered, absorbing, broken, gap) and emits a personalized update for each client, applying, adapting, or rejecting peer patches with an auditable decision log that records source patch, reward, and justification for every modified path. Across 20 task families it reports up to +44.4% success and -37.5% compute against isolated self-evolution. In Section 3 terms FederatedSkill is the first surveyed system in which Loop 2 is a federated aggregation of artifact updates rather than a promotion of a single artifact, and its decision log is the first lineage record at the aggregator. It remains inside one operator's federation (clients are backbone-plus-harness profiles, not organizations), its acceptance decision uses the source client's reward rather than a held-out evaluation at the receiving client, and it reports neither RBAC nor rollback; Section 9's properties (b), (c), and (d) are each partially or wholly open.

F.9 Synthesis: what the convergence establishes

The four claims stated in Section 8 are supported as follows:

1. **The scaffold-versus-weights decomposition is independently confirmed.** GEPA, Meta-Harness, MOSS, RCL, and PACE all begin from the observation that model weights and the external artifact layer are distinct adaptation surfaces with different cost, reversibility, and scope properties. No surveyed paper disputes this decomposition; the variation is in which substrate each paper targets (skill document, harness code, system prompt, shared memory).
2. **Credit assignment is the central engineering bottleneck.** AHE, CANTANTE, Meta-

Harness, [42], HARNESSEVO, and SkillsVote all identify credit assignment — attributing a system-level failure to a specific scaffold coordinate — as the problem that distinguishes disciplined Loop-1 evolution from trial-and-error. This is the credit-assignment step of Appendix D.1 (operation 2; Appendix A), and it remains unsolved in the general multi-substrate case.

3. **Lifecycle hygiene is a precondition for descent, not an alternative to it.** Ratchet establishes that the gradient-analog mechanism of Section 3 requires a maintained scaffold as a precondition. A dirty artifact pool (stale, bloated, miscurated) prevents the gate G_t from receiving a meaningful signal. Hygiene and optimization are sequential dependencies, not competing paradigms.

4. **No surveyed system combines Loop-1 automation with cross-organizational Loop-2 governance.** SkillOpt has the strongest Loop-1 closure and the most systematic evidence-radius measurement, but it does not implement cross-organizational promotion, versioned lineage with RBAC, or rollback. CORAL implements asynchronous cross-agent promotion within one system but not across organizations. PACE implements two-timescale consolidation within one deployment. Meta-Harness implements Loop-1 closure over the harness substrate but no Loop-2 promotion mechanism. FederatedSkill federates skill patches across clients under one operator, with a decision log but no RBAC or rollback. The four-property gap named in Section 9 is narrowed on property (b) by FederatedSkill and closed on none; it is, if anything, confirmed more strongly by the independent convergence of multiple research threads on the same single-organization ceiling.

F.10 SkillOpt against Section 9's four properties

Mapped onto Section 9's four properties of governed cross-tenant scaffold optimization:

- (a) **Auto-gated Loop 1.** *Satisfied.* The held-out selection-split gate at strictly-greater margin instantiates G_t.
- (b) **Multi-tenant cross-org promotion.** *Absent.* SkillOpt is a single-organization research system; there is no governed cross-tenant aggregator.
- (c) **Versioned lineage with RBAC.** *Partial.* The exported `best_skill.md` is a versioned artifact, and the protected slow-update field separates fast and slow consolidation. There is no documented RBAC layer or audit-trail policy, and `edit_apply_report.json` is an operational log rather than an access-controlled lineage system.
- (d) **Rollback.** *Absent.* The training loop selects the best validation-gated skill and exports it; no rollback envelope on deployed artifacts is reported.

The cross-model, cross-harness, and cross-benchmark transfer experiments reported by SkillOpt are *empirical evidence-radius measurements*: they tell us that a skill optimized in one (model, benchmark, harness) cell continues to improve performance when redeployed in nearby cells without further optimization. In Section 3 vocabulary, this is a measured Loop-2 *radius* for the artifact, not a *governance mechanism* for promoting the artifact. Both readings are useful: SkillOpt is the strongest current Loop-1 proof and supplies the first systematic transfer evidence at the scaffold layer, while the Section 9 cross-tenant governance triad ((b), (c), (d)) remains unfilled.

F.11 Cost and bloat

SkillOpt reports 0.6M to 46.4M training tokens per absolute test-point gain (their Table 6), with the procedural benchmarks (SpreadsheetBench, OfficeQA, LiveMath) at the cheap end and search/visual benchmarks (SearchQA, DocVQA) an order of magnitude more expensive per point. The deployed artifact remains 379–1,995 tokens regardless. This is, to our knowledge, the first published cost-per-point figure for scaffold-layer descent, and it complements the Section 10 scaffold-bloat discussion (and the Ratchet hygiene-precondition finding walked in Appendix F.7): the textual learning rate η_t with cosine decay keeps the deployed skill compact even when the optimizer explores many more edits than are accepted (only 1–4 edits survive into the final skill across the six benchmarks). The mechanism that prevents the deployed artifact from bloating is exactly the complexity penalty $\Omega(z)$ of Section 3, instantiated as a hard cap on accepted edits per step rather than a soft regularizer.

G Claims audit and the rubric-reward comparison

Every absolute claim of the May-2026 draft of this survey (the version whose corpus closed in May 2026) of the form *no surveyed system / only X / first / absent / empty cell*, with its verdict after the October-2026 literature sweep (three parallel sweeps: skills; harness, context, and LLMOps governance; memory governance, competing surveys, rubric rewards; 126 systems added, scored from their own method sections) and the recount script released with the score table. Verdicts: **holds** (unchanged), **sharpened** (true, now stated more precisely), **revised** (wording must change), **dropped** (not carried into this version). Evidence names the system(s) that forced the verdict; arXiv ids are in the reference list.

Corpus after the sweep: 256 unique systems (130 May + 126 October), 204 core, 52 contrast. No October addition scores 5 on any substrate. Composite two-loop audit: 14 research systems + 3 industry exemplars (Sierra Agent OS 2.0, Cognition Devin, and now Letta Context Repositories, whose shared-memory push carries git lineage but no gate) pass; 7 October systems promote across contexts without versioning or lineage and enter only under relaxation (a) or not at all (EvolveNet, Evo2Team, XRepoSkill, ShareMem, RASO, Spotify, Future AGI (T5 only)).

Corrections to the May data applied here (applied before the recount): (1) the row "Governed Collaborative Memory / SSGM" conflated Cuadros et al. (2605.04264) with SSGM (Lam et al., 2603.11768); split, SSGM scored 2 (conceptual framework). (2) MAE and Memento-Skills were scored 5 on S5 in the CSV while the published table said no orchestration system reaches 5; both close one loop only, so they are re-scored 4 per the uniform rubric. S5 mean for the May corpus moves from 2.68 to 2.58.

G.1 The Section 9 corner (a)–(d)

Claim	Verdict	Evidence
No public system combines (a) auto-gated Loop 1, (b) cross-organization promotion, (c) versioned lineage with RBAC, (d) rollback	**holds**	Three sweeps, 126 systems: (b) is unclaimed by any evidenced system (EvolveNet's clients are benchmark partitions, "organizations" only in motivation; MemClaw is single-tenant in its evaluation; Buildrix is an open community hub with no gate); (c) appears as lineage without RBAC everywhere (EDDOps, ACM, MemClaw, Letta, Mem0 history) and as RBAC without versioned promotion in MCP control planes (agentic-community gateway, TrueFoundry); (d) is demonstrated by Governed Capability Evolution and EDDOps and claimed by EvolveNet (round rollback) and EvoUndo (recoverability as admission), none of which has (a)+(b).
"No surveyed system meets the FedAvg limit; FederatedSkill comes closest"	**sharpened**	EvolveNet (2608.04968) is now the nearest: broadcast, client-local optimization, server-side merge accepted iff fixed $\geq$ broken on a held-out slice, rollback to the previous shared harness. Still selection-and-merge over program edits, not averaging; cite both.
"(iv) ... FederatedSkill comes closest ... narrowed on one property, closed on none"	**revised**	Two closest approaches now: FederatedSkill (decision log, no gate at receiver) and EvolveNet (held-out merge gate and round rollback, no lineage or RBAC). Say "narrowed on (b) and (d) by different systems, closed on none."
"no member of the Section 8 research families provides (d), and only FederatedSkill provides even a partial (b)"	**revised**	(d): EvolveNet (round rollback), SkillSmith and SkillAudit (edit-level rollback inside one agent), Growing Harness and WDA (within-optimization rollback), EvoUndo (recoverability as an admission test). (b): EvolveNet and RASO partial. New sentence: "rollback now appears inside single deployments and inside one federated round; no system rolls back a promotion that has crossed an organization boundary, because none makes such a promotion."

G.2 Matrix cells

Claim	Verdict	Evidence
"Three cells are populated; the rest are empty for structural reasons"	**revised**	Among composite-passing systems the three cells hold; but single-loop and governance-only systems now occupy [Human × Human] (MCP registries: Azure API Center, agentic-community MCP Gateway & Registry, TrueFoundry; Buildrix; Enoch), [Human × None] (VerificAgent, revocation guard, Davis et al. governance conversion, Continual Harness human phase), [Auto+Human × None] (SkillChain, Learning on the Job), [None × Auto] (Governed Capability Evolution), [None × Auto+Human] (EDDOps), [None × Human] (ACM). Restate as: three cells hold every system that passes the composite audit; the human-authored cells are occupied only by registries and curation workflows with no session-signal loop.
"[Human × Auto] is empty by engineering logic . . . no published example exists"	**holds**	No system with human-authored candidates and automated promotion was found; the closest, MCP Gateway & Registry, adds an automated security scan to a human admission, which is [Human(+scan) × Human].
"[Human × Human] is empty in the surveyed corpus"	**revised**	Occupied by MCP registries and a community hub; see above. The paper's predicted occupant (solo or small-team workflows) is also now documented empirically by "Who Maintains Agent Skills?" (2609.05677): across five public skill repositories every substantive edit is human-merged, 62% AI co-authored, 1 deprecation in 254 edits.
"[Human × None] is structurally improbable"	**revised**	Occupied: VerificAgent (agent-drafted memories, human fact-check, frozen bank), the revocation guard of Shen et al., and human-in-the-loop harness phases. Restate: it is the human-curation cell, single-loop by construction.
"Nearly every auto-gated system fires at n = 1"	**revised**	Batched or statistical acceptance is now common: SAGE-gate (paired per-item test), Future AGI (paired bootstrap CI), AutoSaddler (mini-batch failure signals), MGM, ModularRSI (evidence across tasks), VaG (3-of-3 critics), EvolveNet (fixed $\geq$ broken on held-out), VACE, HackProbe, PROCTOR. Say "common since mid-2026" and cite SAGE-gate and VaG.
"no surveyed system has formalized agreement as a k-of-n acceptance rule"	**revised**	VaG requires all three heterogeneous critics to pass (3-of-3); SkillSpec is consensus-gated. Keep the pˆk-vs-1/k distinction, drop "no surveyed system".

Claim	Verdict	Evidence
"Only AlphaEvolve demonstrates explicit multi-layer depth"	**sharpened**	Still the only system with cascade evaluator plus diversity archive; HarnessBank, JIT-Agent, MGM keep archives (lineage), VaG adds tiered subset selection. Say "AlphaEvolve remains the only system combining a cascade evaluator with a diversity archive."

G.3 "Only" and "first"

Claim	Verdict	Evidence
CORAL "the only asynchronous multi-agent Loop-2 mechanism in the corpus"	**revised**	Evo2Team (2609.34135) promotes routing and communication skills across 4–32-agent teams with target-side confirmation; ShareMem pools memory across users. Say "CORAL was the only one in the May corpus; Evo2Team and ShareMem add cross-team and cross-user promotion without versioning."
AlphaEvolve Strassen claim	**holds** (attributed)	Third-party; attribute to the AlphaEvolve report in the same sentence.
"CASCADE reports the largest within-benchmark ablation gain in the corpus"	**dropped**	Not re-checked across 127 new systems; comparing ablation gains across benchmarks is not meaningful. Removed from this version.
ChronoMem and rollback repair "the first surveyed instances of the rollback envelope"	**revised**	Rollback of memory is now in VerMem (soft-delete/restore ops), Mi-Memory (design), Letta (git history); and shown unsafe in checkpoint-rollback studies (2608.29381, 2608.15939). Say "among the first" and cite the counter-evidence.
Cuadros "only surveyed memory system with full provenance + versioning + correction"	**holds**	Memory governance additions (TOKI, PPMF, TMA-NM, MemClaw, He & Yu) each carry provenance or lineage without correction loops or versioning, and the auto-gated memory loops (Recuris, MemGuard, VerMem, Compiled Memory) carry no lineage.
SkillOpt "cleanest published instance" / "first to instantiate all four simultaneously"	**sharpened**	SkillOpt-Lite (2607.03451) removes two of the four and matches it; VALVE, SkillSmith, SkillAudit instantiate held-out gates with rollback. Say "the first system we found that instantiates all four, and its own follow-up shows two of them are stabilizers rather than necessities."
FederatedSkill "first … federated aggregation … first lineage record at the aggregator"	**holds**	EvolveNet (Aug 2026) postdates it and has no lineage record.

Claim	Verdict	Evidence
SkillOpt "first published cost-per-point figure"	**holds**	No earlier figure found.

G.4 Absences

Claim	Verdict	Evidence
"production deployments sit at Stage 1 or 2; none reaches Stage 3"	**sharpened**	Spotify (2609.30297) runs automated prompt and planning optimization gated by human launch and A/B metrics; SkillChain (Alibaba) runs judge-monotone edits behind a human reflection gate with reported agreement. Both are Stage 3 on Loop 1 with a human Loop 2; say "production deployments reach Stage 3 on the local loop only behind a human promotion gate".
S1 score-5 none; "no instruction system closes both loops"	**holds**	S1 n=15, max 4; adoption studies cut the other way (Gloaguen: context files raise cost >20% without raising success; Galster: context files dominate configuration, skills rare).
"Anthropic's skills repository is one-pool with PR review but no automated eval gate"	**holds**	Confirmed by 2609.05677 (human-merged, no eval gate observed).
"correctable, versioned memory is rare; production memory lacks failure-triggered correction and versioned lineage"	**revised**	Letta Context Repositories (git-backed memory, every edit committed, shared memory auto-pushed), Mem0 per-memory history and feedback endpoint, Zep bitemporal invalidation: lineage is now common in production memory; failure-triggered correction is not, and 2609.08258 shows revoked facts still outrank their replacements in five backends. Say "versioned lineage has arrived in production memory; enforced correction has not."
S5 score-5 none; "topology evolution is rare"	**sharpened**	After the correction S5 has no 5 in either corpus. Gated topology evolution now exists: TOCOMAS retains only candidates satisfying structural invariants; Evo2Team promotes across teams; OptiMAS, AgentGrad, HarnessForge update S5 under evaluation. Say "rare and, where it exists, gated by evaluation alone except TOCOMAS."
"no system matures all six at once"	**holds**	No October addition scores 5 on any substrate.
"Failure-triggered memory is rare in production"	**holds**	One field report (SIx Harness, N=1, self-reported); Letta dreaming writes from conversation history, not failures.

Claim	Verdict	Evidence
"Cross-customer skill promotion is nearly absent"	**holds**	ShareMem, EvolveNet, XRepoSkill, RASO promote across users, clients, or repositories inside one operator; none across customers or organizations with evidence.
"Memory versioning is mostly unsolved outside Cuadros et al. and ChronoMem"	**revised**	See 190: Letta, Mem0 history, Zep bitemporal facts, TOKI audit rows, MemClaw supersession chains.
"Scaffold-level curriculum is unspecified in nearly every surveyed system"	**sharpened**	Task-CoEvolve (variance-weighted task sampling) and AutoSaddler (mini-batch failure signals) specify it; still the exception.
"Held-out evals at Loop-2 promotion are absent"	**revised**	Receiving-side evaluation now exists: ShareMem (evaluation tasks belong to a different user), XRepoSkill (independent verification in $\geq$2 repositories), Evo2Team (target-side confirmation; 4 of 22 transfers still fail on new graphs), VACE (candidate evaluated with the receiving model fixed). EvolveNet explicitly has none; Federated Agent Optimization (2610.01195) proposes a receiving-client gate without implementing it.
research full-auto: "enterprise governance is uniformly absent"	**holds**	No October [Auto $\times$ Auto] system reports RBAC or audited promotion.
governance-first: "no patch-local inner loop"	**holds**	EDDOps, ACM, GCE, MCP control planes all have Loop 1 = None.
"AGENTS.md in over 60,000 repositories"	**revised**	Newer counts: 2,853-repository study (Galster), 128,018-project adoption study (Robbes: 22–29% of coding-agent projects), 36,710 repositories mined for loop engineering (Lulla 2608.21884). Replace the single count with these studies and the cost finding (Gloaguen).
"no surveyed system treats pruning or expiration as a first-class gated operation (outside Ratchet, SkillOpt, ChronoMem)"	**revised**	Retirement is a gated operation in at least eleven skill systems (Library Drift: retire when n $\geq$ 100 and contribution $\leq$ -0.10 with a cap of 50; SkillSmith; SkillOps; ASSAY; HiSME; SkeMex; MUSE-Autoskill; SkillMAS; SafeEvolve; Double Ratchet; SkillGen) and expiry is a product control in Mem0, Zep, and LangGraph Platform. Say "pruning and expiry became first-class in 2026; what remains rare is pruning of a promoted artifact's descendants, which VaG shows is structurally irreversible."
failure surface "largely unmitigated in production"	**holds**	Revocation unenforced in five production backends (2609.08258); checkpoint rollback unsafe in three frameworks (2608.29381); no evidentiary record in 16 deployed frameworks (Hearsay 2609.32495).

Claim	Verdict	Evidence
multi-sample agreement "under-explored; SkillOpt-Lite nearest"	**revised**	See 231: SAGE-gate, VaG, SkillSpec.
"No surveyed paper disputes the scaffold-vs-weights decomposition"	**holds**	SIA (2605.27276) updates harness and weights together but keeps them distinct levers.
credit assignment "remains unsolved in the general multi-substrate case"	**holds**	HARNESSEVO (slot attribution), AgentGrad (intervention-based), CANTANTE (contrastive) each solve one substrate's case.

G.5 Section 4 claims (checked against the rescored corpus)

Claim	Statement	Verdict	Evidence
IV-1	Every [Auto × Auto] system with a per-edit estimator gate runs on a C1 signal or a simulated C2 environment; [Auto × Auto] systems in C4 domains gate by proposal pruning	**holds**	May [Auto × Auto]: DGM, Voyager, AlphaEvolve, SkillOpt, SkillRL, SAGE, EvolveR, CoEvoSkills, AutoAgent, AutoManual (C1/simulated C2); NanoResearch (semantic merge, C4) and CORAL (heartbeat, C4) prune. October: EvolveNet, Evo2Team, XRepoSkill (C1 code/benchmark signals); ShareMem (C2 Mind2Web); RASO (target execution feedback, C1/C2); Letta (no gate).
IV-2	[Auto × Human] is populated only by C2/C3 systems	**holds**	SkillForge (C3 judge, human Loop 2), CASCADE (C3), Sierra (C2/C3), Devin (C2 merge outcome), Spotify (C2 A/B behind human launch). No C1 system occupies the cell.
IV-3	Rubric-as-reward builds C3 gates on the weight side; scaffold-side judge calibration under the reflexive condition is rare	**sharpened**	14 reward papers: 8 fix the rubric or judge during policy optimization, 5 co-evolve it (RLPR by construction, EvoRubrics, SCORE, RubricEM, Rubric-ARM at the reward-model stage); only 5 report any human-agreement number and none of the co-evolving ones does. Scaffold side: SkillForge (>90% agreement), SkillChain (κ 0.72–0.91), SkillCoach (trajectory-filter consistency 82→96% against human gold) now report calibration; none calibrates a judge that is itself being edited.

G.6 Recount output (merged corpus, all rows)

```
rows: 269  unique systems: 256  core: 204  contrast: 52
substrate            n   mean  score-5 systems
INTEGRATED           52   3.81  AutoAgent, NanoResearch, SkillRL
S1_Instructions      15   3.07  (none)
S2_Skills            50   3.34  COSPLAY, SAGE
S3_Memory            50   3.06  Governed Collaborative Memory (Cuadros et al.)
```

```
S4_Tools             20   3.65  Harvey, Hippocratic AI, MCP
S5_Orchestration     37   3.08  (none)
S6_Governance        45   3.02  AGENTS.md / AAIF, Braintrust, LangSmith Hub, Vellum
May corpus alone (after corrections): 130 / 99 / 31; S5 mean 2.58.
```

H Extended related work

The main article makes four design commitments that another survey could make differently: it classifies systems by whether a feedback loop closes over a persisted artifact, rather than by which mechanism is edited; it labels the gate on each of two loops as algorithmic, human, or absent; it classifies the signal that feeds the gate by verifiability; and it audits governance against four named properties. Each commitment meets a separate line of prior work. This section traces what each line established, the setting it assumed, and the condition that changes here, so that a reader can see the differences without the article having to argue for them. Every description below is taken from the cited work's own abstract, method section, or documentation; the evidence record is released with the article.

H.1 Loop closure as the unit of classification

The surveys of self-evolving agents organize the field by what is evolved and when. Gao et al. [9] ask what, when, how, and where to evolve, with a timing axis that separates adaptation inside a test-time episode from adaptation between episodes, and they note that a human in the loop can validate a newly created tool. Fang et al. [10] give a unified frame of system inputs, agent system, environment, and optimizers, and cover single-agent, multi-agent, and domain-specific settings. Zhou et al. [11] taxonomize 108 self-evolving coding methods by evolution target, timing, and code-specific signal, and they come closest to a gate: their admission rule accepts an update when it improves a metric by a margin and passes a check, and they observe that a passing test "checks only selected behavior". Ren et al. [157] describe an agent as a foundation model times an operational scaffold and treat self-improvement as a self-induced update operator organized by target and driving signal. Surveys of agent memory [158–160], context engineering [17, 161], and agent skills [15, 16, 162] do the same for their substrate: each catalogues mechanisms and, in the skills surveys, lifecycle stages.

What this line established is the inventory. The substrates this article scores are the ones these surveys name, and the mechanisms it finds in the corpus are the ones they catalogue. The setting they assume is a mechanism-centered one: a system is described by what it edits. The condition that changes here is the question asked of each system. Whether a loop closes at all, whether it closes under a gate, and whether a second loop promotes the result are properties that the mechanism inventory does not determine, and they are what the two-loop audit of Section 5 measures. Zhou et al.'s admission rule is the nearest precedent for the gate; it is stated for one domain, code, where the check is a test, and this article asks what the rule becomes when the check is a judge or a delayed outcome.

H.2 The gate as algorithmic, human, or absent

Three lines bear on gate type. The first is prompt and program optimization, which a reader will expect to see named. APE treats the instruction as a program and selects among LLM-proposed candidates [163]; ProTeGi forms natural-language "gradients" from minibatches that criticize the current prompt and searches edits with beam search [164]; OPRO has the language

model propose new instructions from a prompt that lists previous candidates with their scores and reports gains of up to 8% on GSM8K and up to 50% on Big-Bench Hard over human-designed prompts [18]; EvoPrompt applies evolutionary operators to a prompt population and improves it against a development set, with gains of up to 25% on BBH across 31 datasets [19]; Promptbreeder evolves task prompts and the mutation prompts that modify them, evaluated on arithmetic and commonsense reasoning and on hate-speech classification [20]. DSPy compiles pipelines of language-model calls into text-transformation graphs and optimizes each pipeline to a metric by creating and collecting demonstrations [21], MIPRO proposes instructions and demonstrations jointly for multi-stage programs under a stochastic mini-batch surrogate [165], TextGrad backpropagates textual feedback through the variables of a compound system [22], and Trace generalizes the pattern to any computation whose execution trace can be shown to an optimizer [166]. This line established that a development-set score is a usable gate for an algorithmic proposer and that the proposer can be the model itself. The setting it assumes is a single optimization run against a fixed task distribution. The condition that changes here is persistence and scope: these optimizers produce a prompt or program as the optimizer's output, not a versioned deployment artifact edited from session signal and promoted under a second gate, which is why they sit in the contrast corpus or at the single-loop boundary (Appendix E). SkillOpt is the point where the lineage crosses into the corpus, by adding a persistent skill document, a held-out acceptance gate, and a rejected-edit buffer to the same proposer (Section 8).

The second line optimizes the scaffold as a whole rather than one prompt, and it is the nearest precedent for the loop of Section 3. Agent symbolic learning treats prompts, tools, and the pipeline that connects them as symbolic parameters and updates them with textual losses and gradients [24]; STOP has a scaffolding program recursively rewrite the code that improves it [25]; a self-improving coding agent edits its own harness and raises its benchmark score as a result [26]; and workflow search optimizes the orchestration graph itself, by node and edge optimization over agent graphs [77] or by tree search over code-represented workflows [78]. These established that the whole scaffold is an optimizable object and that textual feedback can drive its updates. Each runs within one deployment under a benchmark score, with no promotion to other deployments and no governance of the artifact it produces; the two-loop audit of Section 5 is the measurement of exactly those two absences.

The third line is the classic single-loop agents and their memories: Reflexion's verbal reinforcement into episodic memory [151], the reflection-and-importance memory of generative agents [167], Voyager's growing skill library [100], the experience bank ExpeL extracts from training tasks [168], MemGPT's virtual context management [169], Agent Workflow Memory's induced and reused workflows [170], the Zettelkasten-style organization of A-MEM [171], the persistent test-time memory of Dynamic Cheatsheet [172], the evolving context playbook of agentic context engineering [23], and the in-context iteration of Self-Refine and ReAct [148, 149]. They established that a frozen model can improve across episodes through an artifact it writes, and the cognitive-architecture framing of Sumers et al. [54] gave that artifact the episodic, semantic, and procedural division this article's memory substrate uses. Reflexion, generative agents, Voyager, ExpeL, MemGPT, Agent Workflow Memory, A-MEM, Dynamic Cheatsheet, and the context playbook persist the artifact and close Loop 1; Self-Refine and ReAct do not persist it. None promotes the artifact beyond the agent that wrote it, which is the absence the second loop of this article is defined to measure.

H.3 Verifiability of the feedback signal

No surveyed work classifies systems by the verifiability of the signal that feeds the gate, but three lines come near it. Guo et al. [14] note that software engineering provides mechanical feedback, in the form of builds, unit tests, linters, and execution logs, that most other domains lack; Zhou et al. [11] note that even a passing test is incomplete feedback. The judged end of the spectrum has its own measurements: language-model judges agree with human preference at rates that make them usable evaluators of open-ended answers [27], a proxy reward optimized past a point lowers the true score [37], and people who grade model outputs revise their own criteria as they grade, so that the evaluator drifts along with the evaluated [38]. The second line is the weight-side effort to extend reinforcement learning from verifiable rewards into domains without verifiers. Rubrics as Rewards generates an instance-specific checklist before training and scores responses with a fixed judge [43]; Writing-Zero trains a pairwise generative judge on writing principles and holds it fixed during policy training [44]; reference-guided evaluation reaches 79.1% agreement with human annotations across the datasets its authors test [45]; an essay scorer trained against a fixed rubric reaches a quadratic weighted kappa of 0.803 against a single human rater's 0.805 [46]. A second group moves the gate with the policy: RLPR scores by the policy's own probability of a fixed reference [47], Rubric-ARM alternates updates of a rubric generator and a judge [48], and EvoRubrics, SCORE, and RubricEM update rubrics adversarially or from a rubric buffer within training [49–51]. Of the fourteen papers in this line that were checked, eight hold the rubric or judge fixed during policy optimization and five co-evolve it; five report agreement with human judgment and none of the co-evolving ones does; one calibrates against language-model golden judges rather than people [173]; and a survey of rubric evaluation names the dynamic regime as the trend [174].

This line established the gate constructions for judged signals: checklists, references, pairwise judges, and rubric buffers. The setting it assumes is weight-space optimization with the policy as the learner. The condition that changes here is the learner: when the scaffold is what learns, the rubric is itself a scaffold coordinate, so the fixed-versus-co-evolved distinction becomes the question of whether a gate under edit can be calibrated at all. The article borrows the constructions and the distinction; it does not score the methods.

H.4 Governance: lineage, access control, rollback, and promotion across organizations

Three lines bear on the four-property audit. The first is governance surveys. Ding et al. [12] code 435 works on six dimensions per state item, including provenance and recoverability, and find the literature "concentrates more heavily on accumulating and retrieving state than on governing, recovering, or relinquishing it". Lin et al. [13] organize memory security by lifecycle phase and name five primitives, among them principal-scoped retrieval and rollbackability. Neither carries a promotion dimension, and neither scores whether an inner loop fires from session signal.

The second line is the systems that come closest to the four properties. FederatedSkill exchanges semantic skill diffs between clients that are agent instances under one operator, and a server-side evolution agent applies, adapts, or rejects each patch per client while writing an auditable decision log of source patch, reward, and justification; it reports up to 44.4% higher success than isolated self-evolution across 20 task families [126]. EvolveNet broadcasts a shared harness, optimizes it locally at each client, and merges only when the held-out items a merge fixes outnumber those it breaks, rolling back to the previous shared harness after a failed round; its authors describe clients as spanning users and organizations, evaluate on benchmark partitions, and note that a program

edit can itself encode client information [89]. The registries supply the remaining properties without an inner loop: EDDOps promotes through automatic evaluation thresholds and human sign-off with supersession lineage and emergency rollback, and states that it does not address role-based access control [84]; Agentic Configuration Management keeps immutable revisions and baselines that enable rollback [85]; Governed Capability Evolution gates activation and rolls back on monitoring, recovering in 72.4% of drift cases in its proof of concept [86]; and the MCP control planes add role-based access and quarantine without an evaluation gate [74–76]. Letta's Context Repositories commit every memory edit to git and push shared memory across agents without a gate [64].

The third line is federated learning. FedAvg averages client updates in parameter space [130], DP-FedAvg adds user-level differential privacy [131], the field's open problems are catalogued in Kairouz et al. [132], and PromptFL moves the federated object from weights to a shared prompt that participants learn cooperatively [133]. The setting is numeric updates that are comparable by construction. The condition that changes here is the artifact: scaffold promotion is selection and merge over symbolic objects, and the nearest systems aggregate program edits with a language model rather than by averaging, which is why the article uses the federated analogy only as a limit.

H.5 What is and is not new

The ingredients have precedent, and the article says so. The six substrates are the inventory of the self-evolving-agent, memory, context, skill, and harness surveys, and the memory taxonomy is CoALA's. The gate as a development-set score is the prompt-optimization lineage; the scaffold as an optimizable object is agent symbolic learning, STOP, and workflow search; the persisted artifact that closes Loop 1 is Reflexion, Voyager, and the agent-memory line; the admission rule with a margin and a check is Zhou et al.'s; the gate constructions for judged signals are the rubric-reward line; provenance, recoverability, and rollback as governance dimensions are Ding et al. and Lin et al.; federated aggregation of artifact patches is FederatedSkill and EvolveNet. What is new is the combination and the measurement: a corpus of 256 systems scored on one rubric and released; a classification of each by which of two loops it closes and under which gate type; a classification of the signal that feeds the gate into four verifiability classes, with the demonstration that the class fixes the reachable cells of the design space and the dominant failure; and an audit of every system against four governance properties, with the finding that none meets all four and that the two nearest, FederatedSkill and EvolveNet, each narrow different properties without meeting the set. These are the claims of the abstract and the introduction, and the limitations in Section 5 (single-rater scoring, two-pass corpus with an October-2026 cutoff, no new experiments) bound them.

I Full score table

Every scored (substrate, system) row of the corpus: 130 systems scored by May 2026 and 126 added by the October 2026 sweep. Scores follow the 0–5 rubric of the main text (Table 4); Loop 1 / Loop 2 gate types and signal classes are recorded for the October rows (and for May rows re-audited in Section 7). Substrate codes: INT integrated, S1 instructions, S2 skills, S3 memory, S4 tools, S5 orchestration, S6 governance. A year of "—" marks a classical system that predates the survey window. The CSV files with per-row justifications are released as ancillary files with this preprint.

Sub.	System	Score	Year	Source	Loop 1	Loop 2	Class	Added
INT	ADAS / Meta Agent Search	4	2024	arXiv:2408.08435				May 26
INT	Agent S / S2	4.5	2024	arXiv:2410.08164				May 26
INT	Agent Workflow Memory (AWM)	3.5	2024	arXiv:2409.07429				May 26
INT	AlphaEvolve	4	2025	arXiv:2506.13131				May 26
INT	AutoAgent	5	2026	arXiv:2603.09716				May 26
INT	AutoManual	3.5	2024	NeurIPS 2024				May 26
INT	AutoSaddler	4	2026	arXiv:2608.23041	Auto	None	C2	Oct 26
INT	CaptainAgent	2.5	2024	arXiv:2405.19425				May 26
INT	CASCADE	4.5	2025	arXiv:2512.23880				May 26
INT	ChatDev	3	2023	arXiv:2307.07924				May 26
INT	Co-Harness	4	2026	arXiv:2607.22688	Auto	None	C2	Oct 26
INT	CoEvoSkills	3.5	2026	arXiv:2604.01687				May 26
INT	Cognition Devin	3	2024	cognition.ai				May 26
INT	Continual Harness	4	2026	arXiv:2605.09998	None	None	C4	Oct 26
INT	Cradle	4	2024	arXiv:2403.03186				May 26
INT	Darwin Gödel Machine	4	2025	arXiv:2505.22954				May 26
INT	Double Ratchet	4	2026	arXiv:2607.12790	Auto	None	C3 anchored by C1	Oct 26
INT	EvolveNet	4	2026	arXiv:2608.04968	Auto	Auto	C1,C2	Oct 26
INT	EvolveR	4	2025	arXiv:2510.16079				May 26
INT	ExpeL	3.5	2023	arXiv:2308.10144				May 26
INT	Generative Agents	4	2023	arXiv:2304.03442				May 26
INT	GenericAgent	4	2026	arXiv:2604.17091	Auto	None	C2	Oct 26
INT	GITM	3	2023	arXiv:2305.17144				May 26
INT	HarnessBank	4	2026	arXiv:2607.13683	Auto	None	C2	Oct 26
INT	HarnessX	4	2026	arXiv:2606.14249	Auto	None	C2	Oct 26
INT	Hippocratic AI Polaris	3.5	2024	hippocraticai.com				May 26
INT	JARVIS-1	3.5	2023	arXiv:2311.05997				May 26
INT	JIT-Agent	4	2026	arXiv:2608.25593	Auto	None	C2	Oct 26
INT	Life-Harness	4	2026	arXiv:2605.22166	Auto	None	C2	Oct 26
INT	Mendel Gödel Machine (MGM)	4	2026	arXiv:2608.07645	Auto	None	C1	Oct 26
INT	MetaGPT	3.5	2023	arXiv:2308.00352				May 26
INT	Mobile-Agent-E	4.5	2025	arXiv:2501.11733				May 26
INT	ModularRSI	4	2026	arXiv:2609.14857	Auto	None	C2	Oct 26
INT	NanoResearch	5	2026	arXiv:2605.10813				May 26
INT	OpenCore	4	2025	github.com/sibmike/opencore				May 26
INT	OpenHands / CodeAct	3	2024	arXiv:2407.16741				May 26
INT	OS-Copilot / FRIDAY	4	2024	arXiv:2402.07456				May 26
INT	Plan4MC	2.5	2023	GitHub/arXiv				May 26
INT	SAGE	4	2025	arXiv:2512.17102				May 26
INT	Sakana AI Scientist	3	2024	arXiv:2408.06292				May 26
INT	ScholarEvolve	4	2026	arXiv:2609.40169	Auto	None	C2	Oct 26
INT	SIA	4	2026	arXiv:2605.27276	Auto	None	C2	Oct 26
INT	Sierra Agent OS	4	2024	sierra.ai				May 26
INT	Sierra Agent OS 2.0	3	2025	sierra.ai/blog/agent-os-2-0				May 26
INT	SkillForge	4	2026	arXiv:2604.08618				May 26
INT	SkillMAS	4	2026	arXiv:2605.09341	Auto	None	C2	Oct 26
INT	SkillOS	3	2026	SemanticScholar:2653e4c7				May 26
INT	SkillRL	5	2026	arXiv:2602.08234				May 26
INT	TTHE	4	2026	arXiv:2607.08124	Auto	None	C3	Oct 26
INT	VACE	4	2026	arXiv:2609.37105	Auto	None	C2	Oct 26
INT	Voyager	4	2023	arXiv:2305.16291				May 26
INT	Workspace Optimization (DreamTeam)	3	2026	arXiv:2605.09650	Auto	None	C1	Oct 26
S1	AGENTS.md	2	2026	arXiv:2601.20404				May 26
S1	Aider Conventions	2	2024	aider.chat				May 26
S1	Claude Code CLAUDE.md	4	2025	docs.anthropic.com				May 26

Sub.	System	Score	Year	Source	Loop 1	Loop 2	Class	Added
S1	Cody / Sourcegraph	2	2024	sourcegraph.com				May 26
S1	Continue.dev Rules	3	2024	docs.continue.dev				May 26
S1	Cursor Rules	3	2024	docs.cursor.com/rules				May 26
S1	GitHub Copilot Custom Instructions	3	2024	docs.github.com				May 26
S1	GRACE	4	2026	arXiv:2607.09175	Auto	None	C2	Oct 26
S1	Lovable Knowledge	2	2024	docs.lovable.dev				May 26
S1	Meta Context Engineering (MCE)	4	2026	arXiv:2601.21557	Auto	None	C2	Oct 26
S1	Replit replit.md	4	2025	docs.replit.com				May 26
S1	Spotify conversational-recommendation loop	4	2026	arXiv:2609.30297	Auto	Human	C3	Oct 26
S1	VS Code Copilot Instructions	3	2024	code.visualstudio.com				May 26
S1	Windsurf Cascade Rules	3	2024	docs.windsurf.com				May 26
S1	Zed AI Rules	3	2024	zed.dev/docs				May 26
S2	AgentVerse	1	2023	arXiv:2308.10848				May 26
S2	Anthropic Claude Agent Skills	3	2025	anthropic.com/ engineering				May 26
S2	Anthropic/skills GitHub repo	2	2025	github.com/ anthropics/skills				May 26
S2	ASSAY	4	2026	arXiv:2606.15390	Auto	None	C2	Oct 26
S2	AutoSkill	3	2026	arXiv:2603.01145	Auto	None	C3	Oct 26
S2	Buildrix	3	2026	arXiv:2606.25139	Human	Human	C3	Oct 26
S2	ChatGPT Plugins (legacy)	1	2023	openai.com				May 26
S2	Claude Code Skills	3	2025	docs.anthropic.com				May 26
S2	COSPLAY	5	2026	arXiv:2604.20987				May 26
S2	CrewAI Skills	2	2025	docs.crewai.com				May 26
S2	HiSME	4	2026	arXiv:2605.28390	Auto	None	C1,C3	Oct 26
S2	HuggingFace Agent Skills	2	2025	huggingface.co				May 26
S2	LangChain Skills	2	2025	langchain.com				May 26
S2	Library Drift curator	4	2026	arXiv:2605.19576	Auto	None	C1	Oct 26
S2	Meta Context Engineering (MCE)	4	2026	arXiv:2601.21557	Auto	None	C2	Oct 26
S2	MetaGPT (SOP-as-skill)	3	2023	arXiv:2308.00352				May 26
S2	MetaSkill-Evolve	4	2026	arXiv:2607.05297	Auto	None	C2	Oct 26
S2	Microsoft Semantic Kernel Plugins	2	2024	learn.microsoft.com				May 26
S2	MUSE-Autoskill	4	2026	arXiv:2605.27366	Auto	None	C1,C2	Oct 26
S2	NanoResearch Skill Bank	4	2026	arXiv:2605.10813				May 26
S2	OpenAI Custom GPTs / Actions	2	2023	platform.openai.com				May 26
S2	Personalized developer skills (Huang-Du-Lan)	3	2026	arXiv:2608.10319	Auto	None	C3	Oct 26
S2	RASO	4	2026	arXiv:2609.38024	Auto	Auto	C2	Oct 26
S2	SAGE	5	2025	arXiv:2512.17102				May 26
S2	SCAFFOLD	4	2026	arXiv:2609.05511	Auto	None	C2	Oct 26
S2	SE-GoS	4	2026	arXiv:2609.08228	Auto	None	C2	Oct 26
S2	SkeMex	4	2026	arXiv:2606.09365	Auto	None	C2	Oct 26
S2	Skill Issues (Bauplan)	4	2026	arXiv:2606.01185	Auto	None	C1,C3	Oct 26
S2	SKILL.md smells (Hong-Imani-Ahmed)	1	2026	arXiv:2607.01456	None	None	-	Oct 26
S2	SkillAudit	4	2026	arXiv:2606.14239	Auto	None	C3,C1-partial	Oct 26
S2	SkillBoost	4	2026	arXiv:2607.26643	Auto	None	C1	Oct 26
S2	SkillChain	4	2026	arXiv:2606.12984	Auto->Huma	None	C3,C2	Oct 26
S2	SkillComposer	4	2026	arXiv:2606.06079	Auto	None	C1,C2	Oct 26
S2	SkillEvoReg	4	2026	arXiv:2609.30861	Auto	None	C1,C2	Oct 26
S2	SkillFoundry	3	2026	arXiv:2604.03964	Auto	None	C1	Oct 26
S2	SkillGen	4	2026	arXiv:2605.10999	Auto	None	C2	Oct 26

Sub.	System	Score	Year	Source	Loop 1	Loop 2	Class	Added
S2	SkillGLoW	4	2026	arXiv:2609.02217	Auto	None	C2	Oct 26
S2	SkillLift	4	2026	arXiv:2609.15396	Auto	None	C3 inner, C2 outer	Oct 26
S2	SkillOps	4	2026	arXiv:2605.13716	Auto	None	C2	Oct 26
S2	SkillSmith	4	2026	arXiv:2606.01314	Auto	None	C1,C2	Oct 26
S2	SkillSpec (consensus-gated)	4	2026	arXiv:2610.00704	Auto	None	C1,C2	Oct 26
S2	SuperAGI Toolkits	1	2024	github.com/ TransformerOptimus				May 26
S2	TRUSS	3	2026	arXiv:2608.17588	Auto	None	C1,C2	Oct 26
S2	VALVE	4	2026	arXiv:2609.32990	Auto	None	C1	Oct 26
S2	VCE-Skill	4	2026	arXiv:2608.16544	Auto	None	C1,C2	Oct 26
S2	Voyager	4	2023	arXiv:2305.16291				May 26
S2	Web2BigTable	3	2026	arXiv:2604.27221	Auto	None	C1,C2	Oct 26
S2	Who Maintains Agent Skills? (empirical)	2	2026	arXiv:2609.05677	Human	None	C3	Oct 26
S2	WikiSkill	4	2026	arXiv:2608.27454	Auto	None	C2	Oct 26
S2	XRepoSkill	4	2026	arXiv:2609.36807	Auto	Auto-parti	C1	Oct 26
S3	A-MEM	3	2025	NeurIPS 2025				May 26
S3	Agent-native memory system evaluation (Zhou et a	2	2026	arXiv:2606.24775	n/a	n/a	n/a	Oct 26
S3	AIM privacy-aware interoperable memory (Johnson	3	2026	arXiv:2609.12320	Auto	None	C3	Oct 26
S3	Beyond the Harness (enterprise Text-to-SQL cards	3	2026	arXiv:2608.22830	Auto	None	C2	Oct 26
S3	ChatGPT Memory	3	2024	openai.com				May 26
S3	Claude Memory	3	2025	anthropic.com				May 26
S3	Cognee	3	2024	github.com/ topoteretes/cognee				May 26
S3	Compiled Memory (Rhodes & Kang)	4	2026	arXiv:2603.15666	Auto-gated	None	C1	Oct 26
S3	Control-plane placement / ForgetEval (Yang)	2	2026	arXiv:2606.15903	n/a	n/a	n/a	Oct 26
S3	FRESH failure-aware heterogeneous graph memory (	4	2026	arXiv:2609.28003	Auto	None	C2	Oct 26
S3	GateMem multi-principal memory-governance benchm	2	2026	arXiv:2606.18829	n/a	n/a	n/a	Oct 26
S3	Gemini Code Assist Memory	4	2025	cloud.google.com				May 26
S3	Generative Agents	3	2023	arXiv:2304.03442				May 26
S3	Governed Collaborative Memory (Cuadros et al.)	5	2026	arXiv:2605.04264				May 26
S3	HippoRAG	2	2024	arXiv				May 26
S3	Honest Lying mitigation / programmatic failure s	4	2026	arXiv:2605.29463	Auto	None	C1/C2	Oct 26
S3	KV-cache rollback consistency (Zhang & Yang)	2	2026	arXiv:2608.15939	n/a	n/a	n/a	Oct 26
S3	LangChain Primitives (legacy)	1	2023	langchain.com				May 26
S3	LangGraph Long-Term Memory	3	2024	langchain.com				May 26
S3	LangGraph Store / LangMem (2026 refresh)	3	2026	docs.langchain.com/ oss/python	None	None	n/a	Oct 26
S3	Learning on the Job	4	2026	arXiv:2607.22157	Auto+ Human	None	C2,C3	Oct 26

Sub.	System	Score	Year	Source	Loop 1	Loop 2	Class	Added
S3	Letta MemFS + Context Repositories + Dreaming (2	4	2026	docs.letta.com/ letta-code	Auto	Auto	C3	Oct 26
S3	Mem0	3	2025	arXiv				May 26
S3	Mem0 Platform (2026 refresh: history, feedback,	3	2026	docs.mem0.ai/ api-reference	Auto	None	C3	Oct 26
S3	MemAudit post-hoc poisoned-memory audit (Tan et	3	2026	arXiv:2605.23723	Auto	None	C2	Oct 26
S3	MemClaw / Governed Shared Memory (Margalit et al	3	2026	arXiv:2606.24535	Auto	None	C3	Oct 26
S3	MemGPT / Letta	3	2023	arXiv:2310.08560				May 26
S3	MemGuard persisted verifier signals (Wang et al.	4	2026	arXiv:2608.21867	Auto-gated	None	C3	Oct 26
S3	MemoryBank	3	2023	Zhong et al.				May 26
S3	Mi-Memory lifecycle framework (Liu et al.; Xiaom	3	2026	arXiv:2607.18975	Auto	None	C3	Oct 26
S3	MIRIX	3	2025	arXiv				May 26
S3	MPBench memory-poisoning study (Dash et al.)	2	2026	arXiv:2606.04329	n/a	n/a	n/a	Oct 26
S3	NanoResearch Memory Module	3	2026	arXiv:2605.10813				May 26
S3	PPMF provenance-preserving memory firewall (Xu e	3	2026	arXiv:2607.29167	Auto	None	C1	Oct 26
S3	REALM retrieval-driven memory reconsolidation (S	4	2026	arXiv:2609.16053	Auto	None	C2/C3	Oct 26
S3	Recuris recursive experiential-working memory (Y	4	2026	arXiv:2608.24876	Auto-gated	None	C2	Oct 26
S3	Reflexion	4	2023	arXiv:2303.11366				May 26
S3	Revocation guard / Revoked but Still Authoritati	3	2026	arXiv:2609.08258	Human	None	C1	Oct 26
S3	Safe to Resume? checkpoint-rollback continuity (	2	2026	arXiv:2608.29381	n/a	n/a	n/a	Oct 26
S3	ShareMem	4	2026	arXiv:2609.32511	Auto	Auto-parti	C3	Oct 26
S3	SIx Harness / Memory as Infrastructure (Helwig)	3	2026	arXiv:2609.05510	Auto	None	C2	Oct 26
S3	SOAR Cognitive Architecture	4	—	Newell/Laird				May 26
S3	SSGM stability-and-safety governed memory (Lam e	2	2026	arXiv:2603.11768	None	None	n/a	Oct 26
S3	Stale constraints in inherited memory (Nakayashi	2	2026	arXiv:2608.25553	n/a	n/a	n/a	Oct 26
S3	TMA-NM origin-bound memory authority (Louck)	3	2026	arXiv:2606.24322	Auto	None	C1	Oct 26
S3	TOKI bitemporal operator algebra (Wang)	3	2026	arXiv:2606.06240	Auto or Hu	None	C3	Oct 26
S3	Trust-scored memory sanitization (Devarangadi Su	2	2026	arXiv:2601.05504	Auto gate	None	n/a	Oct 26

Sub.	System	Score	Year	Source	Loop 1	Loop 2	Class	Added
S3	Typed provenance + assertion guardrails / Stored	3	2026	arXiv:2609.02127	Auto	None	C1	Oct 26
S3	Utility Under Attack (Karunanidhi)	2	2026	arXiv:2608.21230	n/a	n/a	n/a	Oct 26
S3	VerificAgent human-verified frozen memory (Nguye	3	2025	arXiv:2506.02539	Human	None	C3	Oct 26
S3	VerMem verifiable memory management (Sun et al.)	4	2026	arXiv:2608.03137	Auto-gated	None	C2/C3	Oct 26
S3	Voyager Skill Library	4	2023	arXiv:2305.16291				May 26
S3	Zep / Graphiti	3	2025	arXiv				May 26
S3	Zep / Graphiti bitemporal facts (2026 refresh)	3	2026	help.getzep.com	Auto	None	C3	Oct 26
S4	Anthropic Tool Use API	4	2024	docs.anthropic.com				May 26
S4	Browser Tools (Playwright/Computer Use)	3	2024	anthropic.com				May 26
S4	Claude Code Tool API	4	2024	docs.anthropic.com				May 26
S4	Code Interpreter	3	2023	openai.com				May 26
S4	Cursor MCP Integration	4	2024	docs.cursor.com				May 26
S4	Devin / SWE-agent Tool Harness	4	2024	cognition.ai				May 26
S4	Gemini Function Calling	3	2024	ai.google.dev				May 26
S4	GPT Actions	3	2023	platform.openai.com				May 26
S4	Harvey (Legal Vertical)	5	2024	harvey.ai				May 26
S4	Hippocratic AI	5	2024	hippocraticai.com				May 26
S4	LangChain Tools Abstraction	3	2023	langchain.com				May 26
S4	LangGraph Tool Nodes	4	2024	langchain.com				May 26
S4	LlamaIndex Tool Ecosystem	4	2023	llamaindex.ai				May 26
S4	Model Context Protocol (MCP)	5	2024	modelcontextprotocol.io				May 26
S4	OpenAI Assistants API	3	2023	platform.openai.com				May 26
S4	OpenAI Function Calling	3	2023	platform.openai.com				May 26
S4	Sierra	4	2024	sierra.ai				May 26
S4	SkillSmith	4	2026	arXiv:2606.01314	Auto	None	C1	Oct 26
S4	Toolformer	2	2023	arXiv:2302.04761				May 26
S4	ToolLLM / ToolBench	3	2023	arXiv:2307.16789				May 26
S5	AgentConductor	0	2026	arXiv:2602.17100	None	None	C2	Oct 26
S5	AgentGrad	4	2026	arXiv:2609.08572	Auto	None	C2	Oct 26
S5	AgentVerse	2	2023	arXiv:2308.10848				May 26
S5	AutoGen / MagenticOne	3	2024	arXiv:2308.08155				May 26
S5	AWS Bedrock Multi-Agent	2	2024	aws.amazon.com				May 26
S5	Bilevel Autoresearch	4	2026	arXiv:2603.23420	Auto	None	C1	Oct 26
S5	CAMEL	1	2023	arXiv				May 26
S5	ChatDev	2	2023	arXiv:2307.07924				May 26
S5	ContextEvo	4	2026	arXiv:2609.34649	Auto	None	C2	Oct 26
S5	Control System for Frozen Agents (Paul)	4	2026	arXiv:2607.25415	Auto	None	C2	Oct 26
S5	CrewAI	3	2025	docs.crewai.com				May 26
S5	Evo2Team	4	2026	arXiv:2609.34135	Auto	Auto	C2	Oct 26
S5	Growing Harness	4	2026	arXiv:2609.26760	Auto	None	C2	Oct 26
S5	HARBOR	4	2026	arXiv:2604.20938	Auto	None	C2	Oct 26
S5	HarnessForge	4	2026	arXiv:2606.01779	Auto	None	C2	Oct 26
S5	Inspect AI	2	2024	ukgovernmentbeis.github.io				May 26

Sub.	System	Score	Year	Source	Loop 1	Loop 2	Class	Added
S5	Institutional MAS architectures (Fei et al.)	1	2026	arXiv:2604.27691	None	None	C2	Oct 26
S5	LangGraph	3	2024	langchain.com				May 26
S5	Letta	3	2025	letta.com				May 26
S5	LlamaIndex Workflows	2	2024	llamaindex.ai				May 26
S5	Memento-Skills	4	2026	arXiv				May 26
S5	MetaGPT	2	2023	arXiv:2308.00352				May 26
S5	Microsoft Semantic Kernel	2	2024	learn.microsoft.com				May 26
S5	Multi-Agent Evolve (MAE)	4	2025	arXiv				May 26
S5	OpenAI AgentKit	4	2025	openai.com				May 26
S5	OpenAI Swarm	1	2024	openai.com				May 26
S5	OpenHands / CodeAct	3	2024	arXiv:2407.16741				May 26
S5	OptiMAS	4	2026	arXiv:2608.21918	Auto	None	C2	Oct 26
S5	PluginRSI	4	2026	arXiv:2609.32423	Auto	None	C2	Oct 26
S5	Pydantic AI	2	2024	pydantic.dev				May 26
S5	Recursive Harness Self-Improvement (RHI)	4	2026	arXiv:2607.15524	Auto	None	C3	Oct 26
S5	Skill-MAS (meta-skill)	4	2026	arXiv:2606.18837	Auto	None	C2	Oct 26
S5	TACO	4	2026	arXiv:2604.19572	Auto	None	C2	Oct 26
S5	Task-CoEvolve	4	2026	arXiv:2608.20169	Auto	None	C2	Oct 26
S5	TOCOMAS	4	2026	arXiv:2609.37953	Auto	None	C2	Oct 26
S5	Vertex AI Agent Builder	4	2024	cloud.google.com				May 26
S5	Workflow-Designing Agents (WDA)	4	2026	arXiv:2609.32458	Auto	None	C2	Oct 26
S6	Agenta	3	2024	agenta.ai				May 26
S6	Agentic Configuration Management ACM (Quessada-V	3	2026	arXiv:2608.11166	None	Human	n/a	Oct 26
S6	AGENTS.md / AAIF	5	2025	agents.md				May 26
S6	Anthropic skills repo	4	2025	github.com/ anthropics/skills				May 26
S6	Azure API Center MCP registry	3	2026	learn.microsoft.com	Human	Human	-	Oct 26
S6	Braintrust	5	2024	braintrust.dev				May 26
S6	Cleric.ai	2	2025	cleric.ai				May 26
S6	Competence Not Accuracy	2	2026	arXiv:2608.18719	None	None	-	Oct 26
S6	Constitutional AI	2	2022	Anthropic				May 26
S6	Cursor Rules	3	2024	cursor.com				May 26
S6	Decagon	2	2026	decagon.ai				May 26
S6	DSPy compile	3	2024	dspy.ai				May 26
S6	EvolveNet	4	2026	arXiv:2608.04968	Auto	Auto	C2	Oct 26
S6	EvoUndo	4	2026	arXiv:2608.28363	Auto	None	C1	Oct 26
S6	From Prompts to Contracts	2	2026	arXiv:2607.08028	None	None	C1	Oct 26
S6	Future AGI prompt lifecycle	4	2026	futureagi.com/blog	Auto	Auto	C3	Oct 26
S6	GitHub Copilot enterprise	4	2026	github.com				May 26
S6	Governance conversion (Davis et al. case study)	3	2026	arXiv:2607.01087	Human	None	C2	Oct 26
S6	Governed Capability Evolution (Qin et al.)	3	2026	arXiv:2604.08059	None	Auto	C2	Oct 26
S6	HackProbe	3	2026	arXiv:2609.04665	Auto	None	C1	Oct 26
S6	Inspect AI	3	2024	ukgovernmentbeis. github.io				May 26
S6	LangFuse	3	2024	langfuse.com				May 26
S6	LangSmith Hub	5	2024	smith.langchain.com				May 26
S6	MCP Gateway & Registry (agentic-community)	3	2026	github.com/ agentic-community	Human	Human	C1	Oct 26

Sub.	System	Score	Year	Source	Loop 1	Loop 2	Class	Added
S6	NanoResearch	2	2026	arXiv:2605.10813				May 26
S6	Official MCP Registry	2	2026	modelcontextprotocol.io	Human	None	-	Oct 26
S6	OpenAI AgentKit Evals	3	2025	openai.com				May 26
S6	OPRO	2	2023	arXiv				May 26
S6	Organizational Control Layer (Shi et al.)	2	2026	arXiv:2606.04306	None	None	n/a	Oct 26
S6	Registry-Governed Agent Lifecycle / EDDOps on AW	3	2026	arXiv:2607.00345	None	Auto+ Human	C3	Oct 26
S6	Reward-Free Pairwise Validator	4	2026	arXiv:2607.14408	Auto	None	C3	Oct 26
S6	Runtime Skill Audit	2	2026	arXiv:2606.11671	None	None	-	Oct 26
S6	Runtime-Independent Persistent Agents (Enoch)	3	2026	arXiv:2609.00546	Human	Human	C1	Oct 26
S6	SafeEvolve	4	2026	arXiv:2608.12851	Auto	None	C3,C2	Oct 26
S6	SAGE statistical acceptance gate (≠ SAGE 2512.17	4	2026	arXiv:2609.36043	Auto	None	C2	Oct 26
S6	Self-Refine	1	2023	Madaan et al.				May 26
S6	Sierra Ghostwriter	2	2026	sierra.ai				May 26
S6	SkillCoach	3	2026	arXiv:2607.01874	Auto	None	C3,C1	Oct 26
S6	SkillProbe	2	2026	arXiv:2603.21019	None	None	-	Oct 26
S6	SkillSpec (intent-masked correctness)	2	2026	arXiv:2609.06052	None	None	-	Oct 26
S6	TextGrad	2	2024	arXiv				May 26
S6	TrueFoundry MCP Gateway	3	2026	truefoundry.com/docs	Human	Human	-	Oct 26
S6	Vellum	5	2024	vellum.ai				May 26
S6	Verifier-as-Gatekeeper (VaG)	4	2026	arXiv:2608.05810	Auto	None	C2	Oct 26
S6	W&B Weave (Prompts)	3	2024	weave-docs.wandb.ai				May 26