

Telegraph English: Semantic Prompt Compression via Structured Symbolic Rewriting

Mikhail L. Arbuzov

Alexey A. Shvets

Sisong Bei

Abstract

We introduce Telegraph English (TE), a compression protocol that rewrites natural-language text into a symbol-rich, formally-structured format. Where token-deletion methods like LLMLingua-2 train a classifier to remove low-information tokens at a fixed ratio, TE performs a full semantic rewrite: decomposing text into atomic fact lines, substituting verbose phrases with ~ 40 logical and relational symbols, and letting the compression ratio adapt to each document’s information density.

A consequence of this design—one we did not initially set out to achieve—is that compression and semantic chunking collapse into a single operation. Each output line is an independently addressable fact, which means the compressed representation is simultaneously a semantic index. Individual lines can be retained at full fidelity, reduced to headings, updated with new information, or pruned when they become redundant. The expensive LLM rewrite happens once; everything after that is string manipulation.

We evaluate TE on 4,081 question-answer pairs from LongBench-v2 across five OpenAI models and two difficulty levels. At roughly 50% token reduction, TE preserves 99.1% accuracy on key facts with GPT-4.1 and outperforms LLMLingua-2 at matched compression ratios on every model and task tested. The gap widens on smaller models—up to 11 percentage points on fine-detail tasks—suggesting that explicit relational structure compensates for limited model capacity. We release the grammar specification (CC-BY-SA 4.0), compression prompt, benchmark data, and a reference implementation (MIT License).

1. Introduction

Large language models are increasingly embedded in retrieval-augmented generation (RAG), multi-agent orchestration, and long-context reasoning pipelines. In all of these, input cost scales linearly with token count. Prompt compression—feeding fewer tokens to the model while preserving the information it needs—has become a practical lever for controlling latency and cost.

Two families of approach exist. *Extractive* methods select a subset of tokens or sentences from the input (Jiang et al., 2023; Pan et al., 2024). *Abstractive* methods paraphrase or summarise it (Chevalier et al., 2023). LLMLingua-2 (Pan et al., 2024), currently the strongest published baseline, trains a GPT-4-distilled XLM-RoBERTa-large classifier to perform binary token classification, deleting tokens below an importance threshold at a user-specified ratio.

Token deletion works. But it has structural limits that become visible once you look past the compression ratio.

First, the ratio is fixed regardless of what it’s compressing: a dense technical paragraph gets the same treatment as a verbose preamble. Second, deleting tokens can sever co-reference chains and destroy logical connectives, leaving the downstream model to hallucinate the relationships between surviving fragments. Third, token-deletion methods are input-only preprocessors—they compress the initial prompt, but generated output passes uncompressed to the next pipeline stage, so multi-step agent systems cannot compound the savings. Fourth—and this is the limitation we find most consequential—token deletion produces no structure. The output is a degraded copy of the input. It cannot be indexed, selectively pruned, or dynamically updated. Compressed text is dead text.

We propose Telegraph English (TE), a different kind of compression. Rather than selecting which tokens to keep, TE rewrites the passage into a compact, formally-structured dialect. Before naming the mechanism, consider what the rewrite looks like. The original sentence

“According to research by Author A and colleagues (2023), the application of machine learning techniques to medical diagnostics resulted in a 27.5% increase in early detection rates while simultaneously reducing false positives by approximately 12% compared to traditional methods.”

becomes, under TE:

ML→MEDICAL-DIAGNOSTICS: EARLY-DETECTION+27.5% → FALSE-POSITIVE-12% [AUTHOR-A:2023]

Sixty-eight tokens become fourteen. More importantly, the causal relationship (→), both quantitative claims, and the citation are each on record as separate, addressable units — and the phrase “application of... resulted in” has collapsed into a single symbol. That is the move: verbose natural-language framing gives up its tokens to a compact symbolic dialect, and what survives is fact-structured rather than token-structured.

The design draws on 19th-century telegraphy, where per-word pricing forced operators to develop clipped, symbol-rich conventions that preserved meaning under extreme brevity constraints. The metaphor is apt, but the mechanism is modern: an LLM performs the rewrite using a 430-line grammar specification as its system prompt.

What makes TE architecturally distinctive is a property that emerges from the grammar’s line-structure rule: compression and semantic chunking are the same operation. Every TE output line contains exactly one atomic fact—one claim, one relationship, one datum. This is not a post-processing step; it is a consequence of how the grammar defines a legal output. The result is a representation that is simultaneously compressed, retrieval-ready, and amenable to dynamic management. Three implications follow:

1. **Retrieval without re-chunking.** Each atomic line can be embedded and retrieved independently. Conventional RAG pipelines require a separate chunking stage with arbitrary window sizes and overlap heuristics. TE produces chunks whose boundaries are semantic, not positional.
2. **Hierarchical context control.** TE output is tagged with headings, context scopes, and role markers. An agent assembling a prompt under a token budget can retain high-relevance facts at full fidelity, reduce moderately relevant sections to their heading tags alone, or drop irrelevant sections entirely. This graduated policy operates on the structure of the output and requires no additional LLM calls.
3. **Dynamic state maintenance.** In multi-turn sessions, facts from earlier turns may become stale, redundant, or superseded. Because TE facts are individually addressable, they can be updated in-place, merged, or pruned. The context window reflects the current state of the conversation’s knowledge rather than accumulating everything until a hard truncation boundary forces a discard.

Our contributions:

1. A formal grammar specification for structured prompt compression (Section 3), released under CC-BY-SA 4.0.
2. A unified compression-and-chunking framework where semantic compression, retrieval-ready indexing, and dynamic context management emerge from a single rewriting pass (Sections 3.6, 6.5).
3. A large-scale empirical comparison against LLMingua-2 on 4,081 key-fact and 801 fine-detail QA pairs across five models (Section 5).
4. Evidence — clean, consistent, and largest where it matters most for production deployment — that semantic rewriting beats token deletion on smaller models and on detail-intensive tasks (Section 6).
5. A reference implementation with CLI tools for compression, benchmarking, and error analysis (Section 7).

2. Related Work

Prompt compression. LLMingua (Jiang et al., 2023) introduced budget-constrained prompt compression using perplexity-based token selection. LLMingua-2 (Pan et al., 2024) improved on this with a data-distillation

approach: GPT-4 labels token importance on the MeetingBank corpus, and an XLM-RoBERTa-large classifier learns to predict which tokens to delete. The key architectural constraint is that the output remains a degraded subset of the input tokens—no new structure is introduced.

Abstractive compression. Two lines of work fit here. AutoCompressors (Chevalier et al., 2023) train summary tokens that substitute for long contexts; RECOMP (Xu et al., 2023) compresses retrieved documents into extractive or abstractive summaries tailored to the downstream task. Both are effective but lossy by design — they discard information that cannot be recovered, and neither produces a structured output that supports selective manipulation.

Structured representations for LLMs. Chain-of-thought prompting (Wei et al., 2022) demonstrates that imposing structure on LLM inputs improves reasoning. TE extends this insight to compression: the hypothesis is that explicit logical and relational operators help downstream models reconstruct the intended meaning more reliably than degraded natural language.

Context management in agent systems. Long-running agents face the problem of context window growth. As exchanges accumulate, the context must be either truncated (losing early information) or periodically summarised (requiring additional LLM calls and introducing lossy abstraction). MemGPT (Packer et al., 2023) addresses this with a virtual memory hierarchy; Reflexion (Shinn et al., 2023) maintains an explicit buffer of self-reflections. Both operate on natural-language representations. TE offers a complementary strategy: structured, fact-level representations that can be selectively updated and pruned without further LLM calls.

Semantic chunking for RAG. Standard RAG pipelines split documents using fixed token windows, recursive splitting, or sentence-boundary heuristics (Lewis et al., 2020; Gao et al., 2023). Recent work attempts to align chunk boundaries with topical shifts. TE sidesteps this problem: compression produces atomic fact lines as a structural by-product, so no separate chunking stage is needed.

Controlled natural languages. TE shares some conceptual ground with Attempto Controlled English (Fuchs et al., 2008) and similar formal-reasoning dialects. The difference is purpose: TE is designed for compression rather than knowledge representation, and its consumer is an LLM rather than a formal reasoner.

3. The Telegraph English Grammar

The grammar (version 5) lives in a 430-line specification document that doubles as the system prompt for the LLM-based compressor. We summarise the key design principles here; the full specification is released as supplementary material.

3.1 Foundations

Four principles govern the grammar, listed in strict priority order:

1. **Fidelity over brevity.** No information may be dropped unless it is fully inferable from the remaining text. This is the inviolable constraint; everything else is subordinate.
2. **Atomic line structure.** Each line contains exactly one claim, step, event, or question. Lines are delimited by newlines or semicolons.
3. **Upper-case default.** TE is written in upper case unless case itself carries information (proper names, code, SI unit symbols).
4. **Target compression ~5x** when feasible, but correctness, auditability, and reversibility take strict priority over token reduction.

3.2 Symbol Vocabulary

TE defines a fixed vocabulary of relational and logical operators. The full set numbers roughly 40; the table below shows the core symbols that appear in most compressions:

Symbol	Meaning	Example
=	Definition / equality	VELOCITY=DISTANCE/TIME
→	Causation / flow	HEAT→EXPANSION
⊡	Logical implication	RAIN⊡WETNESS
⊡	Therefore / conclusion	X>Y ⊡ Y>Z ⊡ X>Z
⊡	Because / reason	MOTOR-FAILURE ⊡ OVERLOAD
↑ / ↓	Increase / decrease	TEMPERATURE↑
⊡ / ⊡ / ¬	AND / OR / NOT	A⊡B, ¬EVIDENCE
≈ / ≠	Approximate / not equal	COST≈USD10M
VS	Contrast (never causal)	MODEL-A VS MODEL-B

Each symbol has a single, non-interchangeable meaning. The grammar caps symbol density at three consecutive symbols per line—a readability constraint learned from early iterations where dense symbol chains became opaque even to GPT-4.

3.3 Tags and Domain Conventions

Beyond the symbol vocabulary, the grammar provides a tagging system and a set of domain-specific formatting rules. Tags handle the framing that natural language carries through verbose syntactic constructions: temporal state (PAST:, NOW:, FUTURE:), modality (LIKELY:, POSSIBLE:, CONF=0.87), roles (AGENT:, PATIENT:, INSTRUMENT:), scope (CTX: for shared context), and structured content types (DEF: for definitions, Q: / A: for questions and answers). Each tag does double duty — it collapses verbose natural-language framing into a single token, and it provides the structural handle that downstream systems use for selective retrieval and context management.

Domain conventions standardise the surface forms that vary most across writers: quantities (VAR=VALUEUNIT, SI case rules), citations ([AUTH:YEAR], DOI:, ARXIV:), financial data (USD10.5 M, Y/Y+5%, +2.5PT for percentage points), and URLs (URL:https://...). The motivation here is not aesthetic; ambiguity in any of these categories is a routine source of factual error in compressed text, and locking them down at the grammar level removes a class of failure modes the compressor would otherwise need to handle case by case.

3.4 Compressor Self-Verification

Two mechanisms in the specification keep the compressor honest within a single LLM call: a quality gate and a prescribed distillation sequence. The quality gate is a 12-point checklist covering formatting consistency, symbol precision, abbreviation policy, number formatting, information preservation, and citation integrity. It is embedded directly in the compression prompt, so the compressor model self-verifies output before returning it. Failures at the gate are rare in practice once the prompt has been calibrated, but the gate’s value is structural — it makes the failure modes legible when they do occur.

The distillation sequence prescribes a six-pass reasoning order: (1) concept identification, (2) claim extraction, (3) relation mapping, (4) redundancy elimination, (5) numerical verification, and (6) citation cross-checking. This is a chain-of-thought scaffold inside a single inference, not a multi-call pipeline. The ordering matters: numerical verification before citation cross-checking, because citations sometimes attach to numerical claims that must be confirmed first; redundancy elimination after relation mapping, because two facts that look redundant often differ in their relational connectives.

3.5 Compression Example

A single sentence, expanded and compressed:

Original (68 tokens): *“According to research by Author A and colleagues (2023), the application of machine learning techniques to medical diagnostics resulted in a 27.5% increase in early detection rates while simultaneously reducing false positives by approximately 12% compared to traditional methods.”*

TE (14 tokens):

MACHINE-LEARNING→MEDICAL-DIAGNOSTICS: EARLY-DETECTION+27.5% ☒ FALSE-POSITIVE-12% [AUTHOR-A:2023]

Compression ratio: 4.9x. The causal relationship, both quantitative claims, and the citation are all preserved. The → operator makes the causal direction explicit—something the original expressed with the phrase “application of... resulted in,” which is six tokens doing the work of one symbol.

3.6 Compression as Semantic Chunking

Here is the property we consider most architecturally significant: compression and semantic chunking are not separate stages. They are the same operation.

Consider a multi-paragraph clinical trial summary compressed into TE:

H1: CLINICAL-TRIAL OUTCOMES

CTX: PHASE-III RANDOMISED CONTROLLED-TRIAL(RCT); N=2400

PRIMARY-ENDPOINT: MORTALITY↓23% VS PLACEBO; $p<0.001$ [AUTHOR-B:2024]

SECONDARY-ENDPOINT: HOSPITALIZATION↓18%; $p=0.003$

ADVERSE-EVENTS: NAUSEA=12% ☒ HEADACHE=8% ☒ SERIOUS=2.1%

H1: SUBGROUP-ANALYSIS

AGE>65: MORTALITY↓31% (STRONGER-EFFECT)

AGE<65: MORTALITY↓14% (WEAKER-EFFECT)

CONF=0.92 FOR INTERACTION-EFFECT

H1: LIMITATIONS

FOLLOW-UP=18 MONTHS; LONG-TERM-EFFECTS UNKNOWN

EXCLUSION: PATIENTS WITH RENAL-IMPAIRMENT

Each line is a fact. Each heading is a section boundary. Each CTX: block defines a scope. This structure—which falls out of the grammar’s line-structure rule, not from any additional processing—enables three things that token-deleted text cannot support:

Selective retrieval. A query about adverse events retrieves exactly the ADVERSE-EVENTS line and its CTX: scope. No sliding-window heuristic, no overlap parameter, no risk of splitting a relevant fact across chunk boundaries. The semantic boundaries are intrinsic to the format.

Graduated compression-on-read. When assembling a prompt under a tight token budget, an agent can apply different policies to different sections: keep the lines most relevant to the current query at full fidelity; retain only the heading tags (H1: LIMITATIONS) for moderately relevant sections, preserving topic structure at near-zero cost; drop irrelevant sections entirely. This second-stage compression is semantically principled—it operates on identified sections, not on token positions.

Continuous state refinement. During a conversation, facts from earlier turns can be revised without re-compressing the source: - **Update:** replace PRIMARY-ENDPOINT: MORTALITY↓23% with a corrected figure from a follow-up. - **Merge:** combine two related facts into a single tighter line when the distinction no longer matters. - **Prune:** remove claims about exclusion criteria once the conversation has moved past trial design. - **Promote/demote:** expand a heading-collapsed section when it becomes relevant again, or collapse a fully expanded section that the session has moved beyond.

The context window reflects the current state of knowledge, not a chronological log. We formalise this as the **compress-once, manage-continuously** principle: the expensive LLM rewriting pass happens once per document; subsequent manipulation—re-ranking, filtering, updating, re-assembly—is cheap string operations requiring no further LLM calls.

4. Experimental Setup

4.1 Dataset

LongBench-v2 (Bai et al., 2025) contributes 503 long-context multiple-choice items; we use their source documents as our corpus, generating our own QA pairs per chunk (§4.3) rather than reusing the bundled questions. We filter to three categories suitable for factual QA—Single-Document QA, Multi-Document QA, and Long-Dialogue History Understanding—which leaves 339 documents. NLTK sentence tokenisation chunks each one into segments of at most 1,000 words, producing 4,081 chunk-level evaluation units.

LongBench-v2 was chosen for two reasons. The first is genre coverage: the three categories we use span technical reports, multi-source narrative synthesis, and conversational history — three regimes where compression methods fail differently. The second is question quality: LongBench-v2 questions are vetted for verifiable, single-answer factuality, which lets us evaluate compression preservation rather than the model’s general world knowledge. The 1,000-word chunk cap matches the practical input size for which prompt compression actually saves money — short prompts are not worth compressing.

4.2 Compression

Each chunk is compressed into TE using the v5 grammar prompt with OpenAI’s o4-mini model. We measure token counts with tiktoken (cl100k_base encoding). The mean compression ratio is 0.585—a 41.5% token reduction—with a range spanning 0.13 to 1.57. That upper end deserves explanation: rare, very short inputs that are already informationally dense occasionally *expand* under TE, because the grammar’s fidelity-first principle prohibits dropping information even when doing so would reduce token count. This is a feature, not a failure. The full distribution is shown in Figures 1 and 2.

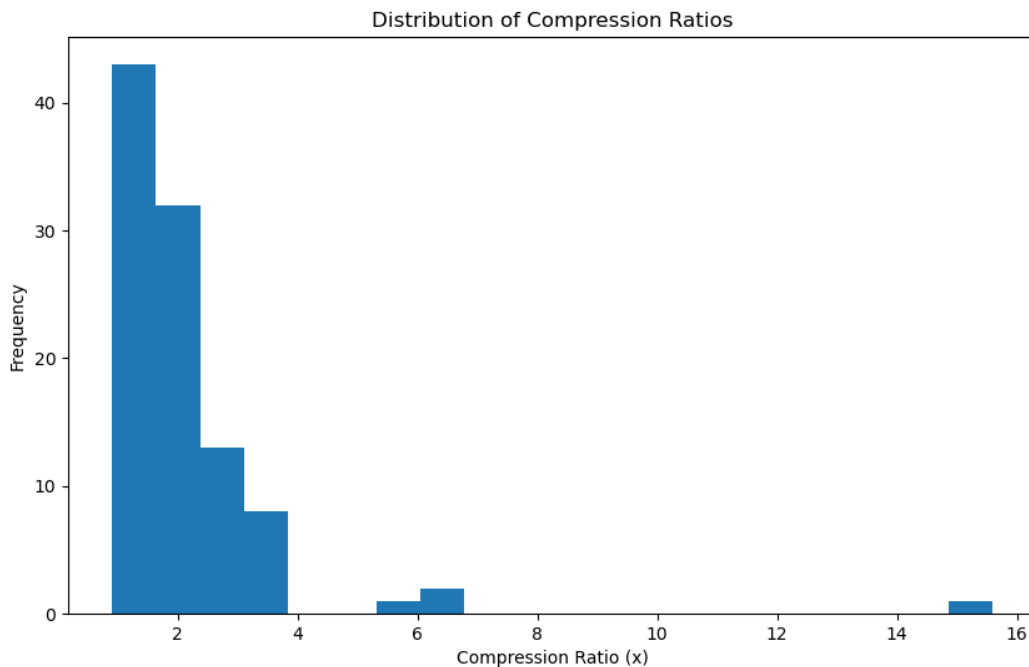


Figure 1: Distribution of compression ratios across 4,081 LongBench-v2 chunks compressed with Telegraph English (o4-mini, tiktoken cl100k_base). Mean 0.585, range 0.13–1.57. The right tail above 1.0 corresponds to short, dense inputs that expand under TE because the grammar’s fidelity-first rule prohibits dropping information even when doing so would reduce token count.

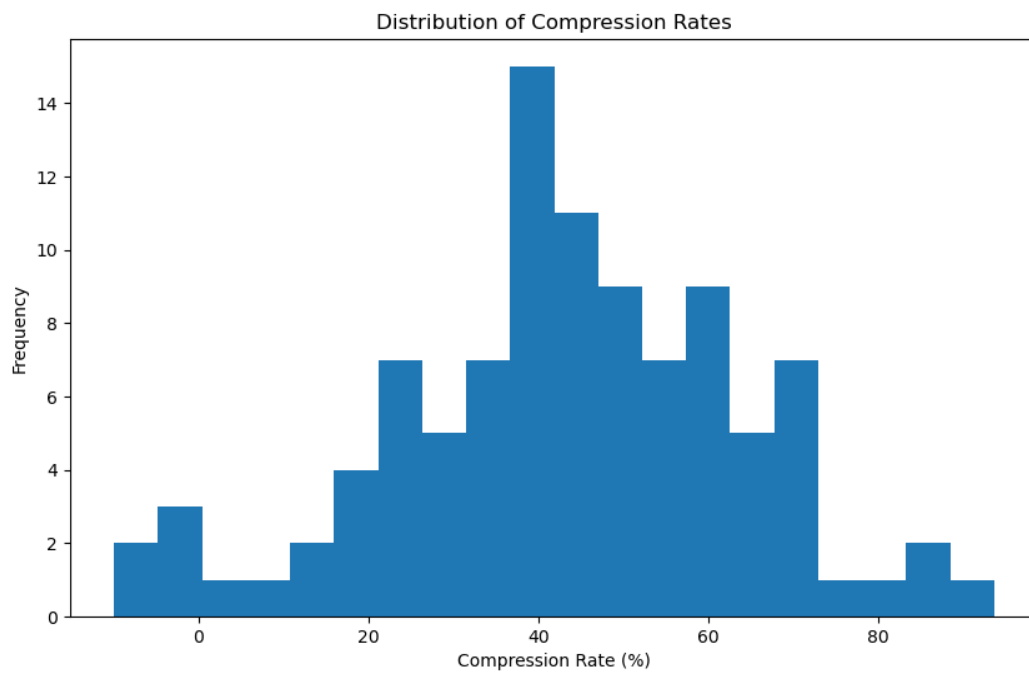


Figure 2: Distribution of per-chunk compression rate (1 - ratio) over the same corpus. The median chunk loses roughly 43% of its tokens; the bottom decile loses very little, reflecting TE’s adaptive behaviour on already-dense inputs.

For the LLMingua-2 baseline, the same chunks are compressed using the publicly available `llmlingua` package at two retention rates: 0.50 (50% of tokens kept) and 0.33 (33% kept).

4.3 QA Evaluation Protocol

We design a multiple-choice protocol that isolates comprehension: can a model answer a factual question correctly when reading compressed text instead of the original? Five steps:

1. **QA generation.** GPT-4.1 generates a factual question-answer pair from the original chunk. The answer must be verbatim from the passage. A semantically equivalent but lexically distinct “modified answer” is also produced—this prevents simple string matching from inflating scores.
2. **Distractor generation.** GPT-4.1 (temperature 0.7) generates three plausible but incorrect answers, matched in style, length, and specificity to the correct answer.
3. **Choice shuffling.** The modified answer and three distractors are shuffled into a four-option question. The correct answer’s position is recorded as `gold_idx`.
4. **Evaluation on original text.** The evaluation model receives the original chunk and selects an answer.
5. **Evaluation on compressed text.** The same model receives the compressed chunk—TE or LLMingua-2—and selects an answer.

Accuracy is the fraction of correct selections. An *error* is a case where the model answers correctly on the original but incorrectly on the compressed version—the compression caused the failure.

4.4 Test Suites

Two suites probe different levels of information preservation:

key_facts (4,081 QA pairs): Questions target core concepts—headline findings, main claims, central arguments. Distractors are generically plausible.

fine_facts (801 QA pairs): Questions are adversarially designed to target information that lossy compression is most likely to destroy: precise numerical qualifiers, conditional statements, boundary conditions, secondary details. Distractors are near-miss variants—changing 4.8% to 4.3%, for instance—that can only be distinguished with access to the exact original detail.

4.5 Models

Five OpenAI models spanning the capability-cost spectrum:

Model	Role
GPT-4.1	QA generation + MC evaluation
GPT-4o	MC evaluation
GPT-4o-mini	MC evaluation
GPT-4.1-nano	MC evaluation
Fine-tuned GPT-4o	MC evaluation

Different suites use different model subsets. GPT-4.1, GPT-4o-mini, and GPT-4.1-nano carry the `key_facts` evaluation; GPT-4o and GPT-4o-mini handle the adversarial `fine_facts` suite. The fine-tuned GPT-4o variant is not used as a separate accuracy benchmark — it serves as a sanity check that fine-tuning on the original distribution does not change comparative behaviour at compression-decoded inputs.

5. Results

5.1 Key Facts Accuracy

Table 1 reports accuracy on the key_facts suite.

Table 1. Key facts accuracy (4,081 QA pairs). TE = Telegraph English (~50% compression). LLML2-50 = LLMingua-2 at 50% retention. Drop measured in percentage points (pp) relative to original.

Model	Original	TE	LLML2-50	TE Drop	LLML2-50 Drop
GPT-4.1	1.000	0.991	0.990	-0.9 pp	-1.0 pp
GPT-4o-mini	0.991	0.957	0.946	-3.4 pp	-4.5 pp
GPT-4.1-nano	0.980	0.950	0.949	-3.0 pp	-3.1 pp

On headline facts, TE matches or edges out LLMingua-2 across the board. The accuracy loss is negligible for GPT-4.1 — less than a percentage point while halving the token count. The gap widens on smaller models: 1.1 pp on GPT-4o-mini, with the same direction at GPT-4.1-nano. Not dramatic. But consistent — the direction never reverses across configurations.

5.2 Fine Facts Accuracy

Table 2 reports accuracy on the adversarial fine_facts suite.

Table 2. Fine facts accuracy (801 QA pairs).

Model	Original	TE	LLML2-50	TE Drop	LLML2-50 Drop
GPT-4o	0.996	0.965	0.933	-3.1 pp	-6.3 pp
GPT-4o-mini	0.938	0.843	0.820	-9.5 pp	-11.8 pp

Fine details are harder. Compression loss runs 3-4x higher than on key facts, regardless of method. But TE holds an advantage: 3.2 pp over LLMingua-2 on GPT-4o, 2.3 pp on GPT-4o-mini at matched 50% retention. The fine-facts regime is where token deletion starts to break down: the very tokens the questions probe—numerical qualifiers, conditional caveats, secondary details—are precisely the ones an importance classifier flags as low-value.

5.3 Accuracy Hierarchy

Across all models and tasks, the ranking holds without exception:

1. **Original (uncompressed)** — baseline
2. **Telegraph English (~50%)** — 1-3 pp drop on key facts; 3-11 pp on fine facts
3. **LLMingua-2 at 50%** — consistently behind TE

5.4 Compression Statistics

TE’s mean compression ratio of 0.585 (std = 0.254) hides a wide spread. Half the corpus sits between 0.41 and 0.74; the median is 0.57. Documents dense with technical content or data tables resist compression — narrative text, by contrast, can yield ratios of 5:1 or better. This variability is the point. The compression adapts to the information density rather than imposing a fixed ratio. Fidelity-first design means the ratio is an outcome, not a parameter.

5.5 Error Analysis

We examined the 187 items (4.6%) where GPT-4.1-nano—the weakest model—answered correctly on the original but incorrectly on the TE-compressed version. These error cases have a mean compression ratio of 0.531, slightly more compressed than the population mean, which suggests that aggressive compression and error risk are correlated. The failures cluster around fine details: dates, measurement units, conditional qualifications, and numerical relationships where the TE compression either abbreviates a critical modifier or collapses a distinction that the question specifically probes.

One characteristic failure: a legal document chunk where TE compressed “no later than 30 calendar days after receipt of written notice” into DEADLINE=30D-AFTER-NOTICE. The question asked whether the deadline was measured in calendar days or business days. The 30D abbreviation is ambiguous on this point—the grammar’s default day notation does not distinguish calendar from business days. This is a genuine limitation of the symbol vocabulary, not a compressor error; the grammar lacks the granularity to preserve this distinction in its current form.

6. Analysis

6.1 Why Semantic Rewriting Outperforms Token Deletion

Four mechanisms explain the pattern in the results. They are not ranked; different mechanisms dominate in different regimes.

Semantic unit preservation. Token deletion operates at the token level — and that is the problem. It can split multi-word expressions, sever noun-modifier pairs, strand a number from its unit. TE works one level up: related concepts are grouped into hyphenated compounds (EARLY-DETECTION-RATE), and complete claims occupy single lines. The unit of compression is the claim, not the token.

Explicit logical structure. Delete a connective like “therefore” or “in contrast to” and the downstream model has to guess the relationship from what remains. TE refuses to offer the guess: ¶ for conclusion, VS for contrast, → for causation — each unambiguous, each preserved regardless of what else is removed. Reviewers familiar with LLMingua-2’s failure modes will recognise this as the reconstruction-from-fragments problem, and it is the failure mode TE’s symbols most directly address.

Co-reference stability. Because TE is one-claim-per-line, with every entity in upper-case and referenced by name, pronouns largely disappear. Token deletion can strand a pronoun whose antecedent has been removed — a surprisingly common failure where the compressed text is grammatical but its referents are unrecoverable. TE’s referents, by construction, do not get stranded.

Adaptive compression. A fixed-ratio method compresses a dense technical paragraph as aggressively as a repetitive introduction. TE does not. Dense passages resist compression and emerge at ratios near 1.0; verbose passages compress to 0.2 or below. Whether this density-sensitive behaviour transfers to non-technical genres is an open question — our corpus leans technical — but within that corpus, the method spends its budget where the information lives.

The four mechanisms are not independent. Semantic-unit preservation makes co-reference stability easier to achieve. Explicit logical structure depends on having claim-level units to operate on. Adaptive compression is a consequence of fidelity-first design rather than a separate property. The result is that LLMingua-2 cannot match TE by adopting any single one of these — the architectural commitments interlock.

6.2 The Small-Model Effect

The TE advantage grows as model capacity shrinks. GPT-4.1 barely notices the difference between TE and LLMingua-2 on key facts; GPT-4.1-nano and GPT-4o-mini show a wider gap, and on fine facts the divergence becomes substantial.

The likely explanation is capacity-dependent. Smaller models have less ability to reconstruct implicit relationships from token-deleted fragments. TE compensates by offloading the reconstruction work to the compression stage — the evaluation model receives a representation where the relationships are already marked, rather than having to hallucinate them from sparse clues. This has practical weight: smaller models are precisely the ones deployed in cost-sensitive production pipelines, which is where prompt compression earns its keep.

6.3 The Fine-Facts Gap

Key facts survive both compression methods reasonably well. Central claims and prominent findings carry high information density and are often redundantly signalled; even aggressive token deletion tends to preserve them. Fine details are stubborn in a different way. Precise numerical qualifiers, conditional caveats, secondary attributions — these are exactly the tokens that an entropy-based classifier flags as low-importance when considered in isolation. A number like “4.8%” may look dispensable next to the surrounding prose. But if the question asks whether the figure was 4.8% or 4.3%, that token is the entire answer.

TE’s claim-level decomposition and explicit numerical formatting (+27.5%, CONF=0.87, Y/Y+12.3%) are designed to preserve these details. The grammar treats every number as a first-class citizen: numbers are never abbreviated, always attached to their units, and always placed in a structured format that a downstream model can parse unambiguously.

6.4 Pipeline-Level Cost

There is a structural difference between the two methods that the accuracy comparison alone obscures: LLMingua-2 operates as an input-only preprocessor. It compresses the initial prompt; generated output passes uncompressed to subsequent stages. TE can persist as a native format throughout a pipeline.

Consider a five-step agent pipeline with 2,000 tokens of initial context and five generation steps averaging 400 tokens each. At \$10 per million tokens:

Method	Total tokens	Cost / 1K calls	Savings
Original	4,000	\$40	—
LLMingua-2	~3,300	\$33	\$7
Telegraph English	~1,600	\$16	\$24

The savings compound because each stage operates on TE-formatted text. LLMingua-2 compresses only the first stage’s input; the remaining four stages process uncompressed output at full token cost.

6.5 Beyond Static Compression: Semantic Chunking and Dynamic Context

The results in Sections 5.1–5.4 measure TE as a static compression method—compress once, read once, evaluate. This is the fair comparison against LLMingua-2, and it’s where the benchmark numbers live. But we think the more consequential property of TE is not its compression ratio; it’s the *structure* of its output.

Unifying compression and chunking. Conventional RAG systems run documents through two stages: chunking (splitting into fixed-size segments for embedding) and optional compression (reducing each chunk’s token count). These stages have different objectives and can interfere—a chunk boundary splits a sentence, and compression then deletes the tokens needed to reconstruct it. TE collapses both stages into one. Each output line is a complete semantic unit; the chunking boundaries *are* the compression output. A TE-compressed document is immediately embeddable at the line level, no post-processing required.

The practical consequence for retrieval precision is straightforward. Fixed-window chunking (say, 512 tokens with overlap) inevitably includes irrelevant context within each chunk and risks splitting relevant information across boundaries. TE surfaces exactly the facts a query matches, at the granularity of individual claims.

Hierarchical context budgeting. Because the output is tagged with headings (H1:, H2:), context scopes (CTX:), and role markers, a context-assembly system can make graduated decisions about inclusion. For a given token budget:

- *Full fidelity*: all atomic lines for the most relevant sections.
- *Heading-only*: just the H1: / H2: tags for moderately relevant sections—topic structure preserved at near-zero token cost.
- *Omission*: irrelevant sections dropped entirely.

This graduated policy can achieve very high total compression (10-50x) when only a fraction of the document is relevant, while maintaining full detail where it matters. The policy operates on the TE output’s structure. No LLM call needed.

Dynamic state in agentic sessions. This is, we believe, the application with the most unrealised potential. Long-running agent sessions accumulate context over many exchanges. The standard solutions are blunt instruments: hard truncation drops the oldest tokens regardless of relevance; periodic summarisation requires an LLM call and is irreversible.

TE enables something finer. Because context is already decomposed into tagged atomic facts, an agent can maintain a living context state:

- **Fact updates**: new information replaces the old line in-place, not appended alongside it.
- **Redundancy pruning**: a fact that has been acted upon and is no longer needed gets removed—the information it carried is captured in subsequent facts.
- **Scope closure**: when a topic is resolved, its entire CTX: block collapses to a heading. The *that* is preserved; the *what* and *why* are released.
- **Priority re-ranking**: facts reorder by current relevance, placing the most important context at the top of the prompt where transformer attention is strongest.

Context growth is controlled not by discarding the oldest tokens, but by continuously refining the set of active facts. This is cheap—string manipulation, no LLM calls—and semantically principled, operating on identified facts rather than arbitrary token boundaries.

We call this the **compress-once, manage-continuously** principle. The cost profile is asymmetric by design: one expensive LLM rewrite per document, then indefinite cheap manipulation of the structured output.

7. Implementation

The reference implementation is a Python package with five pipeline stages:

1. **Compression** (`telegrapher.compression`): synchronous (Chat API) and asynchronous (Batch API) compression of LongBench-v2 documents using the TE grammar prompt.
2. **Review** (`telegrapher.review`): automated quality review via Claude, producing structured JSON scores (0-10) with identified strengths, weaknesses, and original/compressed example pairs.
3. **QA Benchmarking** (`telegrapher.benchmark`): end-to-end QA generation, distractor creation, multiple-choice evaluation, and accuracy computation.
4. **Baseline Evaluation** (`telegrapher.benchmark.llm12_eval`): evaluation of LLMingua-2-compressed text against the same QA pairs.
5. **Error Analysis** (`telegrapher.benchmark.error_analysis`): identification and reporting of compression-induced failures, with detailed case-level output.

Each stage is accessible as both a CLI command (`python -m cli.compress`, `python -m cli.bench`, ...) and an importable library function; configuration is centralised in a single module. The grammar specification is released under CC-BY-SA 4.0, the implementation under the MIT License, and the benchmark data under CC0.

8. Limitations

LLM-dependent compression. TE requires an LLM call per chunk, adding latency and cost at compression time. This cost is amortised when compressed text is reused across multiple retrievals or pipeline invocations, but it makes TE poorly suited for compressing ephemeral inputs that will be read once and discarded.

Proprietary evaluation models. Our benchmark relies on OpenAI models that are not open-weight. This limits reproducibility; future work should extend the evaluation to open models (Llama, Mistral, Gemma).

English only. The grammar and all benchmarks are English-language. Adapting the symbol vocabulary and abbreviation conventions to other languages—particularly agglutinative or logographic ones—is non-trivial.

Compressor model sensitivity. The quality of TE output depends on the model performing the rewrite. We use o4-mini for cost efficiency. A more capable compressor would likely produce better results; a weaker one would introduce errors. We have not yet mapped this sensitivity curve.

QA generation bias. Both the QA pairs and the evaluation are produced by OpenAI models, creating a risk of systematic bias. An ideal evaluation would include human-written questions or a diverse set of QA generators.

Dynamic context management is not yet benchmarked. The semantic chunking and dynamic state management capabilities described in Sections 3.6 and 6.5 are architectural arguments supported by the structure of the TE output, not empirical results from a multi-turn evaluation. We have demonstrated that the format supports these operations; we have not yet measured their effect on accuracy or efficiency over extended sessions. This is the most important gap in the current evaluation and the most pressing direction for future work.

Comparison scope. We benchmark against LLMingua-2 only — currently the strongest published baseline at the compression ratios we operate in. A broader comparison against AutoCompressors, RECOMP, and more recent methods would strengthen the claims.

9. Future Work

The compress-once, manage-continuously principle is currently a design argument. Validating it — and the related architectural claims of §6.5 — requires benchmarks that don't yet exist. The list below sketches the priority directions, in roughly the order we expect to pursue them.

Multi-turn context management benchmarks. Sessions of 50–500 exchanges, with TE's fact-level update/prune strategy compared against truncation, periodic summarisation, and hybrid approaches. Key metrics: accuracy on questions about earlier turns, token efficiency over session length, latency of context operations.

Retrieval evaluation. TE's claim that atomic-line structure improves RAG retrieval precision needs validation against standard retrieval benchmarks, measuring recall@k and downstream answer accuracy for line-level vs. window-level chunking.

Key token preservation theory. A formal analysis of which semantic units contribute most to downstream accuracy, which would inform adaptive compression thresholds and provide a principled basis for the hierarchical budgeting policy.

Domain-specific grammars. Specialised TE dialects for legal, biomedical, and financial domains where precision requirements differ—and where the hierarchical context management is arguably most valuable (e.g., maintaining a living case-law context across a multi-day legal research session).

Embedding geometry. How does TE compression affect vector embedding structure in RAG pipelines? Do compressed and uncompressed vectors remain meaningfully similar? Do line-level TE embeddings produce better retrieval than paragraph-level embeddings of uncompressed text?

Multilingual extension. Adapting the grammar to languages with different morphological structures.

TE-to-TE summarisation. Iterative compression where already-compressed TE text is further condensed at the section or heading level, automating the graduated compression-on-read strategy.

Confidence-based adaptive compression. Using the CONF= tag to dynamically adjust compression aggressiveness based on the compressor model’s uncertainty, and to inform which facts are safe to prune during context management.

10. Conclusion

Telegraph English demonstrates that structured semantic rewriting is a viable alternative to token deletion for prompt compression — and, on the evidence presented here, a better one. A formal grammar with explicit logical operators, atomic line structure, and document-adaptive compression preserves factual accuracy more reliably than LLMingua-2 across every model and task difficulty we tested. The advantage is largest where compression matters most practically: on smaller, cheaper models and on fine-grained details.

The quantitative comparison may not be the most interesting part of this paper. Token-deletion methods treat compression as a one-time lossy reduction; the output is smaller, but still unstructured — a degraded copy of the input with no internal organisation. TE produces something different: a representation where every line is an identified fact, every section is tagged, and every relationship is marked with an explicit symbol. This structure makes the output not just smaller but more *useful* — more retrievable, more auditable, more maintainable over time.

The compress-once, manage-continuously principle is, at this stage, an architectural argument rather than an empirical result. We have shown that the format supports selective retention, hierarchical compression, fact-level updates, and scope-based pruning. We have not yet measured the downstream effects of these operations in production agent systems. That measurement is the obvious next step, and it is the one most likely to determine whether TE becomes a practical tool for long-running context management or remains a compression method with an interesting side property.

What we can say now: a 40-symbol vocabulary, a one-claim-per-line discipline, and a fidelity-first design principle together achieve compression competitive with statistical methods while producing output that a downstream system can actually work with. Whether “work with” scales to the dynamic context scenarios we’ve described is the open question this paper is designed to provoke.

References

- Bai, Y., et al. (2025). LongBench v2: Towards Deeper Understanding and Reasoning on Realistic Long-context Multitasks. *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (ACL)*, 3639–3664.
- Chevalier, A., Wettig, A., Ajith, A., & Chen, D. (2023). Adapting Language Models to Compress Contexts. *Proceedings of EMNLP 2023*.
- Fuchs, N. E., Kaljurand, K., & Kuhn, T. (2008). Attempto Controlled English for Knowledge Representation. *Reasoning Web*, LNCS 5224, 104–124.
- Gao, Y., et al. (2023). Retrieval-Augmented Generation for Large Language Models: A Survey. *arXiv preprint arXiv:2312.10997*.
- Jiang, H., Wu, Q., Lin, C.-Y., Yang, Y., & Qiu, L. (2023). LLMingua: Compressing Prompts for Accelerated Inference of Large Language Models. *Proceedings of EMNLP 2023*.
- Lewis, P., et al. (2020). Retrieval-Augmented Generation for Knowledge-Intensive NLP Tasks. *Advances in Neural Information Processing Systems* 33.

Packer, C., Wooders, S., Lin, K., Fang, V., Patil, S. G., Stoica, I., & Gonzalez, J. E. (2023). MemGPT: Towards LLMs as Operating Systems. *arXiv preprint arXiv:2310.08560*.

Pan, Z., Wu, Q., Jiang, H., Xia, M., Luo, X., Zhang, J., Lin, Q., Rühle, V., Yang, Y., Lin, C.-Y., Zhao, H. V., Qiu, L., & Zhang, D. (2024). LLMlingua-2: Data Distillation for Efficient and Faithful Task-Agnostic Prompt Compression. *Findings of ACL 2024*.

Shinn, N., Cassano, F., Berman, E., Gopinath, A., Narasimhan, K., & Yao, S. (2023). Reflexion: Language Agents with Verbal Reinforcement Learning. *Advances in Neural Information Processing Systems* 36.

Wei, J., et al. (2022). Chain-of-Thought Prompting Elicits Reasoning in Large Language Models. *Advances in Neural Information Processing Systems* 35.

Xu, F., Shi, W., & Choi, E. (2024). RECOMP: Improving Retrieval-Augmented LMs with Context Compression and Selective Augmentation. *International Conference on Learning Representations (ICLR)*.

Appendix A: Full Results Tables

Table A1. Complete key_facts results with compression statistics.

Model	n	Original Acc.	TE Acc.	LLML2-50 Acc.	TE Drop (pp)	LLML2-50 Drop (pp)	Mean Compression Ratio
GPT-4.1	4,081	1.000	0.991	0.990	-0.9	-1.0	0.585
GPT-4o-mini	4,081	0.991	0.957	0.946	-3.4	-4.5	0.585
GPT-4.1-nano	4,081	0.980	0.950	0.949	-3.0	-3.1	0.585

Table A2. Complete fine_facts results.

Model	n	Original Acc.	TE Acc.	LLML2-50 Acc.	TE Drop (pp)	LLML2-50 Drop (pp)
GPT-4o	801	0.996	0.965	0.933	-3.1	-6.3
GPT-4o-mini	801	0.938	0.843	0.820	-9.5	-11.8

Table A3. Compression ratio statistics (tiktoken cl100k_base, n = 4,081 chunks).

Statistic	Value
Mean	0.585
Std	0.254
Min	0.000
25th percentile	0.407
Median	0.570
75th percentile	0.739
Max	1.567

Table A4. Error analysis: key_facts items correct on original, incorrect on TE (GPT-4.1-nano).

Statistic	Value
Total items	4,081
Error items	187
Error rate	4.58%
Mean compression ratio (errors)	0.531
Mean compression ratio (all)	0.585