


Baseline Scenarios: TITE vs non-TITE CRM (alpha = 0.6, ncycle = 2, Nmax = 30, restrict_to_target = 0)

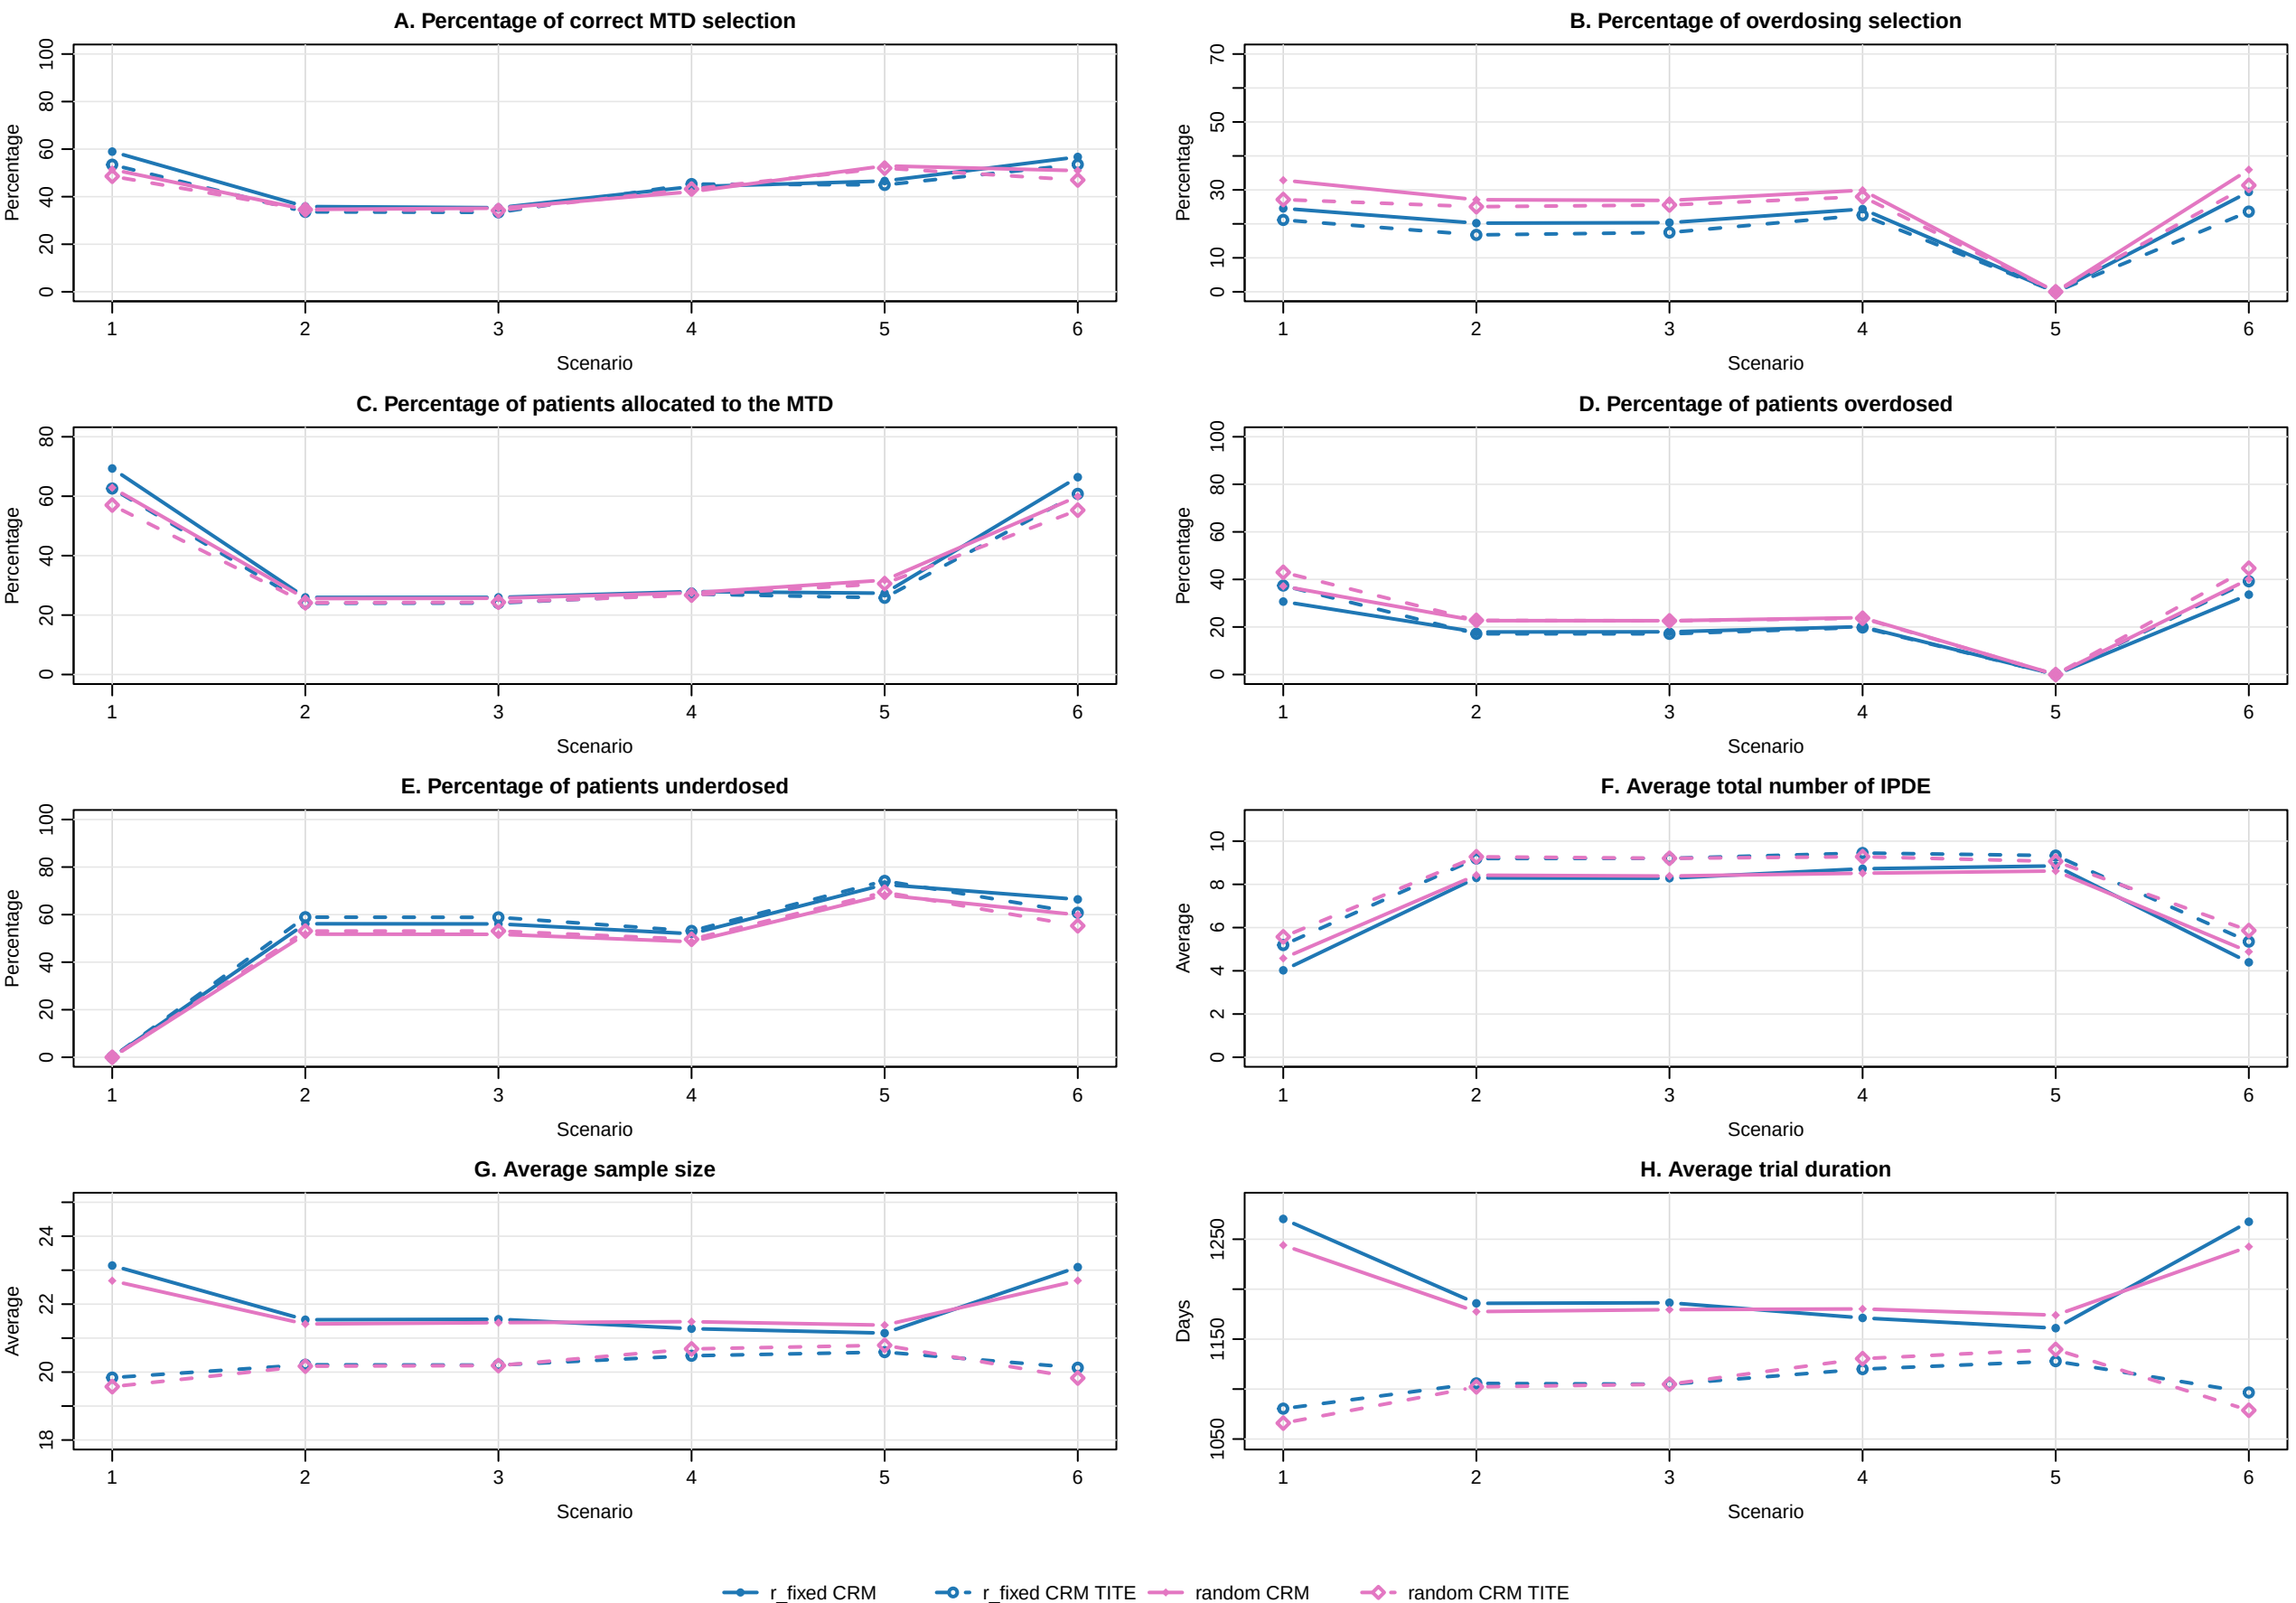

Scenarios shown: 1, 2, 3, 4, 5, 6. True MTD labels come from the dose-summary CSV.
TITE and non-TITE summaries use accrual rate 0.0179 (56-day arrival setting), ncycle = 2, and Nmax = 30.
Patient-overdose percentages use treated counts above target divided by total treated counts.