



# Selected S20\_8d Operating Characteristics ( $\alpha = 0$ , $\text{ncycle} = 3$ , $N_{\text{max}} = 30$ )


A. Percentage of correct MTD selection

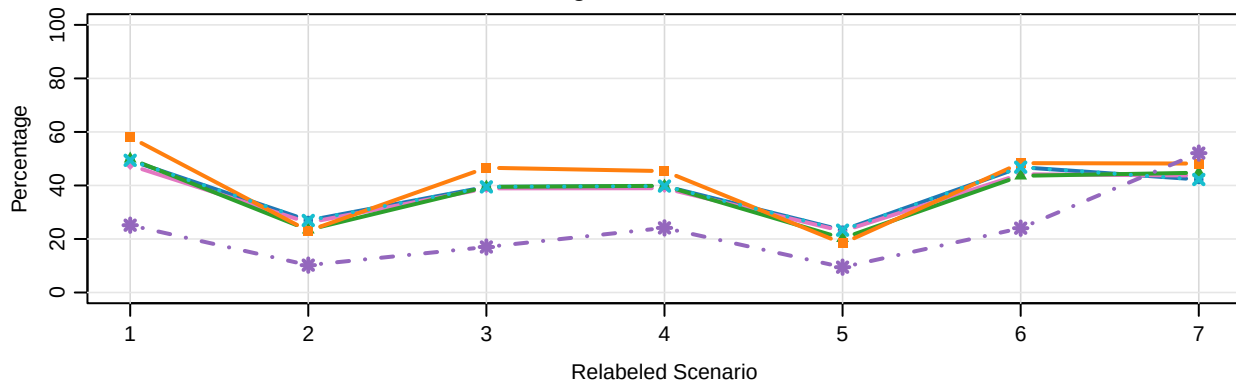


B. Percentage of overdosing selection

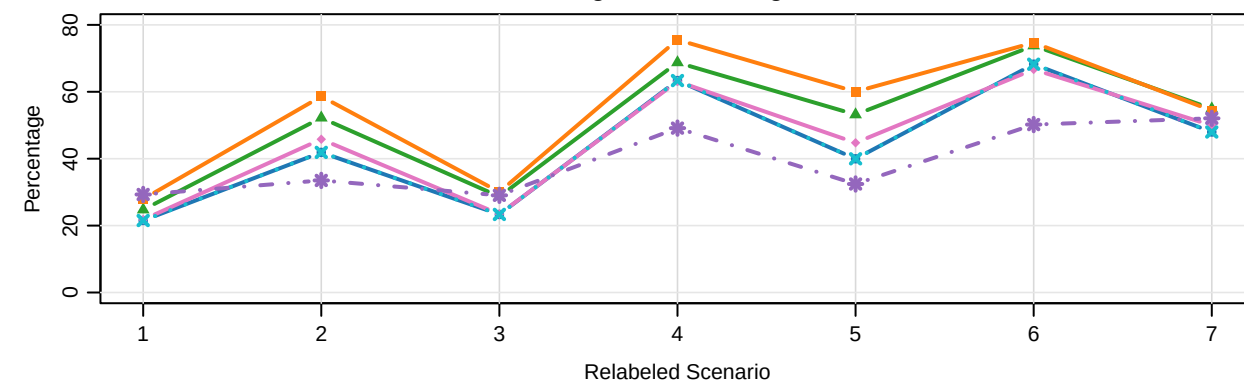


C. Percentage of patients allocated to the MTD

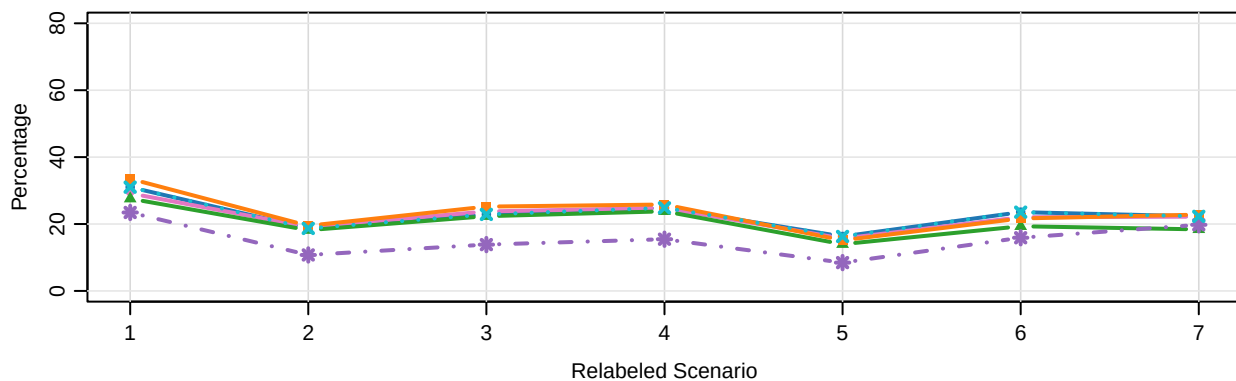


D. Percentage of patients overdosed

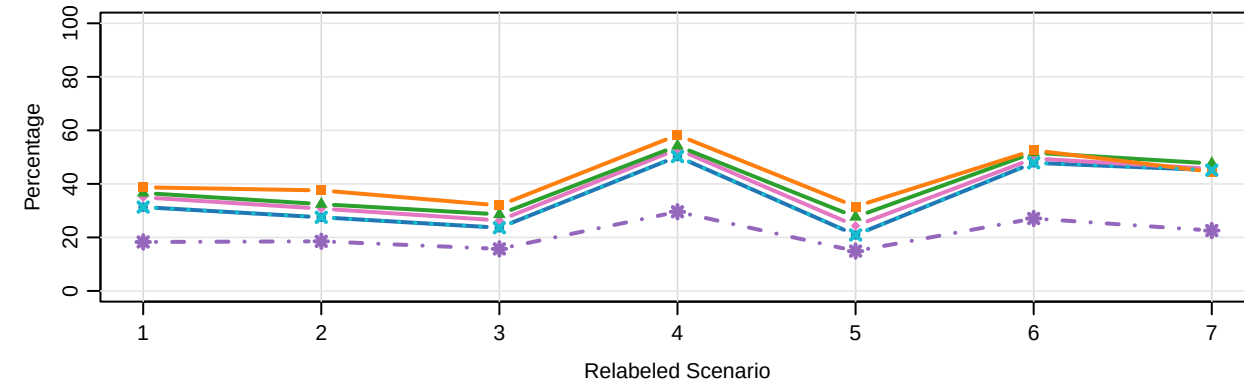


E. Percentage of patients underdosed

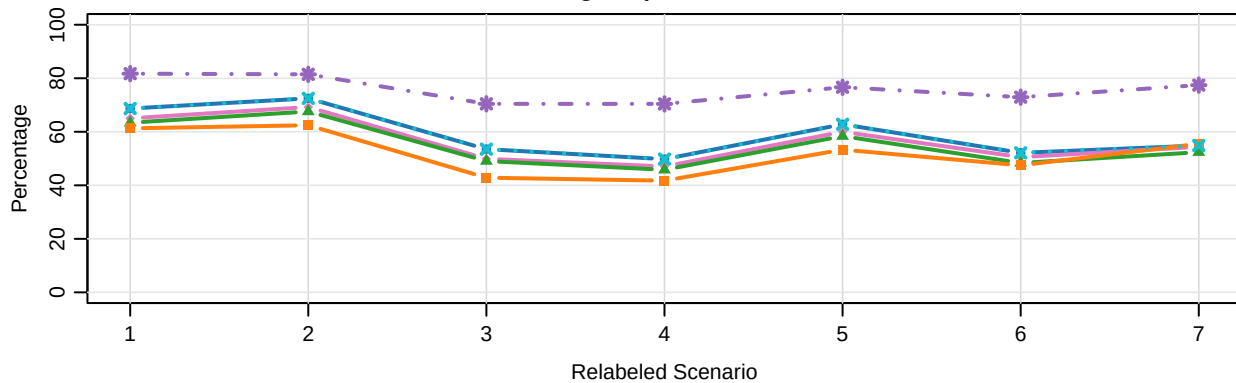


F. Average total number of IPDE

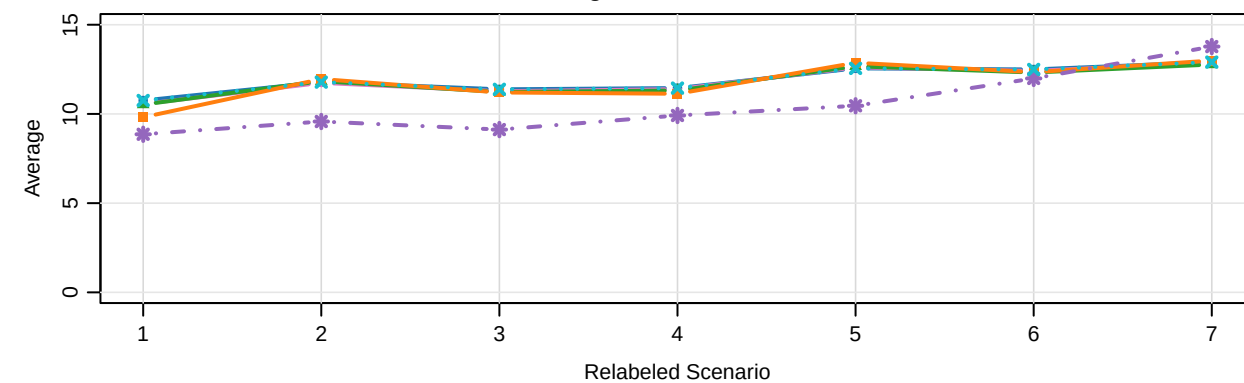

G. Average sample size

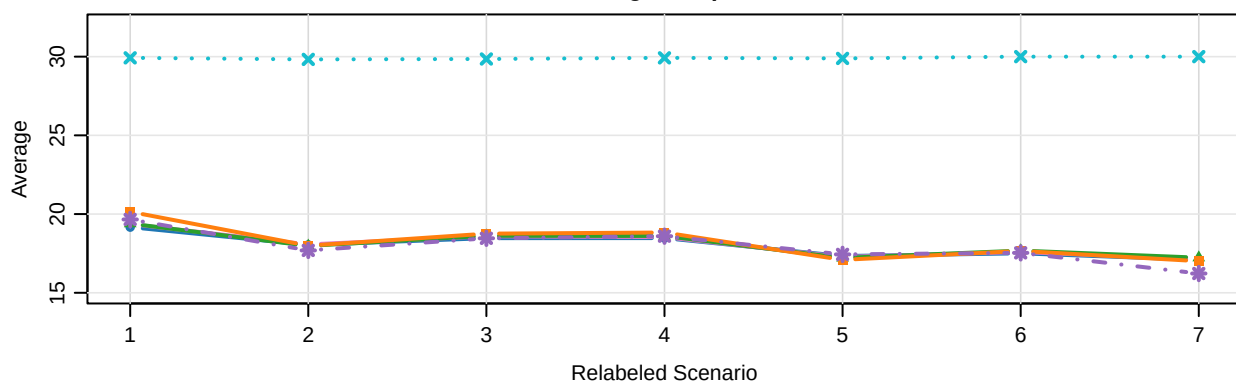

H. Average trial duration

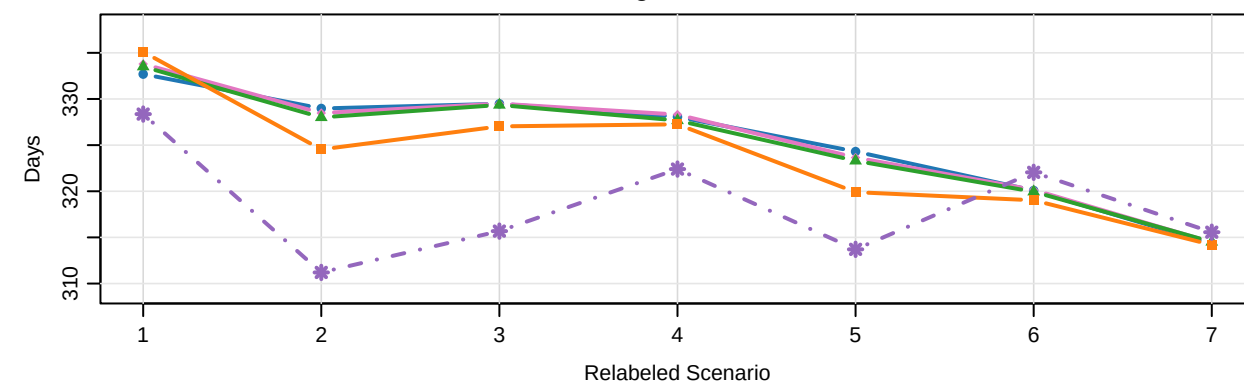

—●— AIDE-CRM fixed,  $r = 0$ 
—▲— AIDE-alpha-CRM
 - - -\* CFO PRIDE
 —◆— AIDE-CRM random
 —■— AIDE-IP-CRM
 - - -x Oracle CRM

Relabeled scenarios are ordered by requested true MTD from low to high; ties preserve input order.  
 Oracle CRM uses fixed CRM with  $r = 0$ , carryover  $\alpha = 0$ , the same  $\text{ncycle}$ , and the same  $N_{\text{max}}$ .  
 Patient-overdose percentages use dose-level treated counts above the target divided by total treated counts. Oracle duration is not plotted.