



# Baseline Scenarios (alpha = 0.6, ncycle = 2, Nmax = 45, restrict\_to\_target = 0)


## A. Percentage of correct MTD selection

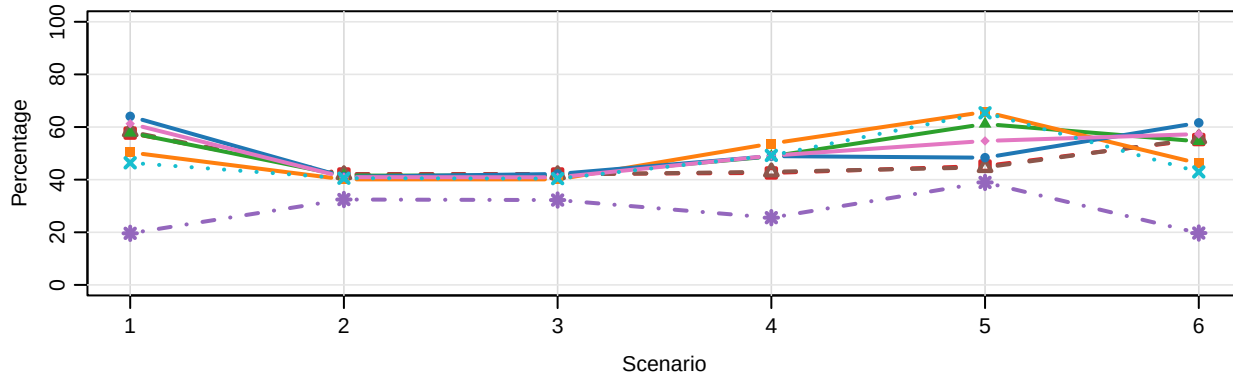


## B. Percentage of overdosing selection

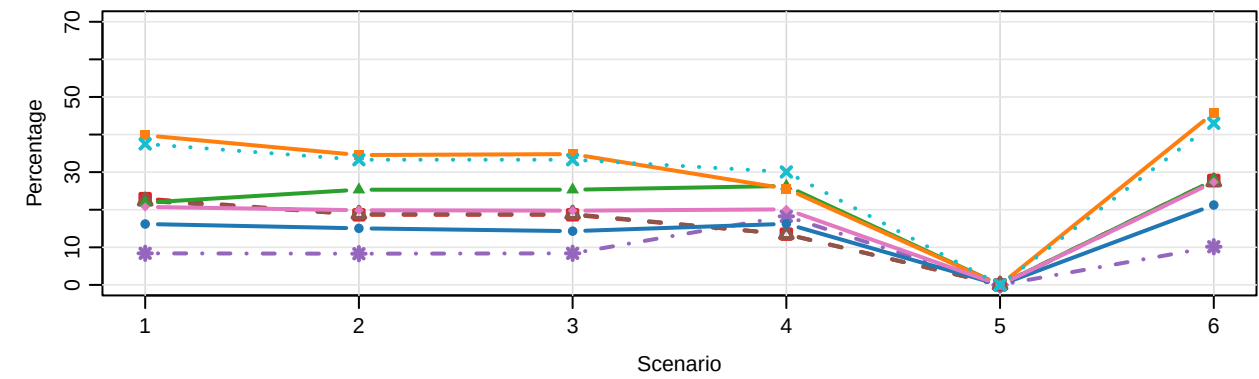


## C. Percentage of patients allocated to the MTD

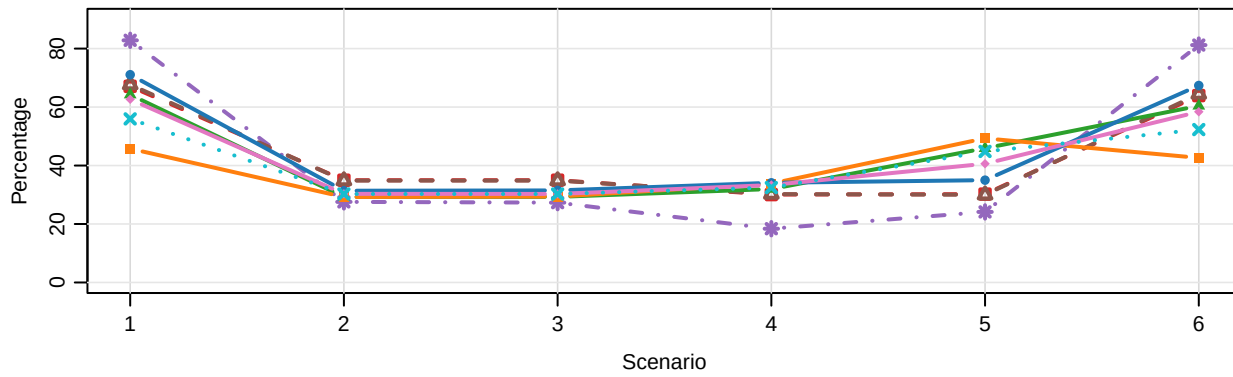


## D. Percentage of patients overdosed

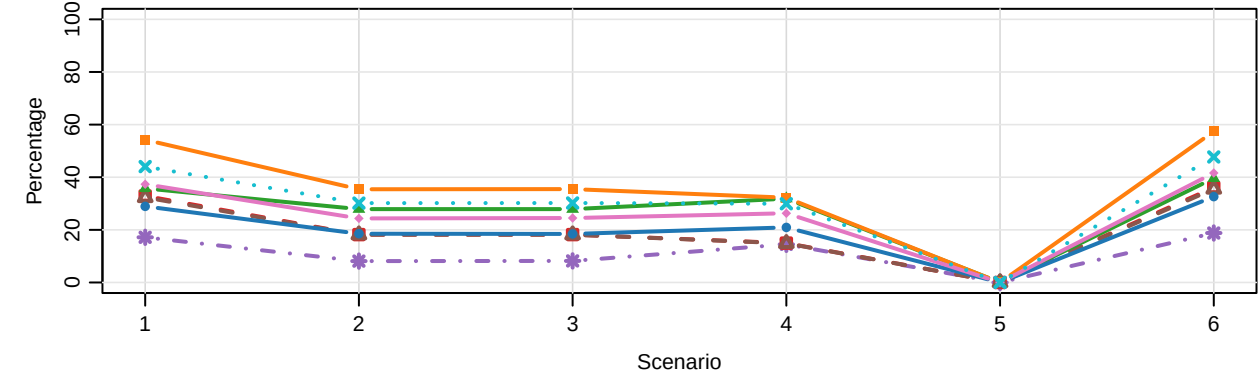


## E. Percentage of patients underdosed

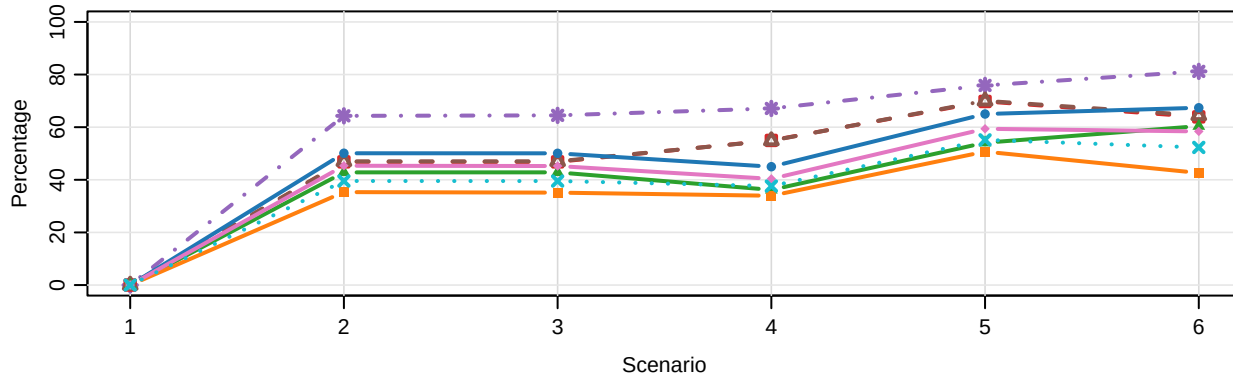



## F. Average total number of IPDE

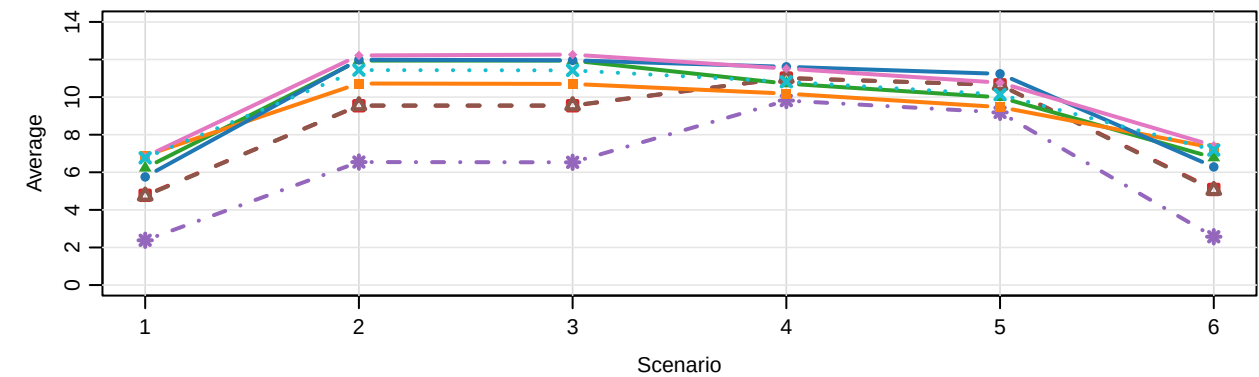

## G. Average sample size

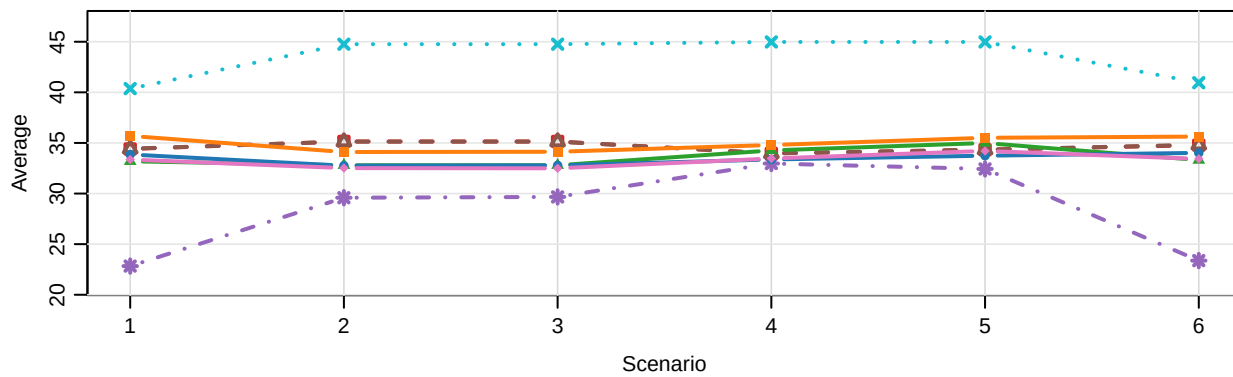

## H. Average trial duration

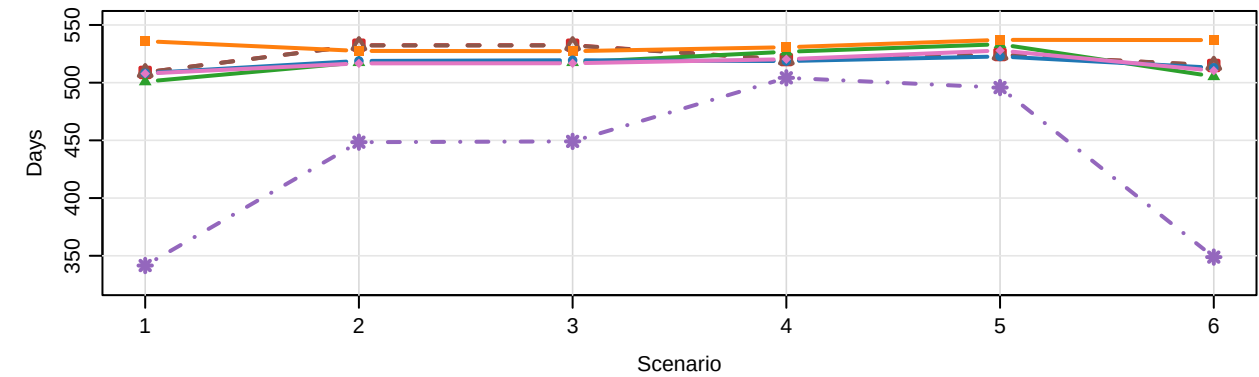

Scenarios shown: 1, 2, 3, 4, 5, 6. True MTD labels come from the dose-summary CSV.

Oracle CRM uses CRM  $r_{\text{fixed}}$  with  $r = 0$  and  $\alpha = 0$ . BOIN uses approx1/approx2 with  $r_{\text{adaptive}}$  from the adaptive summary.

Patient-overdose percentages use dose-level treated counts above target divided by total treated counts. Oracle duration is not plotted.