

ES best-rule CA attractors (panels a-d) and failure modes (e-f)
v2 init formula (browser GPU production: s + randomSeed*1000003, matches gpu_scorer.js:1078)

(a) manhattan-2, s=444 [best]

ckptScore=0.8233 raw=0.49 canvas=0.49 inv
init_seed=0x1a76ec34 steps=300 W=40 H=60




(b) chebyshev-1, s=333 [best]

ckptScore=0.8095 raw=0.51 canvas=0.51 orig
init_seed=0x13d93127 steps=300 W=40 H=60



(c) chebyshev-2, s=333 [best]

ckptScore=0.8080 raw=0.50 canvas=0.50 inv
init_seed=0x13d93127 steps=300 W=40 H=60

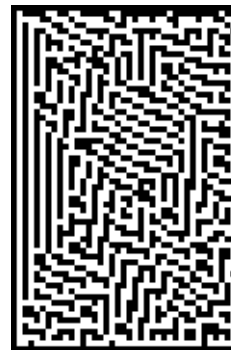

(d) manhattan-4, s=111 [best]

ckptScore=0.7999 raw=0.48 canvas=0.48 inv
init_seed=0x069dbb0d steps=300 W=40 H=60



(e) chebyshev-4, s=111 [FAIL]

ckptScore=0.4244 raw=0.31 canvas=0.31 inv
init_seed=0x069dbb0d steps=300 W=40 H=60



(f) manhattan-1, s=444 [FAIL]

ckptScore=0.4240 raw=0.45 canvas=0.45 orig
init_seed=0x1a76ec34 steps=300 W=40 H=60

