

### Homework 3: Advanced Design Techniques


Instructor: Sid Nadendla

Due: April 1, 2022

#### Problem 1: Task Selection

50 points

Consider a total of  $n$  jobs. Let the  $i^{th}$  job be designated with a start time  $s_i$ , a finish time  $f_i$  and a net value  $v_i$ . Two jobs are said to be *compatible* if they do not overlap in time. Your goal is to find the subset of mutually compatible jobs that have the maximum total value.

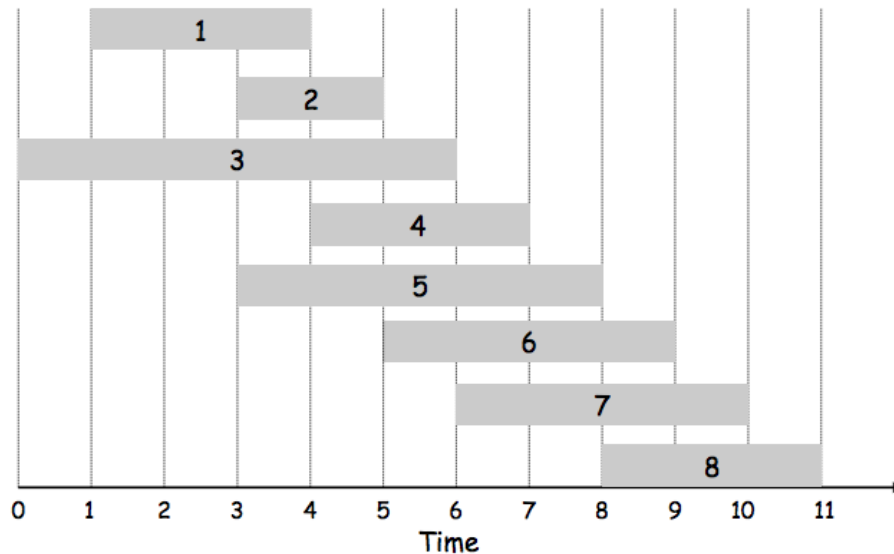

1. Model the above problem as a multi-stage decision problem, identify the state and decision variables, define the state transitions and derive the Bellman equation.
2. Using the Bellman equation, write a pseudocode to compute the optimal solution using dynamic programming approach.
3. Write down the pseudocode for the greedy solution to this problem.
4. Implement in Python, both the dynamic programming and greedy solutions to this problem and compare the value of the solutions returned for random inputs when there are a total of  $n = 10$  jobs.

## Problem 2: String Edit Problem

**50 points**

The *string edit* problem is to find the cheapest way to modify two strings so that they are the same. The permitted operations are *deletions*, *insertions* and *substitutions*.

**Example:** Consider two strings: ALKHWARIZMI and ALGORITHM. We need to perform the following sequence of operations in order to modify ALKHWARIZMI into ALGORITHM:

- Substitute K with G
- Substitute H with O
- Delete W
- Delete A
- Replace Z with T
- Insert H
- Delete I

Let the two strings be denoted as  $a_1a_2 \cdots a_m$  and  $b_1b_2 \cdots b_n$ , where each  $a_i$  and each  $b_j$  are characters in the set  $S$ . If  $s_i$  and  $s_j$  are any two characters in  $S$ , let

- the cost of deleting  $s_i = D_i > 0$
- the cost of inserting  $s_i = I_i > 0$
- the cost of substituting  $s_i$  with  $s_j = C_{ij} \geq 0$ .

Assume  $C_{ij} = C_{ji}$  for all  $i, j$  and  $C_{ij} = 0$  if and only if  $i = j$ .

1. Model the above problem as a multi-stage decision problem, identify the state and decision variables, define the state transitions and derive the Bellman equation.
2. Using the Bellman equation, write a pseudocode to compute the optimal solution using dynamic programming approach.
3. Write down the pseudocode for the greedy solution to this problem.
4. Implement in Python, both the dynamic programming and greedy solutions to this problem and compare the value of the solutions returned for random pairs of strings.

## Problem 3: Huffman Coding

*(Extra Credit: 5 points)*

Given a benchmark sequence as an input, write a Python function to construct the Huffman tree. Using this tree, develop an encoder to convert any input string into a binary sequence, and a decoder to convert any binary sequence back into the original input sequence.

For your convenience, the following Python base structure is provided to help develop your code:

```
from collections import Counter

class Node():
    def __init__(self, freq=None, left=None, right=None):
        self.set_children(left, right)
        self.freq = freq
        self.set_frequency()

    def set_children(self, left, right):
        self.left = left
        self.right = right

    def get_children(self):
        return self.left, self.right

    def set_frequency(self):
        if self.left and self.right:
            self.freq = self.left.freq + self.right.freq

    def get_frequency(self):
        return self.freq

    def __str__(self):
        return f"left:{self.left},right:{self.right}"

def huffman_tree(string):

    # Compute the occurrence frequency of all symbols in the input string
    symb_freq = Counter(string)

    # Sort the symbols according to their frequency of occurrence
    symb_freq = sorted(symb_freq.items(), key=lambda x: x[1])

    """
    TODO:    Function to construct Huffman tree
             depending on symbol frequency using Node()
             and return the root node
    """
    pass

def huffman_encoder(input_string, tree_root_node):
    """
```

```
    TODO: Function to encode the input string using huffman_tree()

    Suggestion: Label left children with '0' and right children with '1'
    """
    pass

def huffman_decoder(binary_string, tree_root_node):
    """
    TODO: Function to decode a binary sequence constructed using huffman_encoder()
    """
    pass

if __name__ == '__main__':
    benchmark_string = 'AABCACAAABCBABBAABAAAACACBBABCBABBACB'
    root = huffman_tree(benchmark_string)
    test_string = 'ABCAAB'
    encoded_sequence = huffman_encoder(test_string, root)
    decoded_sequence = huffman_decoder(encoded_sequence, root)
    print(f"Input:{test_string}")
    print(f"Decoded_Sequence:{decoded_sequence}")
    print("TEST:PASS" if test_string == decoded_sequence else "TEST:FAIL")
```