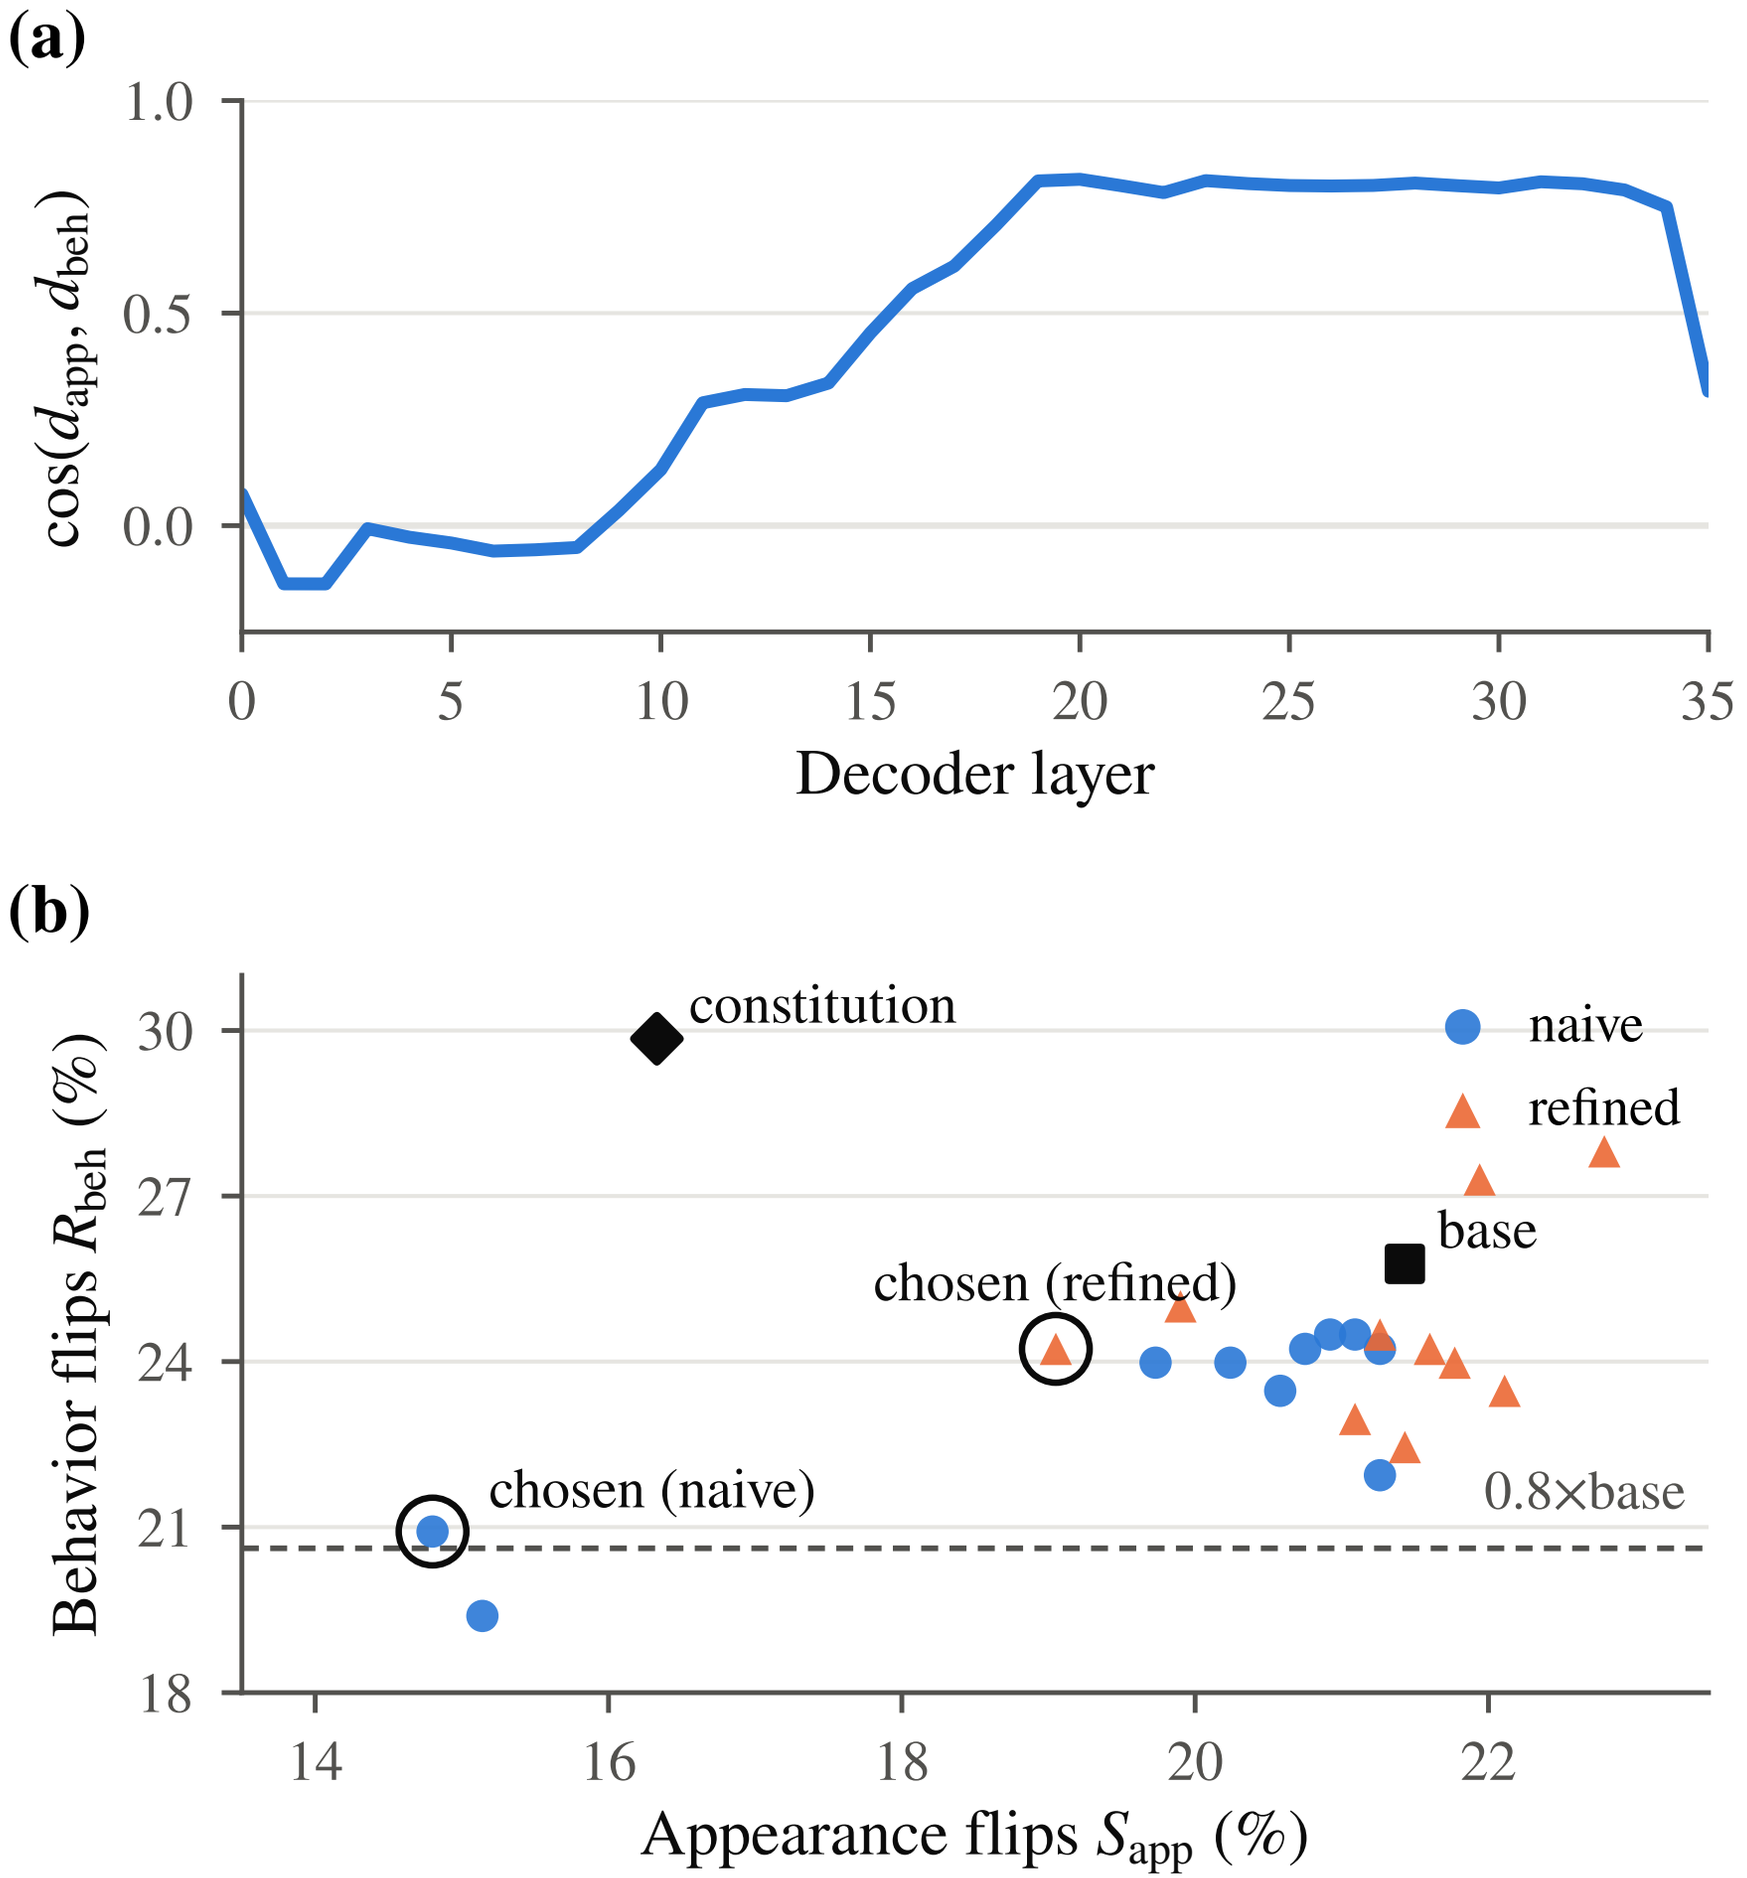
(a)
1.0
0.5
0.0
cos(d_app, d_beh)
0
5
10
15
20
25
30
35
Decoder layer
(b)
30
27
24
21
18
Behavior flips R_beh (%)
constitution
naive
refined
base
chosen (refined)
chosen (naive)
0.8×base
14
16
18
20
22
Appearance flips S_app (%)