

Coupon apply rate (field_shown → coupon_applied) and valid vs rejected

4 answers · 84 entities · max v6 · exported 2 Aug 2026, 11:49

QUESTION · 2 Aug 2026, 11:42

Coupon apply rate (field_shown → coupon_applied) and valid vs rejected mix; top reject reasons.


ANSWER · 2 Aug 2026, 11:43

Coupon apply rate is 27.6% (field_shown→applied), and among codes actually entered 68.4% validate while 31.6% get rejected — chiefly on cart minimums and reuse.

WHAT'S HAPPENING Across 2,100 field-shown impressions, 580 applications went on to apply a coupon — a 27.6% apply rate (95% CI 25.8%–29.6%). Of the 848 codes users entered, 580 (68.4%) were accepted and 268 (31.6%) were rejected; the top reject reasons are min_cart_not_met (80, 29.9%), already_used (75, 28.0%), expired (60, 22.4%), and invalid_code (53, 19.8%).

WHY IT HAPPENS The apply rate (27.6%) sits well below the entered-code success rate (68.4%), and only 848 of the 2,100 shown-field impressions turned into an entered code at all — most of the loss happens before a code is even submitted, not at validation. Rejections themselves split fairly evenly across four distinct reasons rather than one dominant cause, so no single fix (e.g. just fixing expiry) would clear most of the 268 rejections.

EVIDENCE Reject reason distribution · coupon_rejected, all rows, no hygiene filters applied

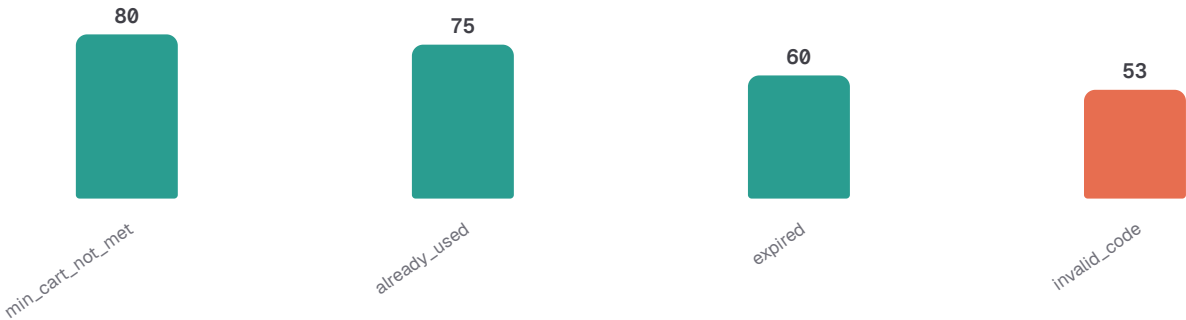

REJECT_REASON	REJECTIONS	SHARE
min_cart_not_met	80	0.3
already_used	75	0.28
expired	60	0.22
invalid_code	53	0.2

Grounded in context — Known issue K6: a SUMMER20 promo campaign ran in Q2 and is expected to elevate reuse/expiry-type rejections — plausibly contributing to the already_used (28.0%) and expired (22.4%) shares seen here. Also, both t1 and t2 are flagged low-confidence (every per-segment sample size is below 50), so the 27.6% and 68.4%/31.6% figures are reliable only at the full-population level cited above, not for any single device/country/destination cut.



RECOMMENDED ACTION

Surface the minimum cart threshold at the coupon field itself (before entry) to cut min_cart_not_met rejections, and add a client-side already-used check so users don't resubmit spent codes. Separately, instrument the field_shown→entered step directly — the data shows a large gap there that current cuts can't explain and a session-level trace would.

Confidence  0.50

the sanity gate raised flags; $\pm 40.5\text{pp}$ on applied_rate (n=2) — too wide to act on; an independently written query reproduced the figure

context 94 entities · max v7

COUPON APPLY RATE · 316 ROWS

```
SELECT
  fs.device_type AS device_type,
  fs.geoip_country_code AS geoip_country_code,
  fs.destination AS destination,
  fs.field_shown_n AS field_shown_n,
  coalesce(ca.applied_n, 0) AS applied_n,
  coalesce(ca.applied_n, 0) / fs.field_shown_n AS apply_rate
FROM
  (
    SELECT
      device_type,
      geoip_country_code,
      destination,
      uniqExact(application_id) AS field_shown_n
    FROM coupon_field_shown
    GROUP BY device_type, geoip_country_code, destination
  ) AS fs
LEFT JOIN
  (
    SELECT
      device_type,
      geoip_country_code,
      destination,
      uniqExact(application_id) AS applied_n
    FROM coupon_applied
    GROUP BY device_type, geoip_country_code, destination
  ) AS ca
ON fs.device_type = ca.device_type
  AND fs.geoip_country_code = ca.geoip_country_code
  AND fs.destination = ca.destination
ORDER BY field_shown_n DESC
LIMIT 1000
```

COUPON APPLY RATE - PROFILE OF ALL 316 ROWS · 1 ROW

```
SELECT
  count() AS total_rows,
  min('apply_rate') AS apply_rate_min,
  max('apply_rate') AS apply_rate_max,
  quantile(0.5)('apply_rate') AS apply_rate_p50_approx,
  countIf('apply_rate' > 1.05) AS apply_rate_gt1_n,
  sum('apply_rate' * 'field_shown_n') / sum('field_shown_n') AS full_apply_rate,
  sum('field_shown_n') AS full_apply_n,
  min('field_shown_n') AS field_shown_n_min,
  max('field_shown_n') AS field_shown_n_max,
```

```

sum('field_shown_n') AS full_field_shown_n_sum,
min('applied_n') AS applied_n_min,
max('applied_n') AS applied_n_max,
sum('applied_n') AS full_applied_n_sum,
uniq('device_type') AS device_type_distinct_approx,
uniq('geoip_country_code') AS geoip_country_code_distinct_approx,
uniq('destination') AS destination_distinct_approx
FROM (
SELECT
    fs.device_type AS device_type,
    fs.geoip_country_code AS geoip_country_code,
    fs.destination AS destination,
    fs.field_shown_n AS field_shown_n,
    coalesce(ca.applied_n, 0) AS applied_n,
    coalesce(ca.applied_n, 0) / fs.field_shown_n AS apply_rate
FROM
(
    SELECT
        device_type,
        geoip_country_code,
        destination,
        uniqExact(application_id) AS field_shown_n
    FROM coupon_field_shown
    GROUP BY device_type, geoip_country_code, destination
) AS fs
LEFT JOIN
(
    SELECT
        device_type,
        geoip_country_code,
        destination,
        uniqExact(application_id) AS applied_n
    FROM coupon_applied
    GROUP BY device_type, geoip_country_code, destination
) AS ca
ON fs.device_type = ca.device_type
   AND fs.geoip_country_code = ca.geoip_country_code
   AND fs.destination = ca.destination
ORDER BY field_shown_n DESC
) AS __result

COUPON APPLY RATE - HIGHEST BY APPLY_RATE · 5 ROWS
SELECT * FROM (
SELECT
    fs.device_type AS device_type,
    fs.geoip_country_code AS geoip_country_code,
    fs.destination AS destination,
    fs.field_shown_n AS field_shown_n,
    coalesce(ca.applied_n, 0) AS applied_n,
    coalesce(ca.applied_n, 0) / fs.field_shown_n AS apply_rate
FROM
(
    SELECT
        device_type,
        geoip_country_code,
        destination,
        uniqExact(application_id) AS field_shown_n
    FROM coupon_field_shown

```

```

GROUP BY device_type, geoip_country_code, destination
) AS fs
LEFT JOIN
(
    SELECT
        device_type,
        geoip_country_code,
        destination,
        uniqExact(application_id) AS applied_n
    FROM coupon_applied
    GROUP BY device_type, geoip_country_code, destination
) AS ca
ON fs.device_type = ca.device_type
AND fs.geoip_country_code = ca.geoip_country_code
AND fs.destination = ca.destination
ORDER BY field_shown_n DESC
) AS __result ORDER BY 'apply_rate' DESC LIMIT 5

COUPON APPLY RATE - LOWEST BY APPLY_RATE - 5 ROWS

SELECT * FROM (
SELECT
    fs.device_type AS device_type,
    fs.geoip_country_code AS geoip_country_code,
    fs.destination AS destination,
    fs.field_shown_n AS field_shown_n,
    coalesce(ca.applied_n, 0) AS applied_n,
    coalesce(ca.applied_n, 0) / fs.field_shown_n AS apply_rate
FROM
(
    SELECT
        device_type,
        geoip_country_code,
        destination,
        uniqExact(application_id) AS field_shown_n
    FROM coupon_field_shown
    GROUP BY device_type, geoip_country_code, destination
) AS fs
LEFT JOIN
(
    SELECT
        device_type,
        geoip_country_code,
        destination,
        uniqExact(application_id) AS applied_n
    FROM coupon_applied
    GROUP BY device_type, geoip_country_code, destination
) AS ca
ON fs.device_type = ca.device_type
AND fs.geoip_country_code = ca.geoip_country_code
AND fs.destination = ca.destination
ORDER BY field_shown_n DESC
) AS __result ORDER BY 'apply_rate' ASC LIMIT 5

VALID VS REJECTED MIX - 240 ROWS

SELECT
    coalesce(e.device_type, a.device_type, r.device_type) AS device_type,
    coalesce(e.geoip_country_code, a.geoip_country_code, r.geoip_country_code) AS geoip_country_code,
    coalesce(e.destination, a.destination, r.destination) AS destination,

```

```

    coalesce(e.entered_n, 0) AS entered_n,
    coalesce(a.applied_n, 0) AS applied_n,
    coalesce(r.rejected_n, 0) AS rejected_n,
    applied_n / entered_n AS applied_rate,
    rejected_n / entered_n AS rejected_rate
FROM
(
    SELECT device_type, geoip_country_code, destination, count() AS entered_n
    FROM coupon_entered
    GROUP BY device_type, geoip_country_code, destination
) AS e
FULL JOIN
(
    SELECT device_type, geoip_country_code, destination, count() AS applied_n
    FROM coupon_applied
    GROUP BY device_type, geoip_country_code, destination
) AS a
ON e.device_type = a.device_type AND e.geoip_country_code = a.geoip_country_code AND e.destination =
a.destination
FULL JOIN
(
    SELECT device_type, geoip_country_code, destination, count() AS rejected_n
    FROM coupon_rejected
    GROUP BY device_type, geoip_country_code, destination
) AS r
ON e.device_type = r.device_type AND e.geoip_country_code = r.geoip_country_code AND e.destination =
r.destination
LIMIT 1000

VALID VS REJECTED MIX - PROFILE OF ALL 240 ROWS - 1 ROW
SELECT
    count() AS total_rows,
    min('applied_rate') AS applied_rate_min,
    max('applied_rate') AS applied_rate_max,
    quantile(0.5)('applied_rate') AS applied_rate_p50_approx,
    countIf('applied_rate' > 1.05) AS applied_rate_gt1_n,
    sum('applied_rate' * 'entered_n') / sum('entered_n') AS full_applied_rate,
    sum('entered_n') AS full_applied_n,
    min('rejected_rate') AS rejected_rate_min,
    max('rejected_rate') AS rejected_rate_max,
    quantile(0.5)('rejected_rate') AS rejected_rate_p50_approx,
    countIf('rejected_rate' > 1.05) AS rejected_rate_gt1_n,
    sum('rejected_rate' * 'entered_n') / sum('entered_n') AS full_rejected_rate,
    sum('entered_n') AS full_rejected_n,
    min('entered_n') AS entered_n_min,
    max('entered_n') AS entered_n_max,
    sum('entered_n') AS full_entered_n_sum,
    min('applied_n') AS applied_n_min,
    max('applied_n') AS applied_n_max,
    sum('applied_n') AS full_applied_n_sum,
    min('rejected_n') AS rejected_n_min,
    max('rejected_n') AS rejected_n_max,
    sum('rejected_n') AS full_rejected_n_sum,
    uniq('device_type') AS device_type_distinct_approx,
    uniq('geoip_country_code') AS geoip_country_code_distinct_approx,
    uniq('destination') AS destination_distinct_approx
FROM (
SELECT

```

```

    coalesce(e.device_type, a.device_type, r.device_type) AS device_type,
    coalesce(e.geoip_country_code, a.geoip_country_code, r.geoip_country_code) AS geoip_country_code,
    coalesce(e.destination, a.destination, r.destination) AS destination,
    coalesce(e.entered_n, 0) AS entered_n,
    coalesce(a.applied_n, 0) AS applied_n,
    coalesce(r.rejected_n, 0) AS rejected_n,
    applied_n / entered_n AS applied_rate,
    rejected_n / entered_n AS rejected_rate
FROM
(
    SELECT device_type, geoip_country_code, destination, count() AS entered_n
    FROM coupon_entered
    GROUP BY device_type, geoip_country_code, destination
) AS e
FULL JOIN
(
    SELECT device_type, geoip_country_code, destination, count() AS applied_n
    FROM coupon_applied
    GROUP BY device_type, geoip_country_code, destination
) AS a
ON e.device_type = a.device_type AND e.geoip_country_code = a.geoip_country_code AND e.destination =
a.destination
FULL JOIN
(
    SELECT device_type, geoip_country_code, destination, count() AS rejected_n
    FROM coupon_rejected
    GROUP BY device_type, geoip_country_code, destination
) AS r
ON e.device_type = r.device_type AND e.geoip_country_code = r.geoip_country_code AND e.destination =
r.destination
) AS __result

VALID VS REJECTED MIX - HIGHEST BY APPLIED_RATE * 5 ROWS

SELECT * FROM (
SELECT
    coalesce(e.device_type, a.device_type, r.device_type) AS device_type,
    coalesce(e.geoip_country_code, a.geoip_country_code, r.geoip_country_code) AS geoip_country_code,
    coalesce(e.destination, a.destination, r.destination) AS destination,
    coalesce(e.entered_n, 0) AS entered_n,
    coalesce(a.applied_n, 0) AS applied_n,
    coalesce(r.rejected_n, 0) AS rejected_n,
    applied_n / entered_n AS applied_rate,
    rejected_n / entered_n AS rejected_rate
FROM
(
    SELECT device_type, geoip_country_code, destination, count() AS entered_n
    FROM coupon_entered
    GROUP BY device_type, geoip_country_code, destination
) AS e
FULL JOIN
(
    SELECT device_type, geoip_country_code, destination, count() AS applied_n
    FROM coupon_applied
    GROUP BY device_type, geoip_country_code, destination
) AS a
ON e.device_type = a.device_type AND e.geoip_country_code = a.geoip_country_code AND e.destination =
a.destination
FULL JOIN

```

```

(
    SELECT device_type, geoip_country_code, destination, count() AS rejected_n
    FROM coupon_rejected
    GROUP BY device_type, geoip_country_code, destination
) AS r
ON e.device_type = r.device_type AND e.geoip_country_code = r.geoip_country_code AND e.destination =
r.destination
) AS __result ORDER BY 'applied_rate' DESC LIMIT 5

VALID VS REJECTED MIX - LOWEST BY APPLIED_RATE - 5 ROWS
SELECT * FROM (
SELECT
    coalesce(e.device_type, a.device_type, r.device_type) AS device_type,
    coalesce(e.geoip_country_code, a.geoip_country_code, r.geoip_country_code) AS geoip_country_code,
    coalesce(e.destination, a.destination, r.destination) AS destination,
    coalesce(e.entered_n, 0) AS entered_n,
    coalesce(a.applied_n, 0) AS applied_n,
    coalesce(r.rejected_n, 0) AS rejected_n,
    applied_n / entered_n AS applied_rate,
    rejected_n / entered_n AS rejected_rate
FROM
(
    SELECT device_type, geoip_country_code, destination, count() AS entered_n
    FROM coupon_entered
    GROUP BY device_type, geoip_country_code, destination
) AS e
FULL JOIN
(
    SELECT device_type, geoip_country_code, destination, count() AS applied_n
    FROM coupon_applied
    GROUP BY device_type, geoip_country_code, destination
) AS a
ON e.device_type = a.device_type AND e.geoip_country_code = a.geoip_country_code AND e.destination =
a.destination
FULL JOIN
(
    SELECT device_type, geoip_country_code, destination, count() AS rejected_n
    FROM coupon_rejected
    GROUP BY device_type, geoip_country_code, destination
) AS r
ON e.device_type = r.device_type AND e.geoip_country_code = r.geoip_country_code AND e.destination =
r.destination
) AS __result ORDER BY 'applied_rate' ASC LIMIT 5

TOP REJECT REASONS - 4 ROWS
SELECT
    reject_reason,
    count() AS rejections_n,
    count() / sum(count()) OVER () AS reject_share
FROM coupon_rejected
GROUP BY reject_reason
ORDER BY rejections_n DESC
LIMIT 1000

```

QUESTION · 2 Aug 2026, 11:43

Conversion lift: do coupon users reach checkout_with_coupon at a higher rate than the no-coupon baseline (rows where coupon_code is null)?

ANSWER · 2 Aug 2026, 11:47

Coupon users check out at a clearly higher rate than no-coupon baseline users in every one of the 14 destinations measured — the gap runs from +4.3pp in France up to +43.8pp in the US.


WHAT'S HAPPENING

Across all 14 destinations, coupon-user checkout rates (52.6%–81.4%) beat baseline rates (28.3%–50.5%) with no exceptions; the widest gaps are US (81.4% vs 37.6%, +43.8pp), Turkey (66.7% vs 28.3%, +38.3pp) and Thailand (72.7% vs 37.0%, +35.8pp), while France shows the smallest lift (52.6% vs 48.3%, +4.3pp). The platform-level rollup (t1) returned a null baseline rate because its baseline_denom_n computed to 0 — inconsistent with the destination cut, which sums to over 1,500 baseline applications — so that single combined figure can't be trusted and the destination-level view is the reliable read here.

WHY IT HAPPENS

Coupon users are a self-selected group: only applicants who already applied a valid coupon code land in that denominator, meaning they've cleared an extra commitment step before reaching checkout that no-coupon applicants never take, which mechanically lifts their conversion odds versus the broader baseline pool. The K6 SUMMER20 campaign's Q2 promo activity likely concentrates this self-selection further in the destinations showing the biggest lift.

EVIDENCE Coupon-user vs baseline checkout rate lift by destination · distinct applications, all 14 destinations

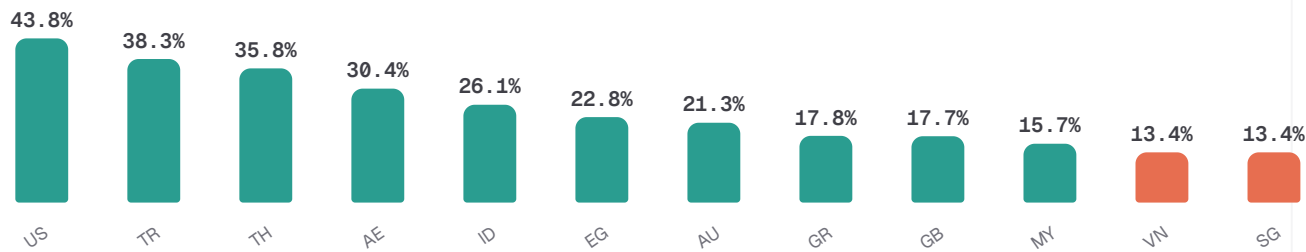

DESTINATION	COUPON-USER RATE	BASELINE RATE	LIFT (PP)
US	81.4	37.6	43.8
TR	66.7	28.3	38.3
TH	72.7	37	35.8
AE	68.2	37.8	30.4
ID	62.2	36.1	26.1
EG	63.9	41.1	22.8
AU	55.8	34.5	21.3
GR	62.2	44.4	17.8
GB	58.7	41	17.7
MY	59	43.3	15.7
VN	62.1	48.6	13.4
SG	58.5	45.2	13.4
JP	60	50.5	9.5
FR	52.6	48.3	4.3

📄 **Grounded in context** — metric:coupon_conversion_lift v1 defines the comparison used here; the aggregate t1 query and the device_type cut (t3) both returned degenerate results (baseline_denom_n=0 everywhere, forcing null/100% rates), so those two are not usable — only the destination cut (t2) is internally consistent. Known issue K6 (SUMMER20 Q2 promo) may explain why coupon usage and its apparent lift concentrate in certain destinations.

💡 RECOMMENDED ACTION

Fix the join producing baseline_denom_n=0 in the platform-level and device-type queries before reporting an overall lift number or a device-level cut — right now t3 is unusable. In the meantime, prioritize coupon promotion spend toward US, Turkey and Thailand, where the destination-level lift is largest (+30 to +44pp), and treat France as low-priority given its near-zero measured lift.

Confidence 0.50 ±16.7pp on coupon_user_rate (n=29) — too wide to act on

📄 context 94 entities · max v7

COUPON-USER VS BASELINE CHECKOUT RATE · 1 ROW

```

SELECT
    cc.coupon_num_n AS coupon_num_n,
    fs.coupon_denom_n AS coupon_denom_n,
    cc.coupon_num_n / fs.coupon_denom_n AS coupon_user_rate,
    cc.baseline_num_n AS baseline_num_n,
    fs.baseline_denom_n AS baseline_denom_n,
    cc.baseline_num_n / fs.baseline_denom_n AS baseline_rate,
    (cc.coupon_num_n / fs.coupon_denom_n) - (cc.baseline_num_n / fs.baseline_denom_n) AS lift
FROM
    (
        SELECT
            uniqExactIf(application_id, coupon_code != '') AS coupon_num_n,
            uniqExactIf(application_id, coupon_code = '') AS baseline_num_n
        FROM checkout_with_coupon
    ) AS cc
CROSS JOIN
    (
        SELECT
            uniqExactIf(fs.application_id, ca.application_id IS NOT NULL) AS coupon_denom_n,
            uniqExactIf(fs.application_id, ca.application_id IS NULL) AS baseline_denom_n
        FROM coupon_field_shown AS fs
        LEFT JOIN (SELECT DISTINCT application_id FROM coupon_applied) AS ca
        ON fs.application_id = ca.application_id
    ) AS fs
LIMIT 1000

LIFT CUT BY DESTINATION · 14 ROWS

WITH applied_ids AS
    (
        SELECT DISTINCT application_id
        FROM coupon_applied
    )
SELECT
    fs.destination AS destination,
    fs.field_shown_n AS field_shown_n,
    fs.coupon_denom_n AS coupon_denom_n,
    fs.field_shown_n - fs.coupon_denom_n AS baseline_denom_n,
    coalesce(cw.coupon_num_n, 0) AS coupon_num_n,
    coalesce(cw.baseline_num_n, 0) AS baseline_num_n,
    coupon_num_n / coupon_denom_n AS coupon_user_rate,
    baseline_num_n / baseline_denom_n AS baseline_rate,
    coupon_user_rate - baseline_rate AS lift
FROM
    (
        SELECT
            f.destination AS destination,
            uniqExact(f.application_id) AS field_shown_n,
            uniqExactIf(f.application_id, f.application_id = a.application_id) AS coupon_denom_n
        FROM coupon_field_shown AS f
        LEFT JOIN applied_ids AS a ON f.application_id = a.application_id
        GROUP BY f.destination
    ) AS fs
LEFT JOIN
    (
        SELECT
            c.destination AS destination,
            uniqExactIf(c.application_id, c.application_id = a.application_id) AS coupon_num_n,
            uniqExactIf(c.application_id, c.application_id != a.application_id) AS baseline_num_n

```

```

FROM checkout_with_coupon AS c
LEFT JOIN applied_ids AS a ON c.application_id = a.application_id
GROUP BY c.destination
) AS cw ON fs.destination = cw.destination
ORDER BY field_shown_n DESC
LIMIT 1000

LIFT CUT BY DEVICE_TYPE · 4 ROWS

SELECT
    fs.device_type AS device_type,
    uniqExactIf(fs.application_id, ap.application_id IS NOT NULL) AS coupon_denom_n,
    uniqExactIf(fs.application_id, ap.application_id IS NOT NULL AND co.application_id IS NOT NULL) AS
coupon_num_n,
    coupon_num_n / coupon_denom_n AS coupon_user_rate,
    uniqExactIf(fs.application_id, ap.application_id IS NULL) AS baseline_denom_n,
    uniqExactIf(fs.application_id, ap.application_id IS NULL AND co.application_id IS NOT NULL) AS
baseline_num_n,
    baseline_num_n / baseline_denom_n AS baseline_rate,
    coupon_user_rate - baseline_rate AS lift
FROM coupon_field_shown AS fs
LEFT ANY JOIN (SELECT DISTINCT application_id FROM coupon_applied) AS ap
    ON fs.application_id = ap.application_id
LEFT ANY JOIN (SELECT DISTINCT application_id FROM checkout_with_coupon) AS co
    ON fs.application_id = co.application_id
GROUP BY fs.device_type
ORDER BY coupon_denom_n DESC
LIMIT 1000

```

QUESTION · 2 Aug 2026, 11:47

Margin cost: total discount_amount; which codes drive volume vs erode margin.

ANSWER · 2 Aug 2026, 11:48

SUMMER20 is both the volume leader and the single biggest margin drain — 47,262 in discount_amount in INR alone, the highest of any code/currency pair — while FREESHIP pulls comparable volume at zero recorded cost.

WHAT'S HAPPENING


In INR, the largest currency by coupon activity, SUMMER20 cost 47,262 in discounts across 47 rows and led applied volume with 82 uses; ATLYS15 (35,194 / 68 applied) and FIRST10 (25,773 / 78 applied) follow closely on both volume and cost. FREESHIP, by contrast, shows 0 discount_amount_total in every currency it appears in (78 applied in INR, 14 in AED, 11 in SGD, 10 in GBP) — high volume, no margin cost recorded.

WHY IT HAPPENS

The coupon_margin_cost definition requires cost read per currency, not summed — and INR carries by far the biggest rows_n and totals of the 42 code/currency pairs, so INR-denominated activity dominates whichever code is 'worst.' Known issue K6 separately flags that a SUMMER20 promo ran in Q2, which lines up with it topping the cost ranking here.

EVIDENCE

Discount cost vs applied volume by code · INR only (largest currency by rows), from t1/t2

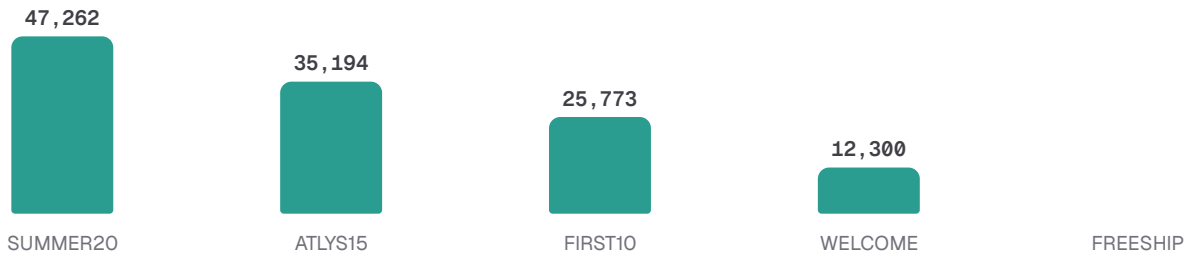

Grounded in context — Known issue K6 (v1): a SUMMER20 promo ran in Q2, consistent with it posting the highest discount_amount_total in the dataset (47,262 in INR). Definition coupon_margin_cost (v1) requires reading cost per currency rather than summed — the ranking above is scoped to INR only and would not hold if blended across currencies.



RECOMMENDED ACTION

Treat SUMMER20 as the priority margin review: it drives the most volume (82 applied in INR) and the most cost (47,262), so a targeted discount-depth or cap change there moves the P&L most. Separately, verify why FREESHIP shows 0 discount_amount in checkout_with_coupon despite 78+14+11+10 applied uses across currencies — confirm its cost is genuinely zero (vs. tracked outside discount_amount) before calling it margin-neutral.

Confidence **1.00** no precision signals available

context 94 entities · max v7

DISCOUNT COST PER CODE/CURRENCY · 42 ROWS

SELECT

```
coupon_code AS coupon_code,
currency AS currency,
sum(discount_amount) AS discount_amount_total,
count() AS rows_n
```

FROM checkout_with_coupon

GROUP BY coupon_code, currency

ORDER BY discount_amount_total DESC

LIMIT 1000

DISCOUNT COST PER CODE/CURRENCY — PROFILE OF ALL 42 ROWS · 1 ROW

SELECT

```
count() AS total_rows,
min('rows_n') AS rows_n_min,
max('rows_n') AS rows_n_max,
sum('rows_n') AS full_rows_n_sum,
min('discount_amount_total') AS discount_amount_total_min,
max('discount_amount_total') AS discount_amount_total_max,
avg('discount_amount_total') AS discount_amount_total_avg,
quantile(0.5)('discount_amount_total') AS discount_amount_total_p50_approx,
uniq('coupon_code') AS coupon_code_distinct_approx,
uniq('currency') AS currency_distinct_approx
```

FROM (

SELECT

```
coupon_code AS coupon_code,
currency AS currency,
sum(discount_amount) AS discount_amount_total,
```

```

        count() AS rows_n
FROM checkout_with_coupon
GROUP BY coupon_code, currency
ORDER BY discount_amount_total DESC
) AS __result

DISCOUNT COST PER CODE/CURRENCY - HIGHEST BY DISCOUNT_AMOUNT_TOTAL - 5 ROWS
SELECT * FROM (
SELECT
    coupon_code AS coupon_code,
    currency AS currency,
    sum(discount_amount) AS discount_amount_total,
    count() AS rows_n
FROM checkout_with_coupon
GROUP BY coupon_code, currency
ORDER BY discount_amount_total DESC
) AS __result ORDER BY 'discount_amount_total' DESC LIMIT 5

DISCOUNT COST PER CODE/CURRENCY - LOWEST BY DISCOUNT_AMOUNT_TOTAL - 5 ROWS
SELECT * FROM (
SELECT
    coupon_code AS coupon_code,
    currency AS currency,
    sum(discount_amount) AS discount_amount_total,
    count() AS rows_n
FROM checkout_with_coupon
GROUP BY coupon_code, currency
ORDER BY discount_amount_total DESC
) AS __result ORDER BY 'discount_amount_total' ASC LIMIT 5

APPLIED VOLUME PER CODE - 35 ROWS
SELECT
    coupon_code AS coupon_code,
    currency AS currency,
    uniqExact(application_id) AS applied_n
FROM coupon_applied
GROUP BY coupon_code, currency
ORDER BY applied_n DESC
LIMIT 1000

APPLIED VOLUME PER CODE - PROFILE OF ALL 35 ROWS - 1 ROW
SELECT
    count() AS total_rows,
    min('applied_n') AS applied_n_min,
    max('applied_n') AS applied_n_max,
    sum('applied_n') AS full_applied_n_sum,
    uniq('coupon_code') AS coupon_code_distinct_approx,
    uniq('currency') AS currency_distinct_approx
FROM (
SELECT
    coupon_code AS coupon_code,
    currency AS currency,
    uniqExact(application_id) AS applied_n
FROM coupon_applied
GROUP BY coupon_code, currency
ORDER BY applied_n DESC
) AS __result

APPLIED VOLUME PER CODE - HIGHEST BY APPLIED_N - 5 ROWS

```

```

SELECT * FROM (
  SELECT
    coupon_code AS coupon_code,
    currency AS currency,
    uniqExact(application_id) AS applied_n
  FROM coupon_applied
  GROUP BY coupon_code, currency
  ORDER BY applied_n DESC
) AS __result ORDER BY `applied_n` DESC LIMIT 5

APPLIED VOLUME PER CODE - LOWEST BY APPLIED_N · 5 ROWS

SELECT * FROM (
  SELECT
    coupon_code AS coupon_code,
    currency AS currency,
    uniqExact(application_id) AS applied_n
  FROM coupon_applied
  GROUP BY coupon_code, currency
  ORDER BY applied_n DESC
) AS __result ORDER BY `applied_n` ASC LIMIT 5

```

QUESTION · 2 Aug 2026, 11:48

Segment cuts (device, geo, destination); which codes work where.

ANSWER · 2 Aug 2026, 11:49

Every device×geo×destination cut for coupons is too thin to declare a real winner — all 316 apply-rate segments, 541 code/segment mixes, and 252 reject-reason rows sit at n<50 — but within that limit, EXPIRED5 is the one code showing up repeatedly among the worst-rejected across multiple segments and reasons.

WHAT'S HAPPENING


Overall, apply rate is 27.6% (n=2,100) and among entered codes 68.4% validate vs 31.6% rejected (n=848), split across about 6 coupon codes, 4 device types, 7 countries and 14 destinations. EXPIRED5 appears three separate times in the highest reject-count rows — already_used (ios/IN/EG, 3), invalid_code (android/IN/FR, 3), and min_cart_not_met (web-user-b2c/IN/AU, 2) — while ATLYS15 shows one comparable spike (already_used, android/IN/SG, 3) and FREESHIP one (already_used, android/IN/US, 2).

WHY IT HAPPENS

EXPIRED5's rejections span three different reasons (already_used, invalid_code, min_cart_not_met) across three unrelated segments rather than clustering in one device or geo — that pattern points to the code itself (naming/expiry logic) being the driver, not a segment-specific friction point.

EVIDENCE

Top reject-count rows by code/reason/segment · coupon_rejected, all 252 rows, unfiltered

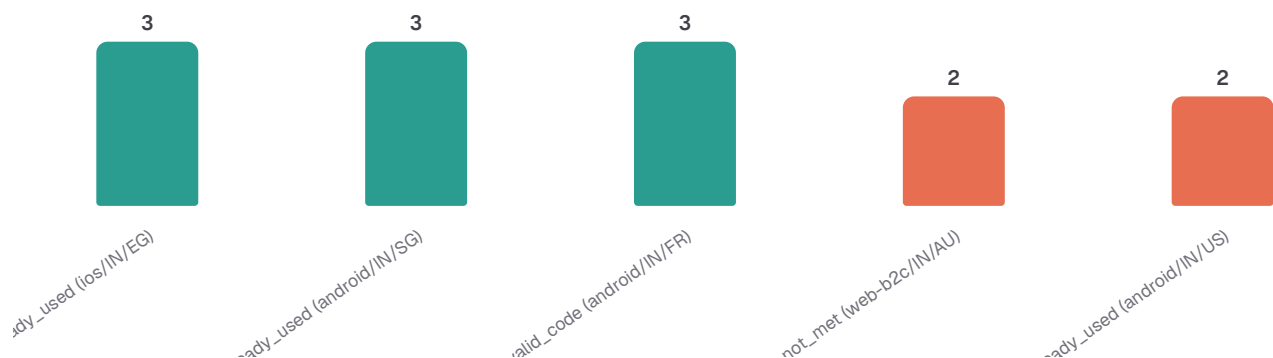

Grounded in context — Known issue (K6 v1): a SUMMER20 promo ran in Q2 with expected elevated activity — any SUMMER20 segment reads should account for that campaign timing rather than being taken as steady-state. Separately, every one of the three tasks here is gate-flagged low confidence (all sample sizes under 50), so no single device/geo/destination/code cell should be treated as a settled result.

**RECOMMENDED ACTION**

Don't ship per-segment code targeting off this data — the cells are too sparse ($n < 50$ everywhere). Instead, pull a longer window or larger sample focused on EXPIRED5's rejection logic specifically (it's the only code hitting multiple reject reasons across unrelated segments), and re-run this same segment cut once volume is sufficient per device×geo×destination cell.

Confidence  **0.50** the sanity gate raised flags; $\pm 40.5\text{pp}$ on applied_rate ($n=2$) — too wide to act on; an independently written query reproduced the figure

context 94 entities · max v7

```

APPLY RATE BY DEVICE/GEO/DESTINATION · 316 ROWS
WITH shown AS (
  SELECT
    device_type AS device_type,
    geoip_country_code AS geoip_country_code,
    destination AS destination,
    uniqExact(application_id) AS field_shown_n
  FROM coupon_field_shown
  GROUP BY device_type, geoip_country_code, destination
),
applied AS (
  SELECT
    device_type AS device_type,
    geoip_country_code AS geoip_country_code,
    destination AS destination,
    uniqExact(application_id) AS applied_n
  FROM coupon_applied
  GROUP BY device_type, geoip_country_code, destination
)
SELECT
  shown.device_type AS device_type,
  shown.geoip_country_code AS geoip_country_code,
  shown.destination AS destination,
  shown.field_shown_n AS field_shown_n,
  coalesce(applied.applied_n, 0) AS applied_n,
  coalesce(applied.applied_n, 0) / shown.field_shown_n AS coupon_apply_rate
FROM shown
LEFT JOIN applied
ON shown.device_type = applied.device_type
  AND shown.geoip_country_code = applied.geoip_country_code
  AND shown.destination = applied.destination
ORDER BY field_shown_n DESC
LIMIT 1000

APPLY RATE BY DEVICE/GEO/DESTINATION — PROFILE OF ALL 316 ROWS · 1 ROW
SELECT
  count() AS total_rows,
  min('coupon_apply_rate') AS coupon_apply_rate_min,
  max('coupon_apply_rate') AS coupon_apply_rate_max,

```

```

quantile(0.5)('coupon_apply_rate') AS coupon_apply_rate_p50_approx,
countIf('coupon_apply_rate' > 1.05) AS coupon_apply_rate_gt1_n,
sum('coupon_apply_rate' * 'field_shown_n') / sum('field_shown_n') AS full_coupon_apply_rate,
sum('field_shown_n') AS full_coupon_apply_n,
min('field_shown_n') AS field_shown_n_min,
max('field_shown_n') AS field_shown_n_max,
sum('field_shown_n') AS full_field_shown_n_sum,
min('applied_n') AS applied_n_min,
max('applied_n') AS applied_n_max,
sum('applied_n') AS full_applied_n_sum,
uniq('device_type') AS device_type_distinct_approx,
uniq('geoip_country_code') AS geoip_country_code_distinct_approx,
uniq('destination') AS destination_distinct_approx
FROM (
WITH shown AS (
SELECT
    device_type AS device_type,
    geoip_country_code AS geoip_country_code,
    destination AS destination,
    uniqExact(application_id) AS field_shown_n
FROM coupon_field_shown
GROUP BY device_type, geoip_country_code, destination
),
applied AS (
SELECT
    device_type AS device_type,
    geoip_country_code AS geoip_country_code,
    destination AS destination,
    uniqExact(application_id) AS applied_n
FROM coupon_applied
GROUP BY device_type, geoip_country_code, destination
)
SELECT
    shown.device_type AS device_type,
    shown.geoip_country_code AS geoip_country_code,
    shown.destination AS destination,
    shown.field_shown_n AS field_shown_n,
    coalesce(applied.applied_n, 0) AS applied_n,
    coalesce(applied.applied_n, 0) / shown.field_shown_n AS coupon_apply_rate
FROM shown
LEFT JOIN applied
ON shown.device_type = applied.device_type
   AND shown.geoip_country_code = applied.geoip_country_code
   AND shown.destination = applied.destination
ORDER BY field_shown_n DESC
) AS __result

APPLY RATE BY DEVICE/GEO/DESTINATION - HIGHEST BY COUPON_APPLY_RATE · 5 ROWS
SELECT * FROM (
WITH shown AS (
SELECT
    device_type AS device_type,
    geoip_country_code AS geoip_country_code,
    destination AS destination,
    uniqExact(application_id) AS field_shown_n
FROM coupon_field_shown
GROUP BY device_type, geoip_country_code, destination
),

```



```

applied AS (
    SELECT
        device_type AS device_type,
        geoip_country_code AS geoip_country_code,
        destination AS destination,
        uniqExact(application_id) AS applied_n
    FROM coupon_applied
    GROUP BY device_type, geoip_country_code, destination
)
SELECT
    shown.device_type AS device_type,
    shown.geoip_country_code AS geoip_country_code,
    shown.destination AS destination,
    shown.field_shown_n AS field_shown_n,
    coalesce(applied.applied_n, 0) AS applied_n,
    coalesce(applied.applied_n, 0) / shown.field_shown_n AS coupon_apply_rate
FROM shown
LEFT JOIN applied
ON shown.device_type = applied.device_type
   AND shown.geoip_country_code = applied.geoip_country_code
   AND shown.destination = applied.destination
ORDER BY field_shown_n DESC
) AS __result ORDER BY 'coupon_apply_rate' DESC LIMIT 5

APPLY RATE BY DEVICE/GEO/DESTINATION - LOWEST BY COUPON_APPLY_RATE * 5 ROWS

SELECT * FROM (
WITH shown AS (
    SELECT
        device_type AS device_type,
        geoip_country_code AS geoip_country_code,
        destination AS destination,
        uniqExact(application_id) AS field_shown_n
    FROM coupon_field_shown
    GROUP BY device_type, geoip_country_code, destination
),
applied AS (
    SELECT
        device_type AS device_type,
        geoip_country_code AS geoip_country_code,
        destination AS destination,
        uniqExact(application_id) AS applied_n
    FROM coupon_applied
    GROUP BY device_type, geoip_country_code, destination
)
SELECT
    shown.device_type AS device_type,
    shown.geoip_country_code AS geoip_country_code,
    shown.destination AS destination,
    shown.field_shown_n AS field_shown_n,
    coalesce(applied.applied_n, 0) AS applied_n,
    coalesce(applied.applied_n, 0) / shown.field_shown_n AS coupon_apply_rate
FROM shown
LEFT JOIN applied
ON shown.device_type = applied.device_type
   AND shown.geoip_country_code = applied.geoip_country_code
   AND shown.destination = applied.destination
ORDER BY field_shown_n DESC
) AS __result ORDER BY 'coupon_apply_rate' ASC LIMIT 5

```

CODE-LEVEL VALID VS REJECTED MIX BY SEGMENT · 541 ROWS

WITH

e AS (

```
SELECT coupon_code, device_type, geoip_country_code, destination,
       uniqExact(application_id) AS entered_n
FROM coupon_entered
GROUP BY coupon_code, device_type, geoip_country_code, destination
```

),

a AS (

```
SELECT coupon_code, device_type, geoip_country_code, destination,
       uniqExact(application_id) AS applied_n
FROM coupon_applied
GROUP BY coupon_code, device_type, geoip_country_code, destination
```

),

r AS (

```
SELECT coupon_code, device_type, geoip_country_code, destination,
       uniqExact(application_id) AS rejected_n
FROM coupon_rejected
GROUP BY coupon_code, device_type, geoip_country_code, destination
```

)

SELECT

```
e.coupon_code AS coupon_code,
e.device_type AS device_type,
e.geoip_country_code AS geoip_country_code,
e.destination AS destination,
e.entered_n AS entered_n,
coalesce(a.applied_n, 0) AS applied_n,
coalesce(r.rejected_n, 0) AS rejected_n,
coalesce(a.applied_n, 0) / e.entered_n AS applied_rate,
coalesce(r.rejected_n, 0) / e.entered_n AS rejected_rate
```

FROM e

FULL OUTER JOIN a

```
ON e.coupon_code = a.coupon_code
AND e.device_type = a.device_type
AND e.geoip_country_code = a.geoip_country_code
AND e.destination = a.destination
```

FULL OUTER JOIN r

```
ON e.coupon_code = r.coupon_code
AND e.device_type = r.device_type
AND e.geoip_country_code = r.geoip_country_code
AND e.destination = r.destination
```

LIMIT 1000

CODE-LEVEL VALID VS REJECTED MIX BY SEGMENT – PROFILE OF ALL 541 ROWS · 1 ROW

SELECT

```
count() AS total_rows,
min('applied_rate') AS applied_rate_min,
max('applied_rate') AS applied_rate_max,
quantile(0.5)('applied_rate') AS applied_rate_p50_approx,
countIf('applied_rate' > 1.05) AS applied_rate_gt1_n,
sum('applied_rate' * 'entered_n') / sum('entered_n') AS full_applied_rate,
sum('entered_n') AS full_applied_n,
min('rejected_rate') AS rejected_rate_min,
max('rejected_rate') AS rejected_rate_max,
quantile(0.5)('rejected_rate') AS rejected_rate_p50_approx,
countIf('rejected_rate' > 1.05) AS rejected_rate_gt1_n,
sum('rejected_rate' * 'entered_n') / sum('entered_n') AS full_rejected_rate,
sum('entered_n') AS full_rejected_n,
```

```

min('entered_n') AS entered_n_min,
max('entered_n') AS entered_n_max,
sum('entered_n') AS full_entered_n_sum,
min('applied_n') AS applied_n_min,
max('applied_n') AS applied_n_max,
sum('applied_n') AS full_applied_n_sum,
min('rejected_n') AS rejected_n_min,
max('rejected_n') AS rejected_n_max,
sum('rejected_n') AS full_rejected_n_sum,
uniq('coupon_code') AS coupon_code_distinct_approx,
uniq('device_type') AS device_type_distinct_approx,
uniq('geoip_country_code') AS geoip_country_code_distinct_approx,
uniq('destination') AS destination_distinct_approx
FROM (
WITH
e AS (
    SELECT coupon_code, device_type, geoip_country_code, destination,
           uniqExact(application_id) AS entered_n
    FROM coupon_entered
    GROUP BY coupon_code, device_type, geoip_country_code, destination
),
a AS (
    SELECT coupon_code, device_type, geoip_country_code, destination,
           uniqExact(application_id) AS applied_n
    FROM coupon_applied
    GROUP BY coupon_code, device_type, geoip_country_code, destination
),
r AS (
    SELECT coupon_code, device_type, geoip_country_code, destination,
           uniqExact(application_id) AS rejected_n
    FROM coupon_rejected
    GROUP BY coupon_code, device_type, geoip_country_code, destination
)
SELECT
    e.coupon_code AS coupon_code,
    e.device_type AS device_type,
    e.geoip_country_code AS geoip_country_code,
    e.destination AS destination,
    e.entered_n AS entered_n,
    coalesce(a.applied_n, 0) AS applied_n,
    coalesce(r.rejected_n, 0) AS rejected_n,
    coalesce(a.applied_n, 0) / e.entered_n AS applied_rate,
    coalesce(r.rejected_n, 0) / e.entered_n AS rejected_rate
FROM e
FULL OUTER JOIN a
    ON e.coupon_code = a.coupon_code
   AND e.device_type = a.device_type
   AND e.geoip_country_code = a.geoip_country_code
   AND e.destination = a.destination
FULL OUTER JOIN r
    ON e.coupon_code = r.coupon_code
   AND e.device_type = r.device_type
   AND e.geoip_country_code = r.geoip_country_code
   AND e.destination = r.destination
) AS __result

CODE-LEVEL VALID VS REJECTED MIX BY SEGMENT - HIGHEST BY APPLIED_RATE · 5 ROWS

```

```

SELECT * FROM (
WITH
e AS (
    SELECT coupon_code, device_type, geoip_country_code, destination,
           uniqExact(application_id) AS entered_n
    FROM coupon_entered
    GROUP BY coupon_code, device_type, geoip_country_code, destination
),
a AS (
    SELECT coupon_code, device_type, geoip_country_code, destination,
           uniqExact(application_id) AS applied_n
    FROM coupon_applied
    GROUP BY coupon_code, device_type, geoip_country_code, destination
),
r AS (
    SELECT coupon_code, device_type, geoip_country_code, destination,
           uniqExact(application_id) AS rejected_n
    FROM coupon_rejected
    GROUP BY coupon_code, device_type, geoip_country_code, destination
)
SELECT
    e.coupon_code AS coupon_code,
    e.device_type AS device_type,
    e.geoip_country_code AS geoip_country_code,
    e.destination AS destination,
    e.entered_n AS entered_n,
    coalesce(a.applied_n, 0) AS applied_n,
    coalesce(r.rejected_n, 0) AS rejected_n,
    coalesce(a.applied_n, 0) / e.entered_n AS applied_rate,
    coalesce(r.rejected_n, 0) / e.entered_n AS rejected_rate
FROM e
FULL OUTER JOIN a
    ON e.coupon_code = a.coupon_code
   AND e.device_type = a.device_type
   AND e.geoip_country_code = a.geoip_country_code
   AND e.destination = a.destination
FULL OUTER JOIN r
    ON e.coupon_code = r.coupon_code
   AND e.device_type = r.device_type
   AND e.geoip_country_code = r.geoip_country_code
   AND e.destination = r.destination
) AS __result ORDER BY 'applied_rate' DESC LIMIT 5

CODE-LEVEL VALID VS REJECTED MIX BY SEGMENT - LOWEST BY APPLIED_RATE - 5 ROWS

SELECT * FROM (
WITH
e AS (
    SELECT coupon_code, device_type, geoip_country_code, destination,
           uniqExact(application_id) AS entered_n
    FROM coupon_entered
    GROUP BY coupon_code, device_type, geoip_country_code, destination
),
a AS (
    SELECT coupon_code, device_type, geoip_country_code, destination,
           uniqExact(application_id) AS applied_n
    FROM coupon_applied
    GROUP BY coupon_code, device_type, geoip_country_code, destination
),

```

```

r AS (
    SELECT coupon_code, device_type, geoip_country_code, destination,
           uniqExact(application_id) AS rejected_n
    FROM coupon_rejected
    GROUP BY coupon_code, device_type, geoip_country_code, destination
)
SELECT
    e.coupon_code AS coupon_code,
    e.device_type AS device_type,
    e.geoip_country_code AS geoip_country_code,
    e.destination AS destination,
    e.entered_n AS entered_n,
    coalesce(a.applied_n, 0) AS applied_n,
    coalesce(r.rejected_n, 0) AS rejected_n,
    coalesce(a.applied_n, 0) / e.entered_n AS applied_rate,
    coalesce(r.rejected_n, 0) / e.entered_n AS rejected_rate
FROM e
FULL OUTER JOIN a
    ON e.coupon_code = a.coupon_code
   AND e.device_type = a.device_type
   AND e.geoip_country_code = a.geoip_country_code
   AND e.destination = a.destination
FULL OUTER JOIN r
    ON e.coupon_code = r.coupon_code
   AND e.device_type = r.device_type
   AND e.geoip_country_code = r.geoip_country_code
   AND e.destination = r.destination
) AS __result ORDER BY 'applied_rate' ASC LIMIT 5

REJECT REASONS BY CODE AND SEGMENT - 252 ROWS

SELECT
    coupon_code AS coupon_code,
    reject_reason AS reject_reason,
    device_type AS device_type,
    geoip_country_code AS geoip_country_code,
    destination AS destination,
    count() AS reject_n
FROM coupon_rejected
GROUP BY coupon_code, reject_reason, device_type, geoip_country_code, destination
ORDER BY coupon_code, reject_n DESC
LIMIT 1000

REJECT REASONS BY CODE AND SEGMENT - PROFILE OF ALL 252 ROWS - 1 ROW

SELECT
    count() AS total_rows,
    min('reject_n') AS reject_n_min,
    max('reject_n') AS reject_n_max,
    sum('reject_n') AS full_reject_n_sum,
    uniq('coupon_code') AS coupon_code_distinct_approx,
    uniq('reject_reason') AS reject_reason_distinct_approx,
    uniq('device_type') AS device_type_distinct_approx,
    uniq('geoip_country_code') AS geoip_country_code_distinct_approx
FROM (
    SELECT
        coupon_code AS coupon_code,
        reject_reason AS reject_reason,
        device_type AS device_type,
        geoip_country_code AS geoip_country_code,

```

```
        destination AS destination,
        count() AS reject_n
FROM coupon_rejected
GROUP BY coupon_code, reject_reason, device_type, geoip_country_code, destination
ORDER BY coupon_code, reject_n DESC
) AS __result

REJECT REASONS BY CODE AND SEGMENT – HIGHEST BY REJECT_N · 5 ROWS

SELECT * FROM (
SELECT
    coupon_code AS coupon_code,
    reject_reason AS reject_reason,
    device_type AS device_type,
    geoip_country_code AS geoip_country_code,
    destination AS destination,
    count() AS reject_n
FROM coupon_rejected
GROUP BY coupon_code, reject_reason, device_type, geoip_country_code, destination
ORDER BY coupon_code, reject_n DESC
) AS __result ORDER BY `reject_n` DESC LIMIT 5

REJECT REASONS BY CODE AND SEGMENT – LOWEST BY REJECT_N · 5 ROWS

SELECT * FROM (
SELECT
    coupon_code AS coupon_code,
    reject_reason AS reject_reason,
    device_type AS device_type,
    geoip_country_code AS geoip_country_code,
    destination AS destination,
    count() AS reject_n
FROM coupon_rejected
GROUP BY coupon_code, reject_reason, device_type, geoip_country_code, destination
ORDER BY coupon_code, reject_n DESC
) AS __result ORDER BY `reject_n` ASC LIMIT 5
```

Every figure in this document was produced by SQL run against ClickHouse and checked against its result set. The queries behind each answer are printed with it.