



AI JOURNAL WITH SENTIMENT ANALYSIS

SPRINT 1

26 March, 2026

AGENDA OVERVIEW

01

TEAM MEMBER ROLES AND RESPONSIBILITIES

02

IMPROVEMENTS MADE FROM FEEDBACK

03

PROJECT DESCRIPTION

04

TEAM WORKING AGREEMENT

05

USER PERSONAS

06

MVP

07

TECHNOLOGIES

08

ALGORITHMS

09

DIAGRAMS

10

PRODUCT BACKLOG

AGENDA OVERVIEW CONTD.

11

SPRINT 1 BACKLOG

12

METRICS

13

RETROSPECTIVE

14

SPRINT 2 PLANNING

15

PROJECT DEMO

16

MVP

17

OUR GITHUB

18

LIVE APP DEMO

19

WIKI PAGE

20

TEAM NEXUS



KRISHNA
Scrum Master |
Developer



CHINTAN KOTADIYA
Developer | Tester



RAFAELA HOLLANDA
Team Leader |
Developer



VANESSA AGBUGBA
Front End Developer



SANKET MATROJA
AI Generalist



SAI
Developer

TEAM MEMBERS

IMPROVEMENTS MADE FROM PROFESSOR'S FEEDBACK

1. TEAM PRESENCE

FEEDBACK:

ONE MEMBER WAS AWAY DURING THE
PRESENTATION VIDEO

- ALL MEMBERS WILL RECORD
TOGETHER GOING FORWARD

3. BOARD USAGE

FEEDBACK:

KUDOS FOR USING A BOARD IN OUR
RETROSPECTIVE

- CONTINUE USING OUR BOARD FOR
RETROSPECTIVES & PLANNING

2. RETROSPECTIVE FOCUS

FEEDBACK:

ONLY SPEAK ABOUT EFFECTIVENESS
DURING RETROSPECTIVES

- KEEP RETROSPECTIVES STRICTLY ON
PROCESS IMPROVEMENT

4. AGENTIC AI

FEEDBACK:

TRY TO INTEGRATE AGENTIC AI / AI
AGENTS INTO THE PROJECT

- IMPLEMENTING AGENTIC AI IDEAS IN
SPRINT 2

PROJECT DESCRIPTION

Project Name:	Mind Mirror
Team:	Nexus
Project Description:	For individuals who struggle to understand and manage their emotions, the AI-powered journaling application is a smart, emotion-tracking tool that provides real-time sentiment analysis, mood visualization, and actionable insights. Unlike traditional journaling apps that lack emotional analytics or structure, our application combines journaling with AI-driven insights to help users recognize patterns, prevent burnout, and improve emotional well-being.
Benefit Outcomes:	Users can anticipate measurable improvements in emotional awareness, reflection consistency, and stress management. The application is expected to increase emotional recognition by 60%, reduce stress levels by 40%, and triple journaling consistency through its quick-entry and real-time feedback features.
Github Link:	https://github.com/htmw/2026S-Nexus

COMMUNICATION PLAN

- Primary instant meeting platform: WhatsApp
- Video Meeting: Discord

Team members are expected to:

- Communicate respectfully and professionally
- Respond to messages within a reasonable time frame (ideally within 24 hours)
- Share progress updates, blockers, and concerns openly
- Use the agreed communication tools for all project-related discussions

MEETINGS & AVAILABILITY

The team will hold three regular sync meetings per week:

- Sunday: 10:00 AM • Tuesday: 6:30 PM • Thursday: 9:00 PM

Additional meetings may be scheduled as needed based on sprint requirements. Expectations:

- All members should attend scheduled meetings
- If unable to attend, members must notify the team in advance
- Meeting notes and action items will be documented and shared

TEAM WORKING AGREEMENT



TASK MANAGEMENT

- Task tracking tool: Jira

All project tasks will be:

- Clearly defined and assigned
- Tracked through Jira
- Updated regularly to reflect progress
- Completed before agreed internal deadlines

CONFLICT RESOLUTION

In the event of conflict:

1. The concerned party should first express the issue to the team openly and respectfully
2. The team will attempt to resolve the issue collaboratively
3. If unresolved, the issue will be escalated to the Team Leader / Scrum Coordinator
4. Further escalation (e.g., to the instructor) will be considered only if necessary

WORK EXPECTATIONS & DEFINITION OF DONE

Each task is considered “Done” when:

- It meets the agreed acceptance criteria
- It is reviewed by at least one other team member (when applicable)
- Code runs without critical errors
- Relevant documentation is updated
- Changes are committed to the shared repository

Team members are responsible for:

- Completing assigned work on time
- Communicating blockers early
- Supporting teammates when needed

STUDENT PERSONA



NAME: SARAH MARTINEZ

Age: 21

Gender: Female

Occupation: Undergraduate Computer Science Student

Sarah is a full-time college student balancing coursework, part-time work, and social commitments. During exam periods, her stress levels rise significantly, but she often ignores the early warning signs of burnout. She occasionally journals but finds long entries overwhelming and inconsistent. She wants a simple way to reflect daily without spending too much time.

Challenges:

- Experiences fluctuating stress levels during the semester
- Inconsistent journaling habits
- Difficulty recognizing emotional patterns over time
- Feels overwhelmed during midterms and finals

Goals:

- Track emotional trends throughout the semester
- Identify early signs of burnout
- Receive short, actionable suggestions
- Maintain better emotional balance during academic pressure

WORKING PROFESSIONAL PERSONA



NAME: DAVID CHEN

Age: 32

Gender: Male

Occupation: Software Engineer

David works remotely for a tech company and spends most of his day attending meetings and coding. While he performs well professionally, he often feels mentally drained without clearly understanding the cause. He values productivity and self-improvement but rarely pauses to reflect on his emotional state.

Challenges:

- Blurred boundaries between work and personal life
- Emotional fatigue during high-pressure deadlines
- No structured way to monitor mood patterns
- Limited time for long reflection exercises

Goals:

- Understand how work stress affects his mood
- Monitor emotional stability over time
- Receive quick, data-driven insights
- Improve work-life balance

WORKING PARENT PERSONA



NAME: EMILY PETERSON

Age: 40

Gender: Female

Occupation: HR Manager

Emily balances a demanding job with parenting responsibilities. Her schedule leaves little time for self-reflection, yet she recognizes the importance of emotional awareness. She often feels emotionally exhausted but cannot clearly identify triggers or patterns. She prefers simple, easy-to-use digital tools.

Challenges:

- Limited time for lengthy journaling
- Emotional fatigue from multitasking responsibilities
- Difficulty identifying emotional triggers
- Wants non-clinical, supportive guidance

Goals:

- Build daily emotional awareness
- Identify patterns in stress levels
- Receive manageable well-being suggestions
- Maintain emotional stability for herself and her family

SELF-IMPROVEMENT ENTHUSIAST PERSONA



NAME: ALEX RIVERA

Age: 27

Gender: Male

Occupation: Fitness Coach

Alex actively tracks his workouts, sleep cycles, and productivity habits. He believes emotional well-being is just as important as physical health but lacks a structured system to measure it. He is interested in data-driven insights and enjoys tools that provide analytics and visualizations.

Challenges:

- Journaling apps provide no analytical insights
- No measurable way to track emotional consistency
- Wants deeper pattern recognition
- Prefers technology-backed recommendations

Goals:

- Quantify emotional trends
- Compare mood ratings with AI sentiment analysis
- Identify emotional volatility
- Optimize overall mental performance

TECHNOLOGIES

FRONT END



BACK END



Hugging Face

DATABASE




TOOLS



Canva



MINIMAL VIABLE PRODUCT (MVP)

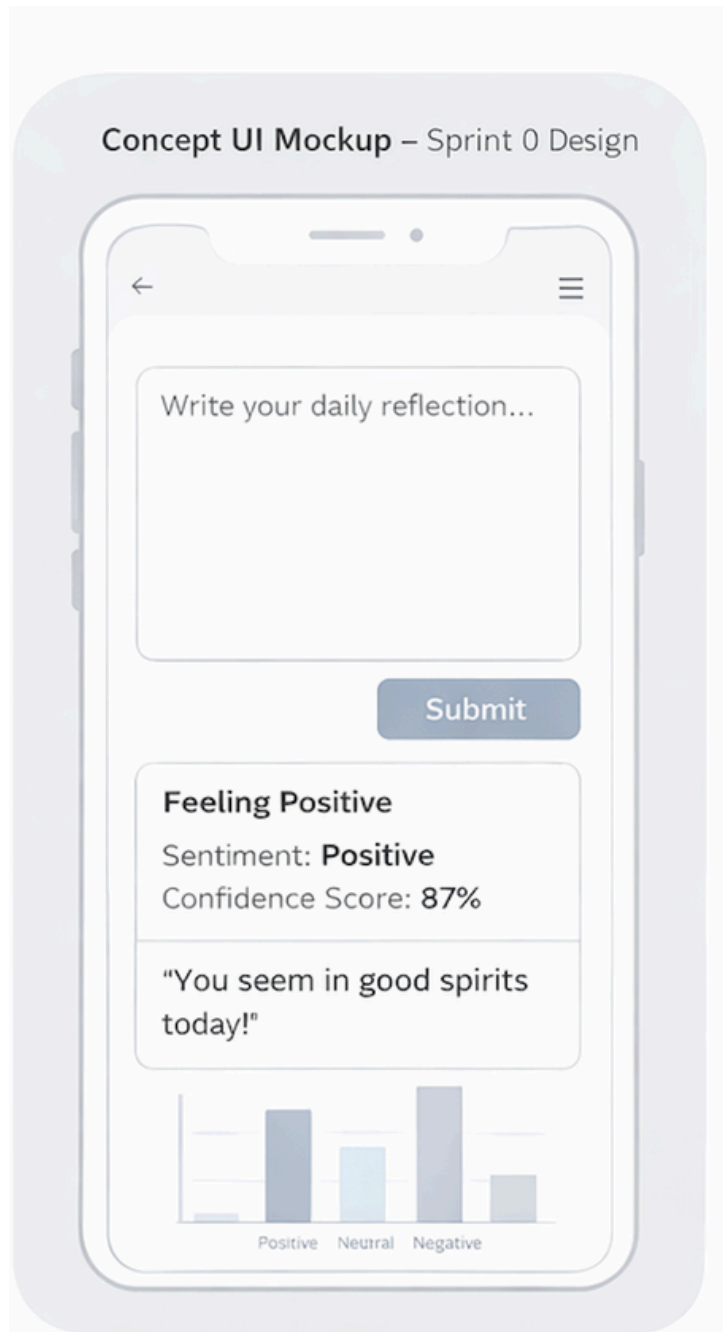


An AI-powered journaling application with real-time emotional analysis and visual mood tracking.


- Real-Time Sentiment Analysis – Journal entries are analyzed instantly using an NLP model.
- Mood Classification System – Each entry is labeled as Positive, Neutral, or Negative.
- Confidence Score Display – Shows the model's certainty level for each classification.
- Immediate Mood Feedback – Provides short, supportive emotional insights after analysis
- Visual Mood Distribution – Displays a basic chart showing mood trends over time.
- Local Entry Persistence – Saves journal entries locally for later review (MVP scope).

COMPONENTS


- Journal Input Manager : Handles user journal entry input and submission through the web interface.
- Backend API Manager : Manages HTTP requests and communication between frontend, sentiment model, and database.
- Sentiment Analysis Manager : Processes journal text and classifies sentiment (Positive / Neutral / Negative).
- Confidence Scoring Module: Extracts prediction probability scores from the DistilBERT output.
- Mood Feedback Generator: Converts sentiment results into short, supportive emotional insights.
- Data Persistence Layer : Stores journal entries, sentiment labels, confidence scores, and timestamps.
- Mood Visualization Manager: Retrieves stored data and generates mood distribution charts over time.

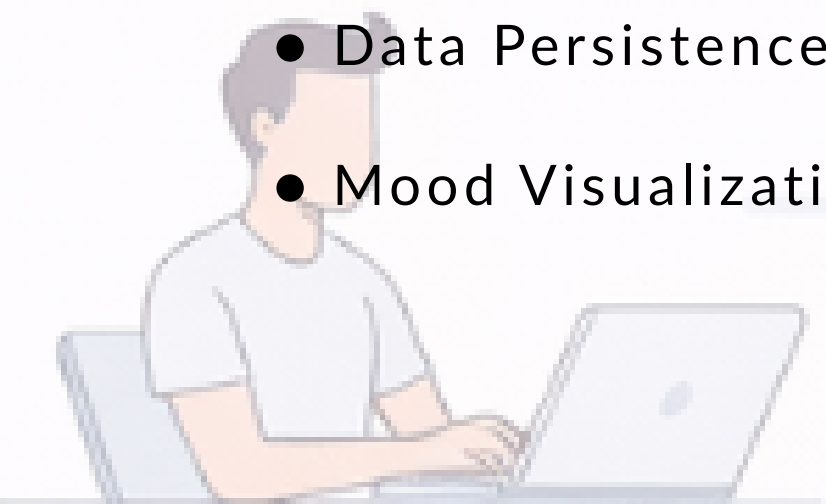


ARCHITECTURE DIAGRAM

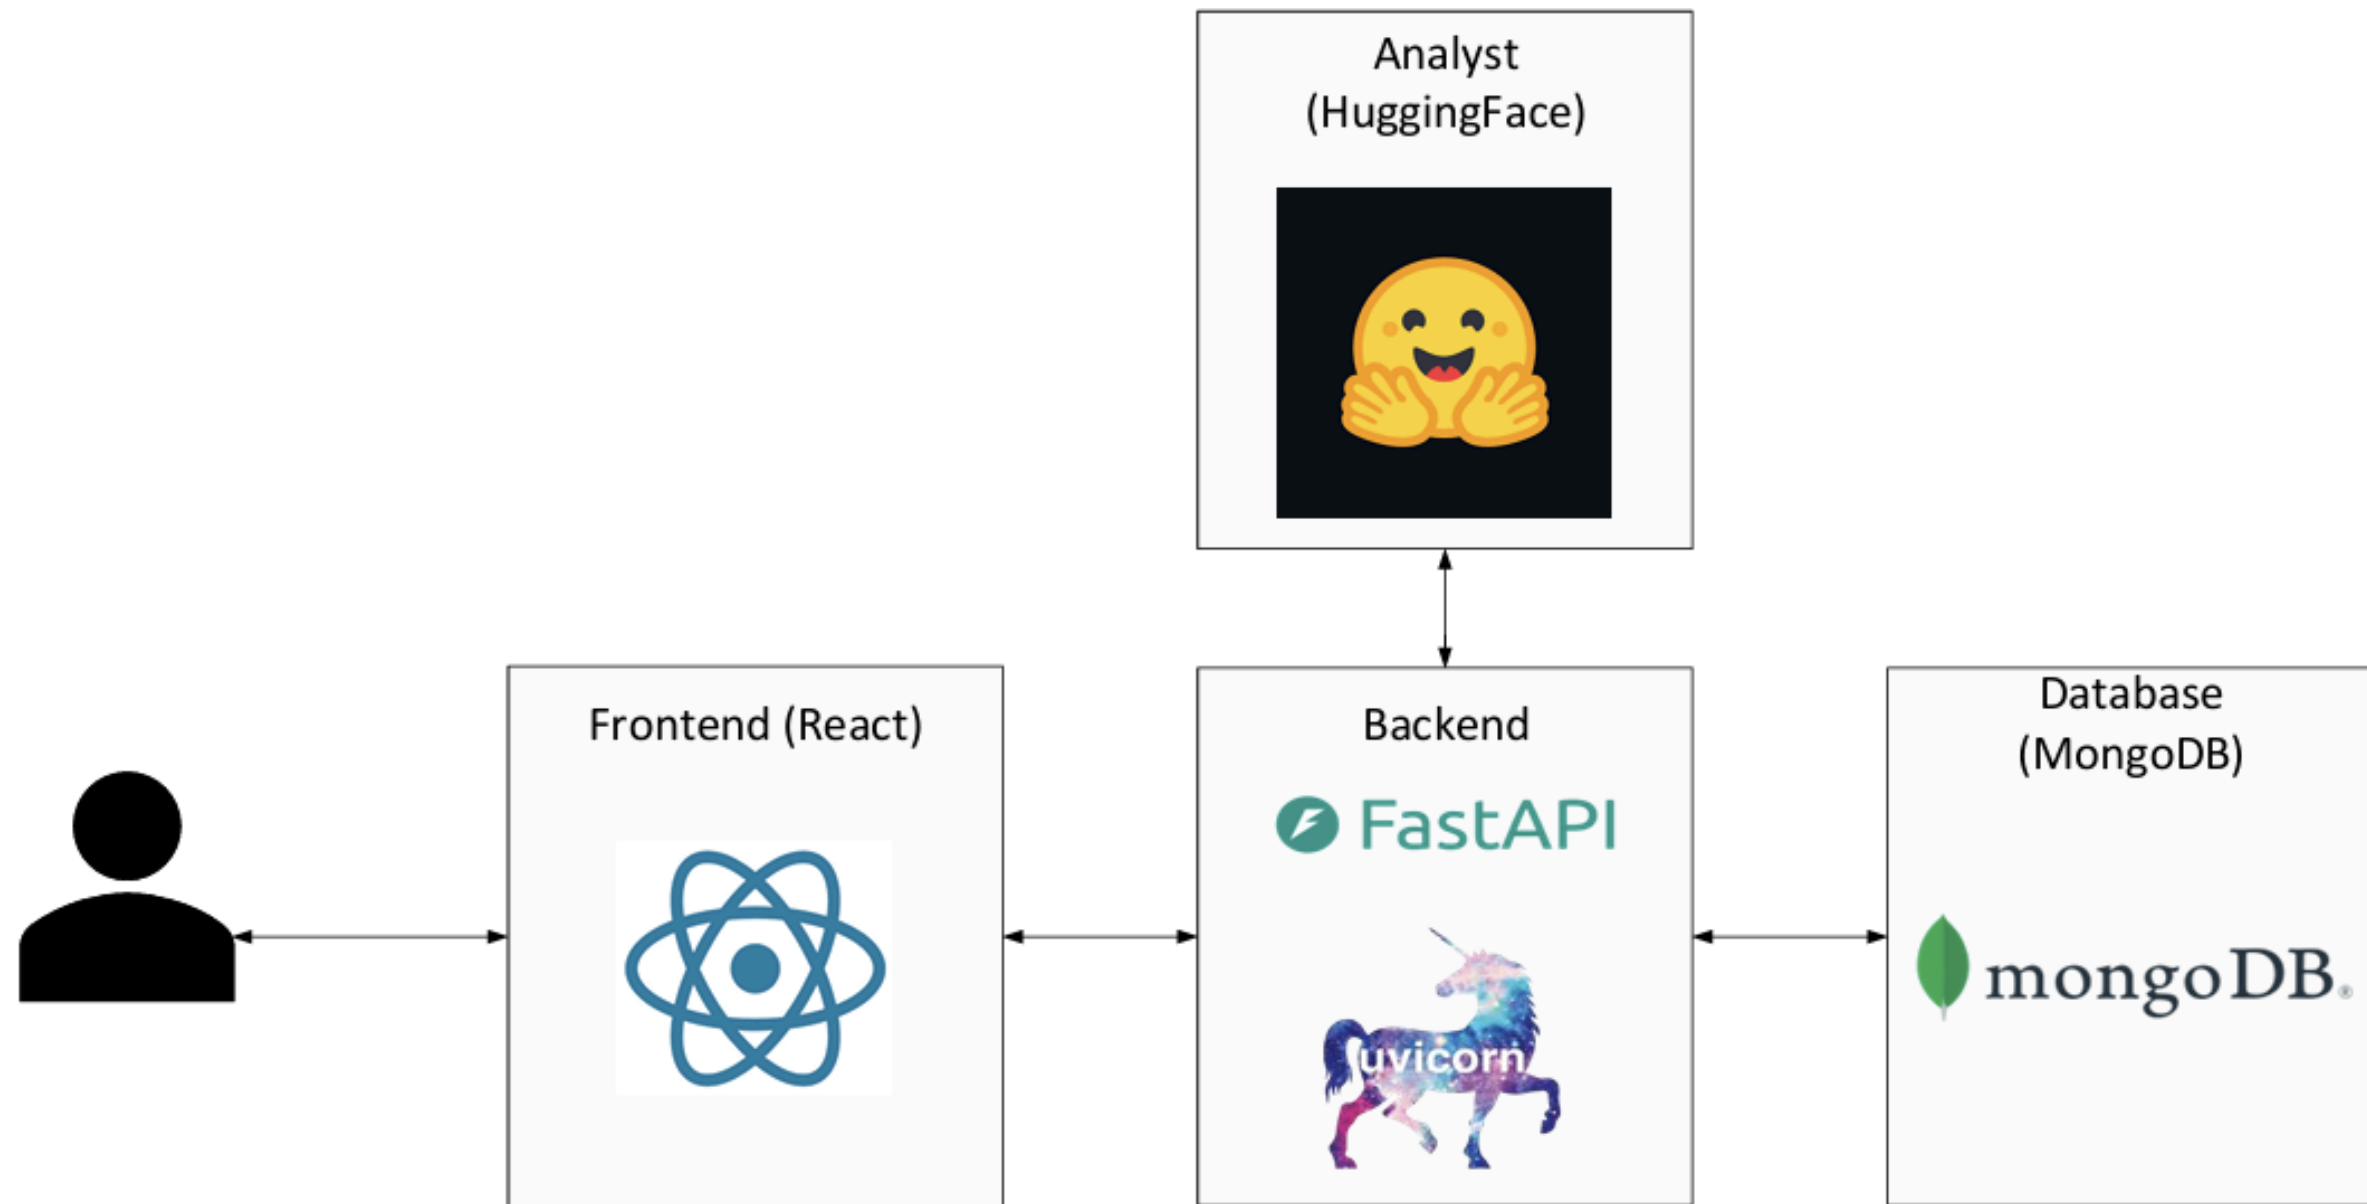


ER DIAGRAM

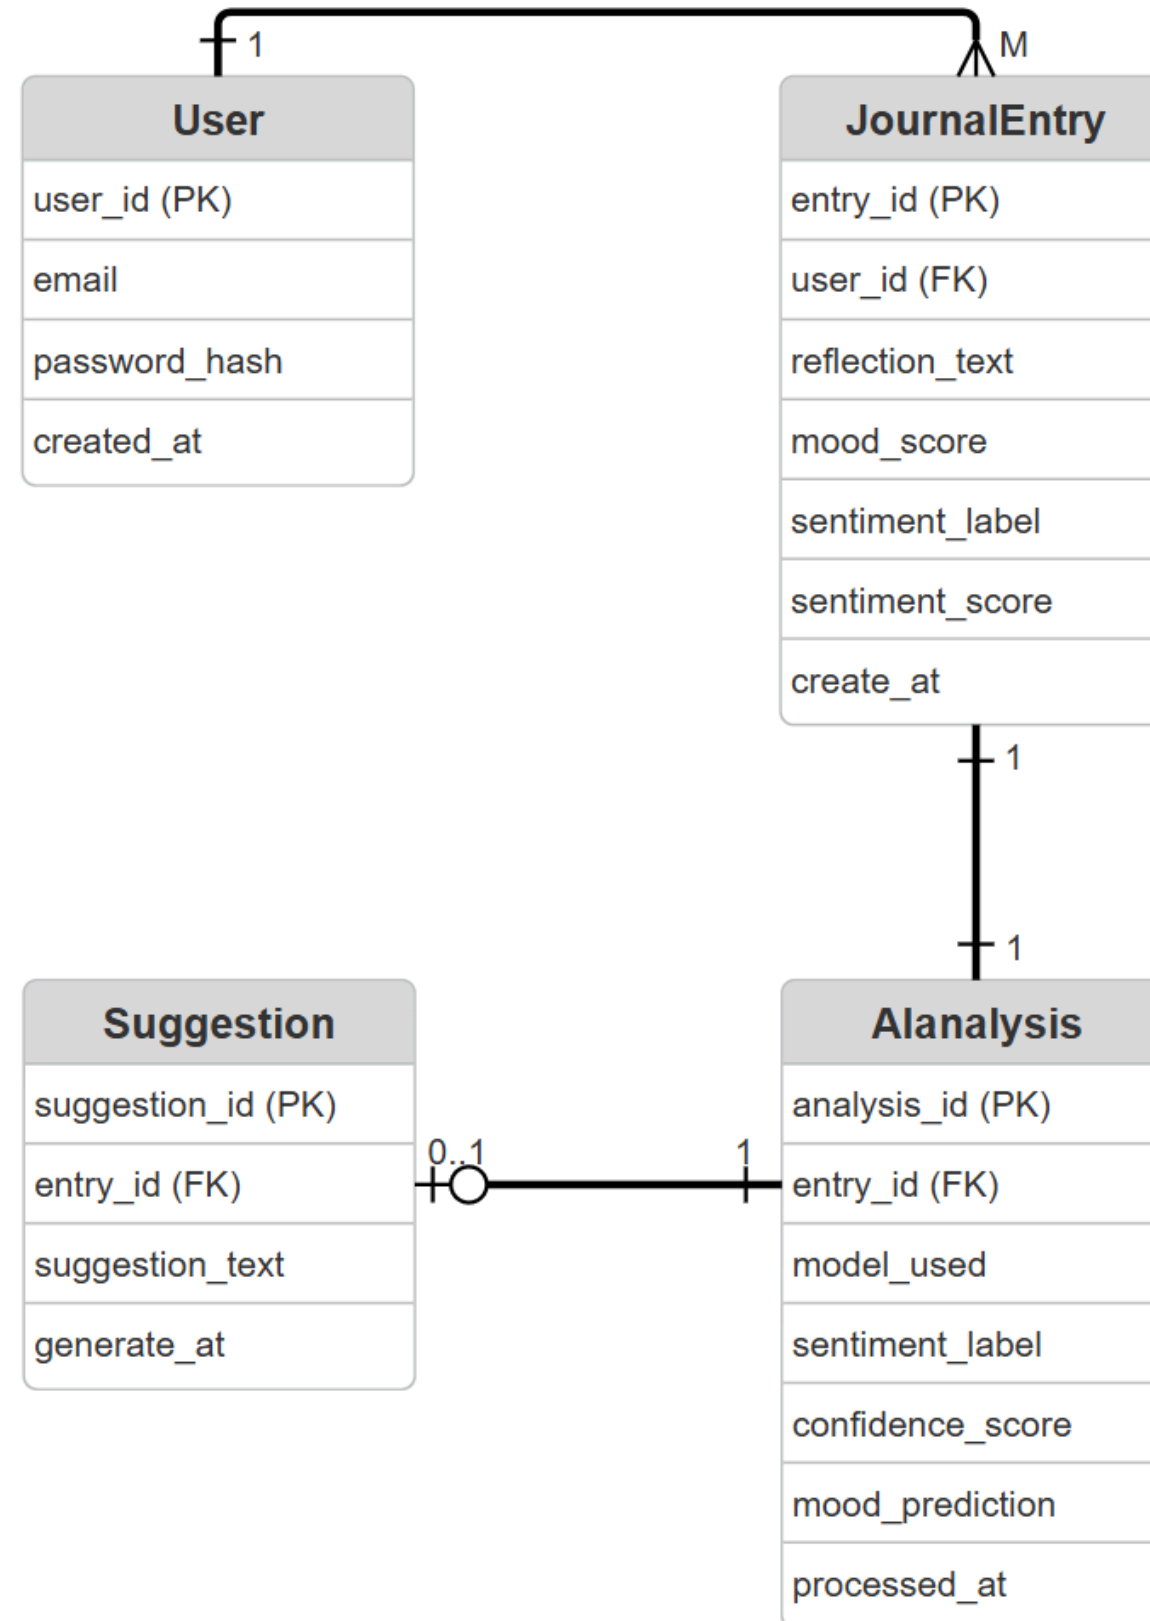

CONTEXT DIAGRAM

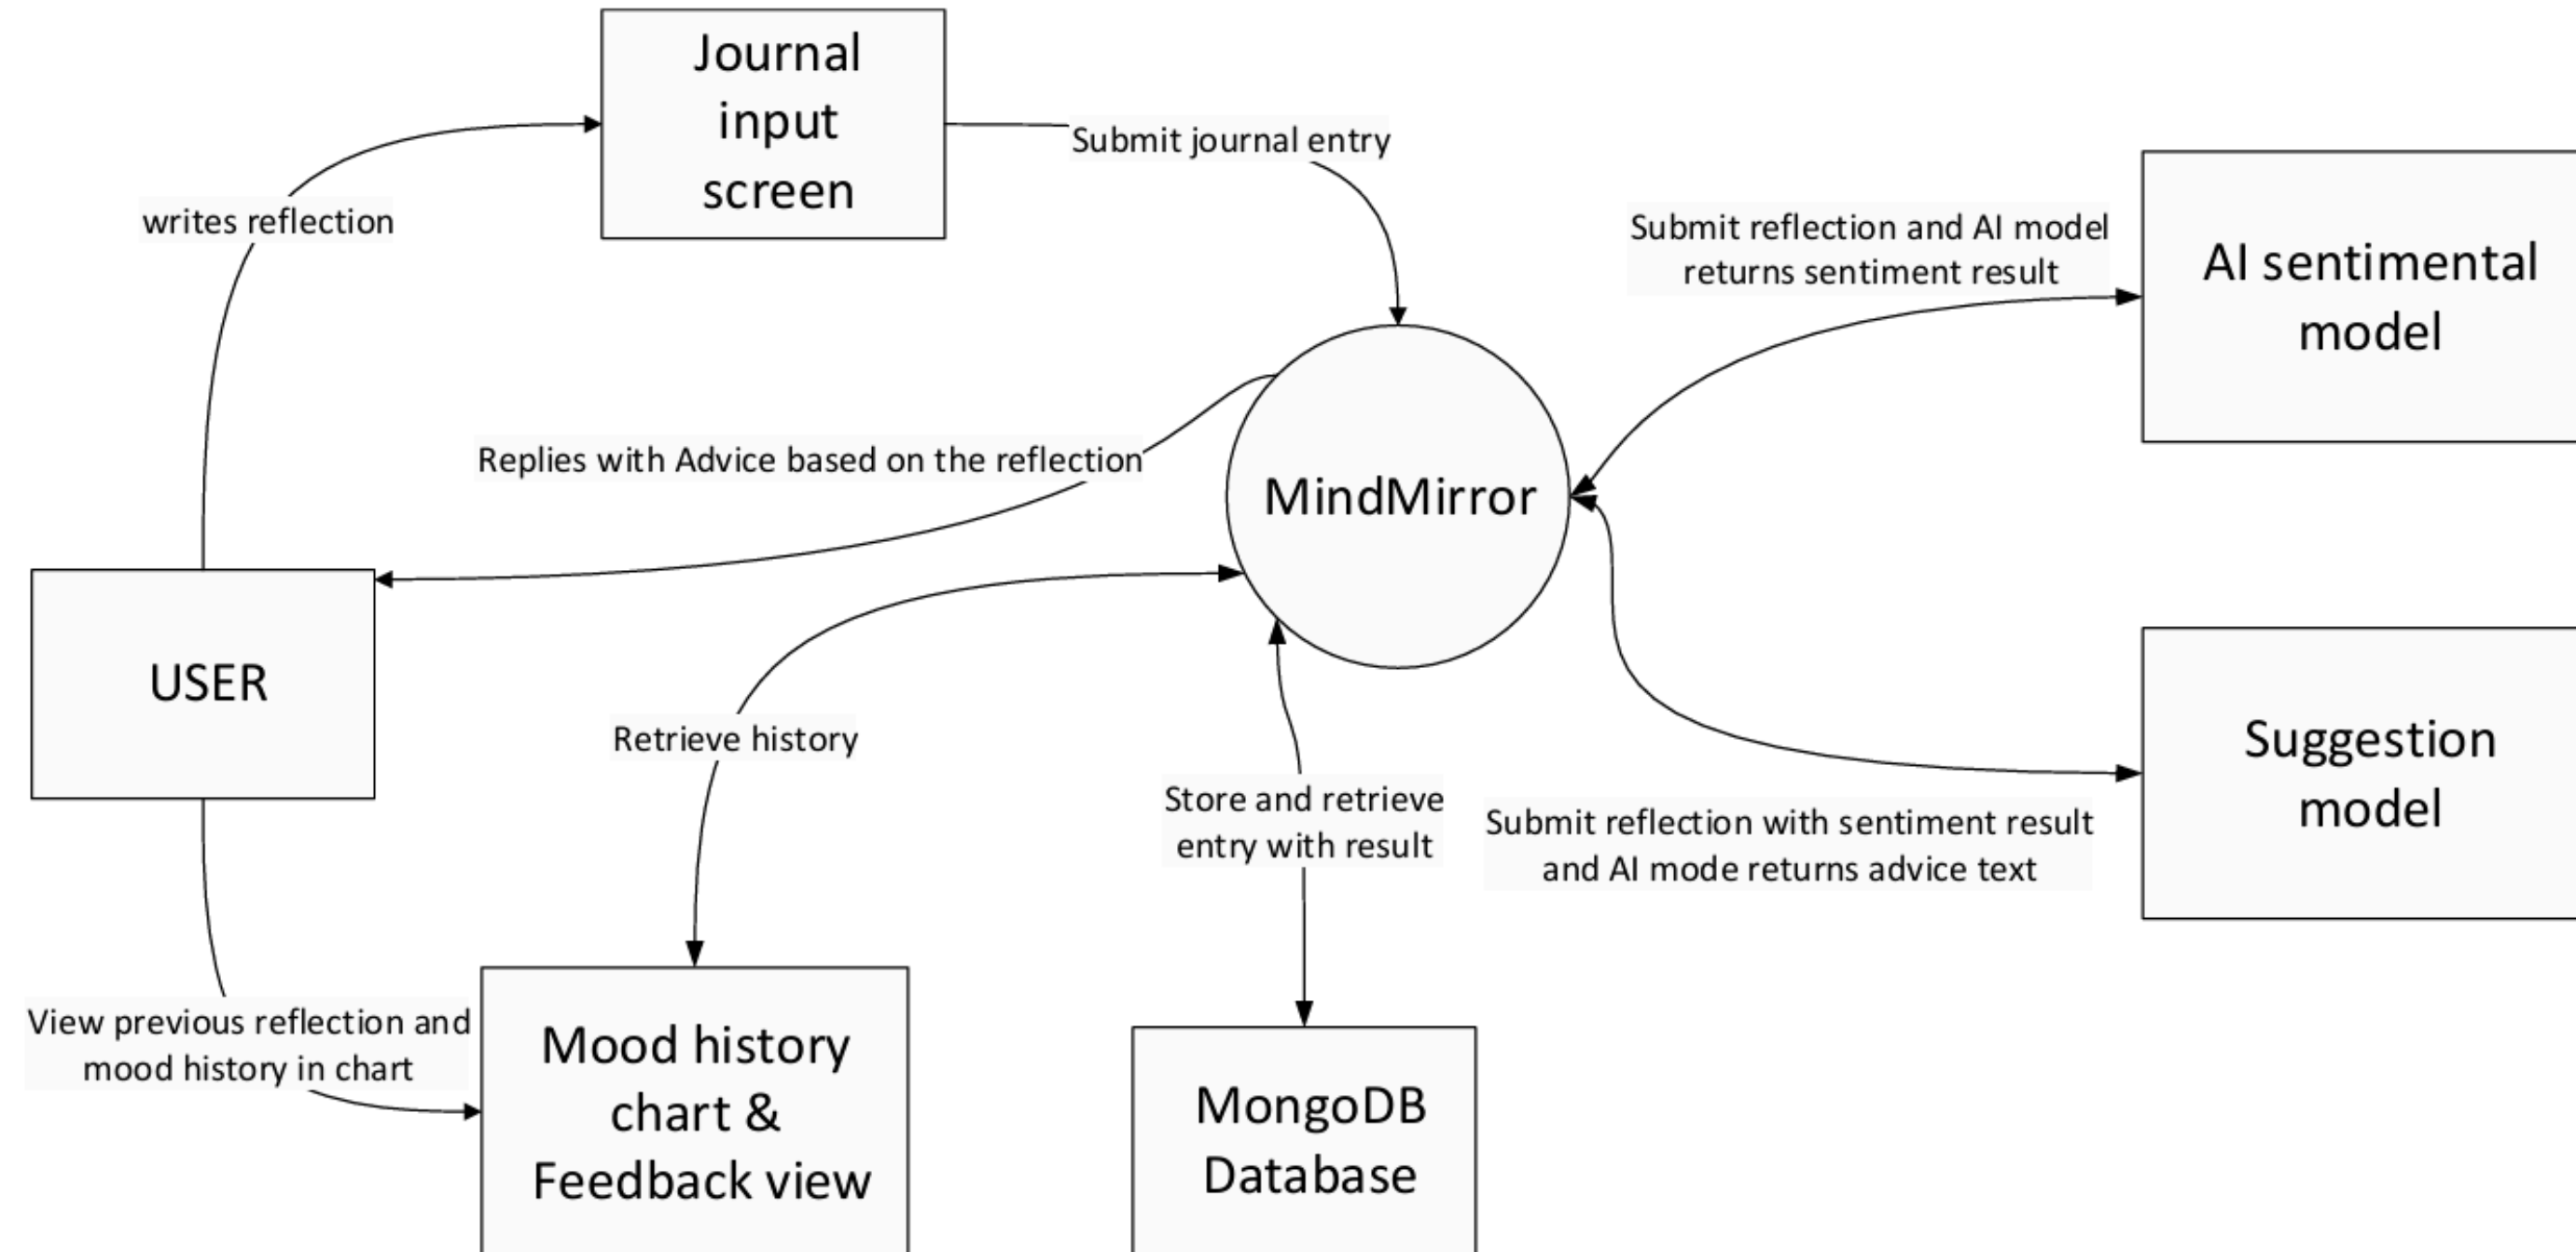


SEQUENCE DIAGRAM - JOURNAL ENTRY

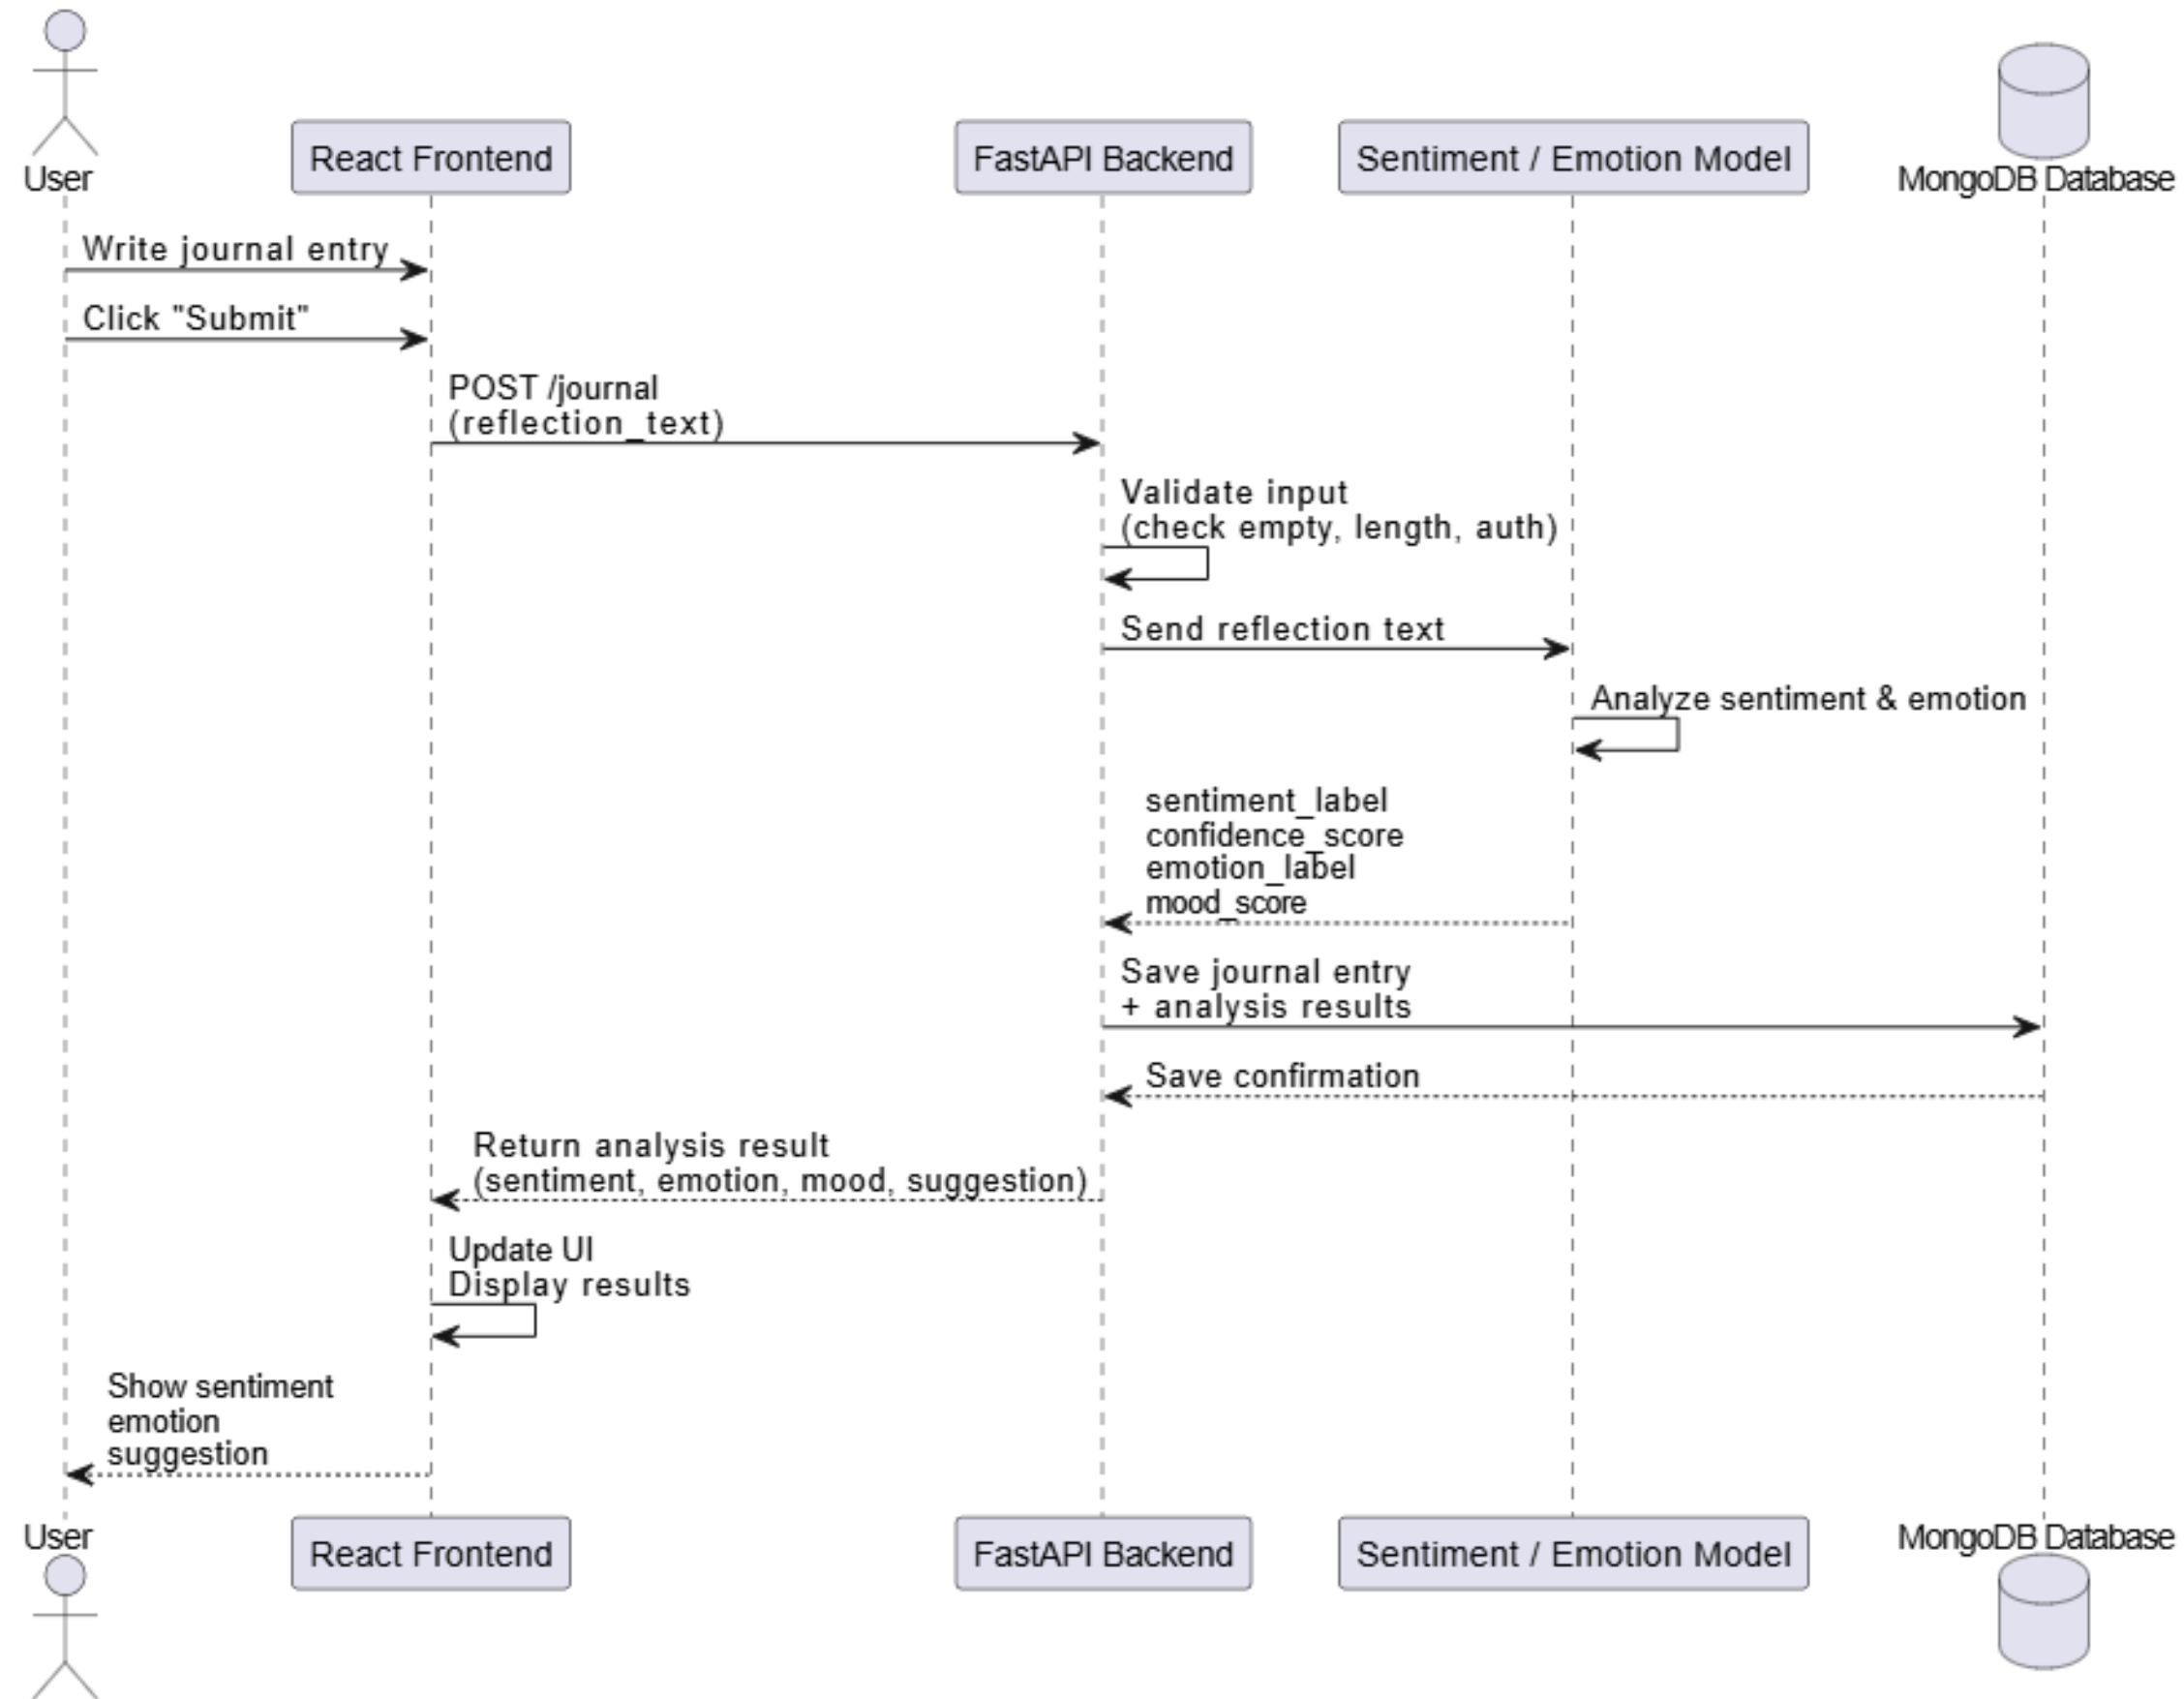

SEQUENCE DIAGRAM

DASHBOARD

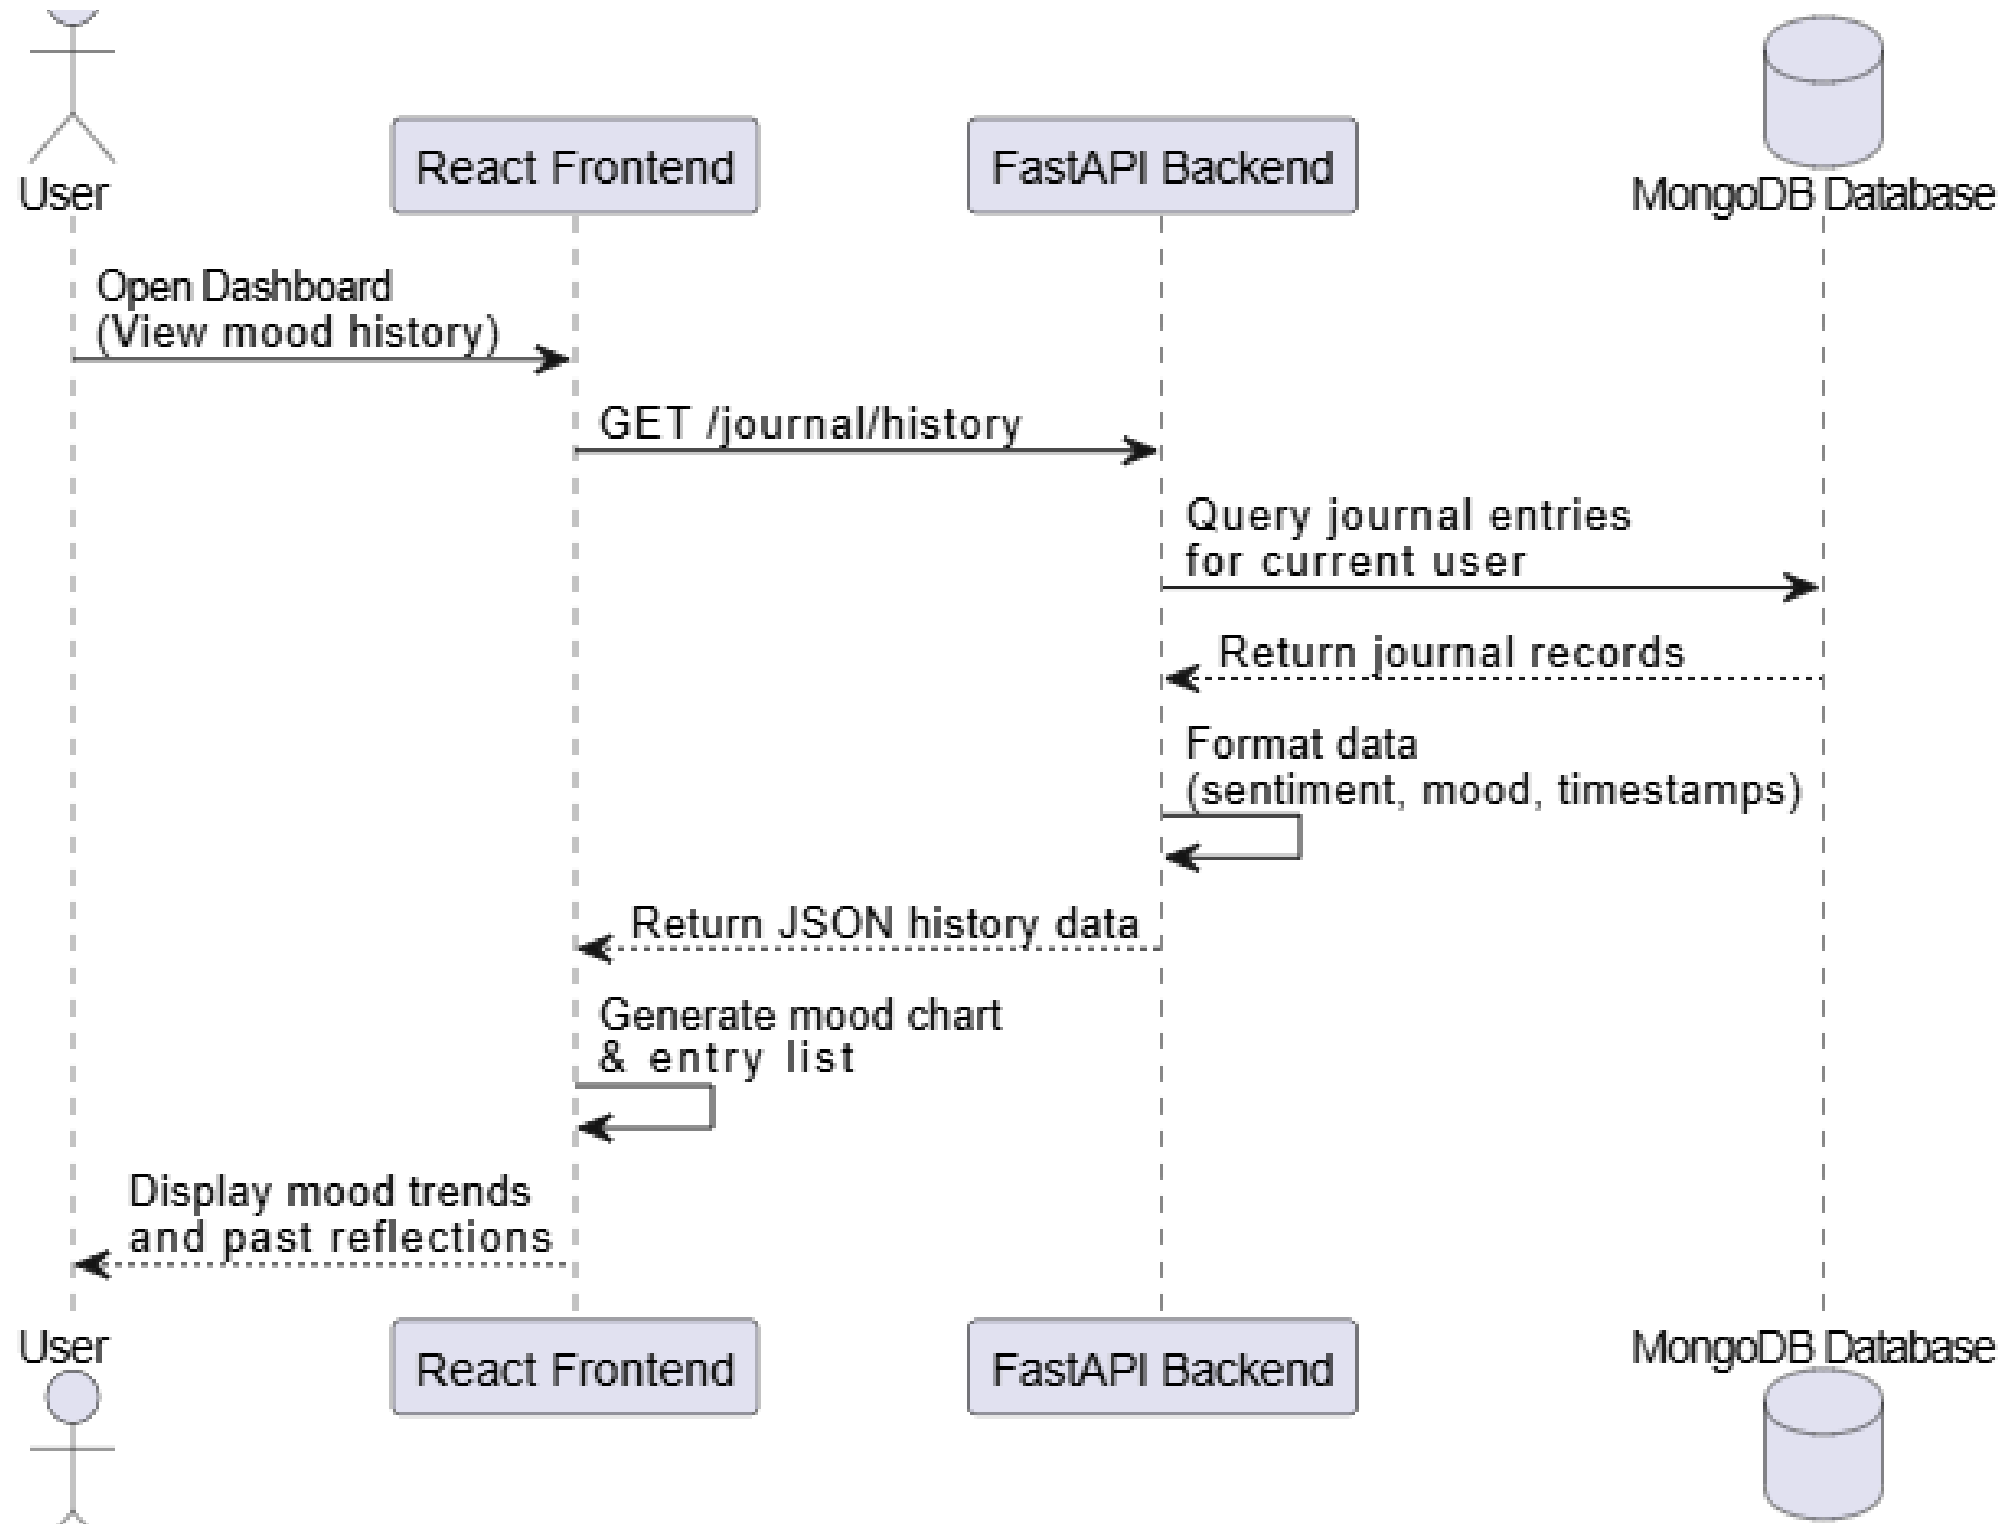

PRODUCT BACKLOG

Additional Features

US5 – Sentiment Result Display

As a user, I want to see my sentiment result immediately after submission so that I receive instant feedback.

Acceptance Criteria

- Sentiment label displayed
- Confidence score displayed
- No page reload

Priority: Could

Story Points: 3

US6 – Mood Visualization

As a user, I want to see a simple visualization of my mood history so that I can begin identifying patterns.

Acceptance Criteria

- Chart renders correctly
- Visualization updates after submission

Priority: Should

Story Points: 5

US8 – Submission Confirmation

As a user, I want a confirmation message when my entry is submitted so that I know it was received.

Acceptance Criteria

- Confirmation message displayed in UI

Priority: Must

Story Points: 2

Future Features

US11 – User Registration

As a user, I want to register an account so that my journal entries are securely stored

Acceptance Criteria

- Email & password required
- Password hashed
- User saved in database
- Duplicate email prevented

Priority: Will not have

Story Points: 5

US12 – User Login

As a user, I want to log in so that I can access my journal dashboard.

Acceptance Criteria

- JWT token generated
- Protected routes enforced
- Login error handling

Priority: Will not have

Story Points: 5

[Detailed spreadsheet here](#)

SPRINT 1 BACKLOG

Sprint Name: Sprint 1
Sprint Duration: February 20 – March 2026
Sprint Length: 3 Weeks

Sprint Goal

Deliver a functional journaling workflow that allows users to submit journal entries and begin sentiment analysis processing.

Stories Committed

US1, US2, US3, US4, US5, US6, US7, US8, US9, US10, US13

Total Story Points Committed: 51

[Detailed spreadsheet here](#)

SPRINT 1 TASK BREAKDOWN

During Sprint 1, user stories were decomposed into technical tasks to distribute work among team members and track implementation progress.

Task breakdown allows the team to:

- Assign clear responsibilities
- Estimate development effort
- Track sprint progress
- Enable parallel development

[Detailed spreadsheet here](#)

US1 - Journal Entry Submission				
Item	Status	Owner	Due Date	Est. Hours
Design Journal Input form	Com...	Vanessa Ag...	04 Mar...	3
Implement submission function	Com...	Rafaela Hol...	04 Mar...	2
Add Form Validation	Com...	Chintan Ko...	04 Mar...	2

US3 – AI Sentiment Analysis				
Item	Status	Owner	Due Date	Est. Hours
Research DistilBERT sentiment pipeline	Com...	Sm05734n	04 Mar...	3
Install HuggingFace transformers	Com...	Sm05734n	04 Mar...	2
Implement sentiment service	Com...	8	04 Mar...	2

SPRINT 1 TEST CASE

US1 – As a user, I want to write and submit a journal entry so that I can reflect on my daily emotions.							
Acceptance criteria: Text input available; Submit works; No empty submission							
TC ID	Scenario	Type	Status	Description	Input / Payload	Expected Result	Notes
TC_US1_01	Valid flow	Integration	PASS	POST /api/checkin with valid mood + reflection returns 201 Created	{"mood": 4, "reflection": "Had a productive day..."}	HTTP 201; body contains id, mood, reflection, created_at	Happy path
TC_US1_02	Edge case	Integration	PASS	POST without reflection field is accepted (reflection is optional)	{"mood": 3}	HTTP 201; response reflection is null	Optional field
TC_US1_02b	Invalid input	Integration	PASS	POST with no mood field returns 422 Unprocessable Entity	{"reflection": "some text"}	HTTP 422	Required field missing
TC_US1_03	System response	Integration	PASS	Successful response includes non-empty id and created_at timestamp	{"mood": 4, "reflection": "..."}	body[id] != ""; body[created_at] is not None	DB persistence check
Totals					4	0	0

Detailed spreadsheet here

SPRINT 1 TEST CASE

US2 – As a user, I want my journal entry to be processed after submission so that I can receive emotional analysis.							
Acceptance criteria: Entry sent to backend successfully; No submission errors							
TC ID	Scenario	Type	Status	Description	Input / Payload	Expected Result	Notes
TC_US2_01	Valid flow	Integration	PASS	POST reaches backend and returns a valid response body	{"mood": 4, "reflection": "..."}	HTTP 201; body keys include id, mood, created_at	API connection check
TC_US2_02	Invalid input	Integration	PASS	Mood score above maximum (>5) is rejected by Pydantic	{"mood": 10}	HTTP 422	Pydantic ge/le validation
TC_US2_02b	Invalid input	Integration	PASS	Mood score below minimum (<0) is rejected by Pydantic	{"mood": -1}	HTTP 422	Pydantic ge/le validation
TC_US2_03	System response	Unit	PASS	create_checkin() calls db.checkins.insert_one and returns correct dict	mood=4, reflection='Test reflection' (mocked DB)	insert_one called once; result has mood, reflection, id, created_at	Service layer unit test
Totals					4	0	0

Detailed spreadsheet here

SPRINT 1 TEST CASE

US7 – As a user, I want input validation so that my journal entries follow length and character rules.							
Acceptance criteria: Max length enforced; Allowed characters checked; No empty submissions							
TC ID	Scenario	Type	Status	Description	Input / Payload	Expected Result	Notes
TC_US7_01	Valid flow	Integration	PASS	Reflection of exactly 500 characters is accepted	{"mood": 3, "reflection": "a" * 500}	HTTP 201	Boundary value – at limit
TC_US7_02	Invalid input	Integration	PASS	Reflection of 501 characters exceeds max_length and is rejected	{"mood": 3, "reflection": "a" * 501}	HTTP 422	Boundary value – over limit
TC_US7_02b[0]	Edge case	Integration	PASS	Mood score of 0 (minimum boundary) is accepted	{"mood": 0}	HTTP 201	Parametrized boundary
TC_US7_02b[5]	Edge case	Integration	PASS	Mood score of 5 (maximum boundary) is accepted	{"mood": 5}	HTTP 201	Parametrized boundary
TC_US7_03	System response	Integration	PASS	Validation error response body includes a 'detail' field	{"mood": 99}	HTTP 422; body contains 'detail' key	Pydantic error shape
Totals				5	0	0	

[Detailed spreadsheet here](#)

SPRINT 1 TEST CASE

US9 — As a user, I want to see friendly error messages if submission or analysis fails so that I understand what went wrong.							
Acceptance criteria: Backend/model errors caught; Clear error displayed Implementation: catch block in onSubmitEntry() calls toast.error('Failed to submit entry. Please try again.')							
TC ID	Scenario	Type	Status	Description	Input / Payload	Expected Result	Notes
TC_US9_01	Valid flow	Integration	PASS	Valid submission returns 201 — catch block never reached, no error toast	{"mood": 4, "reflection": "..."}	HTTP 201	Confirms error path is NOT triggered on success
TC_US9_02	Invalid input	Integration	PASS	Malformed payload returns 422 — axios treats non-2xx as thrown error, triggering toast.error()	{"mood": "bad"}	HTTP status >= 400	Frontend catch block fires on any non-2xx
TC_US9_03	System response	Unit	PASS	If insert_one raises, create_checkin propagates the exception — route returns 500, axios throws	mood=3 (mocked DB raises Exception)	pytest.raises(Exception, match='DB connection lost')	Service layer must not swallow DB errors
TC_US9_03b	System response	Integration	FAIL	When DB raises during insert, FastAPI returns 500 — triggers toast.error() in frontend	{"mood": 4, "reflection": "..."} (broken DB fixture)	HTTP 500	End-to-end error propagation check
Totals				3	1	0	

Detailed spreadsheet here

SPRINT 1 TEST CASE

US10 — As a user, I want the input field to reset after submission so that I can write a new entry easily.							
Acceptance criteria: Input cleared after successful submission							
TC ID	Scenario	Type	Status	Description	Input / Payload	Expected Result	Notes
TC_US10_01	Valid flow	Integration	PASS	Two consecutive POSTs both return 201 with different ids (backend is stateless)	POST 1: {mood:3}, POST 2: {mood:4}	Both HTTP 201; r1[id] != r2[id]	Stateless backend check
TC_US10_02	Edge case	Integration	PASS	Empty payload after UI reset is still rejected by backend	{}	HTTP 422	Frontend reset does not bypass validation
TC_US10_03	System response	Integration	PASS	Three sequential submissions each receive a unique id	3x POST with mood 0,1,2	Set of 3 distinct ids	No id caching/collision
Totals				3	0	0	

Detailed spreadsheet here

SPRINT 1 TEST CASE SUMMARY

Summary

Project: MindMirror | Sprint 1 | Completed user stories: US1, US2, US7, US8, US10

23 tests took 562 ms.

(Un)check the boxes to filter the results.

☒ 1 Failed, ☒ 22 Passed, ☒ 0 Skipped, ☒ 0 Expected failures, ☒ 0 Unexpected passes, ☒ 0 Errors, ☒ 0 Reruns ☒ 0 Retried,

[Show all details](#) / [Hide all details](#)

Result 	Test	User Story	TC ID	Scenario	Description	Duration	Links
Failed	test_sprint1.py::TestUS9_FriendlyErrorMessages::test_TC_US9_03b_server_error_returns_500	US9	TC_US9_03b	System response	When the DB raises during insert, FastAPI returns 500 — axios throws,	3 ms	
Passed	test_sprint1.py::TestUS1_WriteAndSubmitEntry::test_TC_US1_01_valid_submission_returns_201	US1	TC_US1_01	Valid flow	POST /api/checkin with valid mood + reflection → 201 Created.	244 ms	
Passed	test_sprint1.py::TestUS1_WriteAndSubmitEntry::test_TC_US1_02_submission_without_reflection_is_accepted	US1	TC_US1_02	Edge case	POST /api/checkin without reflection field → 201 (reflection is optional).	22 ms	
Passed	test_sprint1.py::TestUS1_WriteAndSubmitEntry::test_TC_US1_02b_missing_mood_returns_422	US1	TC_US1_02b	Invalid input	POST /api/checkin with no mood → 422 Unprocessable Entity.	3 ms	
Passed	test_sprint1.py::TestUS1_WriteAndSubmitEntry::test_TC_US1_03_response_contains_id_and_timestamp	US1	TC_US1_03	System response	Successful submission response includes a non-empty id and created_at.	14 ms	
Passed	test_sprint1.py::TestUS2_EntryProcessedByBackend::test_TC_US2_01_backend_accepts_entry	US2	TC_US2_01	Valid flow	POST /api/checkin reaches the backend and returns a valid response body.	4 ms	
Passed	test_sprint1.py::TestUS2_EntryProcessedByBackend::test_TC_US2_02_mood_above_max_returns_422	US2	TC_US2_02	Invalid input	Mood score > 5 should be rejected by Pydantic validation.	3 ms	
Passed	test_sprint1.py::TestUS2_EntryProcessedByBackend::test_TC_US2_02b_mood_below_min_returns_422	US2	TC_US2_02b	Invalid input	Mood score < 0 should be rejected by Pydantic validation.	3 ms	
Passed	test_sprint1.py::TestUS2_EntryProcessedByBackend::test_TC_US2_03_service_inserts_into_database	US2	TC_US2_03	System response	Unit test: create_checkin() should call db.checkins.insert_one	4 ms	
Passed	test_sprint1.py::TestUS7_InputValidation::test_TC_US7_01_reflection_at_max_length_accepted	US7	TC_US7_01	Valid flow	A reflection of exactly 500 characters is accepted.	3 ms	
Passed	test_sprint1.py::TestUS7_InputValidation::test_TC_US7_02_reflection_over_max_length_rejected	US7	TC_US7_02	Invalid input	A reflection of 501 characters exceeds the schema max_length and is rejected.	2 ms	
Passed	test_sprint1.py::TestUS7_InputValidation::test_TC_US7_02b_mood_boundary_values_accepted[0]	US7	TC_US7_02b	Edge case	Mood scores 0 and 5 (boundary values) are accepted.	3 ms	
Passed	test_sprint1.py::TestUS7_InputValidation::test_TC_US7_02b_mood_boundary_values_accepted[5]	US7	TC_US7_02b	Edge case	Mood scores 0 and 5 (boundary values) are accepted.	3 ms	
Passed	test_sprint1.py::TestUS7_InputValidation::test_TC_US7_03_validation_error_returns_detail_field	US7	TC_US7_03	System response	A validation error response body includes a 'detail' field.	3 ms	
Passed	test_sprint1.py::TestUS8_ConfirmationMessage::test_TC_US8_01_successful_submission_returns_201	US8	TC_US8_01	Valid flow	Backend returns 201 so the frontend can display a success toast.	3 ms	
Passed	test_sprint1.py::TestUS8_ConfirmationMessage::test_TC_US8_02_failed_submission_does_not_return_201	US8	TC_US8_02	Invalid input	An invalid request returns a non-201 status, preventing the success toast.	3 ms	
Passed	test_sprint1.py::TestUS8_ConfirmationMessage::test_TC_US8_03_response_is_well_formed_json	US8	TC_US8_03	System response	The 201 response body matches the CheckinResponse schema shape.	16 ms	
Passed	test_sprint1.py::TestUS10_InputResetsAfterSubmission::test_TC_US10_01_second_submission_succeeds_independently	US10	TC_US10_01	Valid flow	The backend is stateless — a second POST after a first one	4 ms	
Passed	test_sprint1.py::TestUS10_InputResetsAfterSubmission::test_TC_US10_02_empty_mood_after_reset_is_rejected	US10	TC_US10_02	Edge case	If the UI resets and the user tries to submit without selecting a mood,	2 ms	
Passed	test_sprint1.py::TestUS10_InputResetsAfterSubmission::test_TC_US10_03_each_submission_gets_unique_id	US10	TC_US10_03	System response	Multiple submissions produce unique ids (not duplicated/cached).	4 ms	
Passed	test_sprint1.py::TestUS9_FriendlyErrorMessages::test_TC_US9_01_successful_submission_does_not_trigger_error	US9	TC_US9_01	Valid flow	A valid submission returns 201 — the catch block is never reached.	3 ms	
Passed	test_sprint1.py::TestUS9_FriendlyErrorMessages::test_TC_US9_02_invalid_payload_returns_error_status	US9	TC_US9_02	Invalid input	A malformed payload returns 422 — axios treats non-2xx as a thrown	3 ms	
Passed	test_sprint1.py::TestUS9_FriendlyErrorMessages::test_TC_US9_03_db_error_raises_exception	US9	TC_US9_03	System response	Unit test: if insert_one raises, create_checkin propagates the	2 ms	

SPRINT 1 STORIES COMPLETED



- US1 - Journal entry submission
 - US2 - Journal entry processing
 - US3 - AI sentiment analysis
 - US4 - Confidence score display
 - US5 - Sentiment result display
 - US7 - Input validation
 - US8 - Submission confirmation
 - US9 - Error handling
 - US10 - Input field reset
-
- US13 — View previous journal entries - half completed

[Detailed spreadsheet here](#)

SPRINT 1 STORIES NOT COMPLETED



These stories will be carried over to Sprint 2 for completion:

- US6 - Mood visualization
- US13 - User related

Deferred Stories (Out of Sprint Scope)

The following stories were intentionally excluded from Sprint 1, as they were classified as Will Not Have for the MVP:

- US11 – User Registration

As a user, I want to register an account so that my journal entries are securely stored.

- US12 – User Login

As a user, I want to log in so that I can access my journal dashboard.


These features are planned for future sprints after the core journaling and sentiment analysis functionality is fully implemented.

[Detailed spreadsheet here](#)


METRICS

TEAM VELOCITY

WHAT IS TEAM VELOCITY? THE TOTAL NUMBER OF STORY POINTS COMPLETED IN THIS SPRINT — NOT ISSUE COUNTS. TEAM NEXUS COMPLETED 28 STORY POINTS IN TN SPRINT 1. THE COMMITTED SCOPE WAS 41 POINTS; 13 POINTS REMAINED OUTSIDE THE COMPLETED TOTAL (SUBMISSION FLOW, MODEL INTEGRATION, VALIDATION, SENTIMENT DISPLAY WERE DELIVERED; CHART AND HISTORY WORK STILL IN PROGRESS).

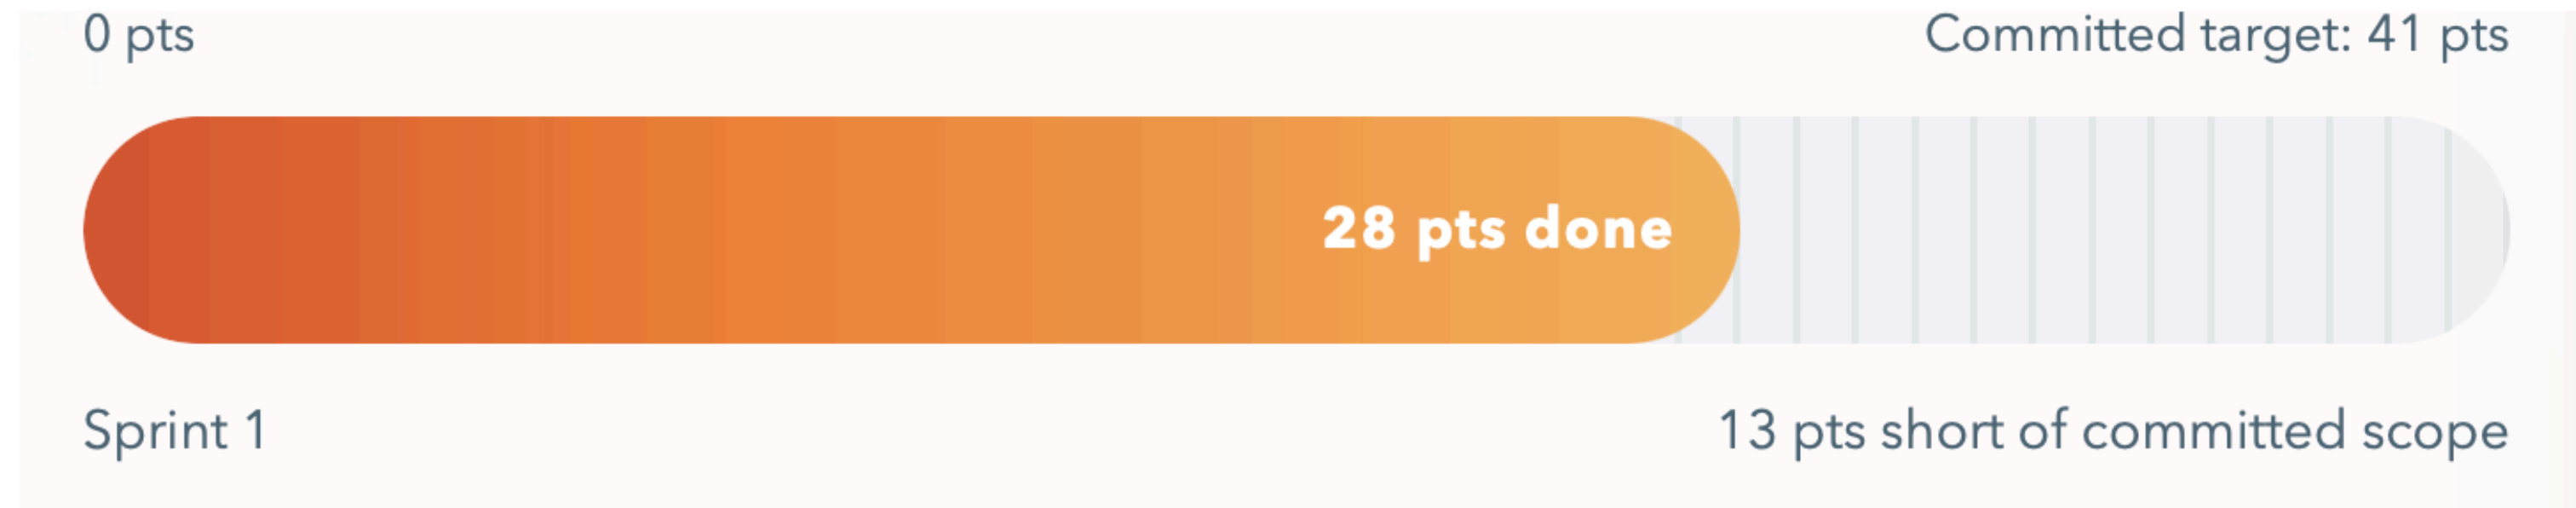

BURNDOWN STATUS

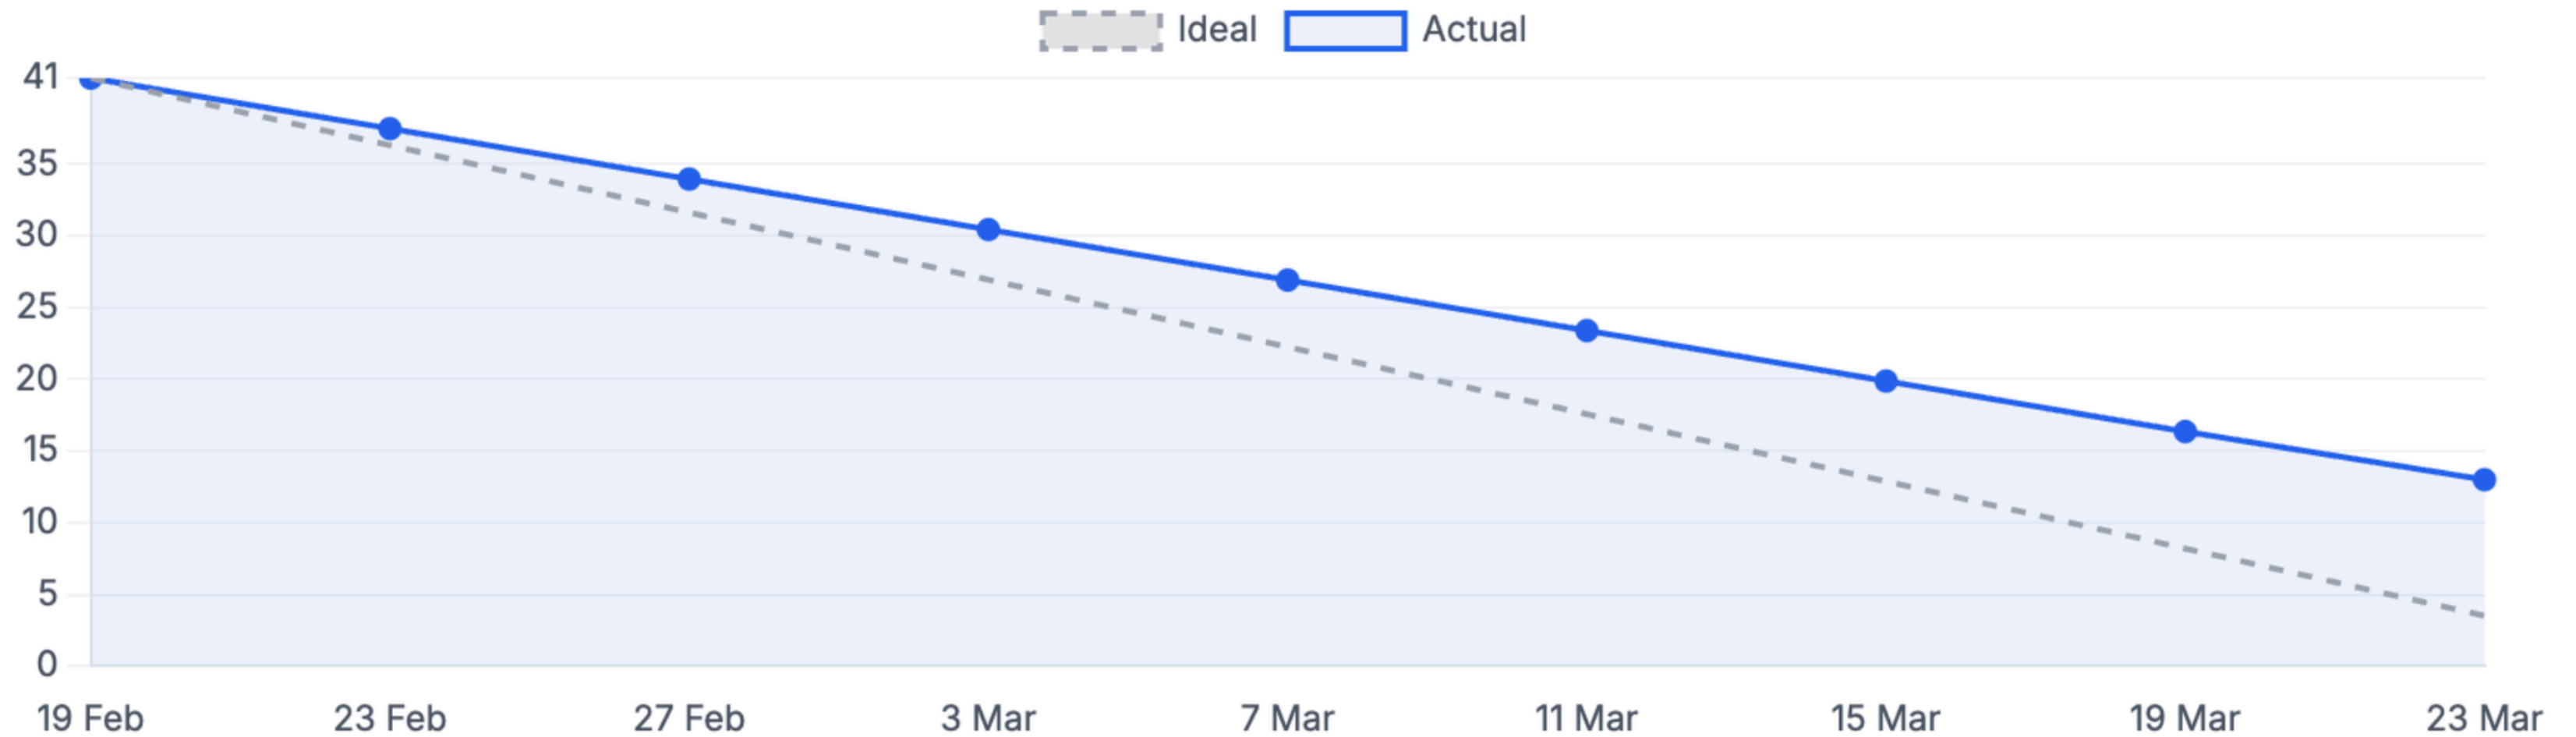

IT TRACKS REMAINING WORK OVER THE SPRINT TIMELINE. THE DASHED LINE SHOWS THE IDEAL PACE (STEADY BURN TO 0). THE SOLID LINE SHOWS ACTUAL PROGRESS. TN SPRINT 1 STARTED WITH 41 COMMITTED POINTS AND ENDED WITH 13 POINTS REMAINING (28 BURNED DOWN). SPRINT DATES: 20 FEB - 27 MAR.

COMPLETED VS COMMITTED



$28 / 41 = 68.29\%$

Completed story points / committed story points

Committed: 41 story points

Completed: 28 story points

Remaining gap: 13 story points

RETROSPECTIVE

WHAT WENT WELL

Strong collaboration across different tasks (frontend, backend, and AI) enabled parallel progress

Co-ownership model worked effectively, especially for shared responsibilities across team members

Task breakdown helped clarify responsibilities and made it easier to track progress during the sprint

WHAT COULD BE IMPROVED?

Communication could be more consistent across the team

Need for more proactive follow-ups (e.g., setting up quick sync calls to ensure tasks stay on track)

Daily stand-ups could be more structured and focused on blockers and progress

ACTIONS FOR NEXT SPRINT

Establish more consistent communication by scheduling quick check-ins when blockers arise

Encourage team members to proactively reach out and coordinate instead of waiting for meetings

Improve stand-up effectiveness by focusing on: what was done, what's next, and any blockers

WIKI PAGE LINK

DEMO



THANK YOU

26 Mar, 2026