VITAP UNIVERSITY, ANDHRA PRADESH

SMARTBRIDGE EXTERNSHIP

MODERN APPLICATION DEVELOPMENT (Java Spring Boot)

ASSIGNMENT-3

Student Name: J Harsha Srikanth

Date: 05-06-2023

Reg. No: 20MIS7045

Implementation JDBC using Java.


Creating the database and connect to Java JDBC.

```
    Windows PowerShell
    ■ Mindows Powe
 Install the latest PowerShell for new features and improvements! https://aka.ms/PSWindows
PS C:\Users\bodar> mysql -u root -p
Enter password: *********
Welcome to the MySQL monitor. Commands end with ; or \g. Your MySQL connection id is 10
Server version: 8.0.33 MySQL Community Server - GPL
 Copyright (c) 2000, 2023, Oracle and/or its affiliates.
Oracle is a registered trademark of Oracle Corporation and/or its
 affiliates. Other names may be trademarks of their respective
owners.
 Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.
mysql> use dhanush_db
Database changed
mysql> create table CricketRanking(
              -> Player_Name VARCHAR(25),
-> Player_Rank INT NOT NULL,
              -> Player_type VARCHAR(25),
-> Player_role VARCHAR(25),
-> Total_Runs INT NOT NULL,
               -> Total_Wickets INT NOT NULL,
                -> PRIMARY KEY(Player_Rank)
 -> );
Query OK, 0 rows affected (0.03 sec)
 mysql>
```


Inserting values into database

```
Windows PowerShell
mysql> INSERT INTO CricketRanking VALUES ('Rohit',2,'Right-handed','Batsmen',8000,2);
Query OK, 1 row affected (0.02 sec)
mysql> INSERT INTO CricketRanking VALUES ('Shubman',3,'Right-handed','Batsmen',3000,0);
Query OK, 1 row affected (0.01 sec)
mysql> INSERT INTO CricketRanking VALUES ('Virat',1,'Right-handed','Batsmen',10000,5);
Query OK, 1 row affected (0.01 sec)
mysql> INSERT INTO CricketRanking VALUES ('Surya',4,'Right-handed','Batsmen',6000,0);
Query OK, 1 row affected (0.01 sec)
mysql> INSERT INTO CricketRanking VALUES ('Hardhik',5,'Right-handed','All-Rounder',4000,20);
Query OK, 1 row affected (0.01 sec)
mysql> INSERT INTO CricketRanking VALUES ('Jedeja',6,'Left-handed','All-Rounder',6000,30);
Query OK, 1 row affected (0.01 sec)
mysql> INSERT INTO CricketRanking VALUES ('Aswin',7,'Right-handed','All-Rounder',5000,35);
Query OK, 1 row affected (0.01 sec)
mysql> INSERT INTO CricketRanking VALUES ('Siraj',8,'Right-handed','Bowler',900,75);
Query OK, 1 row affected (0.01 sec)
mysql> INSERT INTO CricketRanking VALUES ('Shami',9,'Right-handed','Bowler',950,115);
Query OK, 1 row affected (0.01 sec)
mysql> INSERT INTO CricketRanking VALUES ('Chahal',10,'Left-handed','Bowler',200,155);
Query OK, 1 row affected (0.01 sec)
mysql> INSERT INTO CricketRanking VALUES ('Shardul',11,'Right-handed','Bowler',1000,195);
Query OK, 1 row affected (0.01 sec)
```

Visualizing the Database

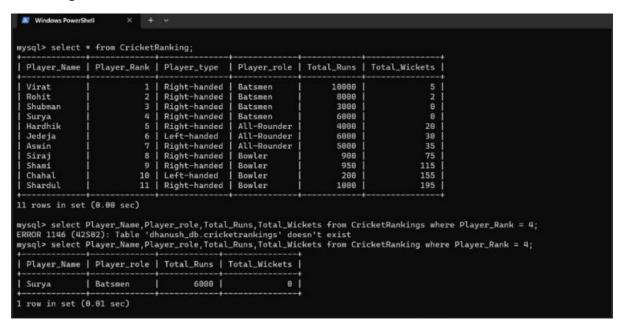

Work-Bench Output:

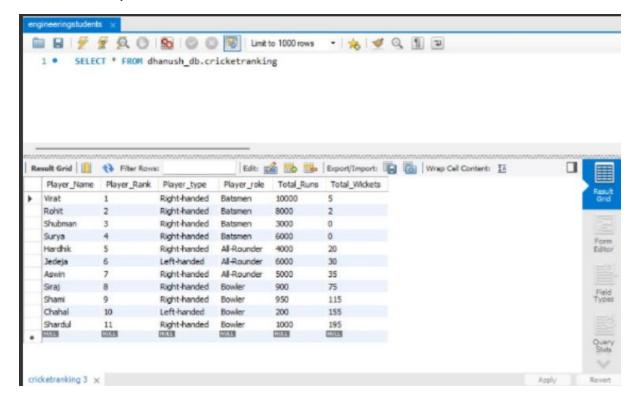

```
Connecting the Database with Java JDBC:
import java.sql.Connection;
import java.sql.DriverManager;
import java.sql.ResultSet;
import java.sql.Statement;
public class main {
  public static void main(String[] args) {
    try {
      Connection conn =
DriverManager.getConnection("jdbc:mysql://localhost:3306/dhanush_db","root","Anuprasad_19"
);
      Statement statement = conn.createStatement();
      ResultSet resultSet = statement.executeQuery("select * from CricketRanking");
      while (resultSet.next()) {
        System.out.println(resultSet.getString("Player_Rank")+ " "
+resultSet.getString("Player_Name"));
```

```
}
catch (Exception e) {
    e.printStackTrace();
}
}
```

OUTPUT

```
Run: main ×

C:\Program Files\Java\jdk-15.0.2\bin\java.exe" "-javaagent:C:\

Virat

Run: notation in the content of the conten
```