


$a \cdot b \cdot c$



\* Just pass the previous variable to next recursion call

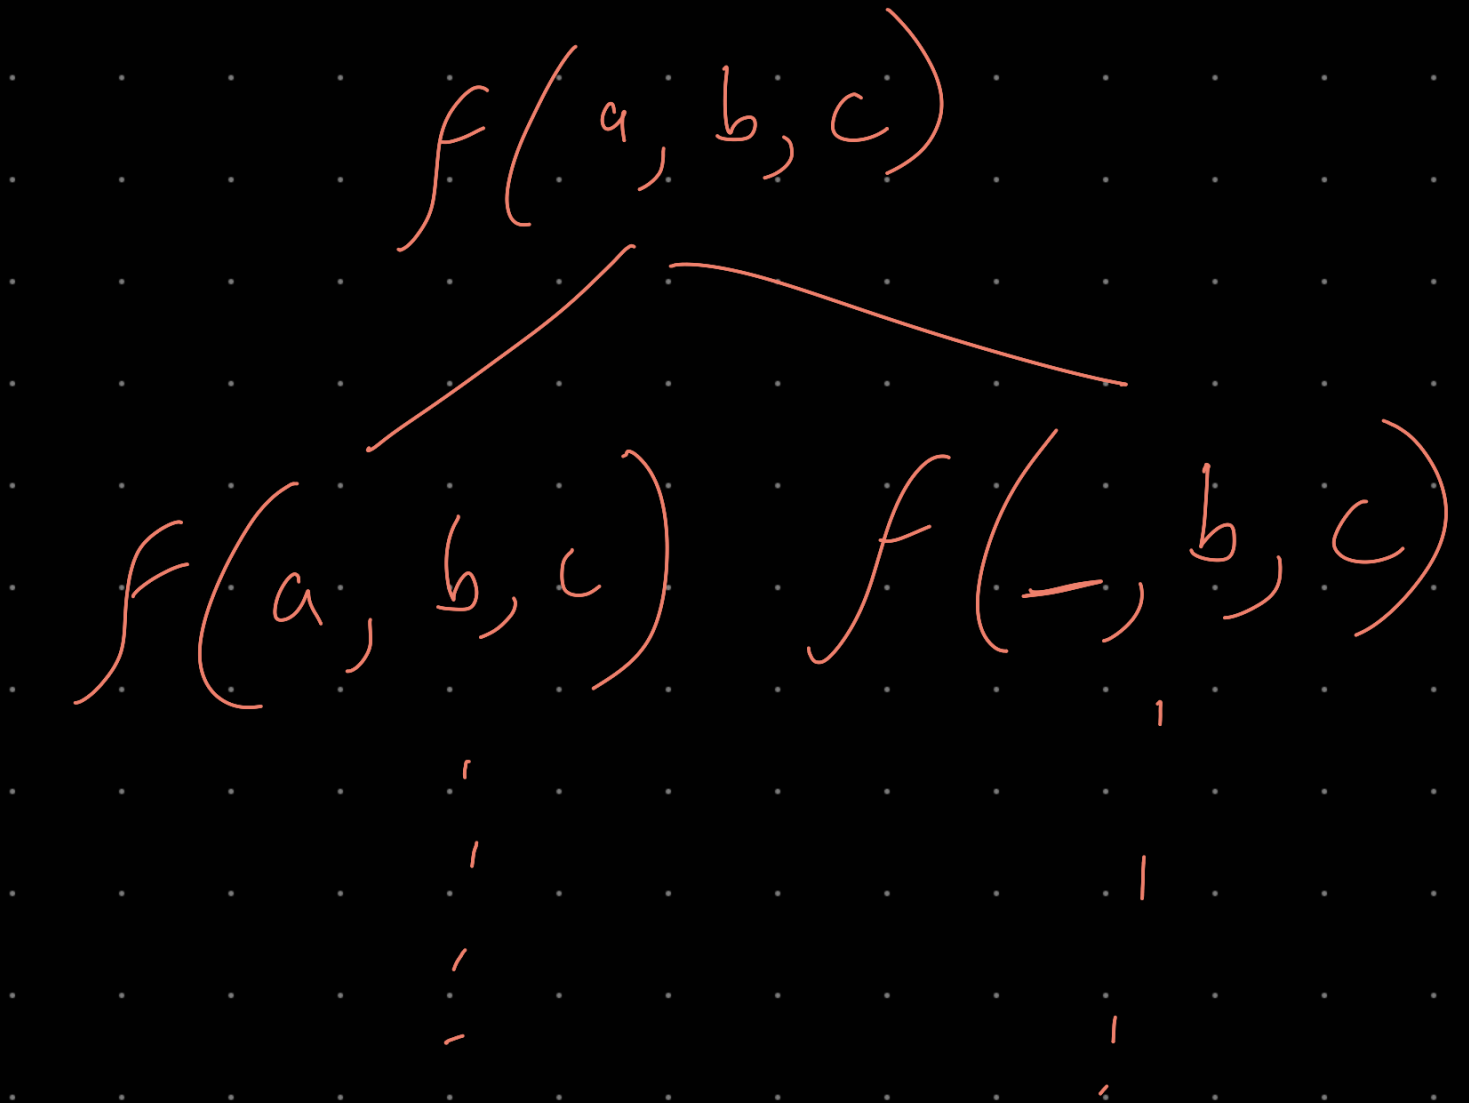

\* Here we are storing subsequences in array.