



# Machine Learning/Data Science Interview Cheat sheets

This document contains cheat sheets on various topics asked during a Machine Learning/Data science interview. This document is constantly updated to include more topics.

## Table of Contents

<b>Machine Learning Topics .....</b>	<b>2</b>
1. Bias-Variance Trade-off .....	2
2. Imbalanced Data in Classification .....	3
3. Principal Component Analysis .....	4
4. Bayes' Theorem and Classifier .....	5
5. Regression Analysis .....	6
6. Regularization in ML .....	7
7. Convolutional Neural Network .....	8
8. Famous CNNs .....	9
9. Ensemble Methods in Machine Learning .....	10
10. Autoencoder and Variational Autoencoder .....	11
<b>Interview Preparation .....</b>	<b>12</b>
1. Data structures .....	12
2. Preparing for Coding Interviews .....	13
3. How to prepare for behavioral interview? .....	14
4. How to answer a behavioral question?.....	16

# Cheat Sheet – Bias-Variance Tradeoff

## What is Bias?

- Error between average model prediction and ground truth
- The bias of the estimated function tells us the capacity of the underlying model to predict the values

$$\text{bias} = \mathbb{E}[f'(x)] - f(x)$$

## What is Variance?

- Average variability in the model prediction for the given dataset
- The variance of the estimated function tells you how much the function can adjust to the change in the dataset


$$\text{variance} = \mathbb{E}[(f'(x) - \mathbb{E}[f'(x)])^2]$$

## High Bias

- Overly-simplified Model
- Under-fitting
- High error on both test and train data

## High Variance



- Overly-complex Model
- Over-fitting
- Low error on train data and high on test
- Starts modelling the noise in the input

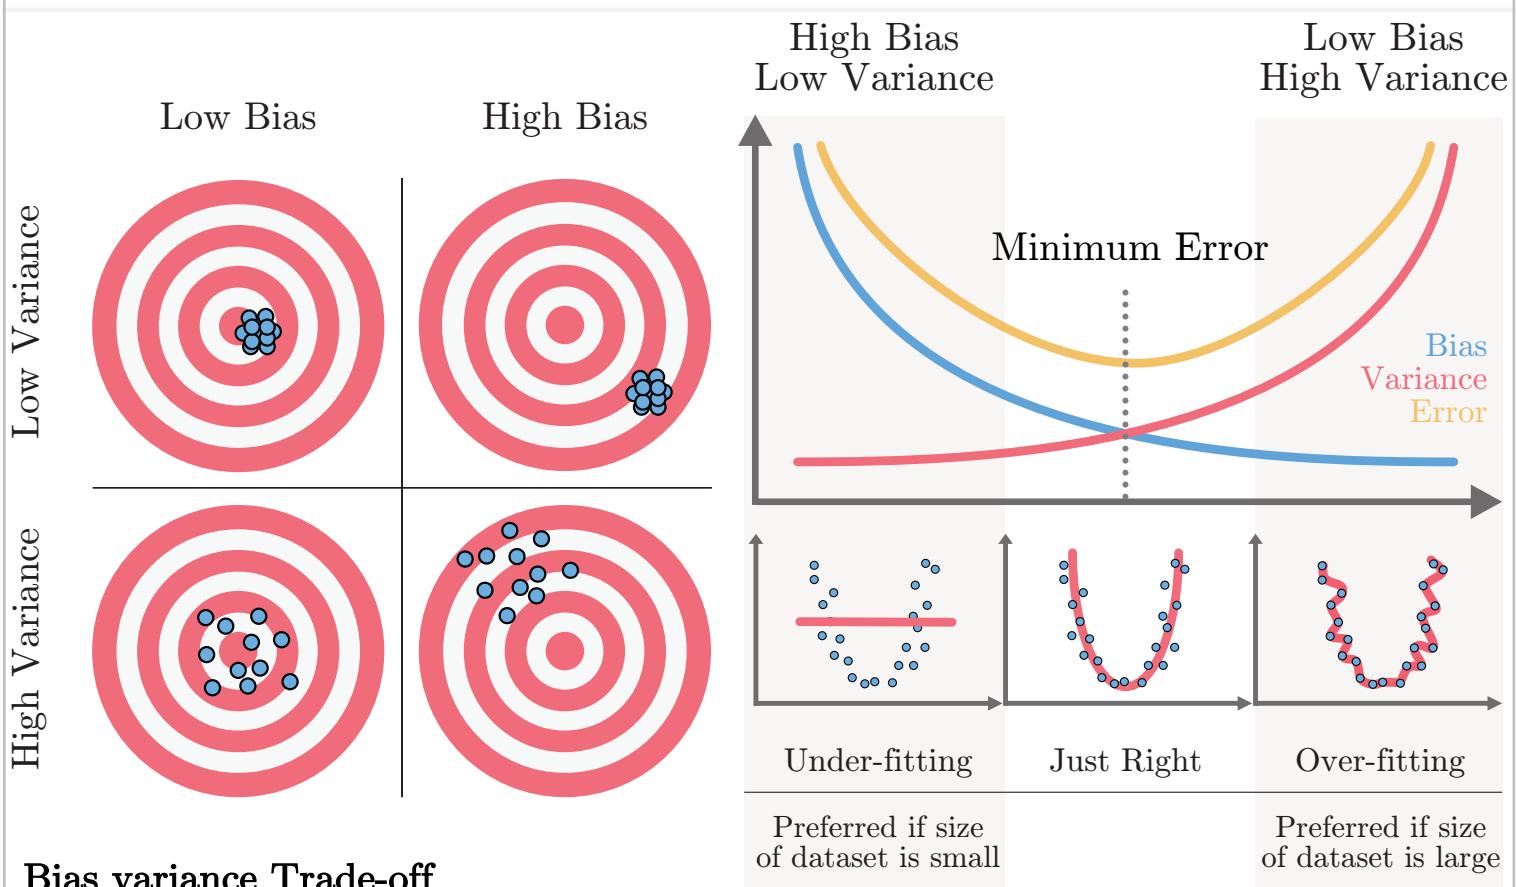

## Bias variance Trade-off

- Increasing bias (not always) reduces variance and vice-versa
- Error = bias<sup>2</sup> + variance + irreducible error
- The best model is where the error is reduced.
- Compromise between bias and variance

# Cheat Sheet – Imbalanced Data in Classification

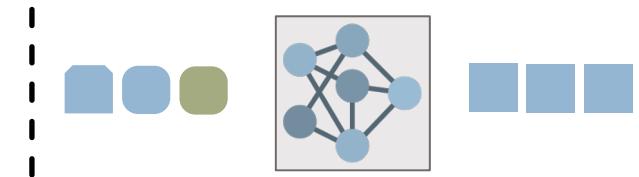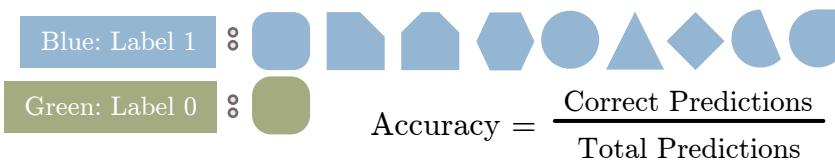

Classifier that always **predicts label blue** yields prediction accuracy of 90%

**Accuracy doesn't always give the correct insight about your trained model**

**Accuracy:** %age correct prediction  
**Precision:** Exactness of model

Correct prediction over total predictions  
 From the detected cats, how many were actually cats

One value for entire network  
 Each class/label has a value

**Recall:** Completeness of model  
**F1 Score:** Combines Precision/Recall

Correctly detected cats over total cats  
 Harmonic mean of Precision and Recall

Each class/label has a value  
 Each class/label has a value

## Performance metrics associated with Class 1

		Actual Labels	
		1	0
Predicted Labels	1	True Positive	False Positive
	0	False Negative	True Negative

(Is your prediction correct?) (What did you predict)

True	Negative

(Your prediction is correct) (You predicted 0)

**Precision** =  $\frac{\text{TP}}{\text{TP} + \text{FP}}$

**F1 score** =  $2x \frac{(\text{Prec} \times \text{Rec})}{(\text{Prec} + \text{Rec})}$

**Specificity** =  $\frac{\text{TN}}{\text{TN} + \text{FP}}$


**False +ve rate** =  $\frac{\text{FP}}{\text{TN} + \text{FP}}$

**Accuracy** =  $\frac{\text{TP} + \text{TN}}{\text{TP} + \text{FN} + \text{FP} + \text{TN}}$

**Recall, Sensitivity** =  $\frac{\text{TP}}{\text{TP} + \text{FN}}$   
**True +ve rate**


## Possible solutions

- Data Replication:** Replicate the available data until the number of samples are comparable
- Synthetic Data:** Images: Rotate, dilate, crop, add noise to existing input images and create new data
- Modified Loss:** Modify the loss to reflect greater error when misclassifying smaller sample set
- Change the algorithm:** Increase the model/algorithim complexity so that the two classes are perfectly separable (Con: Overfitting)



No straight line ( $y=ax$ ) passing through origin can perfectly separate data. **Best solution:** line  $y=0$ , predict all labels blue

Increase model complexity



Straight line ( $y=ax+b$ ) can perfectly separate data.  
 Green class will no longer be predicted as blue

# Cheat Sheet – PCA Dimensionality Reduction

## What is PCA?

- Based on the dataset find a new set of orthogonal feature vectors in such a way that the data spread is maximum in the direction of the feature vector (or dimension)
- Rates the feature vector in the decreasing order of data spread (or variance)
- The datapoints have maximum variance in the first feature vector, and minimum variance in the last feature vector
- The variance of the datapoints in the direction of feature vector can be termed as a measure of information in that direction.

## Steps

1. Standardize the datapoints
2. Find the covariance matrix from the given datapoints
3. Carry out eigen-value decomposition of the covariance matrix
4. Sort the eigenvalues and eigenvectors

$$X_{new} = \frac{X - \text{mean}(X)}{\text{std}(X)}$$

$$C[i, j] = \text{cov}(x_i, x_j)$$

$$C = V\Sigma V^{-1}$$

$$\Sigma_{sort} = \text{sort}(\Sigma) \quad V_{sort} = \text{sort}(V, \Sigma_{sort})$$

## Dimensionality Reduction with PCA

- Keep the first m out of n feature vectors rated by PCA. These m vectors will be the best m vectors preserving the maximum information that could have been preserved with m vectors on the given dataset

## Steps:

1. Carry out steps 1-4 from above
2. Keep first m feature vectors from the sorted eigenvector matrix  $V_{reduced} = V[:, 0 : m]$
3. Transform the data for the new basis (feature vectors)  $X_{reduced} = X_{new} \times V_{reduced}$
4. The importance of the feature vector is proportional to the magnitude of the eigen value

Figure 1

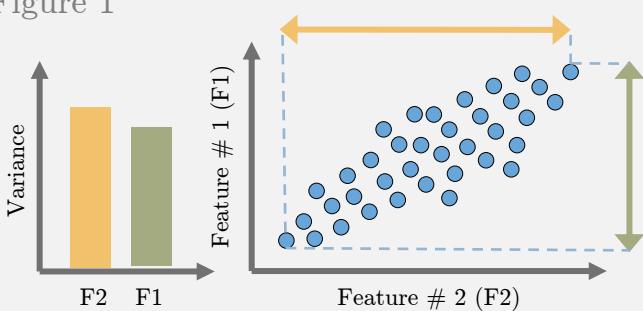


Figure 2

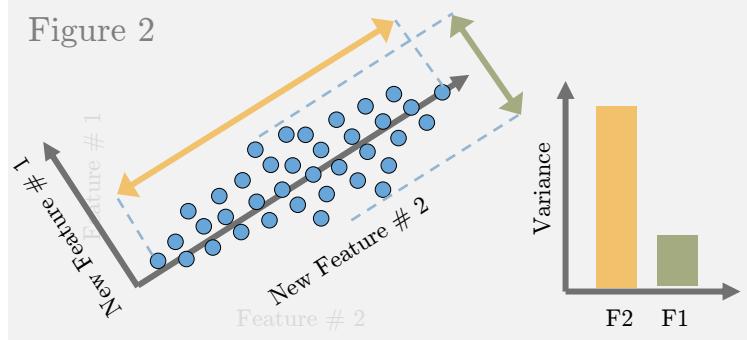
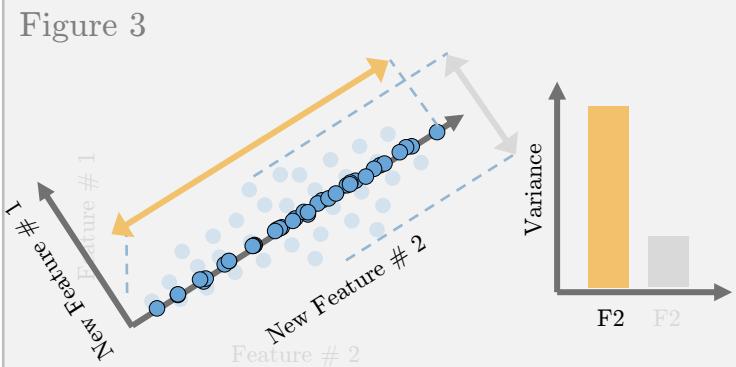


Figure 3



**Figure 1:** Datapoints with feature vectors as x and y-axis

**Figure 2:** The cartesian coordinate system is rotated to maximize the standard deviation along any one axis (new feature # 2)

**Figure 3:** Remove the feature vector with minimum standard deviation of datapoints (new feature # 1) and project the data on new feature # 2

# Cheat Sheet – Bayes Theorem and Classifier

## What is Bayes' Theorem?

- Describes the probability of an event, based on prior knowledge of conditions that might be related to the event.

$$P(A|B) = \frac{P(B|A)(\text{likelihood}) \times P(A)(\text{prior})}{P(B)(\text{evidence})}$$

- How the probability of an event changes when we have knowledge of another event


$$P(A) \longrightarrow P(A|B)$$

Usually, a better estimate than  $P(A)$

## Example

- Probability of fire  $P(F) = 1\%$
- Probability of smoke  $P(S) = 10\%$
- Prob of smoke given there is a fire  $P(S|F) = 90\%$
- What is the probability that there is a fire given we see a smoke  $P(F|S)?$

$$P(F|S) = \frac{P(S|F) \times P(F)}{P(S)} = \frac{0.9 \times 0.01}{0.1} = 9\%$$

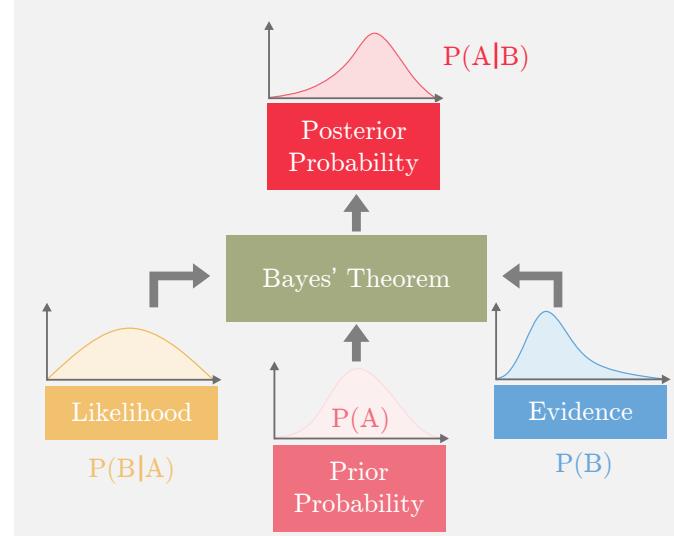

## Maximum Aposteriori Probability (MAP) Estimation

The MAP estimate of the random variable  $y$ , given that we have observed iid  $(x_1, x_2, x_3, \dots)$ , is given by. We try to accommodate our prior knowledge when estimating.

$$\hat{y}_{MAP} = \operatorname{argmax}_y P(y) \prod_i P(x_i|y)$$

$y$  that maximizes the product of prior and likelihood

## Maximum Likelihood Estimation (MLE)

The MAP estimate of the random variable  $y$ , given that we have observed iid  $(x_1, x_2, x_3, \dots)$ , is given by. We assume we don't have any prior knowledge of the quantity being estimated.

$$\hat{y}_{MLE} = \operatorname{argmax}_y \prod_i P(x_i|y)$$

$y$  that maximizes only the likelihood

MLE is a special case of MAP where our prior is uniform (all values are equally likely)

## Naïve Bayes' Classifier (Instantiation of MAP as classifier)

Suppose we have two classes,  $y=y_1$  and  $y=y_2$ . Say we have more than one evidence/features  $(x_1, x_2, x_3, \dots)$ , using Bayes' theorem

$$P(y|x_1, x_2, x_3, \dots) = \frac{P(x_1, x_2, x_3, \dots | y) \times P(y)}{P(x_1, x_2, x_3, \dots)}$$

Naïve Bayes' theorem assumes the features  $(x_1, x_2, \dots)$  are i.i.d. i.e  $P(x_1, x_2, x_3, \dots | y) = \prod_i P(x_i|y)$

$$P(y|x_1, x_2, x_3, \dots) = \prod_i P(x_i|y) \frac{P(y)}{P(x_1, x_2, x_3, \dots)}$$

$$\hat{y} = y_1 \text{ if } \frac{P(y_1|x_1, x_2, x_3, \dots)}{P(y_2|x_1, x_2, x_3, \dots)} > 1 \text{ else } \hat{y} = y_2$$

# Cheat Sheet – Regression Analysis

## What is Regression Analysis?

Fitting a function  $f(\cdot)$  to datapoints  $y_i = f(x_i)$  under some error function. Based on the estimated function and error, we have the following types of regression

### 1. Linear Regression:

Fits a **line** minimizing the **sum of mean-squared error** for each datapoint.

$$\min_{\beta} \sum_i \|y_i - f_{\beta}^{\text{linear}}(x_i)\|^2$$

$$f_{\beta}^{\text{linear}}(x_i) = \beta_0 + \beta_1 x_i$$

### 2. Polynomial Regression:

Fits a **polynomial** of order  $k$  ( $k+1$  unknowns) minimizing the **sum of mean-squared error** for each datapoint.

$$\min_{\beta} \sum_{i=0}^m \|y_i - f_{\beta}^{\text{poly}}(x_i)\|^2$$

$$f_{\beta}^{\text{poly}}(x_i) = \beta_0 + \beta_1 x_i + \beta_2 x_i^2 + \dots + \beta_k x_i^k$$

### 3. Bayesian Regression:

For each datapoint, fits a **gaussian distribution** by minimizing the **mean-squared error**. As the number of data points  $x_i$  increases, it converges to point estimates i.e.  $n \rightarrow \infty, \sigma^2 \rightarrow 0$

$$\mathcal{N}(\mu, \sigma^2) \rightarrow \text{Gaussian with mean } \mu \text{ and variance } \sigma^2$$

### 4. Ridge Regression:

Can fit either a **line**, or **polynomial** minimizing the **sum of mean-squared error** for each datapoint **and** the **weighted L2 norm** of the function parameters beta.

$$\min_{\beta} \sum_{i=0}^m \|y_i - f_{\beta}(x_i)\|^2 + \sum_{j=0}^k \beta_j^2$$

$$f_{\beta}(x_i) = f_{\beta}^{\text{poly}}(x_i) \text{ or } f_{\beta}^{\text{linear}}(x_i)$$

### 5. LASSO Regression:

Can fit either a **line**, or **polynomial** minimizing the **sum of mean-squared error** for each datapoint **and** the **weighted L1 norm** of the function parameters beta.

$$\min_{\beta} \sum_{i=0}^m \|y_i - f_{\beta}(x_i)\|^2 + \sum_{j=0}^k |\beta_j|$$

$$f_{\beta}(x_i) = f_{\beta}^{\text{poly}}(x_i) \text{ or } f_{\beta}^{\text{linear}}(x_i)$$

### 6. Logistic Regression:


Can fit either a **line**, or **polynomial with sigmoid activation** minimizing the **binary cross-entropy loss** for each datapoint. The labels  $y$  are binary class labels.

$$\min_{\beta} \sum_i -y_i \log(\sigma(f_{\beta}(x_i))) - (1 - y_i) \log(1 - \sigma(f_{\beta}(x_i)))$$

$$f_{\beta}(x_i) = f_{\beta}^{\text{poly}}(x_i) \text{ or } f_{\beta}^{\text{linear}}(x_i)$$

$$\sigma(t) = \frac{1}{1 + e^{-t}}$$

## Visual Representation:

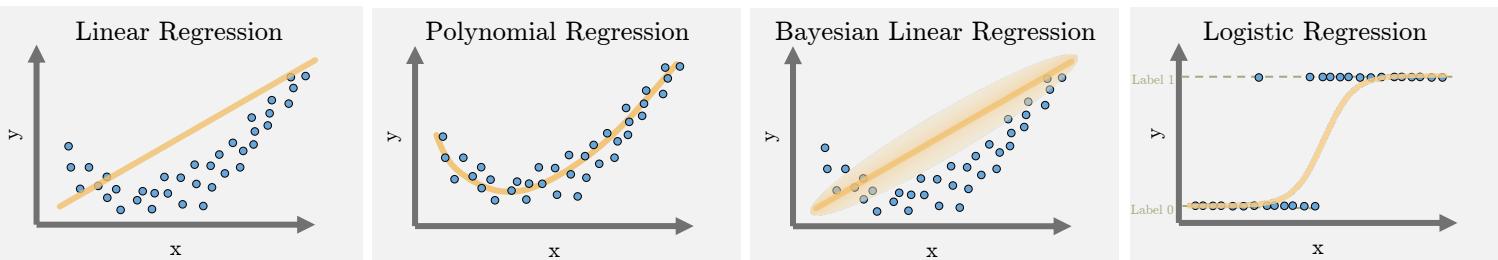

## Summary:

	What does it fit?	Estimated function	Error Function
Linear	A line in $n$ dimensions	$f_{\beta}^{\text{linear}}(x_i) = \beta_0 + \beta_1 x_i$	$\sum_{i=0}^m \ y_i - f_{\beta}(x_i)\ ^2$
Polynomial	A polynomial of order $k$	$f_{\beta}^{\text{poly}}(x_i) = \beta_0 + \beta_1 x_i + \beta_2 x_i^2 + \dots$	$\sum_{i=0}^m \ y_i - f_{\beta}(x_i)\ ^2$
Bayesian Linear	Gaussian distribution for each point	$\mathcal{N}(f_{\beta}(x_i), \sigma^2)$	$\sum_i \ y_i - \mathcal{N}(f_{\beta}(x_i), \sigma^2)\ ^2$
Ridge	Linear/polynomial	$f_{\beta}^{\text{poly}}(x_i) \text{ or } f_{\beta}^{\text{linear}}(x_i)$	$\sum_{i=0}^m \ y_i - f_{\beta}(x_i)\ ^2 + \sum_{j=0}^n \beta_j^2$
LASSO	Linear/polynomial	$f_{\beta}^{\text{poly}}(x_i) \text{ or } f_{\beta}^{\text{linear}}(x_i)$	$\sum_{i=0}^m \ y_i - f_{\beta}(x_i)\ ^2 + \sum_{j=0}^n  \beta_j $
Logistic	Linear/polynomial with sigmoid	$\sigma(f_{\beta}(x_i))$	$\min_{\beta} \sum_i -y_i \log(\sigma(f_{\beta}(x_i))) - (1 - y_i) \log(1 - \sigma(f_{\beta}(x_i)))$

# Cheat Sheet – Regularization in ML

## What is Regularization in ML?

- Regularization is an approach to address over-fitting in ML.
- Overfitted model fails to generalize estimations on test data
- When the underlying model to be learned is low bias/high variance, or when we have small amount of data, the estimated model is prone to over-fitting.
- Regularization reduces the variance of the model

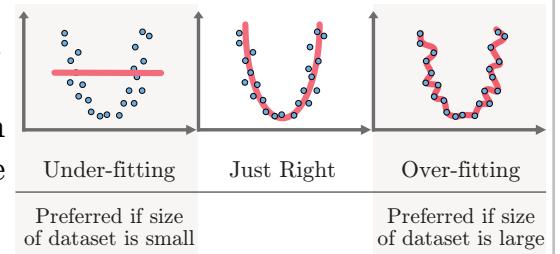


Figure 1. Overfitting

## Types of Regularization:

### 1. Modify the loss function:

- **L2 Regularization:** Prevents the weights from getting too large (defined by L2 norm). Larger the weights, more complex the model is, more chances of overfitting.

$$\text{loss} = \text{error}(y, \hat{y}) + \lambda \sum_j \beta_j^2 \quad \lambda \geq 0, \lambda \propto \text{model bias}, \lambda \propto \frac{1}{\text{model variance}}$$

- **L1 Regularization:** Prevents the weights from getting too large (defined by L1 norm). Larger the weights, more complex the model is, more chances of overfitting. L1 regularization introduces sparsity in the weights. It forces more weights to be zero, than reducing the average magnitude of all weights

$$\text{loss} = \text{error}(y, \hat{y}) + \lambda \sum_j |\beta_j| \quad \lambda \geq 0, \lambda \propto \text{model bias}, \lambda \propto \frac{1}{\text{model variance}}$$

- **Entropy:** Used for the models that output probability. Forces the probability distribution towards uniform distribution.

$$\text{loss} = \text{error}(p, \hat{p}) - \lambda \sum_i \hat{p}_i \log(\hat{p}_i) \quad \lambda \geq 0, \lambda \propto \text{model bias}, \lambda \propto \frac{1}{\text{model variance}}$$

### 2. Modify data sampling:

- **Data augmentation:** Create more data from available data by randomly cropping, dilating, rotating, adding small amount of noise etc.
- **K-fold Cross-validation:** Divide the data into k groups. Train on (k-1) groups and test on 1 group. Try all k possible combinations.

### 3. Change training approach:

- **Injecting noise:** Add random noise to the weights when they are being learned. It pushes the model to be relatively insensitive to small variations in the weights, hence regularization
- **Dropout:** Generally used for neural networks. Connections between consecutive layers are randomly dropped based on a dropout-ratio and the remaining network is trained in the current iteration. In the next iteration, another set of random connections are dropped.

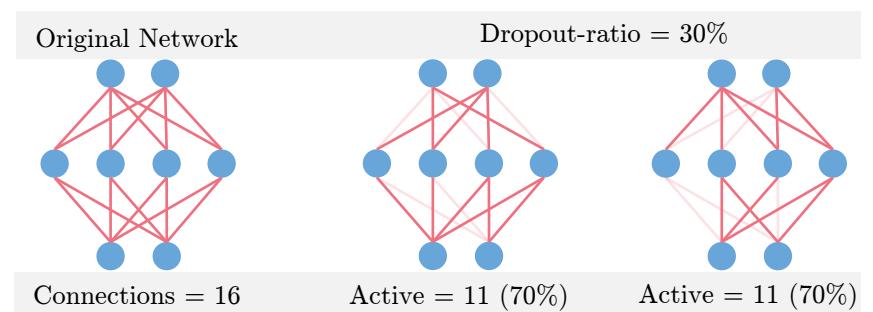
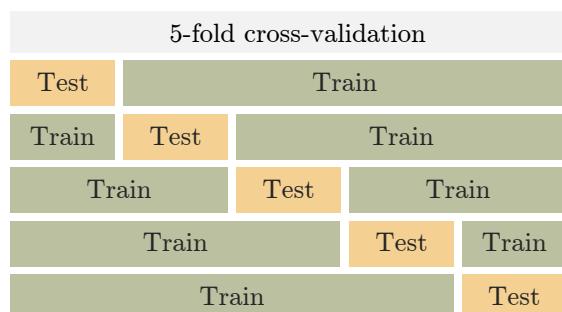


Figure 2. K-fold CV

Figure 3. Drop-out

# Cheat Sheet – Convolutional Neural Network

## Convolutional Neural Network:

The data gets into the CNN through the input layer and passes through various hidden layers before getting to the output layer. The output of the network is compared to the actual labels in terms of loss or error. The partial derivatives of this loss w.r.t the trainable weights are calculated, and the weights are updated through one of the various methods using backpropagation.

## CNN Template:



Most of the commonly used hidden layers (not all) follow a pattern

**1. Layer function:** Basic transforming function such as convolutional or fully connected layer.

**a. Fully Connected:** Linear functions between the input and the

**a. Convolutional Layers:** These layers are applied to 2D (3D) input feature maps. The trainable weights are a 2D (3D) kernel/filter that moves across the input feature map, generating dot products with the overlapping region of the input feature map.

**b. Transposed Convolutional (DeConvolutional) Layer:** Usually used to increase the size of the output feature map (Upsampling) The idea behind the transposed convolutional layer is to undo (not exactly) the convolutional layer

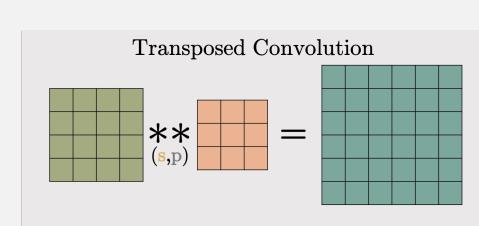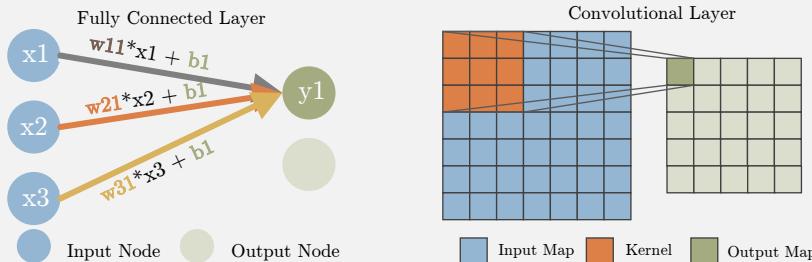

**2. Pooling:** Non-trainable layer to change the size of the feature map

**a. Max/Average Pooling:** Decrease the spatial size of the input layer based on selecting the maximum/average value in receptive field defined by the kernel

**b. UnPooling:** A non-trainable layer used to increase the spatial size of the input layer based on placing the input pixel at a certain index in the receptive field of the output defined by the kernel.

**3. Normalization:** Usually used just before the activation functions to limit the unbounded activation from increasing the output layer values too high

**a. Local Response Normalization LRN:** A **non-trainable layer** that square-normalizes the pixel values in a feature map within a local neighborhood.


**b. Batch Normalization:** A trainable approach to normalizing the data by learning scale and shift variable during training.

**3. Activation:** Introduce non-linearity so CNN can efficiently map non-linear complex mapping.

**a. Non-parametric/Static functions:** Linear, ReLU

**b. Parametric functions:** ELU, tanh, sigmoid, Leaky ReLU


**c. Bounded functions:** tanh, sigmoid

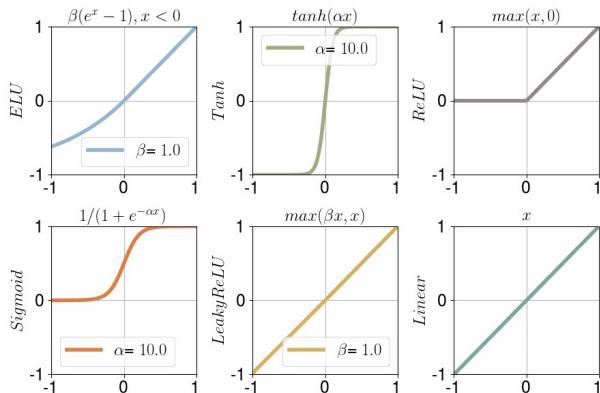

**5. Loss function:** Quantifies how far off the CNN prediction is from the actual labels.

**a. Regression Loss Functions:** MAE, MSE, Huber loss

**b. Classification Loss Functions:** Cross entropy, Hinge loss

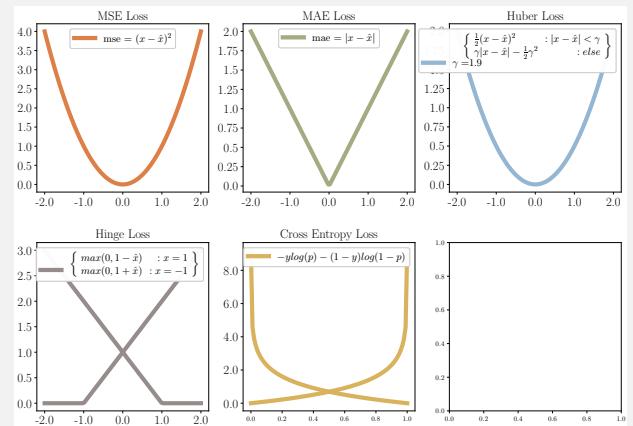

# Cheat Sheet – Famous CNNs

## AlexNet – 2012

**Why:** AlexNet was born out of the need to improve the results of the ImageNet challenge.

**What:** The network consists of 5 Convolutional (CONV) layers and 3 Fully Connected (FC) layers. The activation used is the Rectified Linear Unit (ReLU).

**How:** Data augmentation is carried out to reduce over-fitting, Uses Local response normalization.

## VGGNet – 2014

**Why:** VGGNet was born out of the need to reduce the # of parameters in the CONV layers and improve on training time

**What:** There are multiple variants of VGGNet (VGG16, VGG19, etc.)

**How:** The important point to note here is that all the conv kernels are of size 3x3 and maxpool kernels are of size 2x2 with a stride of two.

## ResNet – 2015

**Why:** Neural Networks are notorious for not being able to find a simpler mapping when it exists. ResNet solves that.

**What:** There are multiple versions of ResNetXX architectures where 'XX' denotes the number of layers. The most used ones are ResNet50 and ResNet101. Since the vanishing gradient problem was taken care of (more about it in the How part), CNN started to get deeper and deeper

**How:** ResNet architecture makes use of shortcut connections to solve the vanishing gradient problem. The basic building block of ResNet is a Residual block that is repeated throughout the network.




Figure 1 ResNet Block

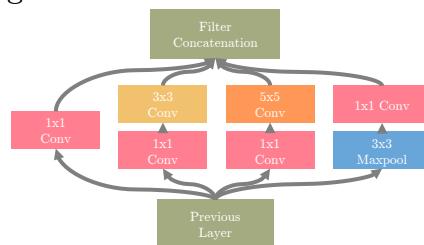


Figure 2 Inception Block

## Inception – 2014

**Why:** Larger kernels are preferred for more global features, on the other hand, smaller kernels provide good results in detecting area-specific features. For effective recognition of such a variable-sized feature, we need kernels of different sizes. That is what Inception does.

**What:** The Inception network architecture consists of several inception modules of the following structure. Each inception module consists of four operations in parallel, 1x1 conv layer, 3x3 conv layer, 5x5 conv layer, max pooling

**How:** Inception increases the network space from which the best network is to be chosen via training. Each inception module can capture salient features at different levels.

Comparison					
Network	Year	Salient Feature	top5 accuracy	Parameters	FLOP
AlexNet	2012	Deeper	84.70%	62M	1.5B
VGGNet	2014	Fixed-size kernels	92.30%	138M	19.6B
Inception	2014	Wider - Parallel kernels	93.30%	6.4M	2B
ResNet-152	2015	Shortcut connections	95.51%	60.3M	11B

AlexNet Network - Structural Details									
Input	Output	Layer	Stride	Pad	Kernel size	in	out	# of Param	
227x227x3	55x55x96	conv1	4	0	11	11	3	96	34944
55x55x96	maxpool1	2	0	3	5	96	256	614656	
27x27x96	conv2	1	2	5	5	96	256	0	
27x27x96	maxpool2	2	0	3	5	256	256	0	
13x13x96	conv3	1	3	3	3	256	384	885120	
13x13x96	conv4	1	1	3	3	384	384	1327488	
13x13x96	conv5	1	1	3	3	384	256	884992	
13x13x256	maxpool5	2	0	3	3	256	256	0	
	f6					1	1	9216	4096
	f7					1	1	4096	4096
	f8					1	1	4096	1000
	Total								62378.344

VGG16 - Structural Details									
#	Input	Image	output	Layer	Stride	Kernel	in	out	Param
1	224	224	3	224x224	64	conv3-64	1	3	3
2	224	224	64	224x224	64	conv3064	1	3	64
3	112	112	64	112x112	128	maxpool3	2	2	64
4	56	56	128	56x56	128	conv3-128	1	3	64
5	112	112	128	56	128	maxpool	2	2	128
6	56	56	128	56	128	conv3-256	1	3	128
7	56	56	256	56	256	conv3-256	1	3	256
8	28	28	256	28	256	maxpool	2	2	256
9	28	28	512	28	512	conv3-512	1	3	512
10	28	28	512	28	512	conv3-512	1	3	512
11	14	14	512	14	512	conv3-512	1	3	512
12	14	14	512	14	512	conv3-512	1	3	512
13	14	14	512	7	512	maxpool	2	2	512
14	1	1	25088	1	1	4096	4096	4096	102764544
15	1	1	4096	1	1	4096	fc	1	1
16	1	1	1000	1	1	1000	fc	1	1
	Total								138,423,208

ResNet18 - Structural Details										Param
#	Input	Image	output	Layer	Stride	Pad	Kernel	in	out	Param
1	227x227	3	112x112	64	conv1	2	1	7	7	64
2	112	112	64	56	64	maxpool	2	0	3	64
3	56	56	64	56	64	conv2-1	1	1	3	64
4	56	56	64	56	64	conv2-2	1	1	3	64
5	56	56	64	56	64	conv2-4	1	1	3	64
6	56	56	64	56	64	conv2-1	2	0	3	64
7	28	28	128	28	128	conv3-2	1	1	3	128
8	28	28	128	28	128	conv3-3	1	1	3	128
9	28	28	128	28	128	conv3-4	1	1	3	128
10	28	28	128	28	128	conv3-5	1	1	3	128
11	14	14	256	14	256	conv3-6	1	1	3	256
12	14	14	256	14	256	conv3-7	1	1	3	256
13	14	14	256	14	256	conv3-8	1	1	3	256
14	14	14	256	7	512	conv5-1	2	0	3	512
15	7	7	512	7	512	conv5-2	1	1	3	512
16	7	7	512	7	512	conv5-3	1	1	3	512
17	7	7	512	7	512	conv5-4	1	1	3	512
18	1	1	512	1	1	avg pool	7	0	7	512
	Total									11,511,784

GoogLeNet - Structural Details										Param
#	Input	Image	Layer	Input Layer	Stride	Pad	Kernel	in	out	Param
1	227x227x3	3	110x110	64	conv1	2	0	3	64	0
2	110	110	64	64	maxpool	2	0	3	64	0
3	56	56	64	56	64	conv1x1	1	0	1	64
4	56	56	64	56	64	maxpool	1	0	3	64
5	56	56	64	56	64	conv2-1	1	1	3	64
6	56	56	64	56	64	conv2-2	1	0	3	64
7	28	28	128	28	128	conv3-2	1	1	3	128
8	28	28	128	28	128	conv3-3	1	1	3	128
9	28	28	128	28	128	conv3-4	1	1	3	128
10	28	28	128	28	128	conv3-5	1	1	3	128
11	14	14	256	14	256	conv3-6	1	1	3	256
12	14	14	256	14	256	conv3-7	1	1	3	256
13	14	14	256	14	256	conv3-8	1	1	3	256
14	14	14	256	7	512	depth-concat	1	0	3	512
15	14	14	512	14	512	conv1x1	1	0	1	512
16	14	14	512	14	512	conv3-1	1	0	1	512
17	14	14	512	14	512	conv3-2	1	0	1	512
18	14	14	512	14	512	conv3-3	1	0	1	512
19	14	14	512	14	512	conv3-4	1	0	1	512
20	14	14	512	14	512	conv3-5	1	0	1	512
21	14	14	512	14	512	conv3-6	1	0	1	512
22	14	14	512	14	512	conv3-7	1	0	1	512
23	14	14	512	14	512	conv3-8	1	0	1	512
24	14	14	512	14	512	conv3-9	1	0	1	512
25	14	14	512	14	512	conv3-10	1	0	1	512
26	14	14	512	14	512	conv3-11	1	0	1	512
27	14	14	512	14	512	conv3-12	1	0	1	512
28	14	14	512	14	512	conv3-13	1	0	1	512
29	14	14	512	14	512	conv3-14	1	0	1	512
30	14	14	512	14	512	conv3-15	1	0	1	512
31	14	14	512	14	512	conv3-16	1	0	1	512
32	14	14	512	14	512	conv3-17	1	0	1	512
33	14	14	512	14	512	conv3-18	1	0	1	512
34	14	14	512	14	512	conv3-19	1	0	1	512
35	14	14	512	14	512	conv3-20	1	0	1	512
36	14	14	512	14	512	conv3-21	1	0	1	512
37	14	14	512	14	512	conv3-22	1	0	1	512
38	14	14	512	14	512	conv3-23	1	0	1	512
39	14	14	512	14	512	conv3-24	1	0	1	512
40	14	14	512	14	512	conv3-25	1	0	1	512
41	14	14	512	14	512	conv3-26	1	0	1	512
42	14	14	512	14	512	conv3-27	1	0	1	512
43	14	14	512	14	512	conv3-28	1	0	1	512
44	14	14	512	14	512	conv3-29	1	0	1	512
45	14	14	512	14	512	conv3-30	1	0	1	512
46	14	14	512	14	512	conv3-31	1	0	1	512
47	14									

# Cheat Sheet – Ensemble Learning in ML

## What is Ensemble Learning? Wisdom of the crowd

Combine multiple weak models/learners into one predictive model to reduce bias, variance and/or improve accuracy.




## Types of Ensemble Learning: N number of weak learners

**1.Bagging:** Trains N different weak models (usually of same types – homogenous) with N non-overlapping subset of the input dataset in parallel. In the test phase, each model is evaluated. The label with the greatest number of predictions is selected as the prediction. Bagging methods reduces variance of the prediction

**2.Boosting:** Trains N different weak models (usually of same types – homogenous) with the complete dataset in a sequential order. The datapoints wrongly classified with previous weak model is provided more weights to that they can be classified by the next weak leaner properly. In the test phase, each model is evaluated and based on the test error of each weak model, the prediction is weighted for voting. Boosting methods decreases the bias of the prediction.

**3.Stacking:** Trains N different weak models (usually of different types – heterogenous) with one of the two subsets of the dataset in parallel. Once the weak learners are trained, they are used to trained a meta learner to combine their predictions and carry out final prediction using the other subset. In test phase, each model predicts its label, these set of labels are fed to the meta learner which generates the final prediction.

The block diagrams, and comparison table for each of these three methods can be seen below.

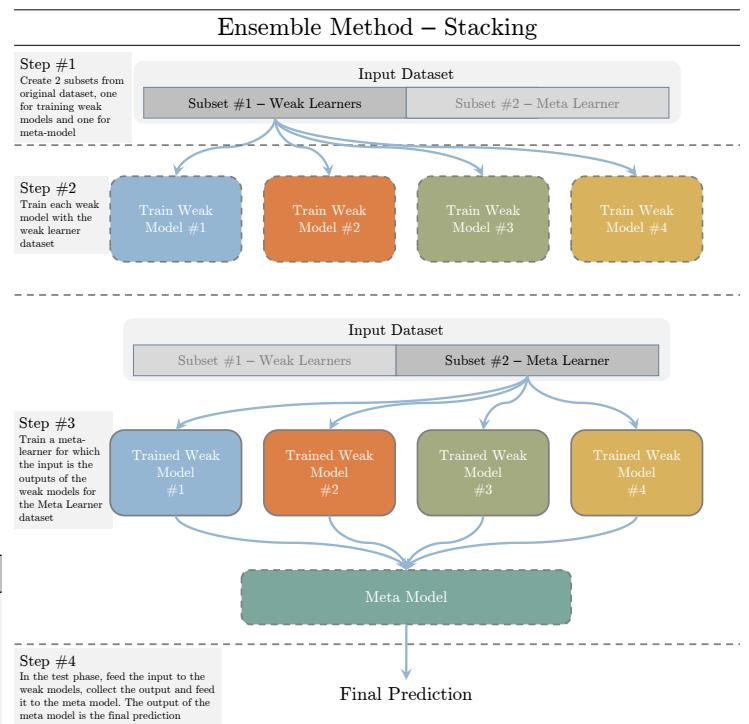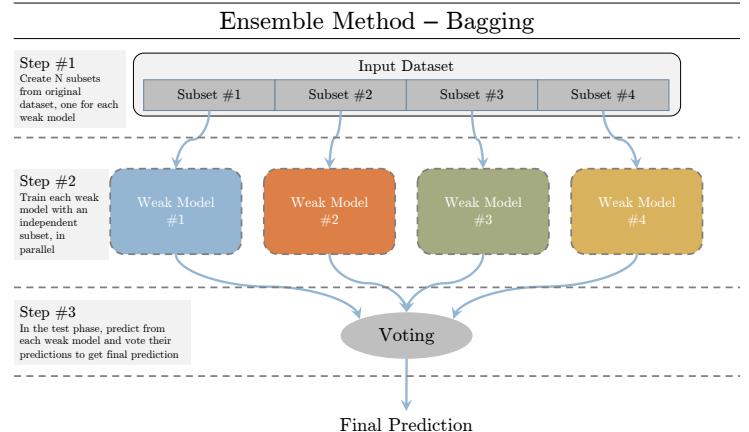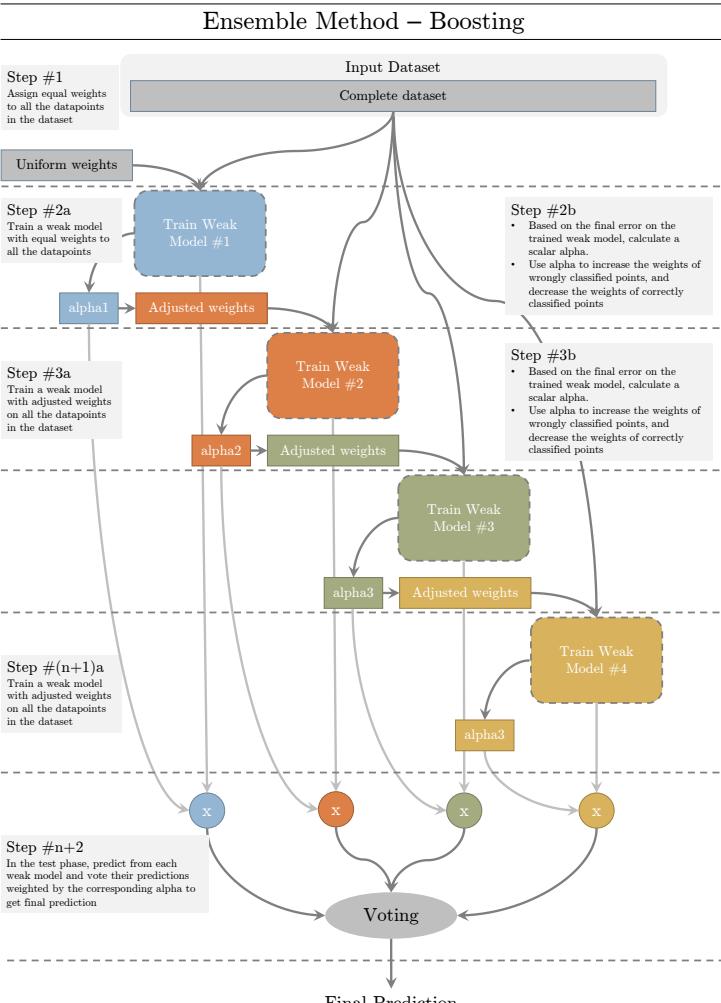

Parameter	Bagging	Boosting	Stacking
Focuses on	Reducing variance	Reducing bias	Improving accuracy
Nature of weak learners is	Homogenous	Homogenous	Heterogenous
Weak learners are aggregated by	Simple voting	Weighted voting	Learned voting (meta-learner)



# Cheat Sheet – Autoencoder & Variational Autoencoder

## Context – Data Compression

- Data compression is an essential phase in training a network. The idea is to compress the data so that the same amount of information can be represented by fewer bits.



## Auto Encoder (AE)

- Autoencoder is used to learn efficient embeddings of unlabeled data for a given network configuration. It consists of two parts, an **encoder**, and a **decoder**.
- The encoder compresses the data from a higher-dimensional space to a lower-dimensional space (also called the latent space), while the decoder converts the latent space back to higher-dimensional space.
- The entire encoder-decoder architecture is collectively trained on the loss function which encourages that the input is reconstructed at the output. Hence the loss function is the mean squared error between the encoder input and the decoder output.
- The latent variable is not regularized. Picking a random latent variable will generate garbage output.
- Latent variable is deterministic values and the space lacks the generative capability

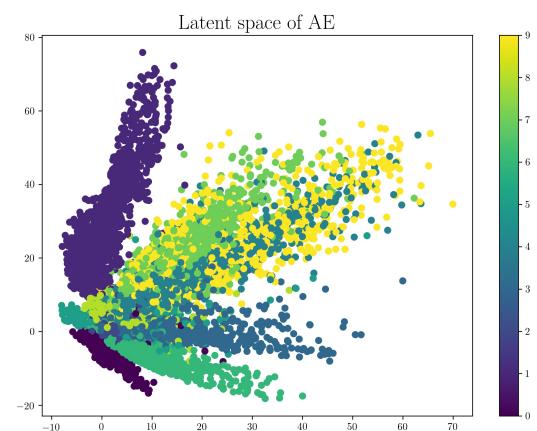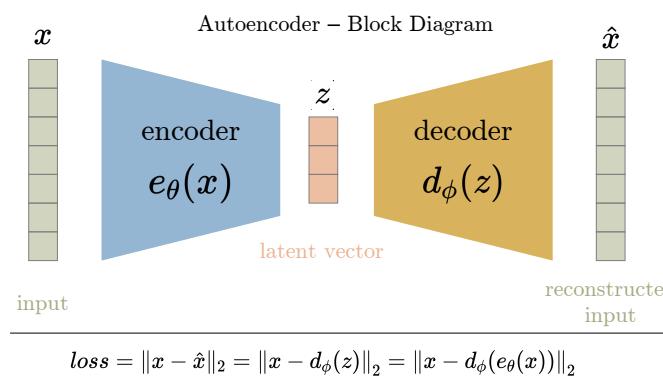

## Variational Auto Encoder (VAE)

- Variational autoencoder addresses the issue of non-regularized latent space in autoencoder and provides the generative capability to the entire space.
- Instead of outputting the vectors in the latent space, the encoder of VAE outputs parameters of a pre-defined distribution in the latent space for every input.
- The VAE then imposes a constraint on this latent distribution forcing it to be a normal distribution.
- The latent variable in the compressed form is mean and variance
- The training loss of VAE is defined as the sum of the reconstruction loss and the similarity loss (the KL divergence between the unit gaussian and decoder output distribution).
- The latent variable is smooth and continuous i.e., random values of latent variable generates meaningful output at the decoder, hence the latent space has generative capabilities.
- The input of the decoder is sampled from a gaussian with mean/variance of the output of encoder.

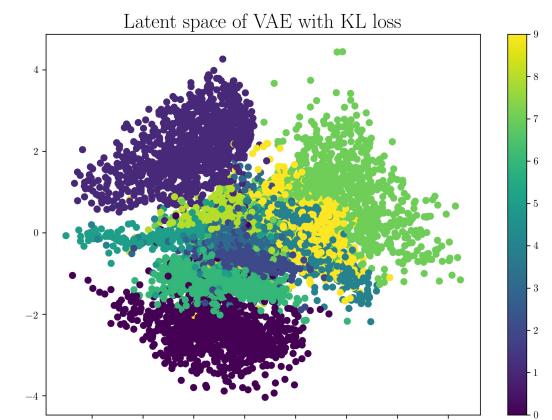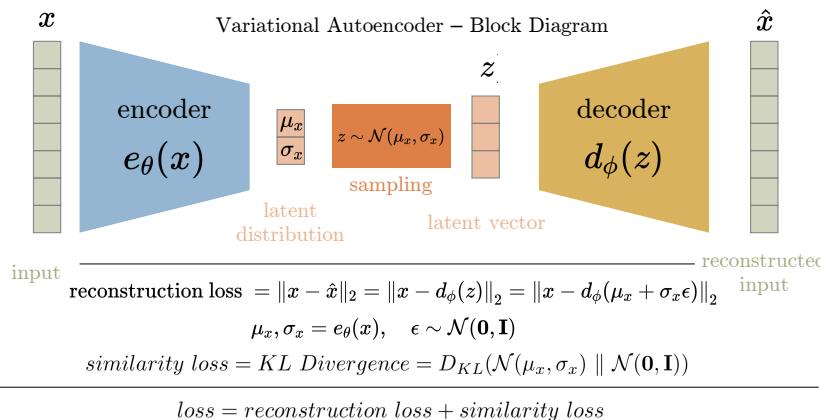

# Cheat Sheet – Data Structures

## 1. List


- Ordered collection of elements
- The position of each element is defined by the *index*
- The elements can be accessed in *any order*



- Each linked list element contains both the values and the address (pointer) to the next linked list element.
- Hence the linked list can only be traversed sequentially going through each element at a time


## 3. Stack

- Stack is a sequential data structure which maintains the order of elements as they were inserted in.
- Last In First Out (LIFO) order, which means that the elements can only be accessed in the reverse order as they were inserted into the stack.
- The element to be inserted last, will be the first one to get removed from the stack.
- Push()** adds an element at the head of the stack, while **pop()** removes an element from the head of the stack
- A real-life example of a stack is a stack of kitchen plates

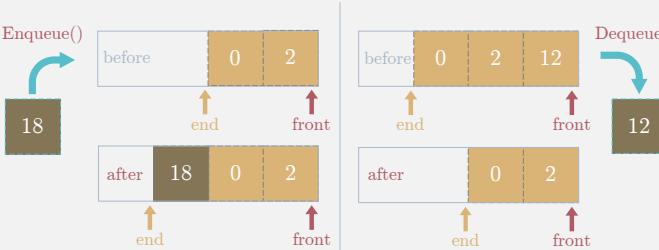


## 5. HashTable

- Creates paired assignments (key mapped to values) so the pairs can be accessed in constant time
- For each (key, value) pair, the key is passed through a hash function to create a unique physical address for the value to be stored in the memory.
- Hash function can end up generating the same physical address for different keys. This is called a collision.

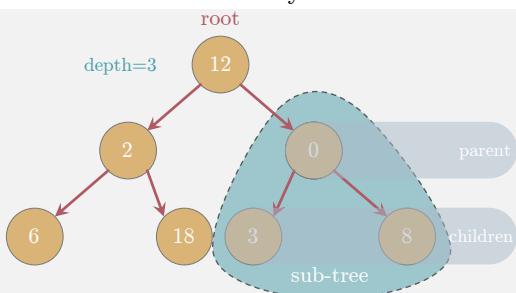


## 4. Graph

- A graph is a pair of sets ( $V, E$ ), where  $V$  is set of all the vertices,  $E$  is set of all edges.
- A neighbor of a node is set of all vertices connected with that node through an edge.
- As opposed to trees, a graph can be cyclic, which means starting from a node and following the edges, you can end up on the same node

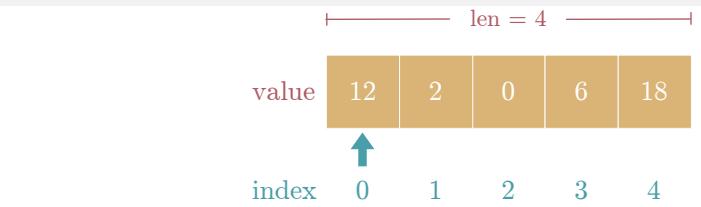

## 2. Linked List

- Linked List does not have their order defined by their physical placement in the memory.
- Contiguous elements of the linked list are not placed adjacent to each other in the memory.

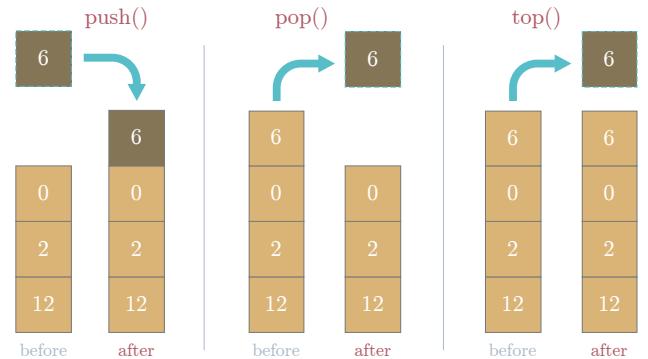


## 4. Queue

- A queue is a sequential data structure that maintains the order of elements as they were inserted in
- First In First Out (FIFO), the element to be inserted first, will be the first one to get removed from the queue
- Whenever an element is added (Enqueue()) it is added to the end of the queue. On the other hand, element removal (Dequeue()) is done from the front of the queue.
- A real-life example is a check-out line at a grocery store

## 4. Tree

- Maintains a hierarchical relation between its elements.
- Root Node** – The node at the top of the tree
- Parent Node** – Any node that has at least one child
- Child Node** – The successor of a parent node is known as a child node. A node can be both a parent and a child node. The root is never a child node.
- Leaf Node** – The node which does not have any child node.
- Traversing** – Passing through the nodes in a certain order, e.g BFS, DFS

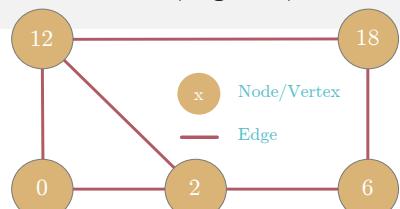

# Cheat Sheet – Preparing for Coding Interviews

## Part 1 – How to prepare for coding interviews?\*

- The timeline:

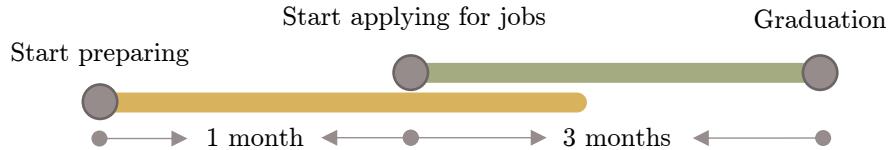


Fig. 1 – Preparation Timeline for Coding Interviews

- Review Data structures and Complexities:**

The following 7 data structures are necessary for the interview, and their time/space complexity

- List/Arrays, Linked List, Hash Table/dictionary, Tree, Graph, Heap, Queue
- Click [here](#) for tutorial.

- Practice coding questions:**

- Multiple online resources such as [LeetCode.com](#), [InterviewBit.com](#), [HackerRank.com](#) etc.
- Pick one online resource and aim for easy and medium coding questions (approx. 100-150).
- Beginners start preparing 2-3 months before the interview, and intermediates about 1 month.

- Note:**

- From my personal experience, paid subscription of LeetCode.com was worth it.
- Facebook, Uber, Google and Microsoft tagged question of LeetCode covered almost 90% of the questions asked

## Part 2 – How to answer a coding question?\*

- Listen to the question**

The interviewer will explain the question with an example. Note down the important points.

- Talk about your understanding of the question**

Repeat the question and confirm your understanding. Ask clarifying questions such as

1. Input/Output data type limitations
2. Input size/length limitations
3. Special/Corner cases

- Discuss your approach**

Walk through how would you approach the problem and ask the interviewer if he agrees with it.

Talk about the data structure you prefer and why. Discuss the solution with the bigger picture.

- Start coding**

Ask the interviewer if you could start coding. Define useful functions and explain as you write.

Think out loud so the interviewer can evaluate your thought process.

- Discuss the time and space complexity**

Discuss the time and space complexity in terms of Big O for your coded approach.

- Optimize the approach**

If your approach is not the most optimized one, the interviewer will hint you a few improvements. Pay attention to hints and try to optimize your code.

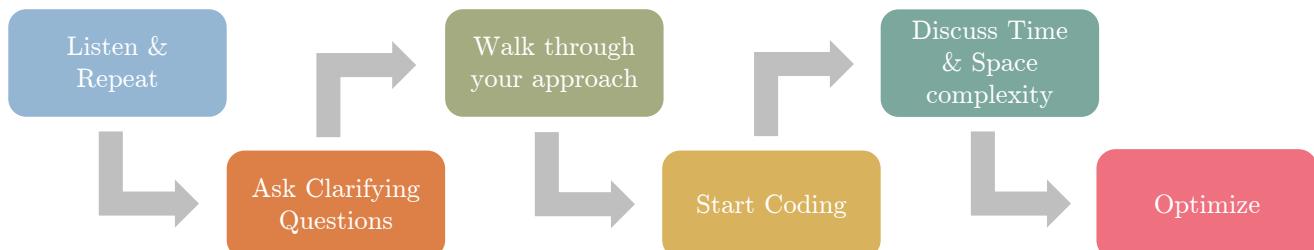


Fig. 2 – How to answer a coding question?

**\*Disclaimer:** The recommendations are based on personal experiences of the author. The mentioned approach and resources might work great for some, but not so much for others.

# 1 /4 How to prepare for behavioral interview?

Collect stories, assign keywords, practice the STAR format



## Keywords

List important keywords that will be populated with your personal stories. Most common keywords are given in the table below

Conflict Resolution	Negotiation	Compromise to achieve goal	Creativity	Flexibility	Convincing
Handling Crisis	Challenging Situation	Working with difficult people	Another team priorities not aligned	Adjust to a colleague style	Take Stand
Handling -ve feedback	Coworker view of you	Working with a deadline	Your strength	Your weakness	Influence Others
Handling failure	Handling unexpected situation	Converting challenge to opportunity	Decision without enough data	Conflict Resolution	Mentorship/ Leadership

## Stories

1. List all the organizations you have been a part of. For example
  1. Academia: BSc, MSc, PhD
  2. Industry: Jobs, Internship
  3. Societies: Cultural, Technical, Sports
2. Think of stories from step 1 that can fall into one of the keywords categories. The more stories the better. You should have at least 10-15 stories.
3. Create a summary table by assigning multiple keywords to each stories. This will help you filter out the stories when the question asked in the interview. An example can be seen below

Story 1:	[Convincing] [Take Stand] [influence other]
Story 2:	[Mentorship] [Leadership]
Story 3:	[Conflict resolution] [Negotiation]
Story 4:	[decision-without-enough-data]

## STAR Format

Write down the stories in the STAR format as explained in the 2/4 part of this cheat sheet. This will help you practice the organization of story in a meaningful way.

Icon Source: [www.flaticon.com](http://www.flaticon.com)

# 2/4

# How to prepare for behavioral interview?

Direct\*, meaningful\*, personalized\*, logical\*

(Respective colors are used to identify these characteristics in the example)



**Example:** "Tell us about a time when you had to convince senior executives"

## Situation

Explain the situation and provide necessary context for your story.

# S

"I worked as an intern in XYZ company in the summer of 2019. The project details provided to me was elaborative. After some initial brainstorming, and research I realized that the project approach can be modified to make it more efficient in terms of the underlying KPIs. I decided to talk to my manager about it."

## Task

Explain the task and your responsibility in the situation

# T

"I had an hour-long call with my manager and explained him in detail the proposed approach and how it could improve the KPIs. I was able to convince him. He asked me if I will be able to present my proposed approach for approval in front of the higher executives. I agreed to it. I was working out of the ABC(city) office and the executives need to fly in from XYZ(city) office."

## Action

Walk through the steps and actions you took to address the issue

# A

"I did a quick background check on the executives to know better about their area of expertise so that I can convince them accordingly. I prepared an elaborate 15 slide presentation starting with explaining their approach, moving onto my proposed approach and finally comparing them on preliminary results."

## Result

State the outcome of the result of your actions

# R

"After some active discussion we were able to establish that the proposed approach was better than the initial one. The executives proposed a few small changes to my approach and really appreciated my stand. At the end of my internship, I was selected among the 3 out of 68 interns who got to meet the senior vice president of the company over lunch."

# 3/4

# How to answer a behavioral question?

Understand, Extract, Map, Select and Apply



**Example:** "Tell us about a time when you had to convince senior executives"

## Understand

### Understand the question

**Example:** A story where I was able to convince my seniors. Maybe they had something in mind, and I had a better approach and tried to convince them

## Extract

### Extract keywords and tags

Extract useful keywords that encapsulates the gist of the question

**Example:**

[Convincing], [Creative], [Leadership]

## Map

### Map the keyword to your stories

Shortlist all the stories that fall under the keywords extracted from previous step

**Example:**

Story1, Story2, Story3, Story4, ... , Story N

## Select

### Select the best story

From the shortlisted stories, pick the one that best describes the question and has not been used so far in the interview

**Example:** Story3

## Apply

### Apply the STAR method

Apply the STAR method on the selected story to answer the question

**Example:** See Cheat Sheet 2/3 for details

Icon Source: [www.flaticon.com](http://www.flaticon.com)

# 4/4

# Behavioral Interview Cheat Sheet

Summarizing the behavioral interview



How to prepare for the interview

1

## Gather important topics as keywords

Understand and collect all the important topics commonly asked in the interview

2

## Collect your stories

Based on all the organizations you have been a part of, think of all the stories that fall under the keywords above

3

## Practice stories in STAR format

Practice each story using the STAR format. You will have to answer the question following this format.

4

## Assign keywords to stories

Assign each of your story one or more keywords. This will help you recall them quickly

5

## Create a summary table

Create a summary table mapping stories to their associated keywords. This will be used during the behavioral question

U

## Understand the question

Understand the question and clarify any confusions that you have

E

## Extract the keywords

Try to extract one or more of the keywords from the question

M

## Map the keywords to stories

Based on the keywords extracted, find the stories using the summary table created during preparation (Step 4)

S

## Select a story

Since each keyword maybe assigned to multiple stories, select the one that is most relevant and has not been used.

A

## Apply the START format

Once the story has been shortlisted, apply STAR format on the story to answer the question.

Icon Source: [www.flaticon.com](http://www.flaticon.com)

